INCH-POUND

MIL-G-50681D (AR)
AMENDMENT 1
24 June 1991

MILITARY SPECIFICATION

GATE CIRCUIT, MULTIPLE, BOARD ASSEMBLY - LOWER: 10548550

This amendment forms a part of Military Specification MIL-G-50681D (AR), dated 30 April 1990, and is approved for use by the U.S. Army Armament, Munitions, and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 6


Add new paragraph 3.5.2.3.4 as follows:

"3.5.2.3.4 Gate Noise. With the board assembly-lower connected with the test setup as shown in Figure 5, a 60± 1% MHz signal and a monitored 2.8 V p-p signal per gate applied to J5, J7 and J10 of the unit under test, the amplitude of the algebraic sum of the Early Gate and Sum Gate signals during the Early Gate period shall be less than 1.0 V p-p. The amplitude of the algebraic sum of the Late Gate and inverted Sum Gate signals during the Late Gate period shall be less than 1.0 V p-p."

Add Figure 5. enclosed (page 6A).

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.

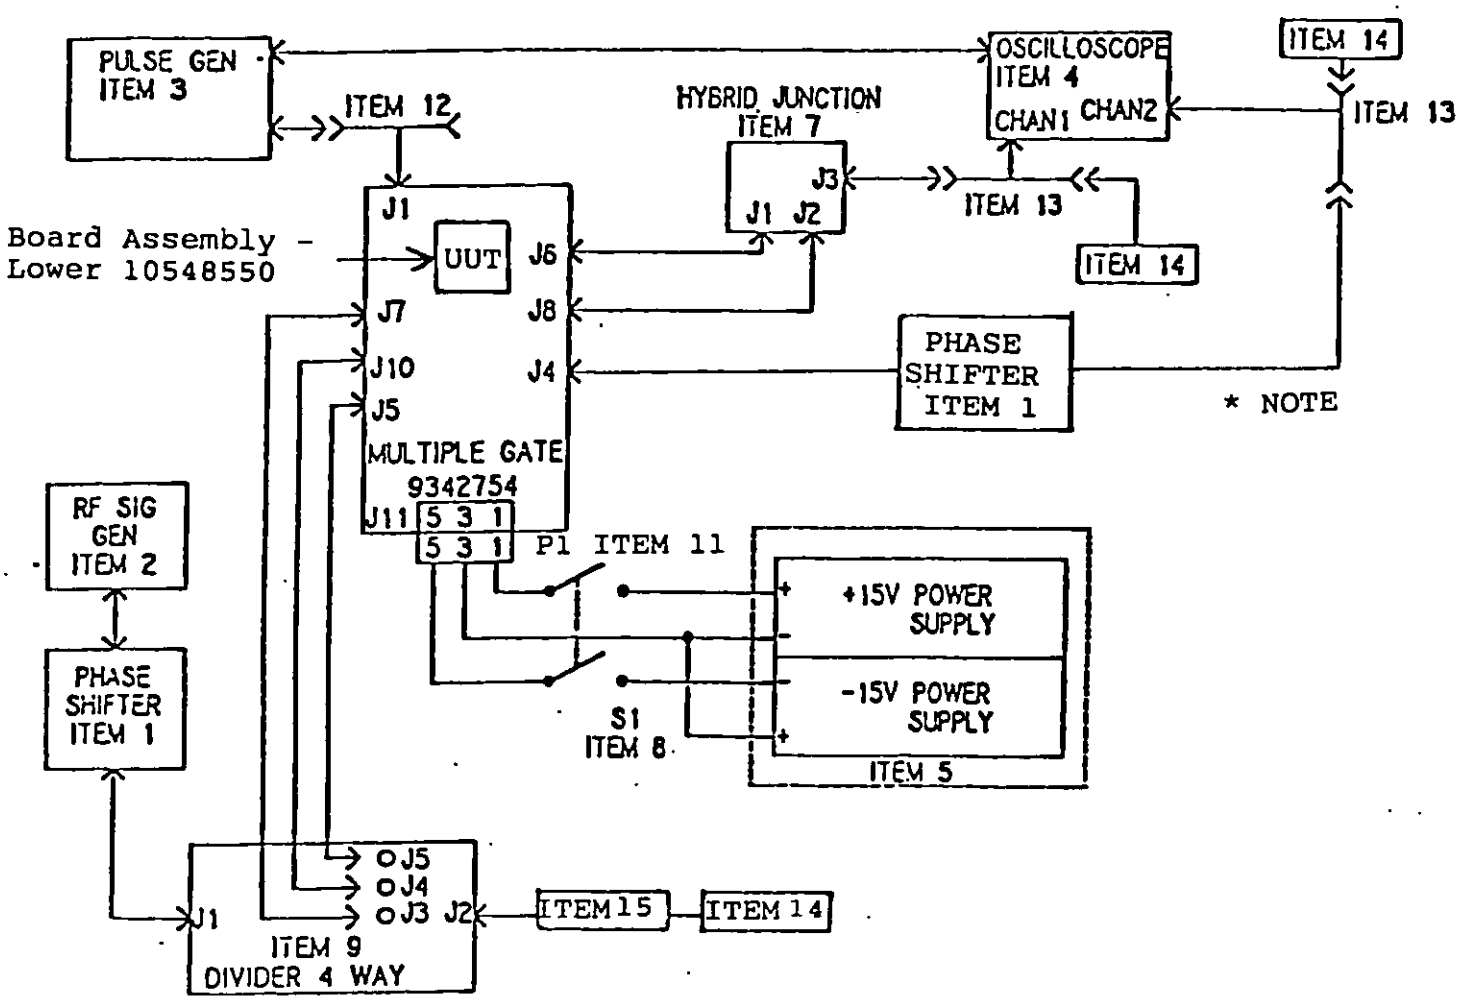

*NOTE:

Adjust Channel 2 Cable length as necessary to place Channel 1/ Channel 2 Waveform relationship into Phase Shifter ADjustment Range.

FIGURE 5. Board Assembly - lower test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:33Z
Check the source to verify that this is the current version before use.

PAGE 12

4.6.2.3, Table III, Item 1, under quantity. Delete "1. Phase shifter Model PS-3-60, Merrimac or equal." Add "1. Phase Shifter Model PS-3-60, Merrimac or equal (2)."

PAGE 17

Add new paragraph 4.7.3.4.4 as follows:

"4.7.3.4.4 Gate noise. Connect the unit under test to the test setup per Figure 5. Adjust channel 2 Phase Shifter so that the Early Gate on channel 1 is 180° out of phase with the Sum Gate on channel 2. Adjust variable gain on channel 2 for equal amplitude waveforms on channels 1 and 2. Place oscilloscope in channel 1 and 2 algebraic add function and readjust channel 2 phase shifter for Early Gate null. Resultant waveforms in the Early Gate shall be less than 1.0 V p-p. Place oscilloscope channel 2 in invert mode. Readjust amplitude and phase for Late Gate null. Resultant waveforms in the Late Gate shall be less than 1.0 V p-p."

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1285-A791)

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:33Z
Check the source to verify that this is the current version before use.