
MILITARY SPECIFICATION SHEET

FUSEHOLDER, BLOCK TYPE
STYLES FH40, FH41, FH42, FH43, FH44, FH45, FH46, FH47, FH50, AND FH51

The complete requirements for procuring the fuseholder described herein shall consist of this document and the latest issue of Specification MIL-F-21346.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

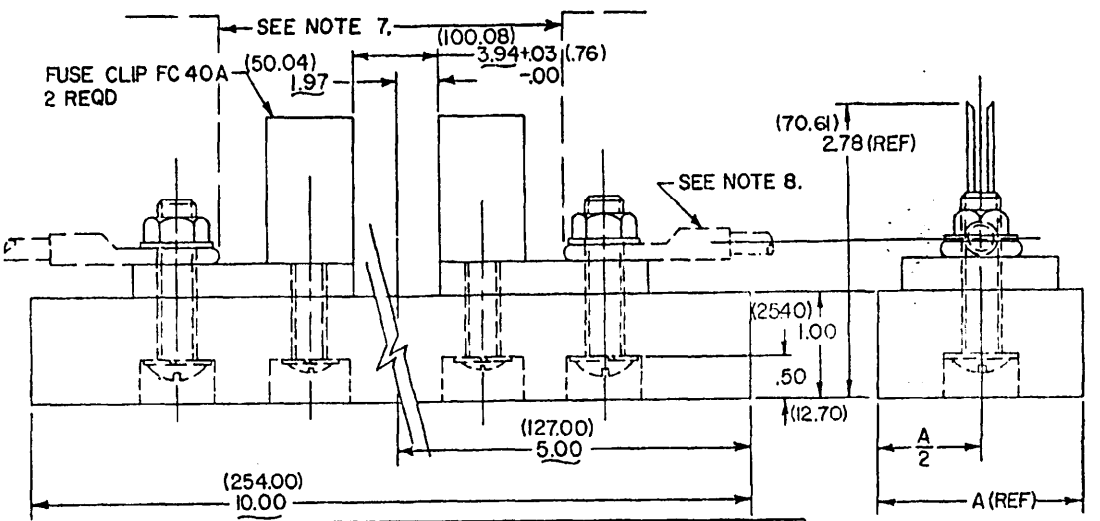

	Part No.	Class	Mounting plan (see figure 11) A	B	C	D
	FH40AM	1 pole, main line	2.00 (50.80)	1.125 (28.58)	.44 (11.18)	9.125 (231.78)
	FH40BM	2 pole, main line	5.00 (127.00)	3.875 (98.43)	.56 (14.22)	8.875 (225.43)
	FH40CM	3 pole, main line	7.00	6.000	.50	9.000
*	FH40DM	3 pole, main line	(177.80)	(152.40)	(12.70)	(228.60)
	FH40EM	4 pole, main line	10.00	8.875	.56	8.875
* *	FH40FM	4 pole, main line	(254.00)	(225.43)	(14.22)	(225.43)

* Two poles fusible; solid neutral bus.
** Three poles fusible; solid neutral bus.


NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuse holders, shall be located 1.00 (25.40) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips, on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between walls shall be a minimum 5.97 (151.64).
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 100 amperes at 250 volts.
10. This fuseholder is for use with F19 and F63 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. Style FH40 fuseholder (front connection).

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:20Z
Check the source to verify that this is the current version before use.

FIGURE 2. Wiring diagrams. (1)(2)(3)(4)(5)

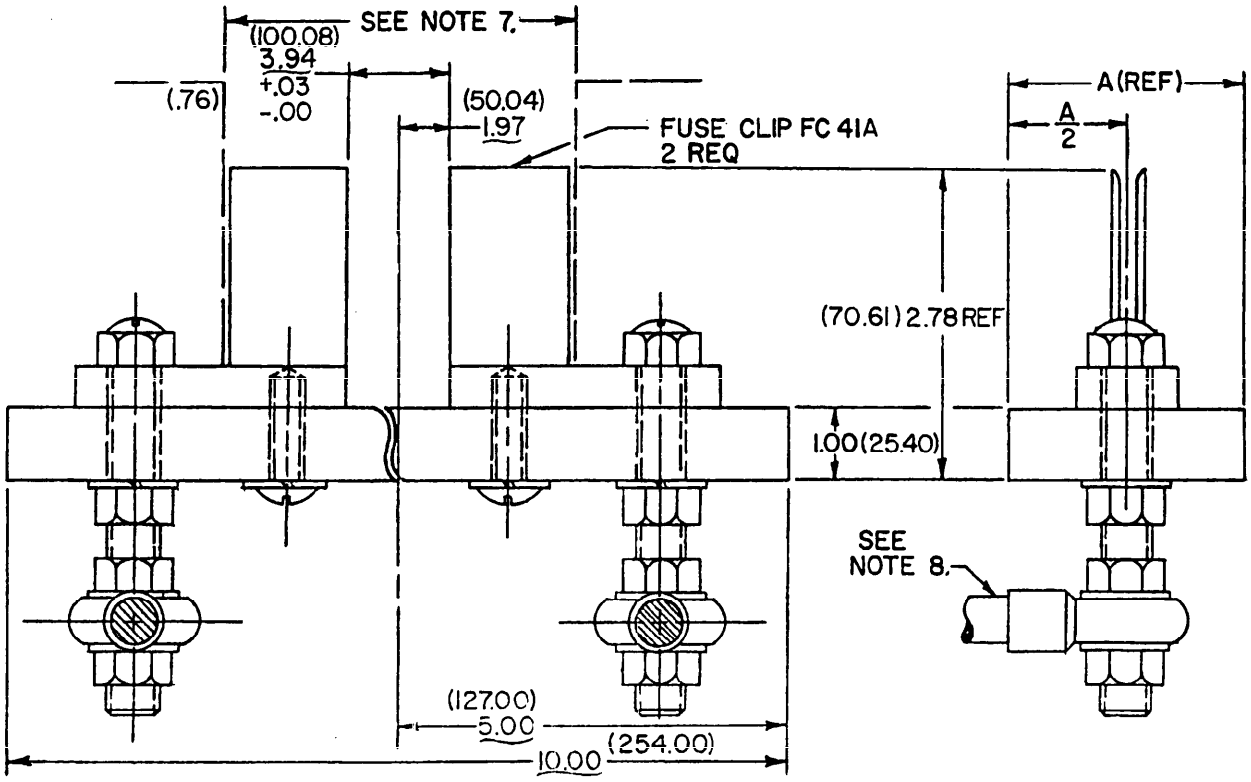


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH41AM	1 pole, main line	2.00 (50.80)	1.125 (28.58)	.44 (11.18)	9.125 (231.78)
	FH41BM	2 pole, main line	5.00 (127.00)	3.875 (98.43)	.56 (14.22)	8.875 (225.43)
	FH41CM	3 pole, main line	7.00	6.000	.50	9.000
*	FH41DM	3 pole, main line	(177.80)	(152.40)	(12.70)	(228.60)
	FH41EM	4 pole, main line	10.00	8.875	.56	8.875
* *	FH41FM	4 pole, main line	(254.00)	(225.43)	(14.22)	(225.43)

* Two poles fusible; solid neutral bus.
** Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13). on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuse holders, shall be located 1.00 (25.40) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips, on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between walls shall be a minimum 5.97 (151.64).
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 100 amperes at 250 volts.
10. This fuseholder is for use with F19 and F63 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Style FH41 fuseholder (back connection).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

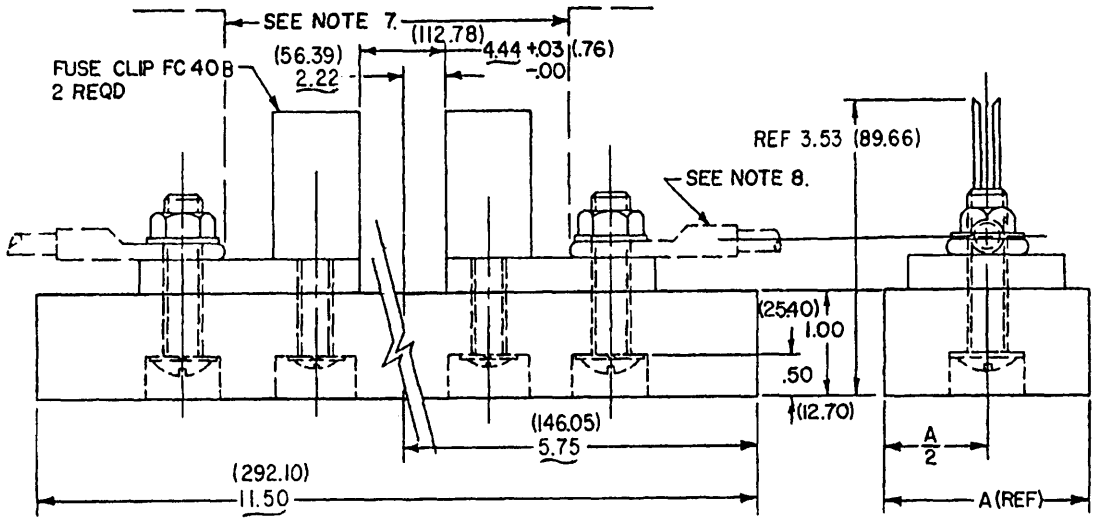


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH42AM	1 pole, main line	2.50 (63.50)	1.625 (41.28)	.44 (11.18)	10.625 (269.88)
	FH42BM	2 pole, main line	6.00 (152.40)	5.000 (127.00)	.50 (12.70)	10.500 (266.70)
	FH42CM	3 pole, main line	9.75 (247.65)	8.625 (219.08)	.56 (14.22)	10.375 (263.53)
*	FH42DM	3 pole, main line				
	FH42EM	4 pole, main line	13.00 (330.20)	11.875 (301.63)		
* *	FH42FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
** Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholder shall be located 1.25(31.75) from the adjacent base block edges.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 7.2? (183.39)
8. Wire lug terminals (solder type)areshown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 200 amperes at 250 volts.
10. This fuseholder is for use with F20 and F64 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 3. Style FH42 fuseholder (front connection)

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:20Z
Check the source to verify that this is the currenversion before use.

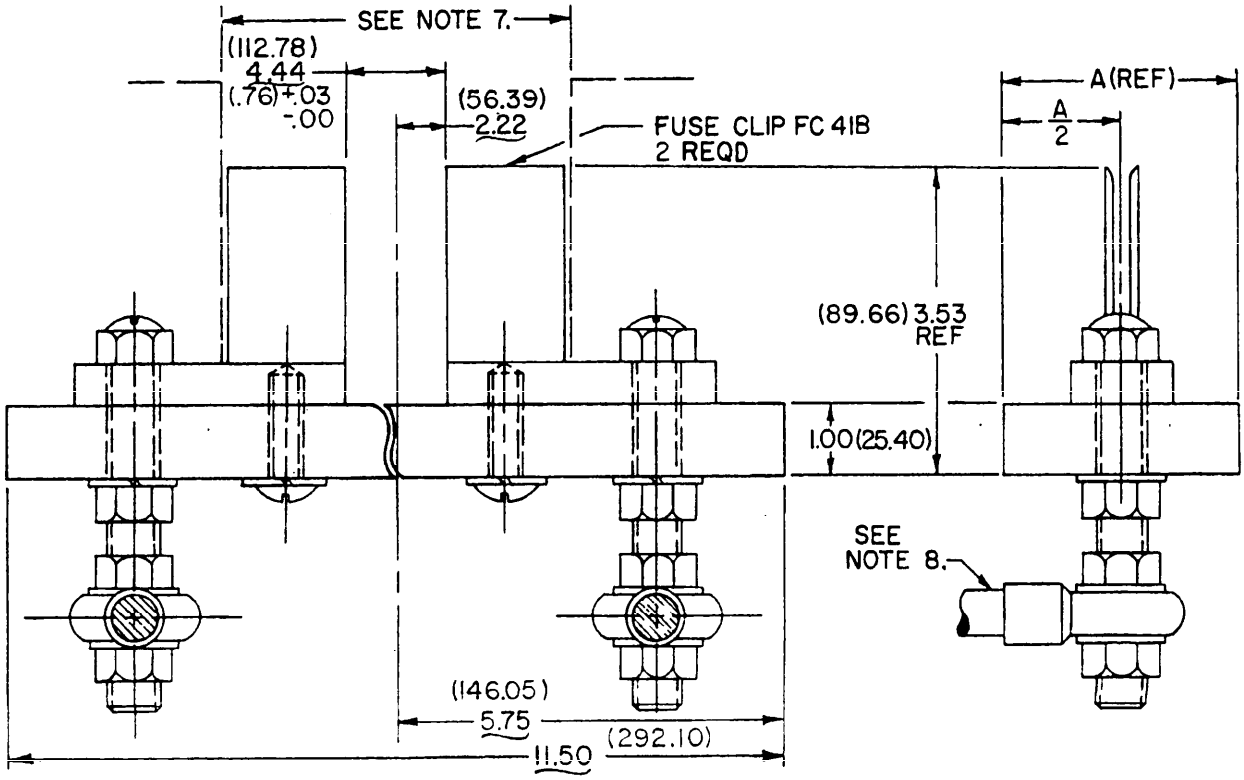


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH43AM	1 pole, main line	2.50 (63.50)	1.625 (41.28)	.44 (11.18)	10.625 (269.88)
	FH43BM	2 pole, main line	6.00 (152.40)	5.000 (127.00)	.50 (12.70)	10.500 (266.70)
	FH43CM	3 pole, main line	9.75 (247.65)	8.625 (219.08)	.56 (14.22)	10.375 (263.53)
*	FH43DM	3 pole, main line				
	FH43EM	4 pole, main line	13.00 (330.20)	11.875 (301.63)		
* *	FH43FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
** Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholder shall be located 1.25(31.75) from the adjacent base block edges.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 7.22 (183.39).
8. Wire lug terminals (solder type)are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 200 amperes at 250 volts.
10. This fuseholder is for use with F20 and F64 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 4. Style FH43 fuseholder (back connection.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:20Z
Check the source to verify that this is the current version before use.

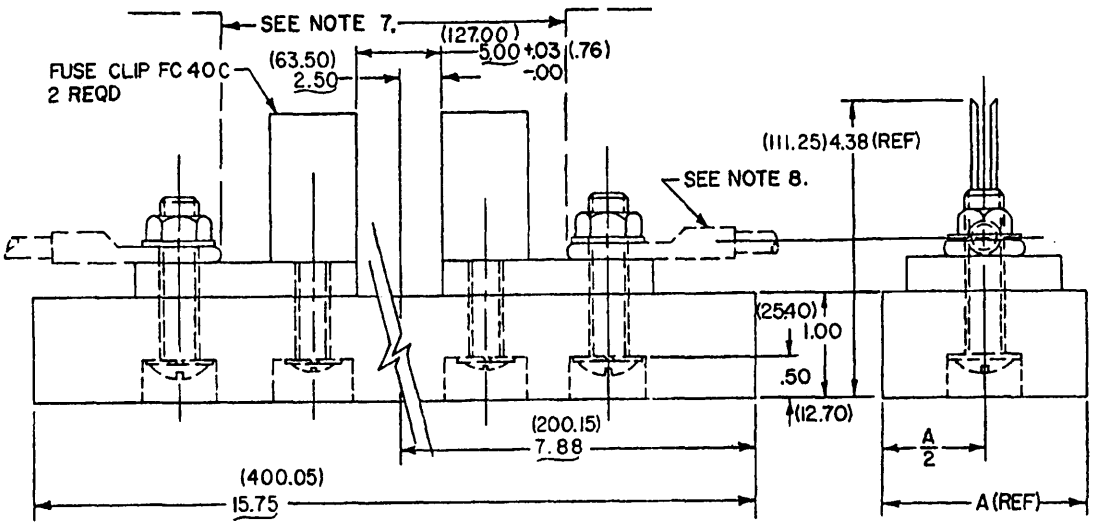


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH44AM	1 pole, main line	3.00 (76.20)	2.000 (50.80)	.50 (12.70)	14.750 (374.65)
	FH44BM	2 pole, main line	7.25 (184.15)	6.125 (155.58)		
	FH44CM	3 pole, main line	12.00 (304.80)	10.875 (276.23)	.56 (14.22)	14.625 (371.48)
*	FH44DM	3 pole, main line				
	FH44EM	4 pole, main line	16.00 (406.40)	14.875 (377.83)		
* *	FH44FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
** Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.50 (38.10) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 8.75 (222.25).
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 400 amperes at 250 volts.
10. This fuseholder is for use with F21 and F65 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 5 Style FH44 fuseholder (front connection).

Source: https://assist.dla.mil -- Downloaded: 20260-19T09:20Z
Check the source to verify that this is the current version before use.

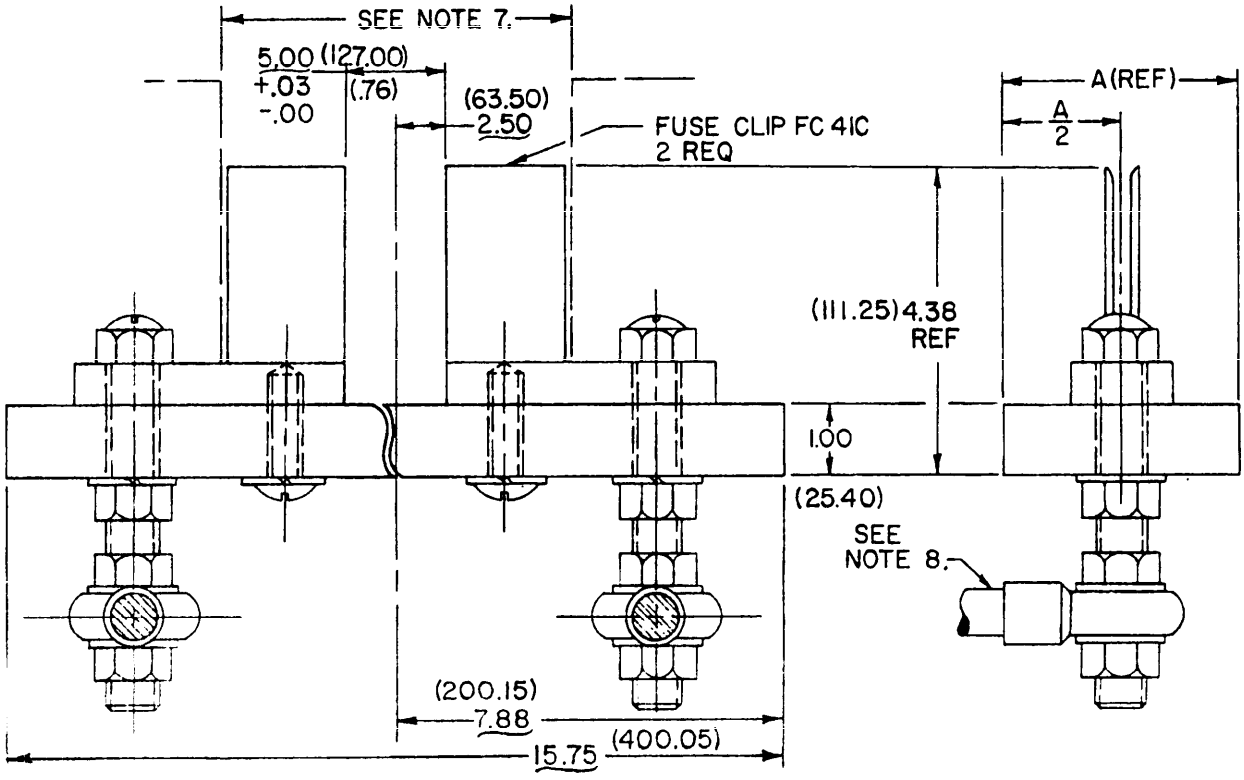

Part No.	Class	Mounting plan (see figure 11)			
		A	B	C	D
FH45AM	1 pole, main line	3.00 (76.20)	2.000 (50.80)	.50 (12.70)	14.750 (374.65)
FH45BM	2 pole, main line	7.25 (184.15)	6.125 (155.58)		
FH45CM	3 pole, main line	12.00 (304.80)	10.875 (276.23)	.56 (14.22)	14.625 (371.48)
* FH45DM	3 pole, main line				
FH45EM	4 pole, main line	16.00 (406.40)	14.875 (377.83)		
** FH45FM	4 pole, main line				

* Two poles fusible; solid neutral bus.


** Three poles fusible; solid neutral bus.

NOTES:

1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide a free fit for no. 10 flat head machine screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.50 (38.10) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 8.75 (222.25).
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 400 amperes at 250 volts.
10. This fuseholder is for use with F21 and F65 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 6. Style FH45 fuseholder (back connection).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

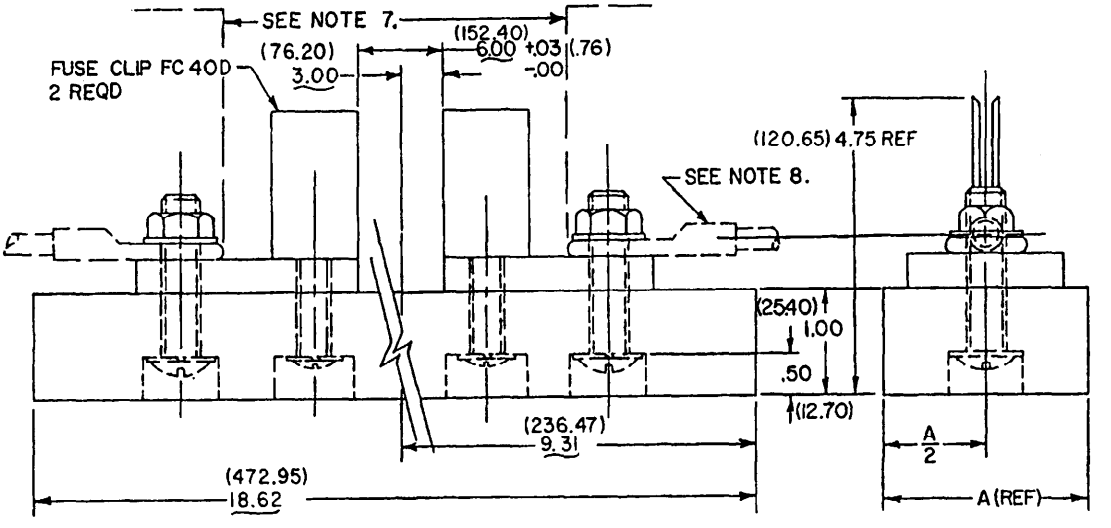


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH46AM	1 pole, main line	3.00 (76.20)	2.000 (50.80)	.50 (12.70)	17.625 (447.68)
	FH46BM	2 pole, main line	8.00 (203.20)	6.875 (174.63)	.56 (14.22)	17.500 (444.50)
*	FH46CM	3 pole, main line	12.50 (317.50)	11.375 (288.93)		
*	FH46DM	3 pole, main line				
	FH46EM	4 pole, main line	18.00 (457.20)	16.875 (428.63)		
* *	FH46FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
**Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide for a free fit for no. 10 flat head screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.50(38.10) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 10.50 (266.70)
8. Wire lug terminals (solder type)are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 600 amperes at 250 volts.
10. This fuseholder is for use with F22 and F66 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 7. Style FH46 fuseholder (front connection).

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:20Z
Check the source to verify that this is the currentversion before use.

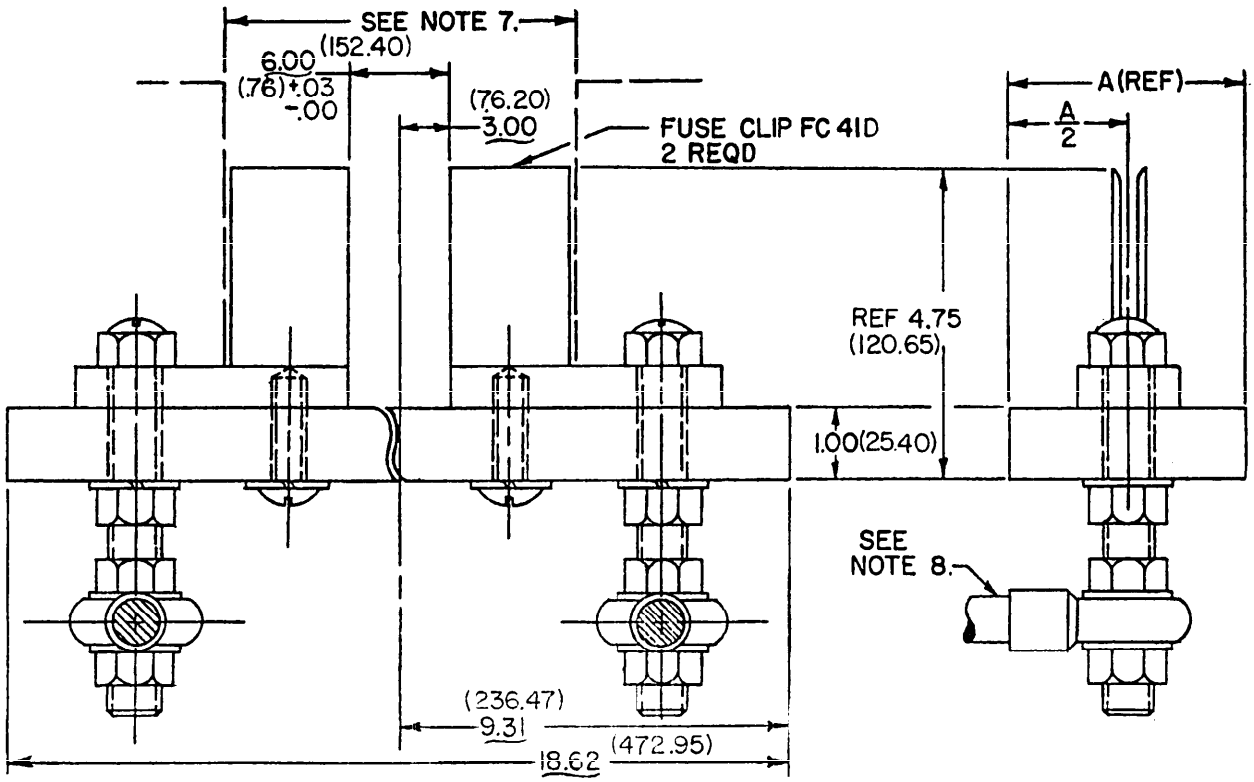


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH47AM	1 pole, main line	3.00 (76.20)	2.000 (50.80)	.50 (12.70)	17.625 (447.68)
	FH47BM	2 pole, main line	8.00 (203.20)	6.875 (174.63)		
	FH47CM	3 pole, main line	12.50 (317.50)	11.375 (288.93)	.56 (14.22)	17.500 (444.50)
*	FH47DM	3 pole, main line				
	FH47EM	4 pole, main line	18.00 (457.20)	16.875 (428.63)		
* *	FH47FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
**Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide for a free fit for no. 10 flat head screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.50 (38.10) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders, shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 10.50 (266.70)
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 600 amperes at 250 volts.
10. This fuseholder is for use with F22 and F66 fuses of MIL-F-15160.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 8. Style FH47 fuseholder (back connection).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

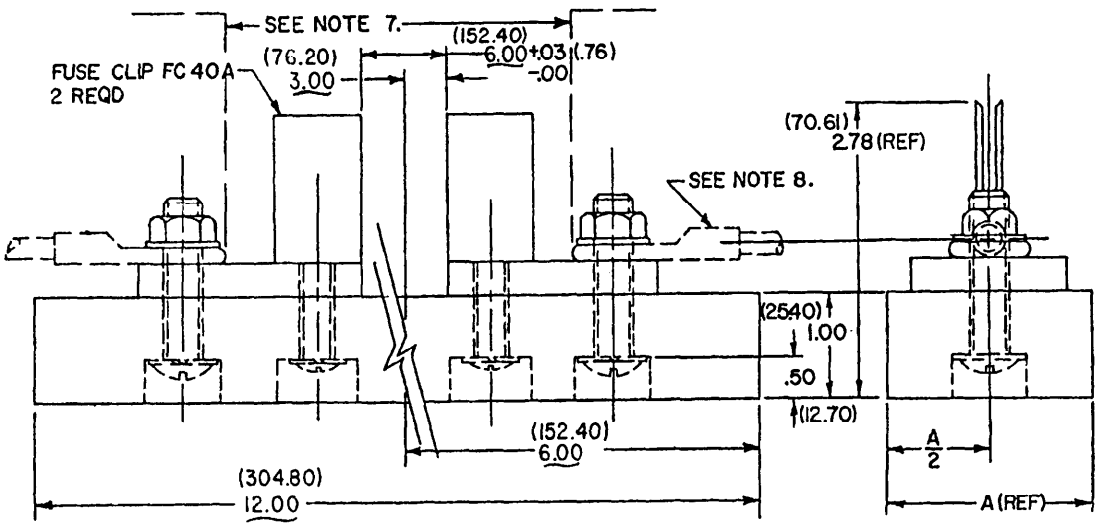


	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH50AM	1 pole, main line	2.00 (50.80)	1.125 (28.58)	.44 (11.18)	11.125 (282.58)
	FH50BM	2 pole, main line	5.00 (127.00)	3.875 (98.43)	.56 (14.22)	10.875 (276.23)
	FH50CM	3 pole, main line	7.00 (177.80)	6.000 (152.40)	.50 (12.70)	11.000 (279.40)
*	FH50DM	3 pole, main line				
	FH50EM	4 pole, main line	10.00 (254.00)	8.875 (225.43)	.56 (14.22)	10.875 (276.23)
* *	FH50FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
**Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide for a free fit for no. 10 flat head screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.00 (25.40) from adjacent base block edges.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 7.97 (202.44).
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 100 amperes at 600 volts.
10. This fuseholder is for use with 7.88 (200.15) long knife blade cartridge fuses as covered in Underwriters Laboratories Inc., Standard for fuses.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 9. Style FH50 fuseholder (front connection).

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:20Z
Check the source to verify that this is the currentversion before use.

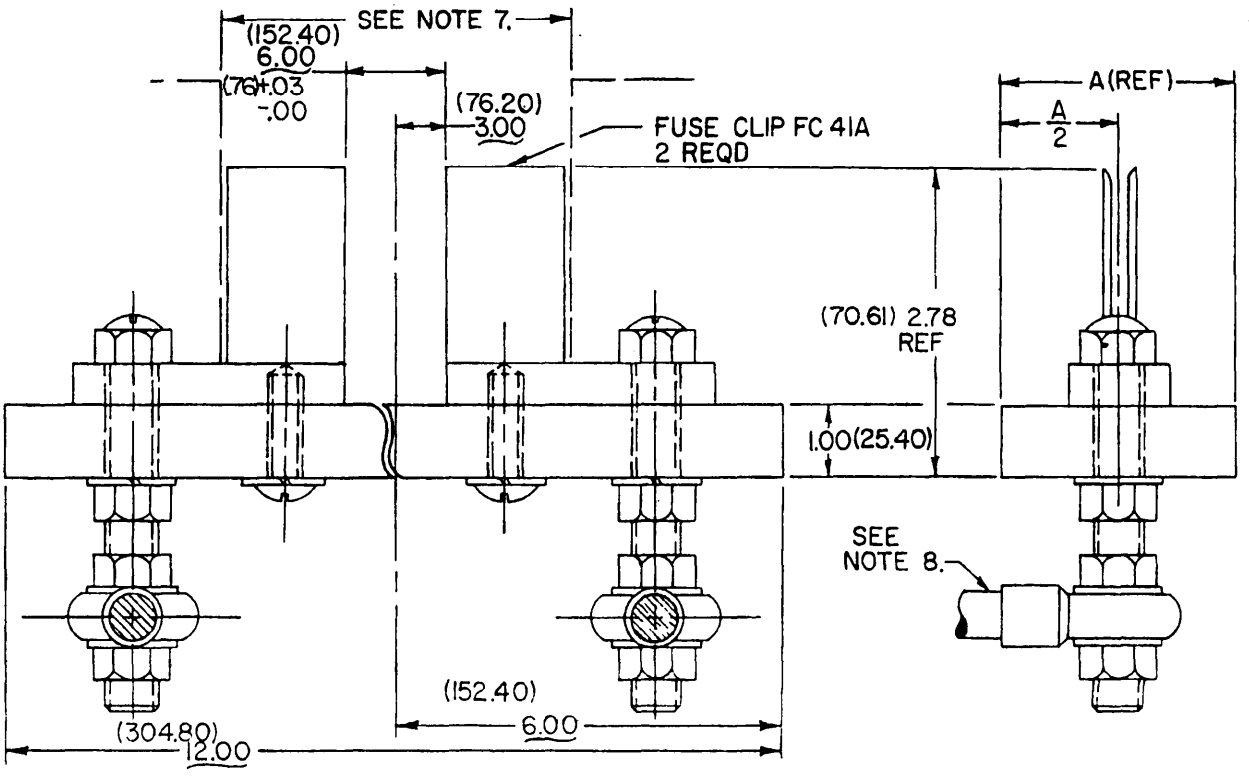

	Part No.	Class	Mounting plan (see figure 11)			
			A	B	C	D
	FH51AM	1 pole, main line	2.00 (50.80)	1.125 (28.58)	.44 (11.18)	11.125 (282.58)
	FH51BM	2 pole, main line	5.00 (127.00)	3.875 (98.43)	.56 (14.22)	10.875 (276.23)
	FH51CM	3 pole, main line	7.00 (177.80)	6.000 (152.40)	.50 (12.70)	11.000 (279.40)
*	FH51DM	3 pole, main line				
	FH51EM	4 pole, main line	10.00 (254.00)	8.875 (225.43)	.56 (14.22)	10.875 (276.23)
* *	FH51FM	4 pole, main line				

* Two poles fusible; solid neutral bus.
**Three poles fusible; solid neutral bus.

NOTES:
1. All dimensions are in inches. Millimeters are in parentheses.
2. Unless otherwise specified, tolerances on 2 place decimals shall be ±.02 (.51) and ±.005 (.13) on 3 place decimals.
3. The base block shall be plastic.
4. Mounting holes shall be countersunk and provide for a free fit for no. 10 flat head screws.
5. The longitudinal centerline of single pole and the outside pairs of fuse clips on multiple pole fuseholders shall be located 1.00(25.40) from the adjacent base block edge.
6. The longitudinal centerlines of the inside pairs of fuse clips on multiple pole fuseholders shall be so located as to provide equal spacing between the two outside pairs of fuse clips.
7. When this fuseholder is used in a facility whose walls form end stops, the distance between the walls shall be a minimum 7.97 (202.44)
8. Wire lug terminals (solder type) are shown to indicate a preferred shape and are not a part of the fuseholders.
9. Fuseholders of this style shall have a rating of 100 amperes at 600 volts.
10. This fuseholder is for use with 7.88 (200.15) long knife blade cartridge fuses as covered in Underwriters Laboratories Inc., Standard for fuses.
11. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 10. Style FH51 fuseholder (back connection).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.

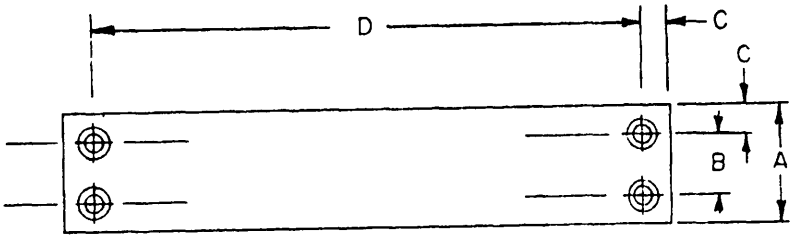


FIGURE 11. Mounting hole plan (for styles FH40, FH41, FH42, FH43, FH44, FH45, FH46, FH47, FH50 and FH51).

Custodians:
Army - EL
Navy - SH
Air Force - 85

Review activities:
Army - EL, MI, ME, MU
Navy - SH, EC
Air Force - 85, 17
DSA - ES

User activities:
Army - WC, AT, AV
Navy - MC, AS, CG
Air Force - 19

Preparing activity:
Navy - SH

(Project 5920-0251)

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:20Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:20Z
Check the source to verify that this is the current version before use.