MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

TRANSFORMER, SCOTT-T, ANALOG, KEY CODE STT

This specification is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document establishes the requirements and test procedures for the acquisition of an electronic Scott-T transformer module.

1.2 Classification. This specification covers one class of modules.

Class 1 as specified in MIL-STD-1389.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-28787 - Modules, Standard Electronic, General Specification for.

STANDARDS

MILITARY

MIL-STD-1389 - Design Requirements for Standard Electronic Modules.

MIL-STD-1665 - Test Equipment for the Standard Electronic Modules Program.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 General requirements. The module shall comply with the requirements of MIL-M-28787 except as modified herein.

3.2 Correlation requirements. Before any production modules are tested, all testers and test equipment shall be correlated in accordance with MIL-M-28787.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Naval Electronic Systems Command, ATTN: ELEX 8111, Department of the Navy, Washington, DC 20360, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

3.3 Failure rate requirements. All modules acquired to this specification shall have a predicted failure rate no greater than 0.56 failures per million operating hours when predicted in accordance with MIL-STD-1389.

3.4 Performance requirements. The module shall conform to the electrical requirements specified in table I and shall operate within the environment of design class I as specified in MIL-STD-1389.

3.5 Module configuration requirements. The module configuration requirements shall be in accordance with MIL-STD-1389 and as specified herein.

3.5.1 Key code. The module key code shall be STT.

3.5.2 Size. The module size shall be 1C.

3.5.3 Weight. The module shall have a maximum weight of 150 grams.

3.5.4 Contact pins. The module shall have 40 contact pins positioned A1 through A40.

3.5.5 Fin position. The module shall have an insertion and extraction and heat dissipation fin on increment A.

3.5.6 Depth. The module shall have no additional depth requirements.

3.5.7 Holddown holes. The module shall have no additional requirements for location or quantity of holddown holes.

3.5.8 Marking. Marking shall be as specified in MIL-STD-1389, and the module shall be marked with the military part number M28787/185-1, except no marking shall interfere with heat dissipation from the fin (for example, affixing a label which may be a heat barrier).

3.6 Circuit pin configuration. The function diagram and pin assignments shall conform to figure 1.

3.7 Acceptance tests. All production modules shall be tested in accordance with footnotes 1 and 2 of table I.

3.8 End-of-life limits. Modules which have been plugged into an operating system, or exceed 2 years from date of manufacture and are to be tested, shall be capable of conforming to the 25°C end-of-life limits of table I (see 6.2).

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance. The quality assurance provisions of MIL-M-28787 shall apply.

4.2 Acceptance tests. Acceptance tests of all modules shall be in accordance with procedures and equipment specified in MIL-M-28787.


4.3 Test equipment. Test equipment specified on figures and in tables with a type designator shall be as specified in MIL-STD-1665. Other equipment and components shall be as specified on the figures. All resistors shall be metal film and all capacitors shall be ceramic unless otherwise specified.

4.4 Test procedures. The module shall be tested as specified in table I.

4.4.1 Alternate test methods. Alternate test methods may be employed if approved by the Standard Electronic Modules Program Quality Assurance Activity and they conform to the requirements of MIL-M-28787.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

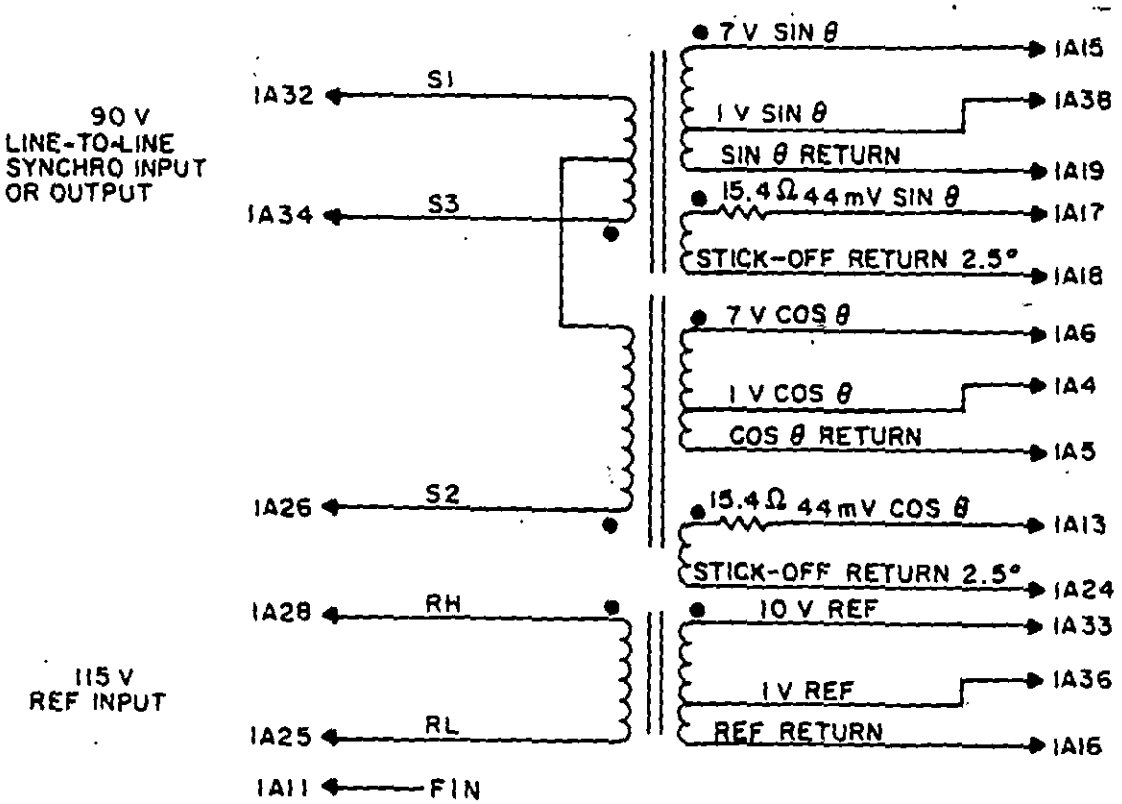


NOTE: Unused pins: 1A1, 1A2, 1A3, 1A7, 1A8, 1A9, 1A10, 1A12, 1A14, 1A20, 1A21, 1A22, 1A23, 1A27, 1A29, 1A30, 1A31, 1A35, 1A37, 1A39, and 1A40.

FIGURE 1. STT module function diagram, Scott-T transformer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements.

| Test condition | Parameter | Ref test table | Test type 1/-3/ | Acceptance requirements 25°±5°C ambient temperature | | | | Operating temperature 0° to 60°C | | | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Initial | | End-of-life | | Initial | | End-of-life | | |
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| A1-A22 | Isolation | II | S | 10 | - | 10 | - | 10 | - | 10 | - | M. |
| A23-A26 | Isolation, secondary windings | II | S | 10 | - | 10 | - | 10 | - | 10 | - | M. |
| B1-B3 | Dielectric withstanding voltage check | III | S | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | 0.0 | 0.5 | mA |
| C | Stress | IV | Q | ← See 4/ and table IV → | | | | | | | | |
| D1-D5 | Reference winding transformation ratio and phase shift, 400 Hz | V | X | ← See 4/ and table V → | | | | | | | | |
| E1-E9 | Angle (S/D function), 400 Hz, check | VI | X | See 4/ and table VI. Angle ±0.020 degree. | | | | | | | | |
| E10-E12 | Angle (S.D. 2.5°), 400 Hz, check | VI | X | See 4/ and table VI. Angle ±0.5 degree. | | | | | | | | |
| F1-F3 | Quadrature (S/D function), 400 Hz, check | VII | X | -2 | 2 | -2 | 2 | -2 | 2 | -2 | 2 | mVrms |
| G | Phase shift (D/S function), 400 Hz, check | VIII | X | 180 | 186 | 180 | 186 | 180 | 186 | 180 | 186 | Degrees |
| H1-H9 | Angle (D/S function), 400 Hz, check | IX | X | See 4/ and table IX. Angle ±0.030 degree. | | | | | | | | |
| H10, H11 | Angle (D/S function), 400 Hz, check | IX | Q | See 4/ and table IX. Angle ±0.030 degree. | | | | | | | | |
| J1-J3 | Quadrature (D/S function), 400 Hz, check | X | X | 0 | 150 | 0 | 150 | 0 | 150 | 0 | 150 | mVrms |
| K | Amplitude output (S/D function) | XI | X | 0.9 | 1.1 | 0.9 | 1.1 | 0.9 | 1.1 | 0.9 | 1.1 | Vrms |
| L1 | Amplitude output (D/S function), loaded, check | XII | X | 81.0 | 92.7 | 81.0 | 92.7 | 81.0 | 92.7 | 81.0 | 92.7 | Vrms |

See footnotes at end of table.

MIL-M-2 858(EC)

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE I. Module electrical requirements - Continued.

| Test condition | Parameter | Ref test table | Test type 1/-3/ | Acceptance requirements 25°±5°C ambient temperature | | | | Operating temperature 0° to 60°C | | | | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | Initial | | End-of-life | | Initial | | End-of-life | | |
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | |
| L2, L3 | Amplitude output (D/S function), unloaded, check | XII | Q | ← See 4/ and table XII → | | | | | | | | |
| M1 | Input impedance (Scott-T) check | XIII | X | 0.008 | 2.380 | 0.008 | 2.380 | 0.008 | 2.380 | 0.008 | 2.380 | Vrms |
| M2 | Input impedance (reference) check | XIII | X | 0.10 | 3.17 | 0.10 | 3.17 | 0.10 | 3.17 | 0.10 | 3.17 | Vrms |
| N1, N2 | Output resistance (secondary) | XIV | X | 13.85 | 16.94 | 13.85 | 16.94 | 13.85 | 16.94 | 13.85 | 16.94 | Ω |
| N3 | Continuity (fin) | XIV | S | 0 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | Ω |
| P1-P3 | Angle (11.8 S/D function), 400 Hz, check | XV | Q | See 4/ and table XV. Angle ±0.03 degree. | | | | | | | | |
| Q1-Q5 | High-voltage low-frequency accuracy (D/S function) | XVI | Q | See 4/ and table XVI. Angle ±0.03 degree. | | | | | | | | |
| R1-R4 | Common mode rejection ratio | XVII | S | 0 | 2 | 0 | 2 | 0 | 2 | 0 | 2 | mVrms |
| S | Phase shift offset (D/S function) check | XVIII | Q | 180 | 186 | 180 | 186 | 180 | 186 | 180 | 186 | Degrees |
| T1-T18 | Angle offset (D/S function) | XIX | Q | See 4/ and table XIX. Angle ±0.030 degree. | | | | | | | | |

1/ (X) parameters shall be 100 percent percent tested during module acceptance tests.

2/ (S) parameters shall be sample acceptance tested (1 percent or two modules from each inspection lot, whichever is greater) at 25°C.

3/ (Q) parameters shall be tested during qualification testing only.

4/ Initial and end-of-life limits for acceptance requirements and operating requirements are the same.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

4.4.2 Order of testing. Test conditions A through T shall be performed in any order with the following exceptions. If test conditions A, B, or C are part of a sequence of tests, the order of testing shall be as follows: A, B, C where applicable, followed by the remaining tests in the sequence.

4.5 Qualification testing. Initial qualification tests and periodic-check tests shall be performed in accordance with the test plan specified in MIL-M-28787 with the following modifications or additions.

4.5.1 Operating temperature tests. The operating temperature tests shall be conducted in accordance with MIL-M-28787. Before starting these tests, test conditions A through Q in table I shall be performed in the order specified in 4.4.2 using the initial limits at 25° ±5°C ambient. When electrical testing is called for at the end of each temperature stabilization period, test conditions D through T shall be performed in the order specified in 4.4.2 using the initial limits for applicable operating temperature. At all other times during the operating temperature tests, the module shall be operated in the test circuit shown on figure 2.

4.5.1.1 Component temperature test. The component temperature test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2.

4.5.2 Vibration tests. The vibration tests shall be conducted in accordance with MIL-M-28787. During the vibration tests, the module shall be nonoperating.

4.5.3 Life test. The life test shall be conducted in accordance with MIL-M-28787. The module shall be operated as shown on figure 2. Following the life test and while still at the maximum class temperature, electrical tests C through Q shall be performed in the order specified in 4.4.2 using the operating temperature end-of-life requirements of table I. Following the return of the module to 25°C, electrical tests C through Q shall be performed in the order specified in 4.4.2 using the 25° ±5°C ambient end-of-life requirements of table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-28787.

6. NOTES

6.1 Definitions. Definitions are as specified in MIL-STD-1331.

6.2 End-of-life. When any individual module circuit parameter fails to conform to the end-of-life requirements of table I, the module is considered to have completed its useful life (see 3.8).

6.3 Cross reference of classification. Part number M28787/185-1 supersedes part number M28787/185. The two parts are interchangeable.

6.4 Module description. The following electrical parameters reflect the 0° to 60°C end-of-life limits from table I.

| | |
|---|---|
| Individual transformer description | |
| Frequency | 360 to 900 Hz |
| Dielectric withstanding voltage | 500 Vdc |
| *Reference transformer* | |
| Input voltage | 115 Vrms ±10 percent |
| Transformer ratios | 0.087 ±0.0025 (115.:10)<br>0.0087 ±0.00025 (115:1) |
| Regulation | ±2 percent from no load to 10 k.. resistive load |
| Phase shift | 0 to +3 degrees |
| Input impedance | 40 kΩ minimum (at 400 Hz) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| Scott-T transformer | |
| S/D function | |
| Angular error | ±0.020 degree maximum |
| Quadrature | ±2 mV maximum |
| Phase shift | 0.5 degree maximum |
| Synchro input voltage | 90 V (line-to-line) ±10 percent (400 to 800 Hz) |
| Impedance at 400 Hz (unloaded) | 40 kΩ minimum (line-to-line) |
| Impedance balance | No worse than the effects of a $Z_{SO}$ (40 kΩ) varying 10 percent |
| Sin and cos output and stick-off output | 1 Vrms ±3 percent with a line-to-line input of 90 V, 2.5 ±0.5 degrees |
| D/S function | |
| Input | 7 V resolver signal (350 to 800 Hz) |
| Output | 90 V (line-to-line) ±3 percent synchro signal with a 7 V resolver signal input |
| Output impedance | R = 450Ω maximum balanced to ±3Ω; inductance 10Ω maximum balanced to ±25 percent |
| Angular error | ±0.03 degree maximum |
| Phase shift | 0.5 degree maximum (no load) |
| Quadrature error | ±150 mV maximum |
| Sin and cos input impedance | 320Ω minimum (unloaded) |

6.5 Module function. This module contains a 400 to 800 Hz transformer which converts 90 V 3-wire synchro data to 1 V resolver angular data or 7 V resolver signal to 90 V line-to-line synchro signal. The module also transforms the reference voltage (115 V) to 10 V and 1 V which is used in the S/D and D/S converts.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Agent:
DLA - ES


Preparing activity:
Navy - EC

(Project 5963-N242)

· U.S. GOVERNMENT PRINTING OFFICE: 1982 0 · 503-022/1601



Source: https://assist.dla.mil -- Downloaded: 202610-20T16:32Z
Check the source to verify that this is the current version before use.

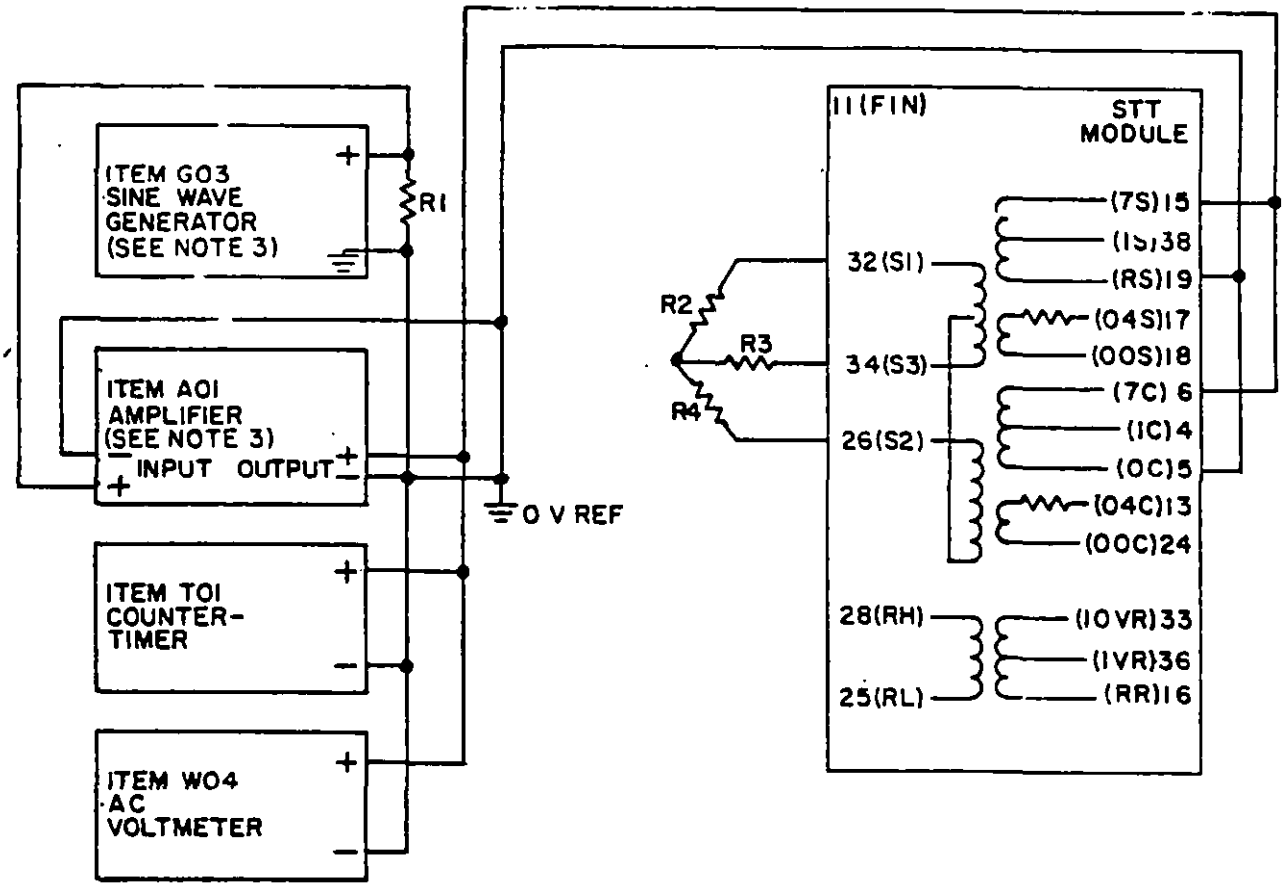


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 51Ω ±5%, 1 W.
2. R2 = R3 = R4 = 3.57 kΩ ±10%, 2 W.
3. Adjust item G03 and item A01 for an output of 7.1 ±0.2 Vrms, 350 ±10 Hz on item A01.

FIGURE 2. Operating temperature, component temperature, and life test circuit.



Source: https://assist.dla.mil -- Downloaded: 20261O-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE II. Isolation test.

| Test condition | Parameter | Connect A to pin | Connect B to pin | Initial limits 25°±5°C ambient Min | Initial limits 25°±5°C ambient Max | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| A1 | Isolation, fin pin to pins | 1,2,3,4,5,6,7,8,9,10, 12,13,14,15,16,17,18, 19,20,21,22,23,24,25, 26,27,28,29,30,31,32, 33,34,35,36,37,38,39, 40 | 11 | 10 | — | MΩ | 3 |
| A2 | Isolation, used to unused pins | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30, 31,35,37,39,40 | 5,13,15, 16,17, 25,26 | | | | |
| A3 | Isolation, unused to unused pins | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30, 31,35,37,39 | 40 | | | | |
| A4 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30, 31,35,37 | 39 | | | | |
| A5 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30, 31,35 | 37 | | | | |
| A6 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30, 31 | 35 | | | | |
| A7 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29,30 | 31 | | | | |
| A8 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27,29 | 30 | | | | |
| A9 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23,27 | 29 | | | | |
| A10 | | 1,2,3,7,8,9,10,12,14, 20,21,22,23 | 27 | | | | |



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE II. Isolation test - Continued.

| Test condition | Parameter | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | Min | Max | | |
| A11 | Isolation, unused to unused pins | 1,2,3,7,8,9,10,12,14, 20,21,22 | 23 | 10 | ∞ | MΩ | 3 |
| A12 | | 1,2,3,7,8,9,10,12,14, 20,21 | 22 | | | | |
| A13 | | 1,2,3,7,8,9,10,12,14, 20 | 21 | | | | |
| A14 | | 1,2,3,7,8,9,10,12,14 | 20 | | | | |
| A15 | | 1,2,3,7,8,9,10,12 | 14 | | | | |
| A16 | | 1,2,3,7,8,9,10 | 12 | | | | |
| A17 | | 1,2,3,7,8,9 | 10 | | | | |
| A18 | | 1,2,3,7,6 | 9 | | | | |
| A19 | | 1,2,3,7 | 8 | | | | |
| A20 | | 1,2,3 | 7 | | | | |
| A21 | | 1,2 | 3 | | | | |
| A22 | | 1 | 2 | | | | |
| A23 | Isolation, secondary windings | 5,13,15,16 | 17 | | | | |
| A24 | | 5,13,15 | 16 | | | | |
| A25 | | 5,13 | 15 | | | | |
| A26 | | 5 | 13 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

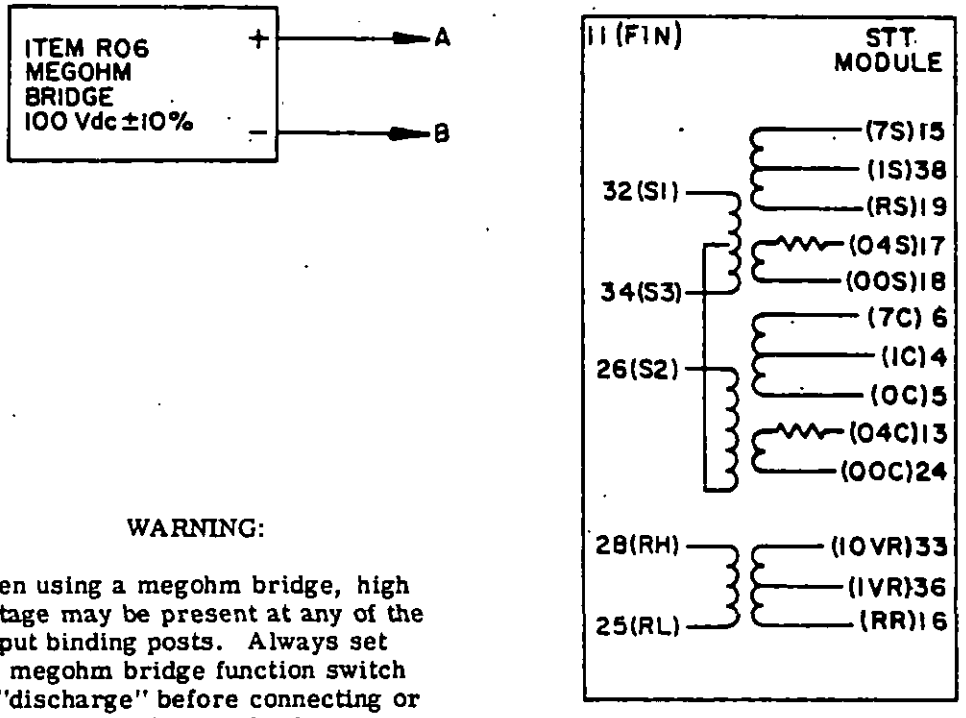


WARNING:

When using a megohm bridge, high voltage may be present at any of the output binding posts. Always set the megohm bridge function switch to "discharge" before connecting or disconnecting the test leads.

FIGURE 3. Isolation test circuit for table II.




Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE III. Dielectric withstanding voltage check test.

| Test condition | Parameter | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | Min | Max | | |
| B1 | Dielectric withstanding voltage check | 5,13,15,16,17, 25,26 | 11 | 0.0 | 0.5 | mA | 4 |
| B2 | Dielectric withstanding voltage check | 26 | 5,13,15,16, 17, 25 | 0.0 | 0.5 | mA | 4 |
| B3 | Dielectric withstanding voltage check | 25 | 5,13,15,16, 17 | 0.0 | 0.5 | mA | 4 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

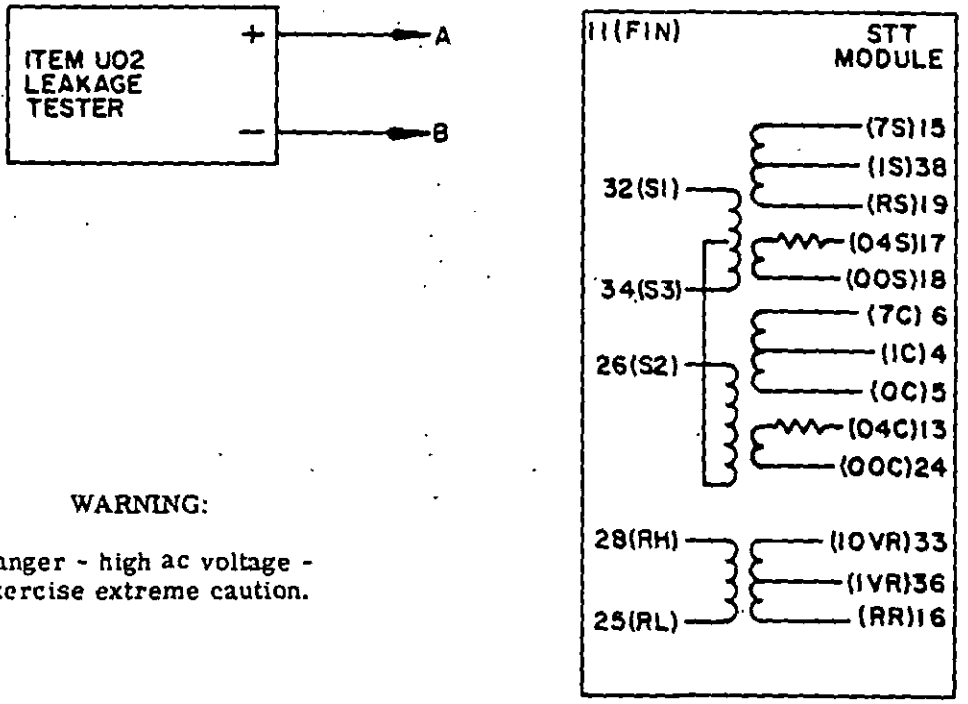


WARNING:

Danger - high ac voltage - exercise extreme caution.

NOTE: This test is to determine dielectric withstanding voltage. Voltage source level should be adjusted until maximum withstanding level is reached or breakdown occurs. Do not exceed specified maximum voltage of 355 Vrms ±1%.

FIGURE 4. Dielectric withstanding voltage check test circuit for table III.



Source: https://assist.dla.mil -- Downloaded: 20261O-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE IV. Stress test.

| Test condition | Parameter | Connect | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| C | Stress | Following this test the module shall conform to the requirements of all test conditions in table I marked test type X. | --- | --- | --- | 5 |





Source: https://assist.dla.mil -- Downloaded: 2022640-20T16:32Z
Check the source to verify that this is the current version before use.

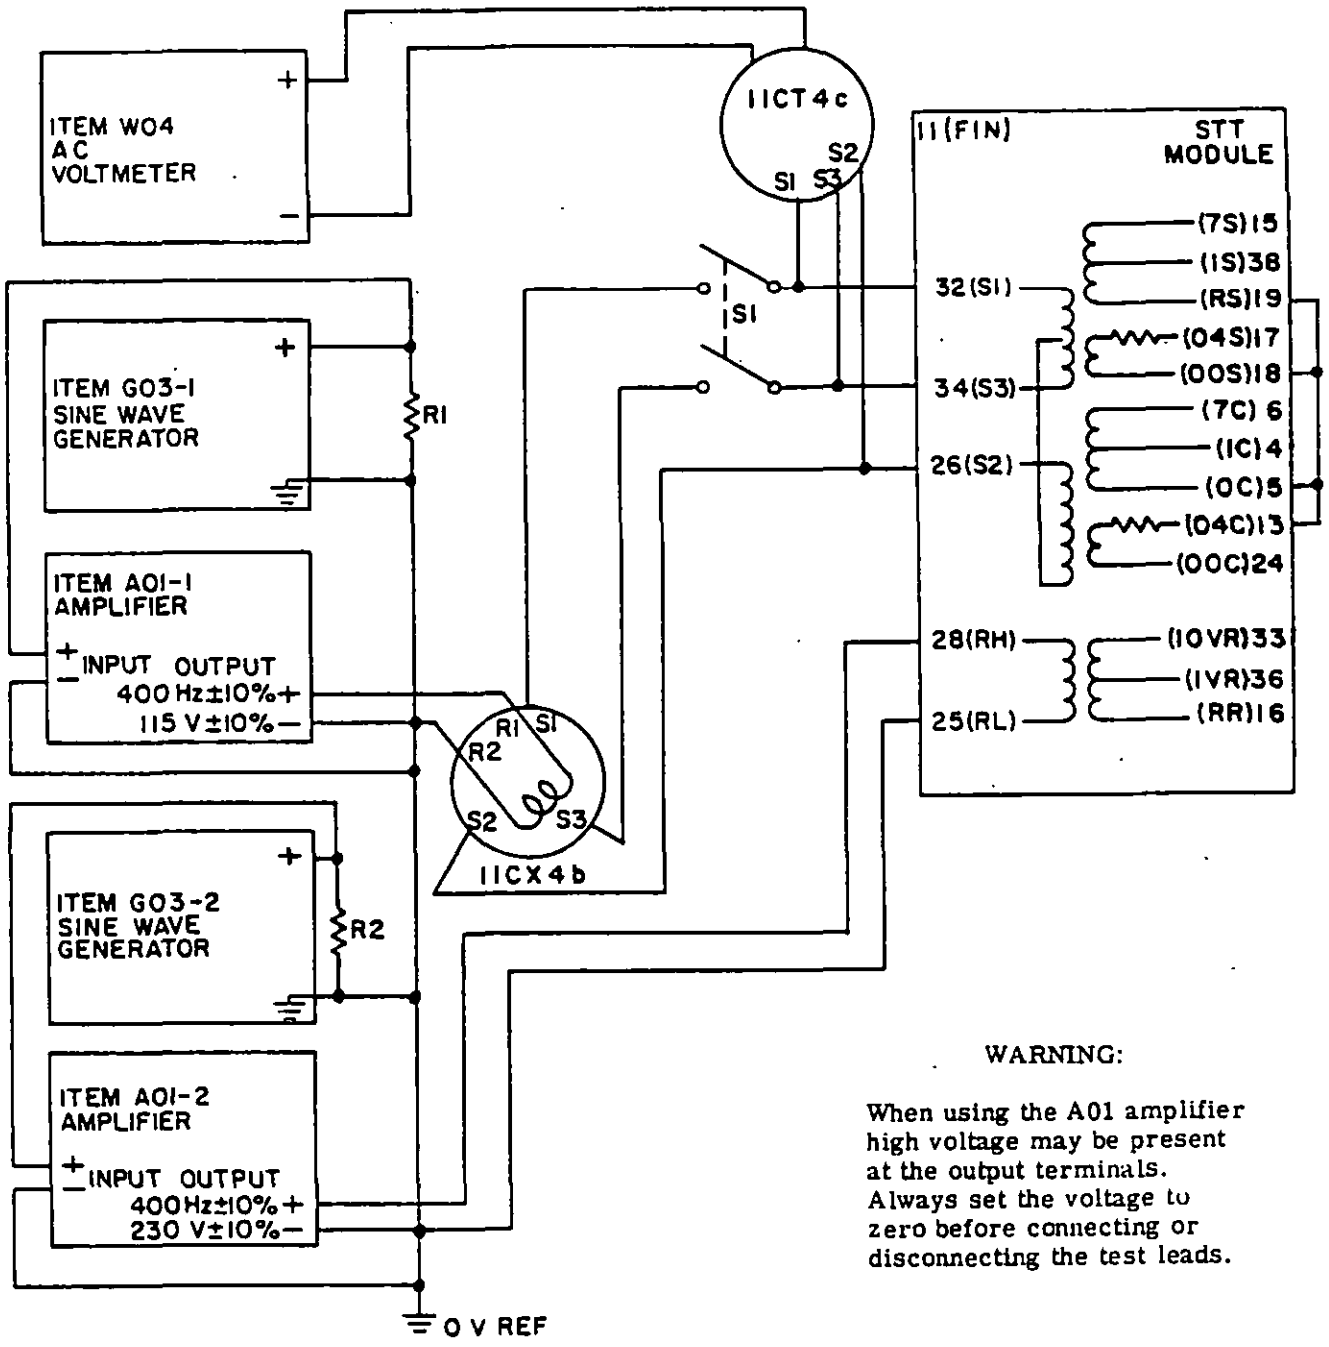


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = R2 = 51Ω ±5%, 1W.
2. S1 = DPST switch.
3. Set synchro at 0 ±10 degrees.
4. Set switch S1 to the closed position for a period of 10 to 30 seconds then operate switch S1 to the open position.
5. Item G03-1 may be used for item G03-2 and item A01-1 may be used for item A01-2.
6. This test shall not exceed 1 minute.

FIGURE 5. Stress test circuit for table IV.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE V. Reference winding transformation ratio and phase shift (400 Hz) test.

| Test condition | Parameter | Connect | | | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | D to pin | E to pin | Min | Max | | |
| 01 | Reference winding transformation ratio, no load | 33 | C | Open | Open | 0.0845 | 0.0895 | Ratio | 6 |
| 02 | Reference winding transformation ratio, loaded (1) k ) 1/ | 33 | C | Open | Open | See note | See note | Ratio | |
| 03 | Reference winding transformation ratio, no load | 36 | C | Open | Open | 0.00845 | 0.00895 | Ratio | |
| 04 | Reference winding phase shift | Open | Open | 33 | 16 | 0 | 3 | Degrees | |
| 05 | Reference winding phase shift | Open | Open | 36 | 16 | 0 | 3 | Degrees | |

1/ For test condition 02 the maximum limit shall be the reading taken for test condition 01 and the minimum limit shall be 0.98 times the reading taken in 01.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

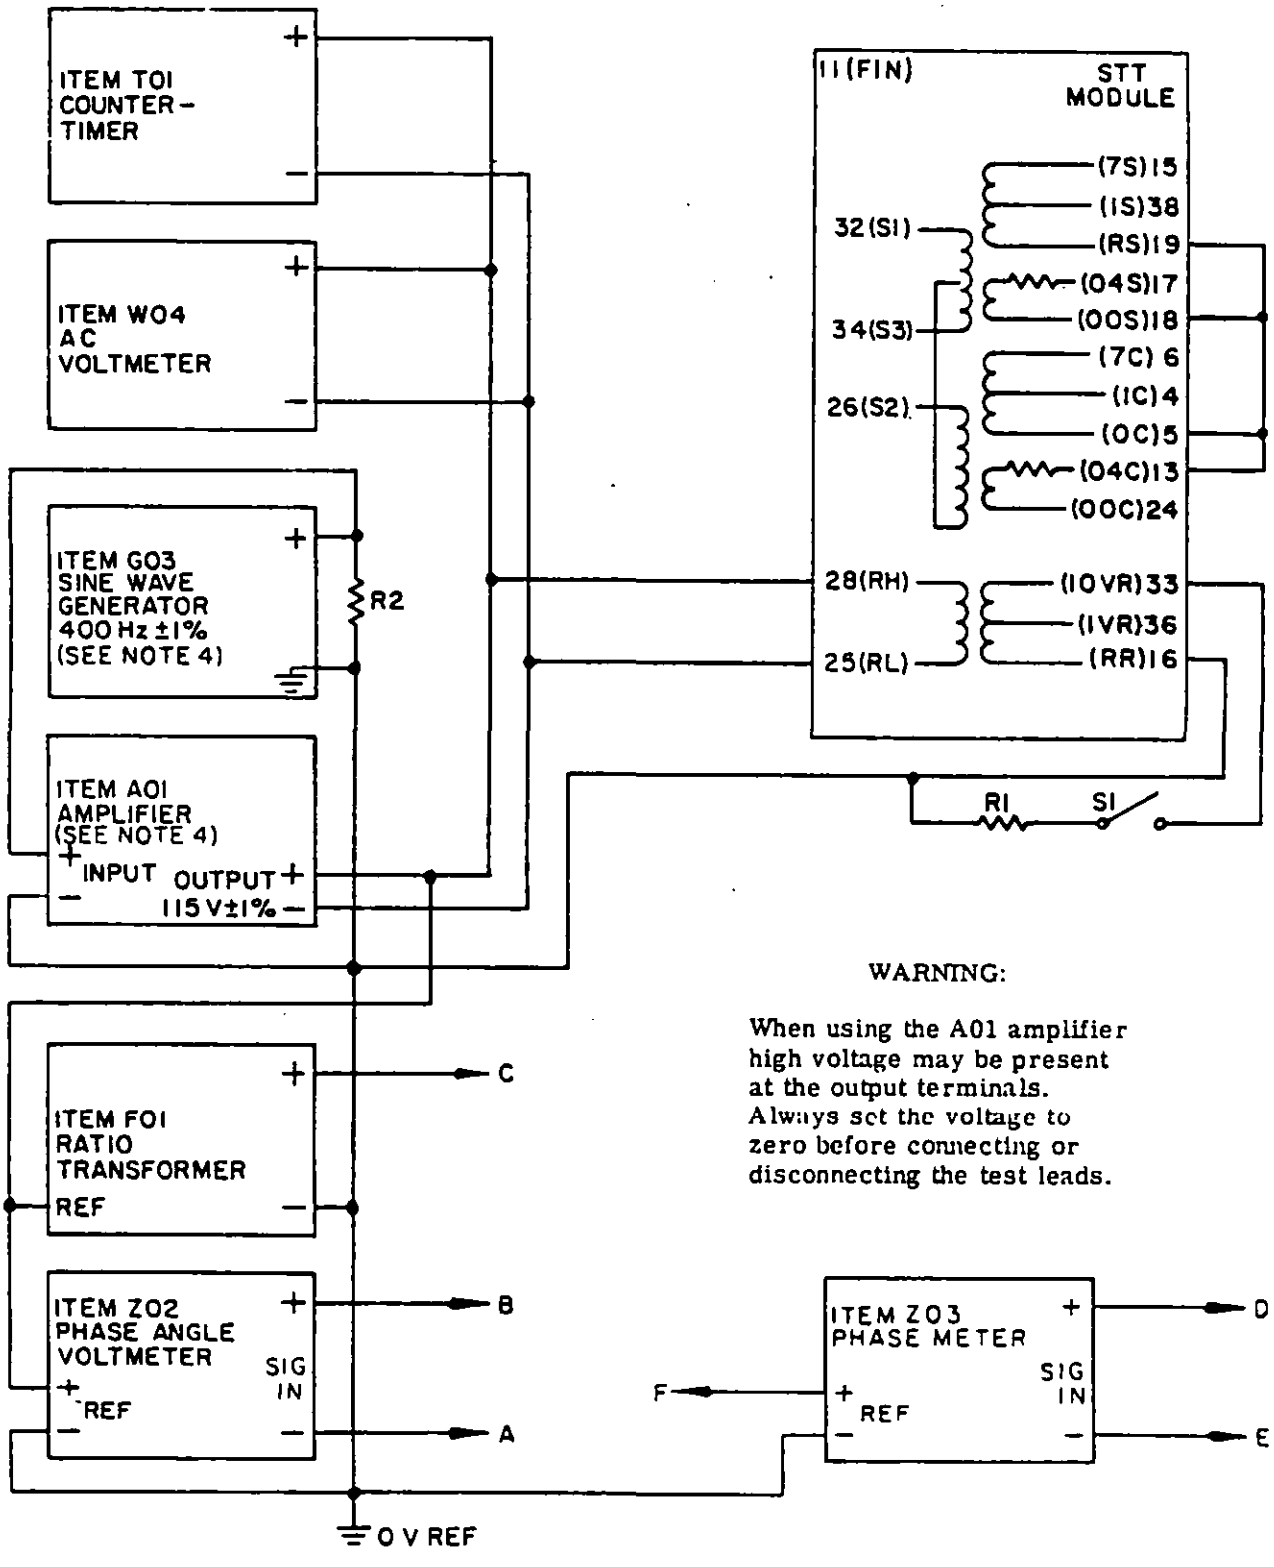



FIGURE 6. Reference winding transformation ratio and phase shift (400 Hz) test circuit for table V.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

NOTES:
1. R1 = 10 kΩ ±1%, 1/8 W.
2. R2 = 600Ω ±5%, 1 W.
3. S1 = SPST switch.
4. Adjust item G03 and item A01 for an output of 115 V ±1% at the output of item A01.
5. For test conditions D1, D3, and D5, open switch S1.
6. For test conditions D2 and D4, close switch S1.
7. For test conditions D1, D2, and D3:

   (a) Set item Z02 quadrant switch and phase dial to 0 degrees.
   (b) Adjust item F01 for a null on item Z02.
   (c) Read item F01.

8. For test conditions D4 and D5:

   (a) Adjust item F01 to a ratio of 0.4000.
   (b) Connect C to F.
   (c) Read item Z03.

FIGURE 6. Reference winding transformation ratio and phase shift (400 Hz) test circuit for table V - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE VI. Angle (S/. function), 400 Hz, check test.

| Test condition | Parameter | Item F03 output angle | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|---|
| | | | A to pin | B to pin | Min | Max | | |
| E1 | Angle check | 0° | 19 | 5 | 359.980 | 0.020 | Degrees | 7 |
| E2 | | 15° | | | 14.980 | 15.020 | | |
| E3 | | 30° | | | 29.980 | 30.020 | | |
| E4 | | 45° | | | 44.980 | 45.020 | | |
| E5 | | 60° | | | 59.980 | 60.020 | | |
| E6 | | 75° | | | 74.980 | 75.020 | | |
| E7 | | 90° | | | 89.980 | 90.020 | | |
| E8 | | 135° | | | 134.980 | 135.020 | | |
| E9 | | 180° | | | 179.980 | 180.020 | | |
| E10 | Angle (S.O. 2.5°) check | 0° | 24 | 17 | 357.0 | 358.0 | | |
| E11 | Angle (S.O. 2.5°) check | 45° | 24 | 17 | 42.0 | 43.0 | | |
| E12 | Angle (S.O. 2.5°) check | 90° | 24 | 17 | 87.0 | 88.0 | | |






Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE VII. Quadrature (S/D function), 400 Hz, check test.

| Test condition | Parameter | Item F03 output angle | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|---|
| | | | A to pin | B to pin | Min | Max | | |
| F1 | Quadrature check | 0° | 19 | 5 | -2 | 2 | mVrms | 7 |
| F2 | Quadrature check | 45° | 19 | 5 | -2 | 2 | mVrms | 7 |
| F3 | Quadrature check | 90° | 19 | | -2 | 2 | mVrms | 7 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

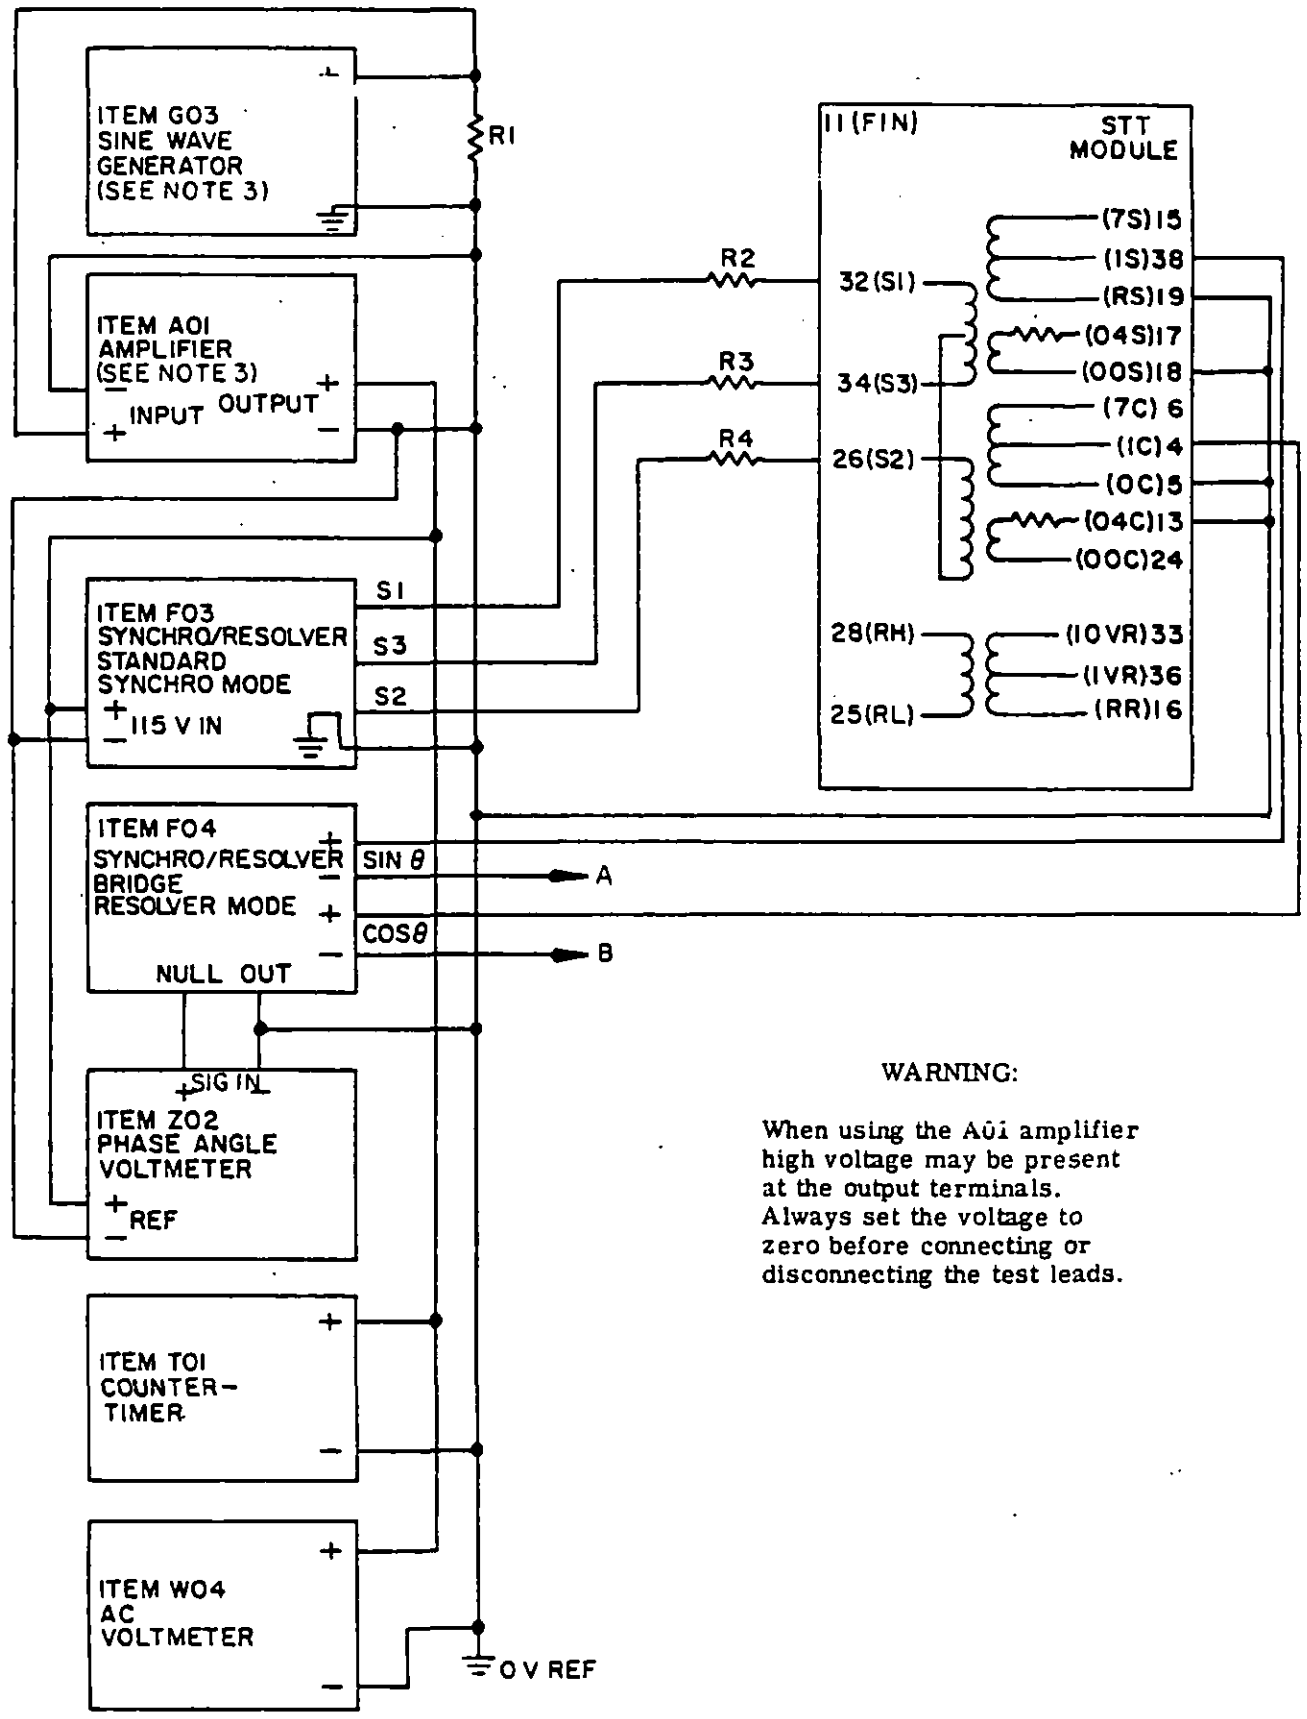


WARNING:

When using the A0i amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

FIGURE 7. Angle and quadrature (S/D function), 400 Hz, check test circuit for tables VI and VII.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = R3 = R4 = 100Ω ±1%, 1/8 W.
3. Adjust item G03 and item A01 for 126 V ±1%, 400 Hz ±1%, at output of item A01.
4. Set item F03 range switch at 90 V.
5. Adjust item F03 angle as specified in tables VI and VII.
6. For test conditions E1-E12 set item Z02 quadrant switch and phase dial to 0 degrees. Adjust item F04 for null on item Z02 and read item F04.
7. For test conditions F1-F3 find null on item Z02 as specified above for test conditions E1-E12 then switch quadrant switch on item Z02 to 90 degrees and read item Z02. Divide reading by m (figure 8, note 8) before comparing with limits specified in table VII.

FIGURE 7. Angle and quadrature (S/D function), 400 Hz, check test circuit for tables VI and VII - Continued.



Source: https://assist.dla.mil -- Downloaded: 20261O-20T16:32Z
Check the source to verify that this is the current version before use.

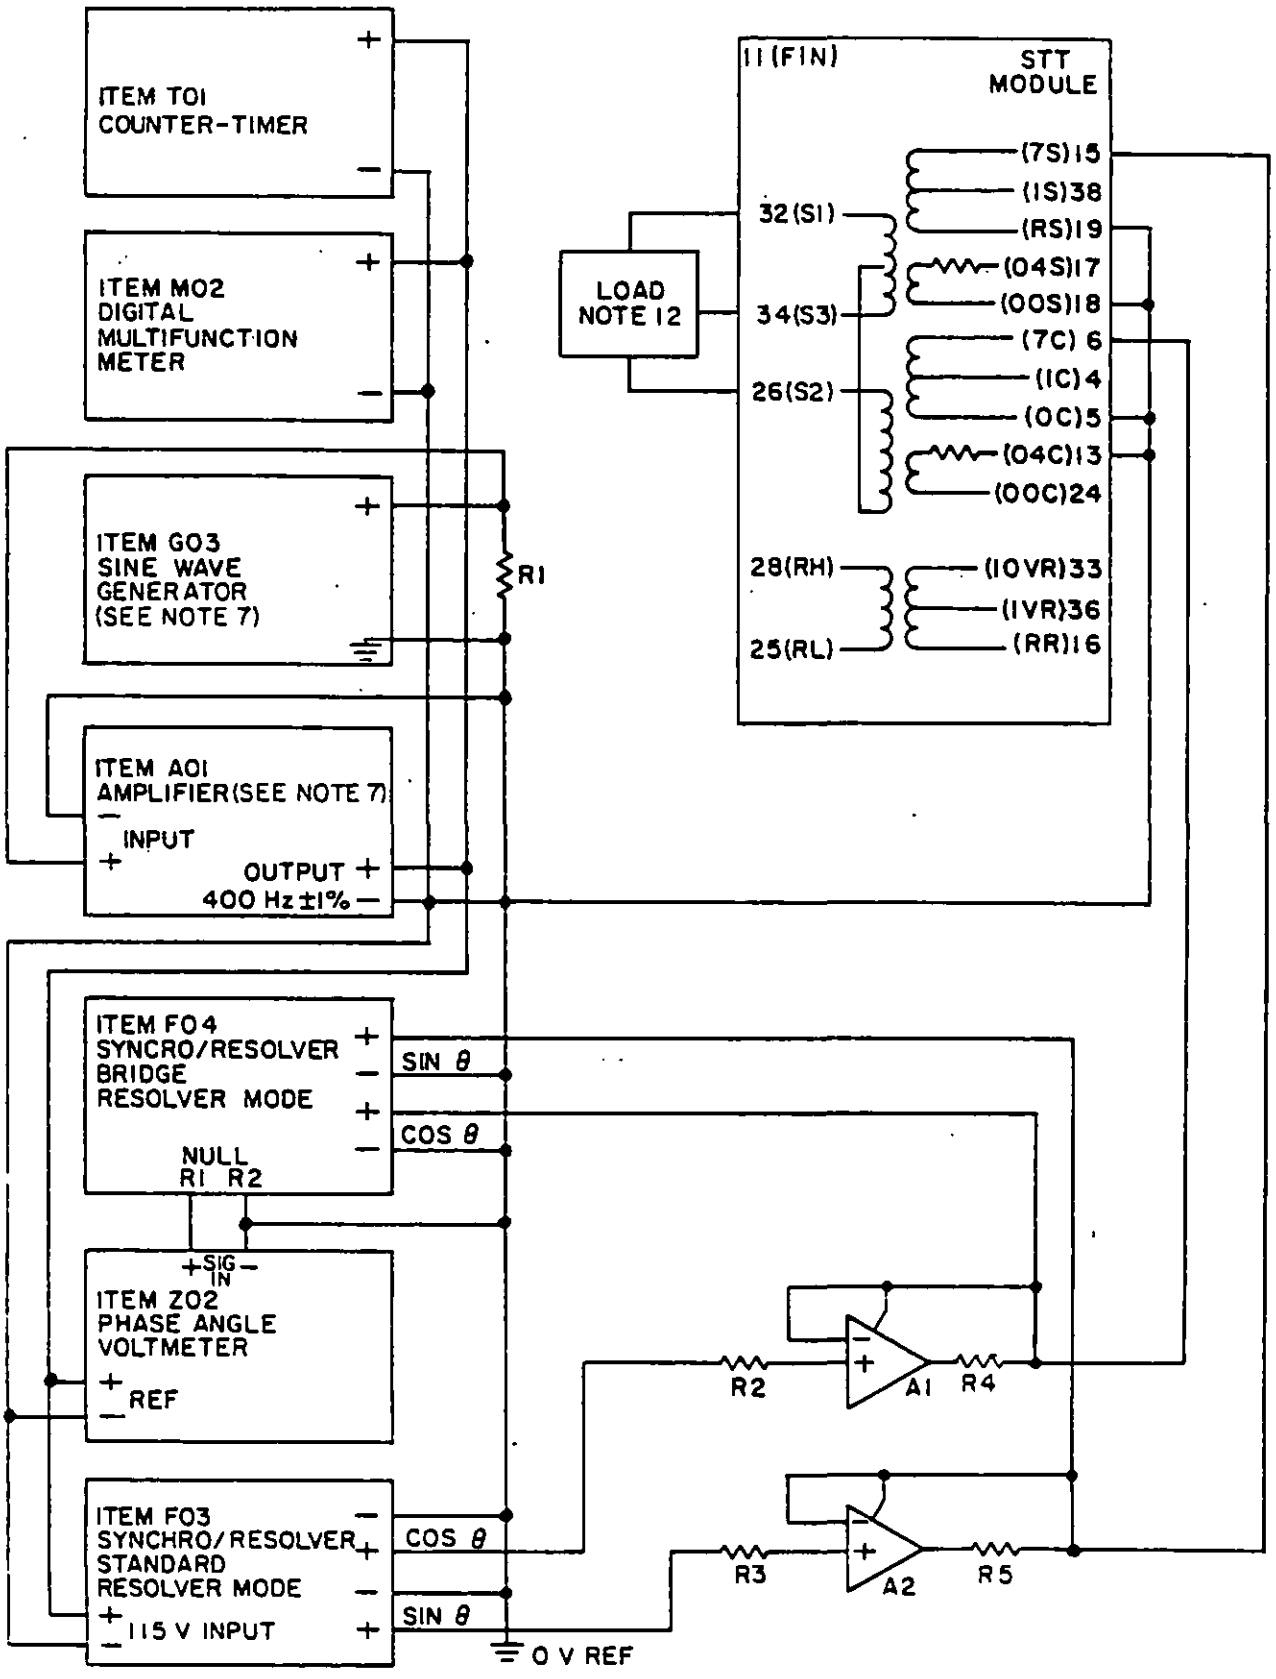



FIGURE 8. Test circuit to match operational amplifiers A1 and A2.




Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:

1. R1 = 600Ω ±5%, 1 W.
2. R2 = R3 = 1 kΩ ±5%, 1/8 W.
3. The values of R4 and R5 shall be selected such that the output currents of A1 and A2, respectively, are limited to 400 mA ±1%.
4. A1 = A2 = Fairchild 791 OpAmp, or equivalent. Set $\pm V_{CC}$ supplies of A1 and A2 to ±15 V ±1%. Adjust dc offsets to 0.05 mVdc.
5. The current sense terminals of A1 and A2 shall be connected to their respective outputs as shown.
6. Set range of item F03 to 11.8 V.
7. Set item F03 to 0 degrees. Adjust item A01 and item G03 for 8.0 ±0.1 Vrms at the output of A1.
8. Set item F03 to 0 degrees, item F04 to 90 degrees, and adjust item Z02 phase dial for a maximum reading. Let m = $\frac{\text{voltage reading}}{8}$.
9. Set item F03 to 45 degrees and adjust item F04 for a null. The null angle must be between 44.9980 and 45.0020 degrees (45.0000 ±0.0020 degrees).
10. Set item F03 to 22.5 degrees and adjust item F04 for a null. The null angle must be between 22.4980 and 22.5020 degrees (22.5000 ±0.0020 degrees).
11. Set item F03 to 67.5 degrees and adjust item F04 for a null. The null angle must be between 67.4980 and 67.5020 degrees (67.5000 ±0.0020 degrees).
12. Load:

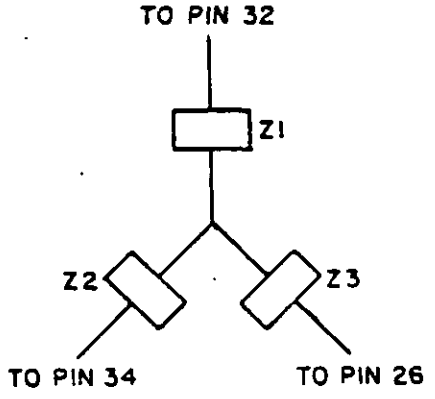


Z1-Z3 = 3.33 kΩ ±0.5% with
$Q = \frac{\omega L}{R} = 5 \pm 0.5\%$ where
f = 400 Hz and $\omega = 2\pi f$, Z and Q matched to 0.1%.

13. All ground connections shall be made to a single common point and shall be as short as possible.

FIGURE 8. Test circuit to match operational amplifiers A1 and A2 - Continued.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE VIII. Phase shift (U/S function), 400 Hz, check test.

| Test condition | Parameter | Item FO3 output angle | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| G | Phase snift check | 0° | 180.0 | 186.0 | De-grees | 9 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE IX. Angle (D/S function), 400 Hz, check test.

| Test condition | Parameter | Item FO3 output angle | Initial limits 25°±5°C ambient Min | Initial limits 25°±5°C ambient Max | Unit | Test figure |
|---|---|---|---|---|---|---|
| H1 | Angle check | 0° | 359.970 | 0.030 | Degrees | 9 |
| H2 | | 15° | 14.970 | 15.030 | | |
| H3 | | 30° | 29.970 | 30.030 | | |
| H4 | | 45° | 44.970 | 45.030 | | |
| H5 | | 60° | 59.970 | 60.030 | | |
| H6 | | 75° | 74.970 | 75.030 | | |
| H7 | | 90° | 89.970 | 90.030 | | |
| H8 | | 135° | 134.970 | 135.030 | | |
| H9 | | 180° | 179.970 | 180.030 | | |
| H10 | | 67.5° | 67.470 | 67.530 | | |
| H11 | | 22.5° | 22.470 | 22.530 | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE X. Quadrature (D/S function), 400 Hz, check test.

| Test condition | Parameter | Item FO3 output angle | Initial lim 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Ma | | |
| J1 | Quadrature check | 0° | 0 | 150 | mVrms | 9 |
| J2 | Quadrature check | 45° | 0 | 150 | mVrms | 9 |
| J3 | Quadrature check | 90° | 0 | 150 | mVrms | 9 |





Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

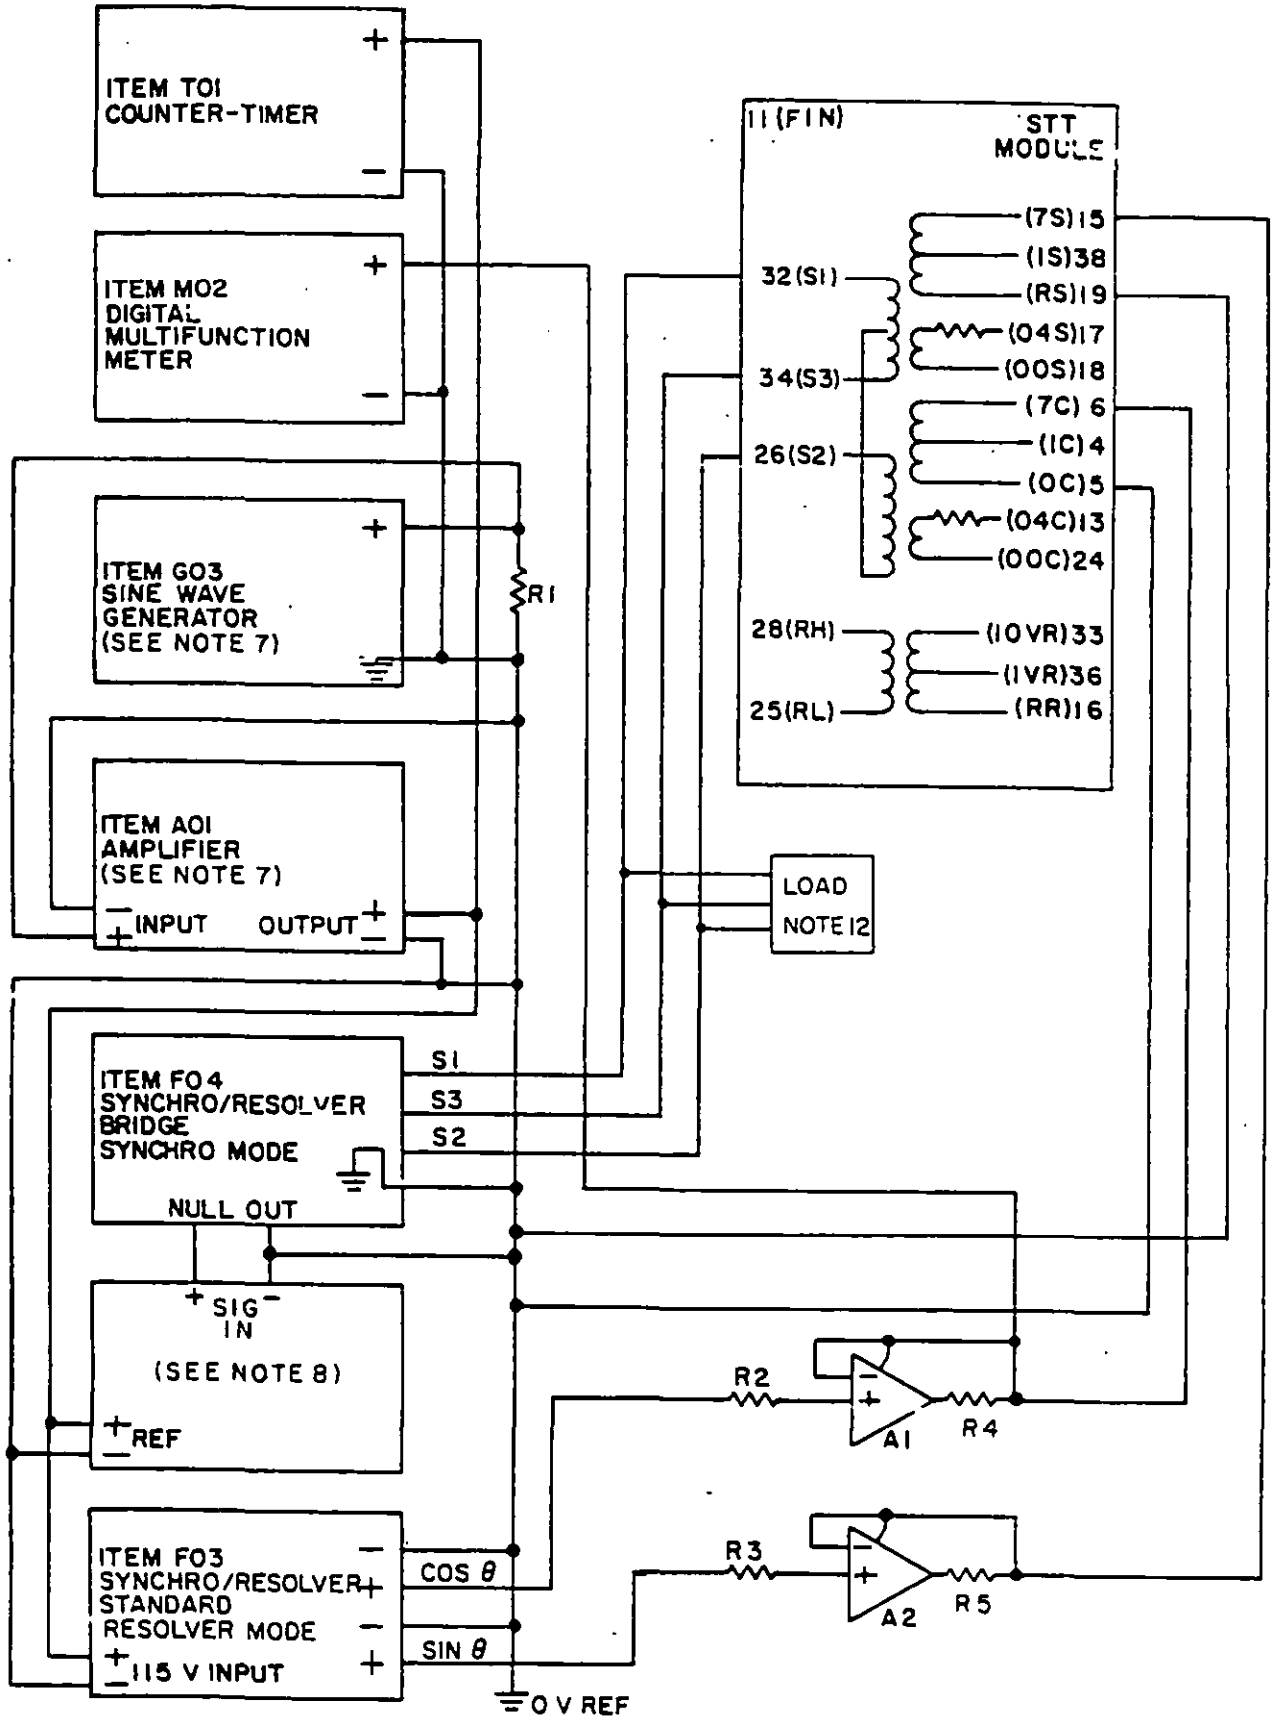



FIGURE 9. Phase shift, angle, and quadrature (D/S function) check test circuit for tables VIII, IX, and X.





Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = R3 = 1 kΩ ±5%, 1/8 W.
3. The values of R4 and R5 shall be selected such that the output currents of A1 and A2, respectively, are limited to 400 mA ±1%.
4. A1 = A2 = Fairchild 791 OpAmp, or equivalent, matched per figure 8. Set $\pm V_{CC}$ supplies of A1 and A2 to ±15 V ±1%.
5. The current sense terminals of A1 and A2 shall be connected to their respective outputs as shown.
6. Set range of item F03 to 26 V.
7. Set item F03 to 0 degrees. Adjust item A01 and item G03 for 8.0 ±0.1 Vrms, 400 ±4 Hz, at the output of A1.
8. For test condition G, use item Z03 and for test conditions H and J, use item Z02.
9. Set item F03 to 0 degrees, item F04 to 90 degrees, and adjust item Z02 phase dial for a null. Using item Z03, take readings for test condition G. Leave phase dial setting on item Z02 for the null to do test conditions H and J.
10. For test conditions H1-H11 set item Z02 quadrant switch to 0 degrees. Adjust item F04 for a null on item Z02 and read item F04.
11. For test conditions J1-J3 adjust item F04 for a null following the procedure for test condition H (note 10). Then switch item Z02 quadrant switch to 90 degrees and read item Z02. Divide reading by m (figure 8, note 8) before comparing with the limits specified in table X.
12. Load for test conditions G, H1-H11, and J:

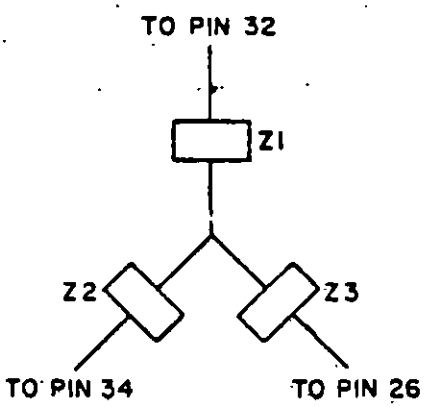


Z1-Z3 = 3.33 kΩ ±0.5% with
$Q = \frac{\omega L}{R} = 5$ ±0.5% where
f = 400 Hz and $\omega = 2\pi f$, Z and Q matched to 0.1%.
$Z_i$ =  where
$R1 + j\omega L = Z$


13. All ground connections shall be made to a single common point and shall be as short as possible.

FIGURE 9. Phase shift, angle, and quadrature (D/S function) check test circuit for tables VIII, IX, and X - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE XI. Amplitude output (S/D function) test.

| Test condition | Parameter | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|
| | | Min | Max | | |
| K | Amplitude output | 0.9 | 1.1 | Vrms | 10 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

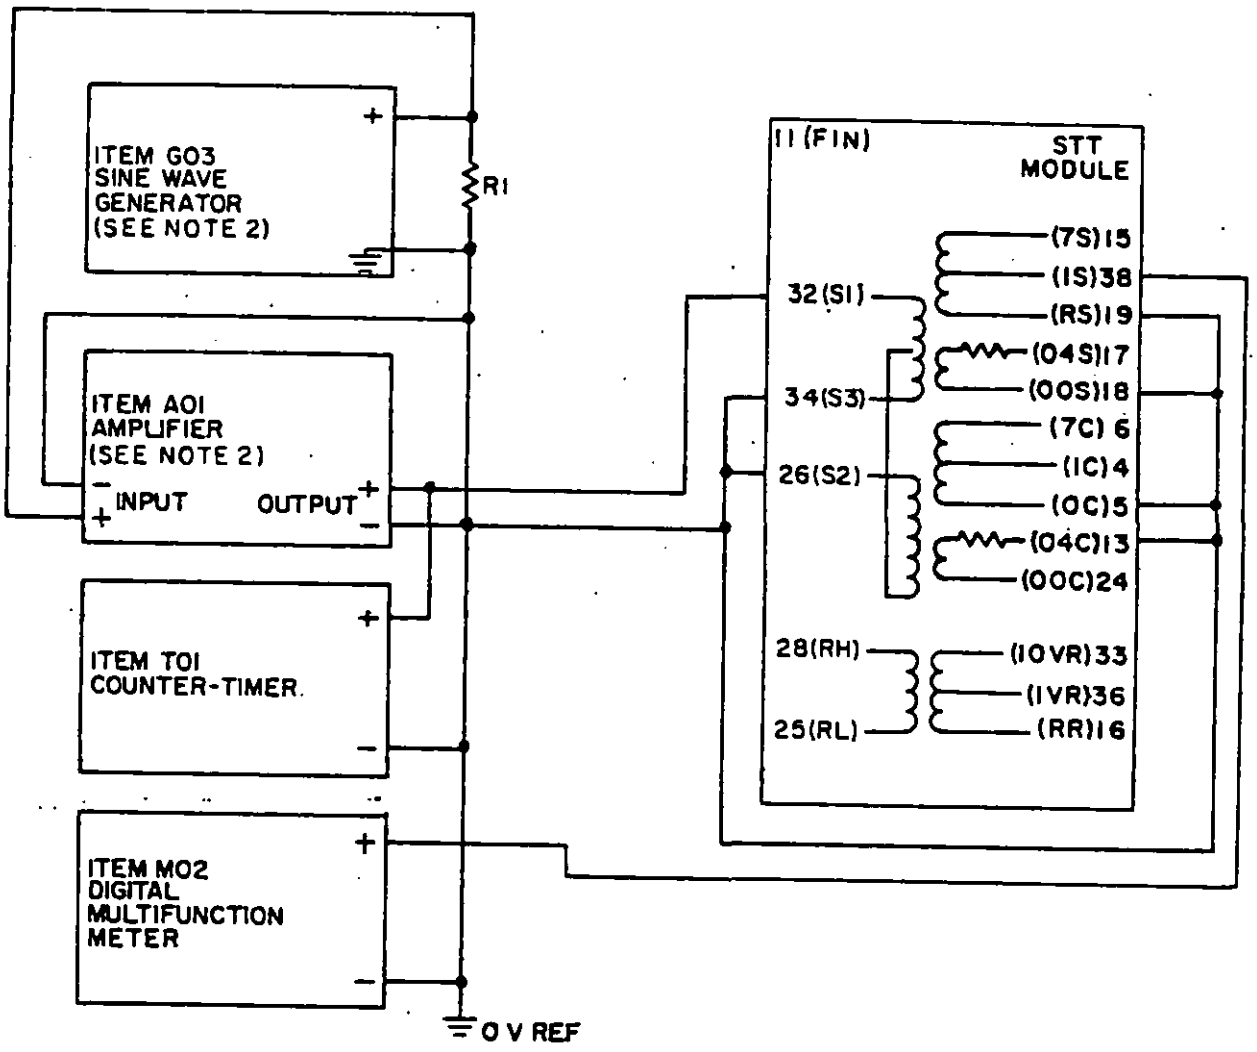


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. Adjust item A01 and item G03 for 90 Vrms ±1%, 400 Hz ±1%, at the output of item A01.

FIGURE 10. Amplitude output (S/D function) test circuit for table XI.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE XII. Amplitude output (O/S function) test.

| Test condition | Parameter | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | Min | Max | | |
| L1 | Amplitude output (loaded) | 32 | 34 | 81.0 | 92.7 | Vrms | 11 |
| L2 | Amplitude output (unloaded) | Open | Open | L1 | 1.1 L1 | Vrms | 11 |
| L3 | Amplitude output (unloaded) | Open | Open | 87.0 | 92.7 | Vrms | 11 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

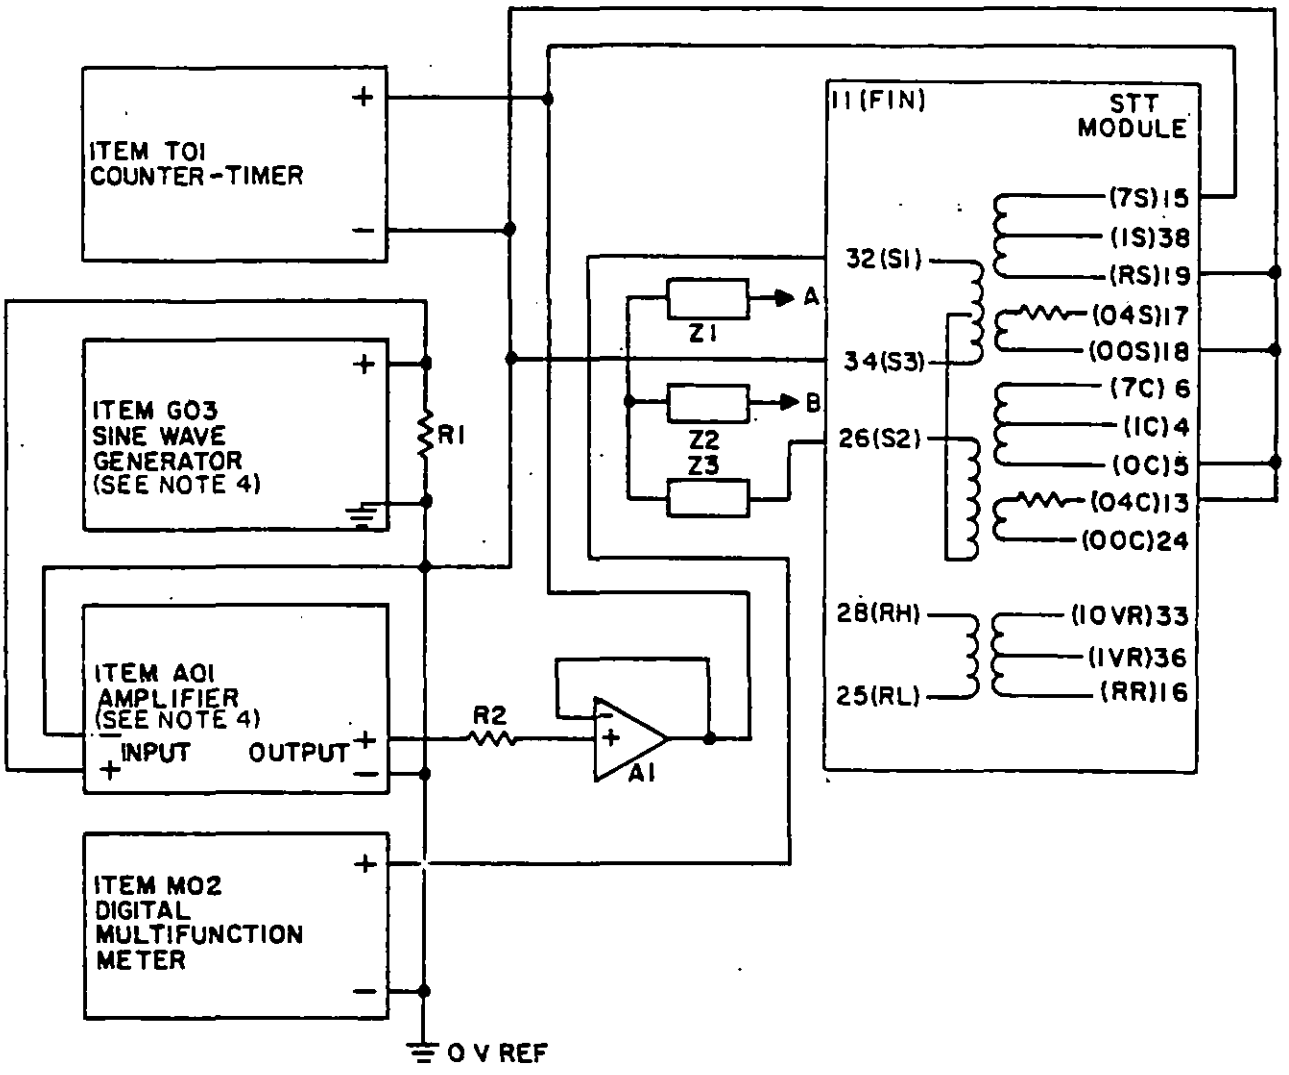


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = 1 kΩ ±1%, 1/8 W.
3. A1 = Fairchild 791 OpAmp, or equivalent. Set $\pm V_{CC}$ supplies of A1 to ±15 V ±1%.
4. Adjust item A01 and item G03 for 7 Vrms ±0.5%, 400 Hz ±1%, at pin 15.
5. Load:
   Z1 Z2 Z3 = 3.33 kΩ ±0.5% with $Q = \frac{\omega L}{R} = 5 \pm 0.5\%$ where f = 400 Hz and $\omega = 2\pi f$. Z and Q matched to 0.1%.
6. Test conditions L2 and L3 refer to the same voltage reading.

FIGURE 11. Amplitude output (D_S function) test circuit for table XII.



Source: https://assist.dla.mil Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE XIII. Input impedance check test.

| Test condition | Parameter | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | Min | Max | | |
| M1 | Input impedance (Scott-T) check | 32 | 26 | 0.008 | 2.380 | Vrms | 12 |
| M2 | Input impedance (reference) check | 28 | 25 | 0.10 | 3.17 | Vrms | 12 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

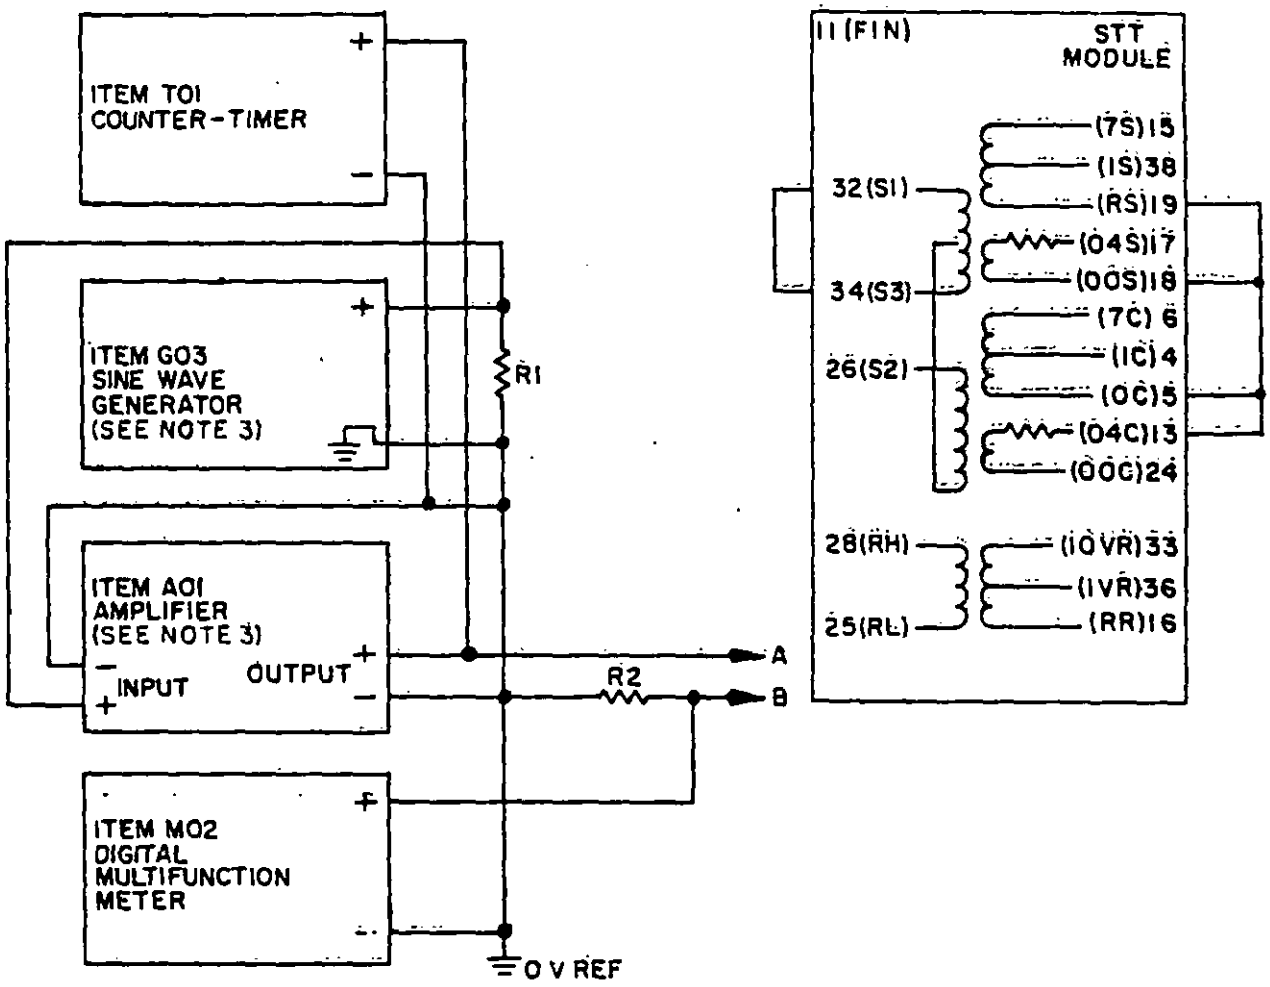


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = 1 kΩ ±1%, 1.8 W.
3. Adjust item A01 and item G03 for an output from item A01 as listed:

| Test condition | Frequency | Voltage |
|---|---|---|
| M1 | 360 Hz ±1% | 95 Vrms ±1% |
| M2 | 360 Hz ±1% | 130 Vrms ±1% |

4. $Z = V/I = \frac{V_{IN} - V_{R2}}{V_{R2}/R2} = \frac{(V_{IN} - V_{R2}) \times 10^3}{V_{R2}}$ (for $V_{IN}$ see note 3).

FIGURE 12. Input impedance check test circuit for table XIII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE XIV. Output resistance and continuity test.

| Test condition | Parameter | Connect | | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|---|
| | | A to pin | B to pin | Min | Max | | |
| N1 | Output resistance (secondary) | 17 | 18 | 13.85 | 16.94 | Ω | 13 |
| N2 | Output resistance (secondary) | 24 | 13 | 13.85 | 16.94 | Ω | 13 |
| N3 | Continuity (fin) | 11 | Fin | 0 | 1 | Ω | 13 |





Source: https://assist.dla.mil -- Downloaded: 2022-02-20T16:32Z
Check the source to verify that this is the current version before use.

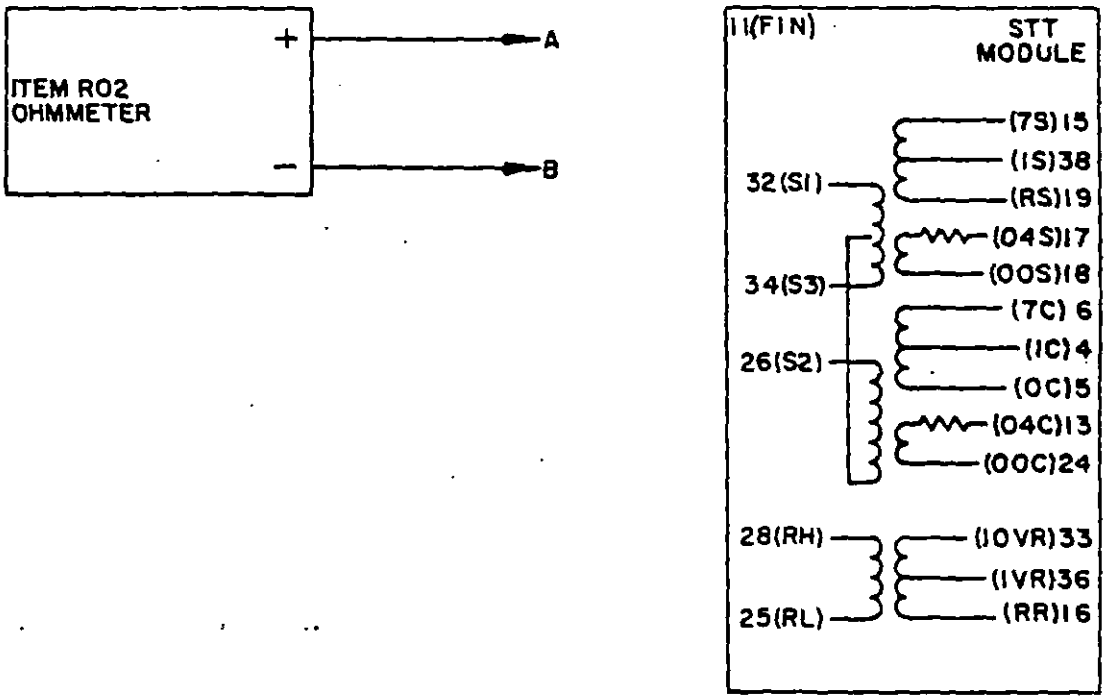


NOTE: For test condition N3, penetrate the anodized finish on the module frame with a sharply pointed probe connected to the negative terminal.

FIGURE 13. Output resistance and continuity test circuit for table XIV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE XV. Angle (11.8 S/D function), 400 Hz, check test.

| Test condition | Parameter | Item F03 output angle | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| P1 | Angle check | 0° | 359.970 | 0.030 | Degrees | 14 |
| P2 | Angle check | 45° | 44.970 | 45.030 | Degrees | 14 |
| P3 | Angle check | 90° | 89.970 | 90.030 | Degrees | 14 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

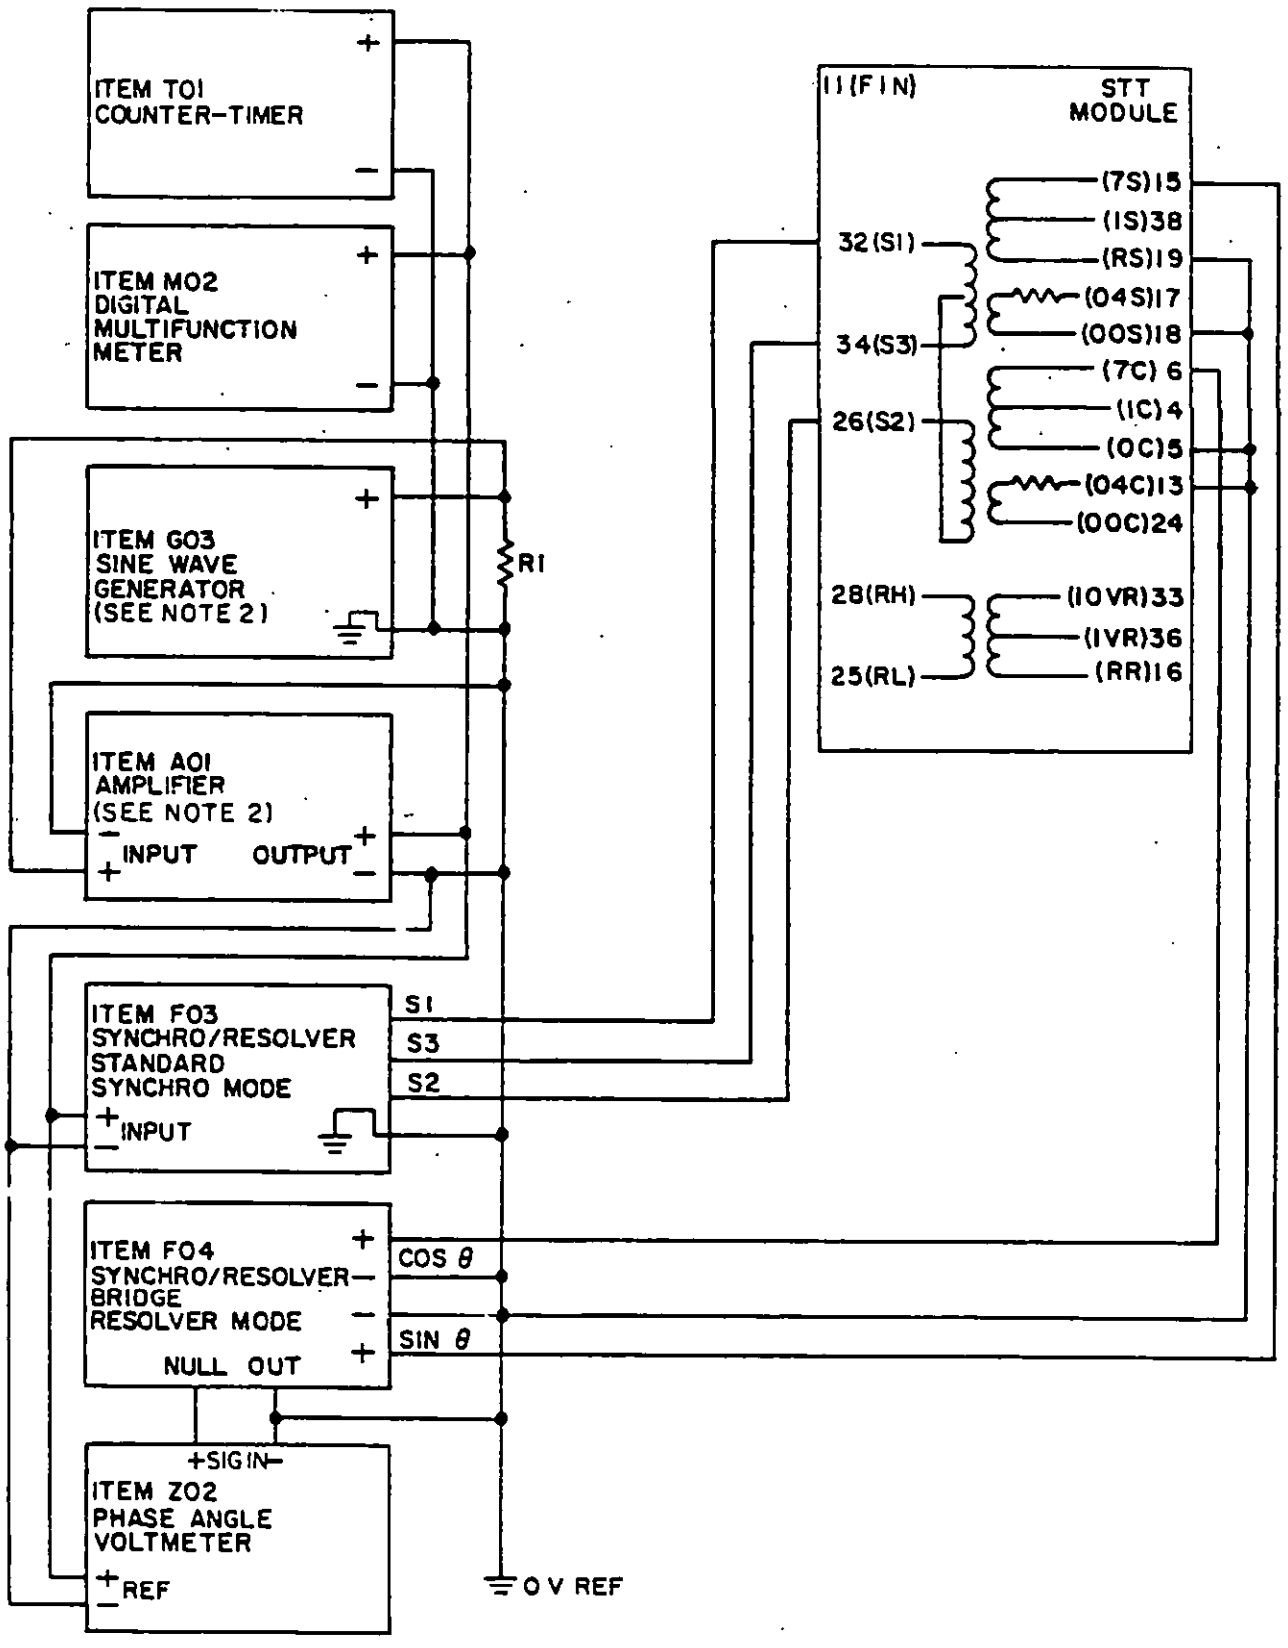



FIGURE 14. Angle (R/D function) check test circuit for table XV.



Source: https://assist.dla.mil - Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. Adjust item A01 and item G03 for 115 V ±5%, 400 Hz ±5% at output of item A01.
3. Adjust item F03 range switch for 11.8 line-to-line synchro signal.

FIGURE 14. Angle (11.8 S/D function) check test circuit for table XV - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE XVI. High-voltage low-frequency accuracy (D/S function) test.

| Test condition | Parameter | Item F03 output angle | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| Q1 | High-voltage low-frequency accuracy | 0° | 359.97 | 0.03 | Degrees | 15 |
| Q2 | ↓ | 22.5° | 22.47 | 22.53 | ↓ | ↓ |
| Q3 | | 45° | 44.97 | 45.03 | | |
| Q4 | | 90° | 89.97 | 90.03 | | |
| Q5 | | 180° | 179.97 | 180.03 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

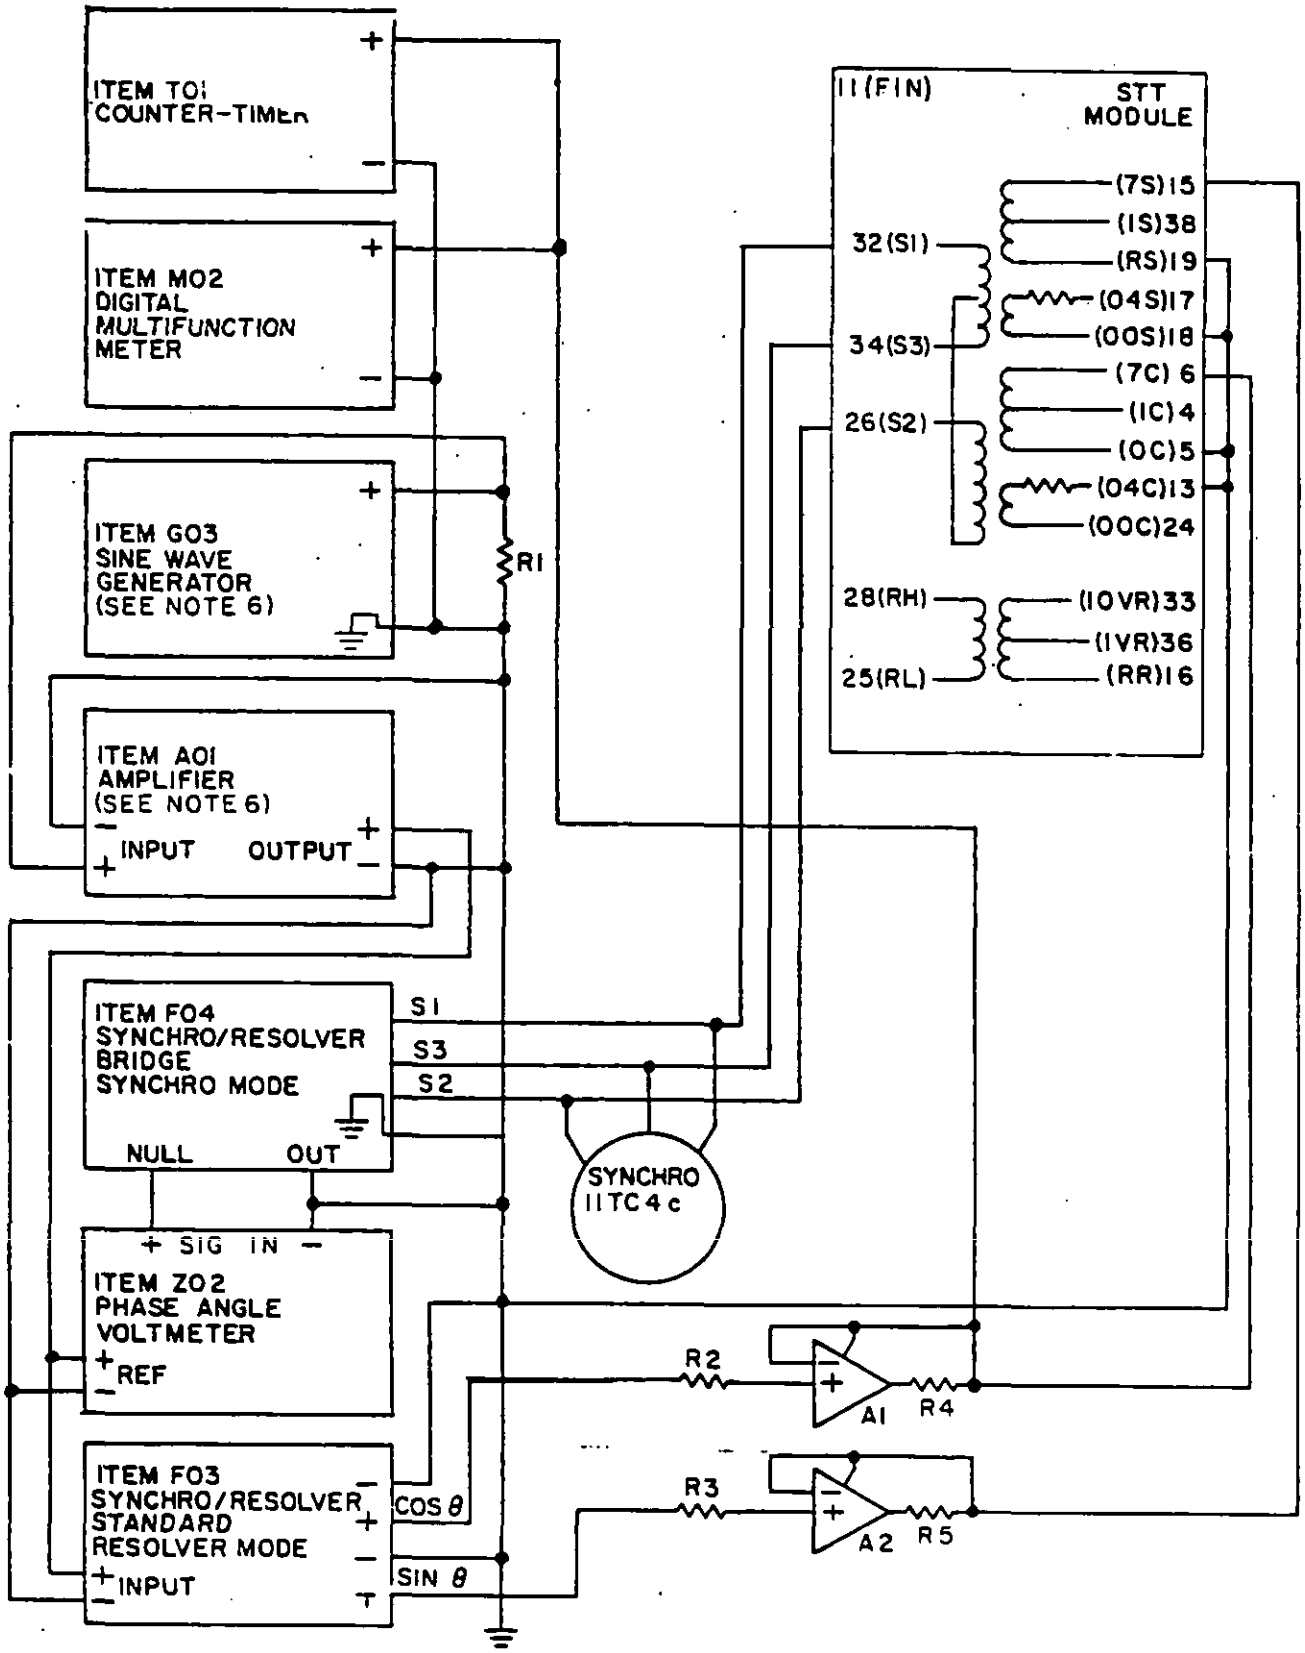



FIGURE 15. High-voltage low-frequency accuracy (D/S function) test circuit for table XVI.



Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = R3 = 1 kΩ ±1%, 1/8 W.
3. The values of R4 and R5 shall be selected such that the output currents of A1 and A2, respectively, are limited to 400 mA ±1%.
4. A1 = A2 = Fairchild 791 OpAmp, or equivalent. Set $\pm V_{CC}$ supplies of A1 and A2 to ±15 V ±1%.
5. The current sense terminals of A1 and A2 shall be connected to their respective outputs as shown.
6. Adjust item A01 and item G03 for 9.0 Vrms ±1%, 350 ±4 Hz, at output of A1 with item F03 set at 0°.
7. Slew 11CT4c to the angle set on item F03 before taking each reading.

FIGURE 15. High-voltage low-frequency accuracy (D/S function) test circuit for table XVI - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.


TABLE XVII. Common mode rejection ratio test.

| Test condition | Parameter | Connect A to pin | Initial limits 25°±5°C ambient Min | Initial limits 25°±5°C ambient Max | Unit | Test figure |
|---|---|---|---|---|---|---|
| R1 | Common mode rejection ratio | 38 | 0 | 2 | mVrms | 16 |
| R2 | ↓ | 4 | ↓ | ↓ | ↓ | ↓ |
| R3 | | 15 | | | | |
| R4 | | 5 | | | | |





Source: https://assist.dla.mil -- Downloaded: 2020-10-20T16:32Z
Check the source to verify that this is the current version before use.

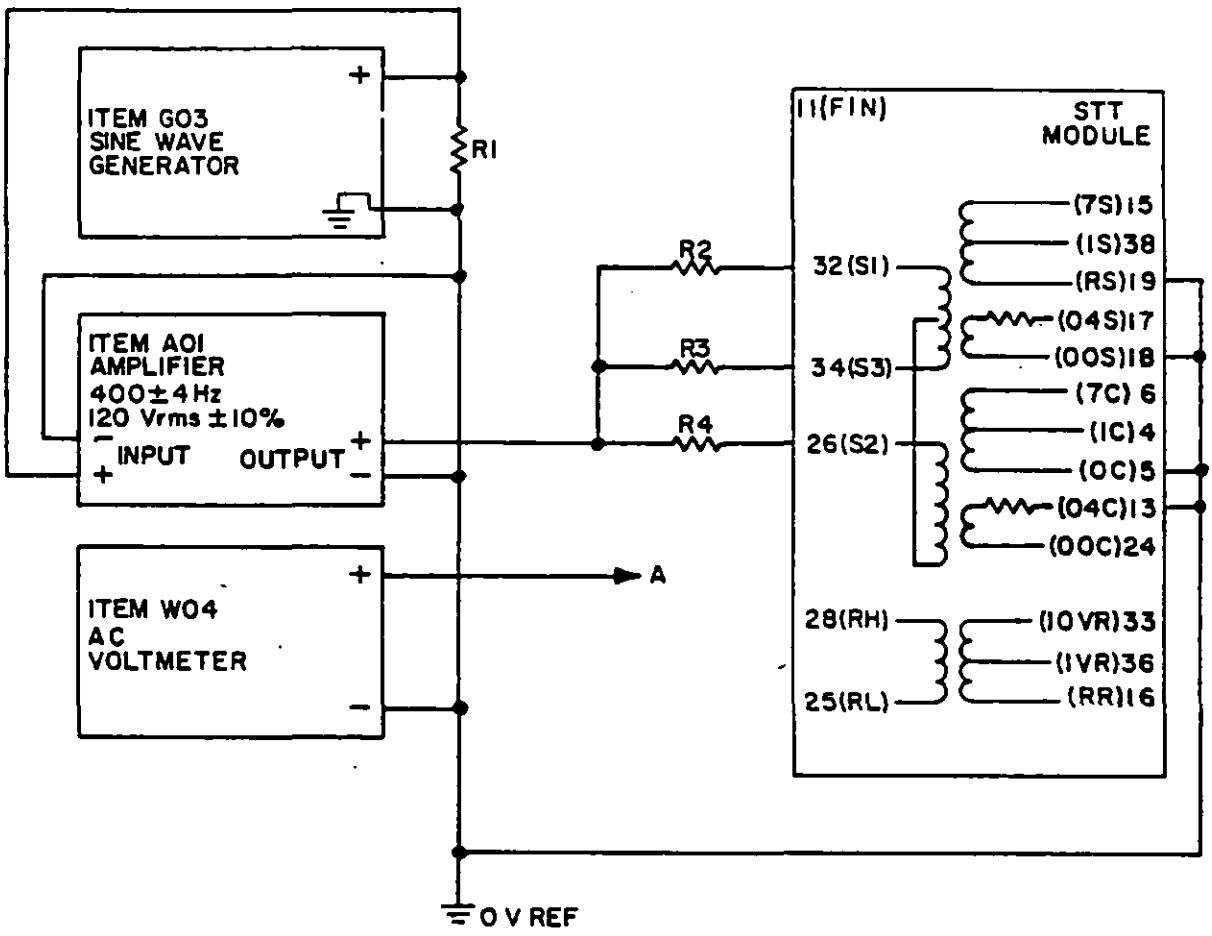


WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 51Ω ±5%, 1 W.
2. R2-R4 = 100Ω ±1%, 1/8 W.

FIGURE 16. Common mode rejection ratio test circuit for table XVII.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE XVIII. Phase shift offset (D/S function) check test.

| Test condition | Parameter | Item F03 output angle | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| S | Phase shift offset check | 0° | 180.0 | 186.0 | Degrees | 17 |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

TABLE XIX. Angle offset (D/S function) check test.

| Test condition | Parameter | Item F03 output angle | Initial limits 25°±5°C ambient | | Unit | Test figure |
|---|---|---|---|---|---|---|
| | | | Min | Max | | |
| T1 | Angle offset check | 0° | 359.970 | 0.030 | Degrees | 17 |
| T2 | | 15° | 14.970 | 15.030 | | |
| T3 | | 30° | 29.970 | 30.030 | | |
| T4 | | 45° | 44.970 | 45.030 | | |
| T5 | | 60° | 59.970 | 60.030 | | |
| T6 | | 75° | 74.970 | 75.030 | | |
| T7 | | 90° | 89.970 | 90.030 | | |
| T8 | | 135° | 134.970 | 135.030 | | |
| T9 | | 180° | 179.970 | 180.030 | | |
| T10 | | 0° | 359.970 | 0.030 | | |
| T11 | | 15° | 14.970 | 15.030 | | |
| T12 | | 30° | 29.970 | 30.030 | | |
| T13 | | 45° | 44.970 | 45.030 | | |
| T14 | | 60° | 59.970 | 60.030 | | |
| T15 | | 75° | 74.970 | 75.030 | | |
| T16 | | 90° | 89.970 | 90.030 | | |
| T17 | | 135° | 134.970 | 135.030 | | |
| T18 | | 180° | 179.970 | 180.030 | | |





Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

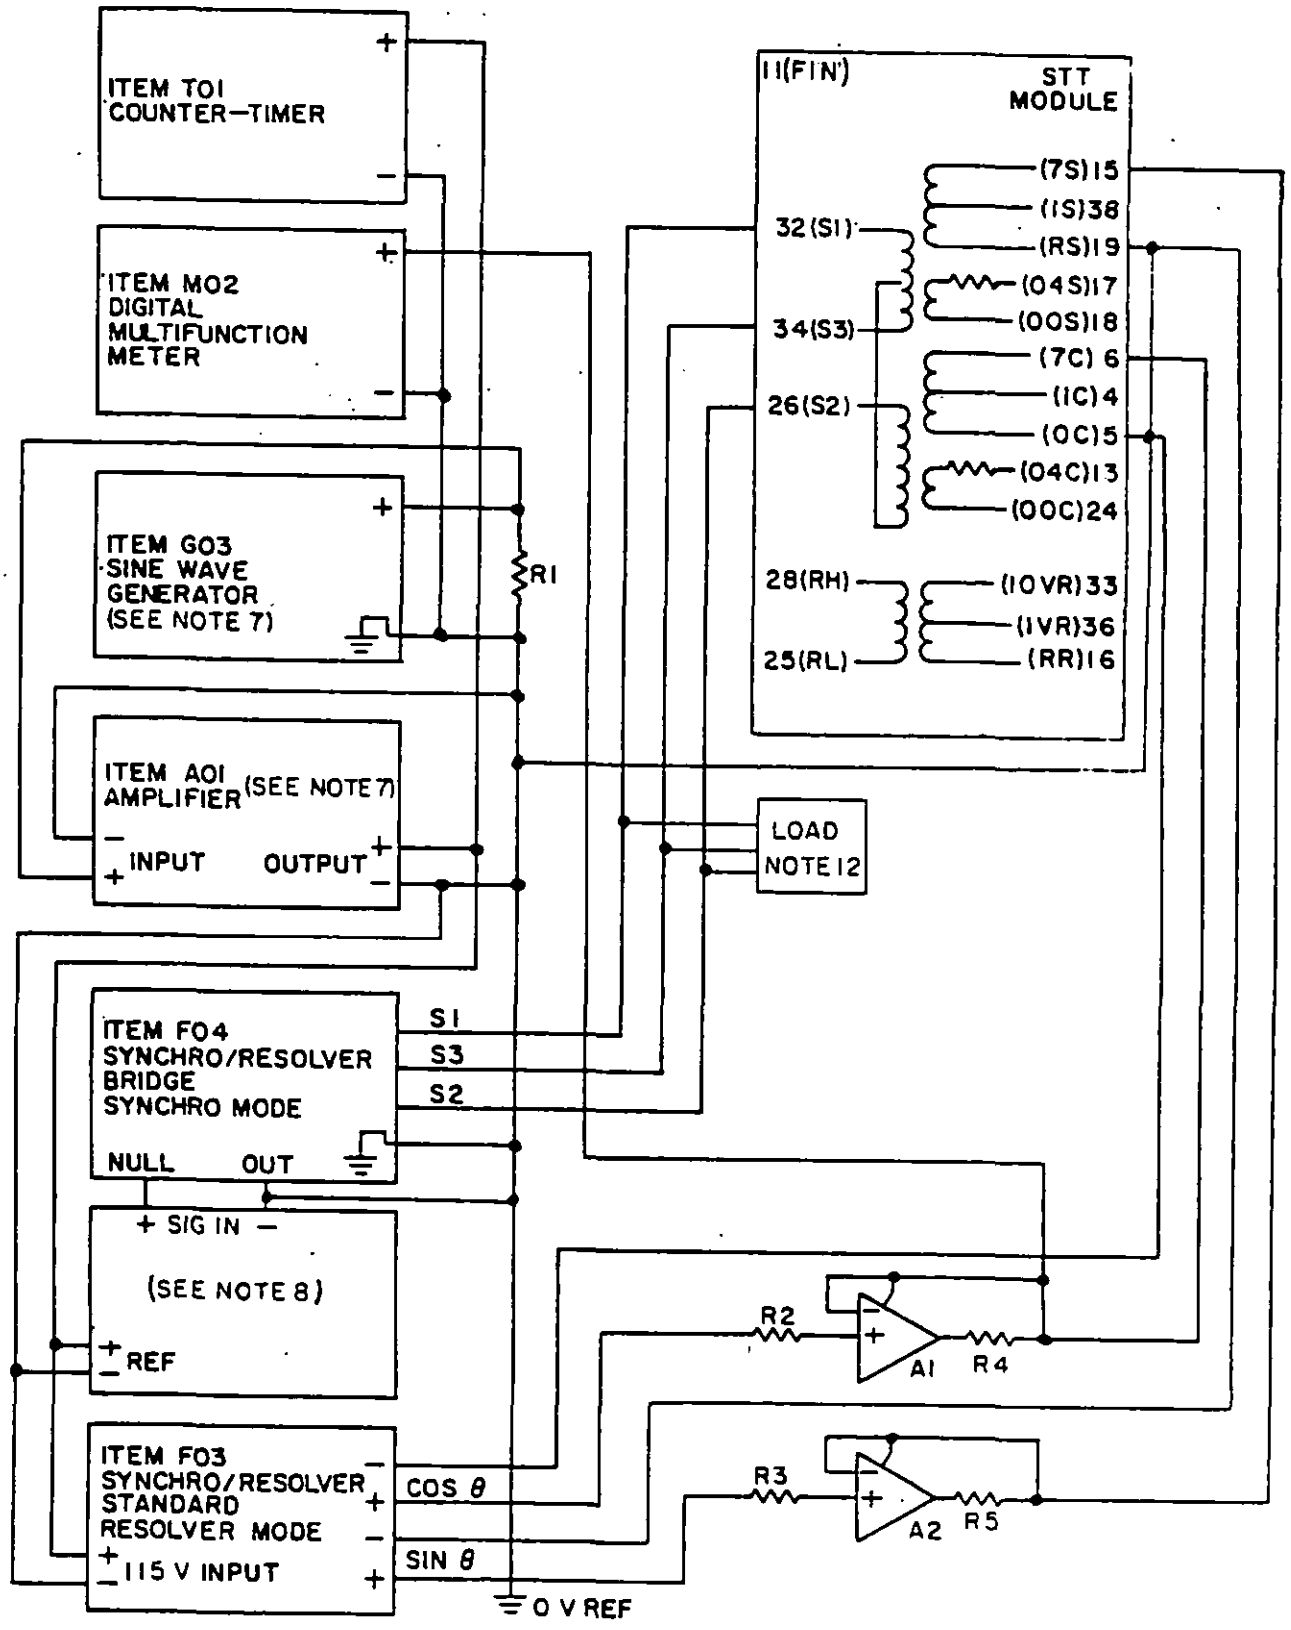



FIGURE 17. Phase shift offset and angle offset (D/S function) check test circuit for tables XVIII and XIX.




Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

WARNING:

When using the A01 amplifier high voltage may be present at the output terminals. Always set the voltage to zero before connecting or disconnecting the test leads.

NOTES:
1. R1 = 600Ω ±5%, 1 W.
2. R2 = R3 = 1 kΩ ±5%, 1/8 W.
3. The values of R4 and R5 shall be selected such that the output currents of A1 and A2, respectively, are limited to 400 mA ±1%.
4. A1 = A2 = Fairchild 791 OpAmp, or equivalent, matched per figure 8. Set $\pm V_{CC}$ supplies of A1 and A2 to ±15 V ±1%.
5. The current sense terminals of A1 and A2 shall be connected to their respective outputs as shown.
6. Set range of item F03 to 11.8 V.
7. Set item F03 to 0 degrees. Adjust item A01 and item G03 for 8.0 ±0.1 Vrms, 400 ±4 Hz, at the output of A1.
8. For test condition AA, use item Z03 and for test condition BB, use item Z02.
9. Set item F03 to 0 degrees, item F04 to 90 degrees, and take reading for test condition AA using item Z03. Adjust item Z02 phase dial for a null. Leave phase dial setting for the null to do test condition BB.
10. For test condition BB1-BB18 set item Z02 function to 0 degrees. adjust item F04 for a null on item Z02 and read item F04.
11. Adjust A1 and A2 for +4 ±0.1 mV of offset and do test conditions BB1-BB9. Do test conditions BB10-BB18 with the offset adjusted to -4 ±0.1 mV.
12. Load for test conditions BB1-BB18:

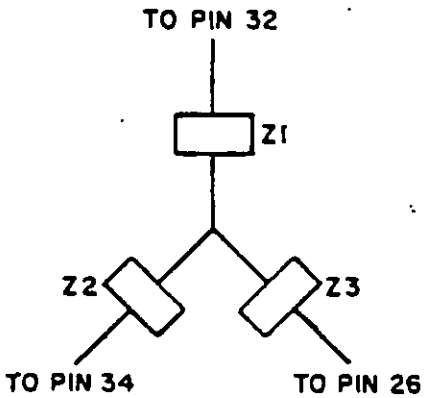


Z1-Z3 = 3.33 kΩ ±0.5% with
$Q = \frac{\omega L}{R} = 5$ ±0.5% where
f = 400 Hz and $\omega = 2\pi f$, Z and Q matched to 0.1%.
$Z_i =$ R1 ωL1 where
R1 + jωL = Z

13. All ground connections shall be made to a single common point and shall be as short as possible.

FIGURE 17. Phase shift offset and angle offset (D/S function) check test circuit for tables XVIII and XIX - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**BUSINESS REPLY MAIL**

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Attn: ELEX 8111
Washington, DC 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T16:32Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-M-28787/185B(EC), Modules, Standard Electronic, Transformers, Scott-T, Analog, Key Code STT

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 20260-20T16:32Z
Check the source to verify that this is the current version before use.