MILITARY SPECIFICATION

MODULES, STANDARD ELECTRONIC

SHIFT REGISTER, DIGITAL, KEY CODE EML

This amendment forms a part of Military Specification MIL-M-28787/277(EC), dated 9 November 1983, and is approved for use by the Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 29

FIGURE 11: Delete and substitute new figure 11 as printed on page 2 of this amendment.

PAGE 40

FIGURE 15: Delete and substitute new figure 15 as printed on page 3 of this amendment.

PAGE 60

FIGURE 19: Delete and substitute new figure 19 as printed on page 4 of this amendment.

PAGE 71

FIGURE 21: Delete and substitute new figure 21 as printed on page 5 of this amendment.

PAGE 77

FIGURE 24: Delete and substitute new figure 24 as printed on page 6 of this amendment.

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5963-N630)


FSC 5963

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.

NOTES:
1. R1 = R2 = R5 = 51.1Ω ±5%, 1/8W.
2. R3 = R4 = 9.09 kΩ ±1%, 1/8 W at 0°C and 25°C.
   = 10.5 kΩ ±1%, 1/8 W at 60°C.
   = 11 kΩ ±1%, 1/8 W at 85°C.
   = 7.5 kΩ ±1%, 1/8 W at -55°C.
3. Item J01 setup.
   PA = 5 V ±1%.
   PW = 500 ±50 ns.
   PRP = 1,000 ±100 ns.
   $t_{TLH} = t_{THL}$ = 20 ±2 ns.
   Single pulse mode.
4. After establishing the setup input condition, apply four pulses using item J01.
5. After establishing the input conditions of test conditions F1 or G1, apply one pulse using item J01. Prior to making the specified measurement, repeat the sequence of notes for the remainder of the test.

FIGURE 11. Output voltage (low-level and high-level) test circuit for tables X and XI - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.

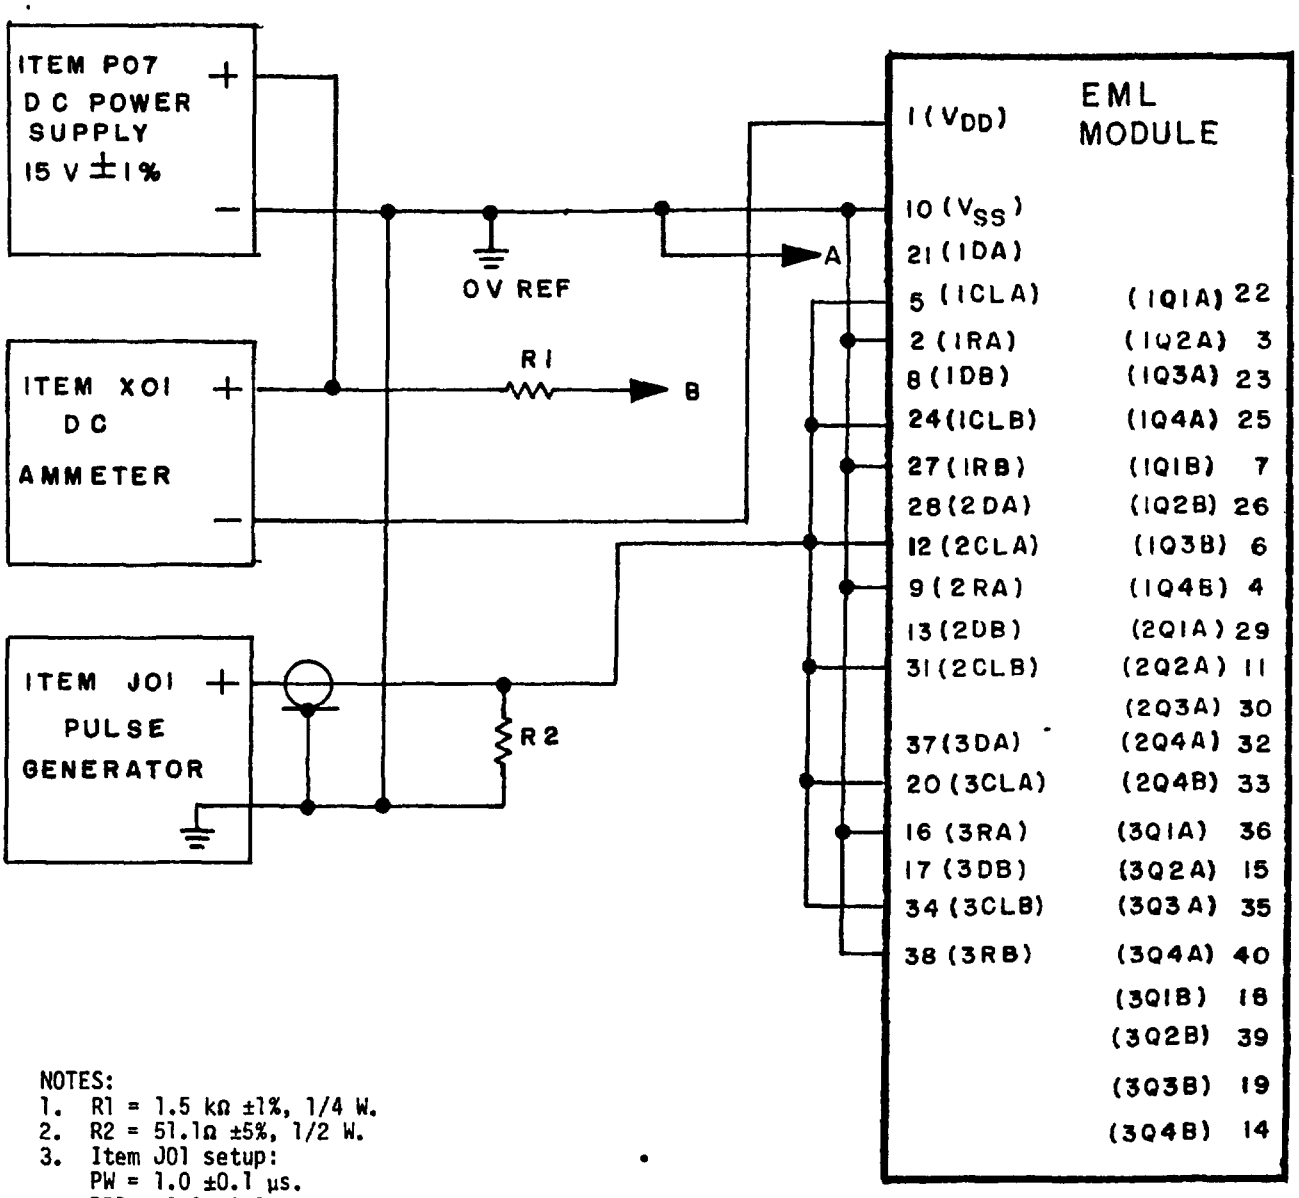

NOTES:
1. R1 = 1.5 kΩ ±1%, 1/4 W.
2. R2 = 51.1Ω ±5%, 1/2 W.
3. Item J01 setup:
   PW = 1.0 ±0.1 µs.
   PRP = 2.0 ±0.2 µs.
   PA = 15 V ±1%.
   $t_{TLH} = t_{THL}$ = 20 ±2 ns.
4. Put item J01 in single pulse mode after all connections are made. Pulse item J01 four times, measure test condition M1 and repeat procedure for test condition M2.

FIGURE 15. Power supply current (low-level and high-level) test circuit for table XVI.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.

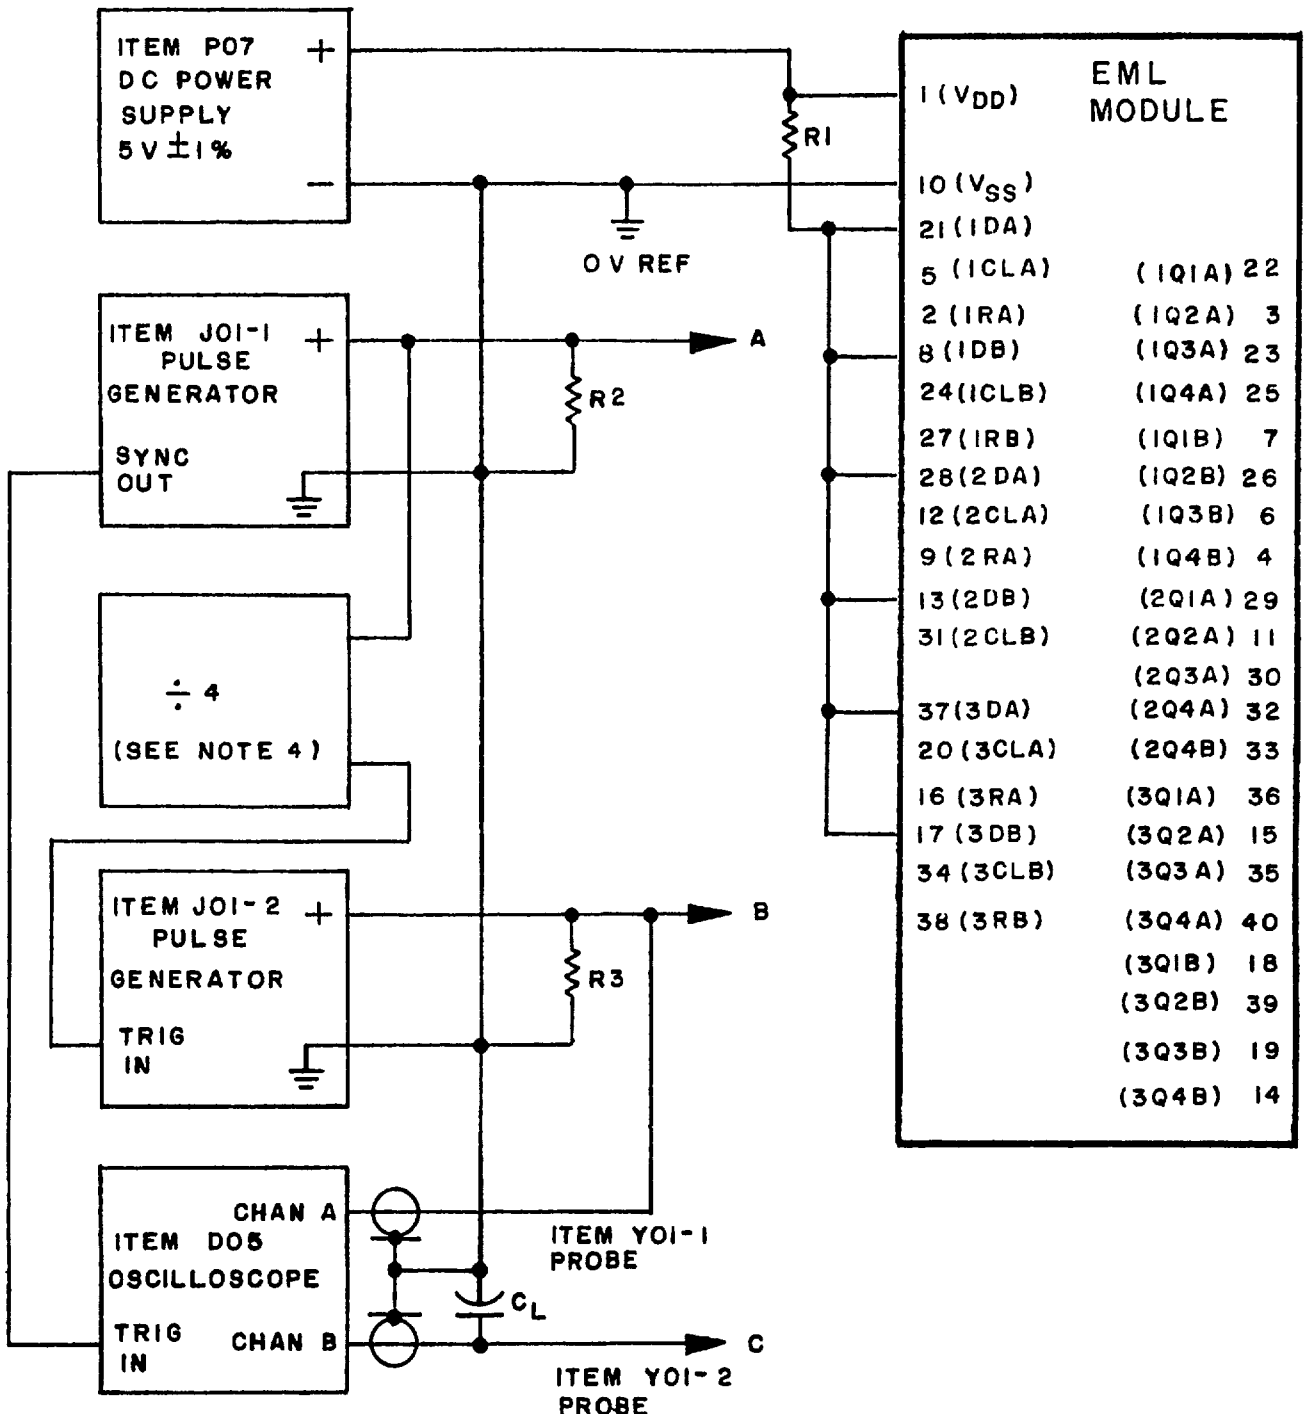

NOTES:
1. R1 = 1,000Ω ±5%, 1/4 W.
2. R2 = R3 = 50Ω ±5%, 1/2 W.
3. C_L = 50 ±5 pF for test conditions U1-U20.
   = 150 ±15 pF for test conditions U21-U40.
4. The divide by 4 function may be either a commercially available unit (such as the Tektronix Model 00501) or any circuit that will provide one trigger input to item J01-2 for every fourth output pulse of item J01-1.

FIGURE 19. Propagation delay time (t_{PHL}) test circuit for table XXI.


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.

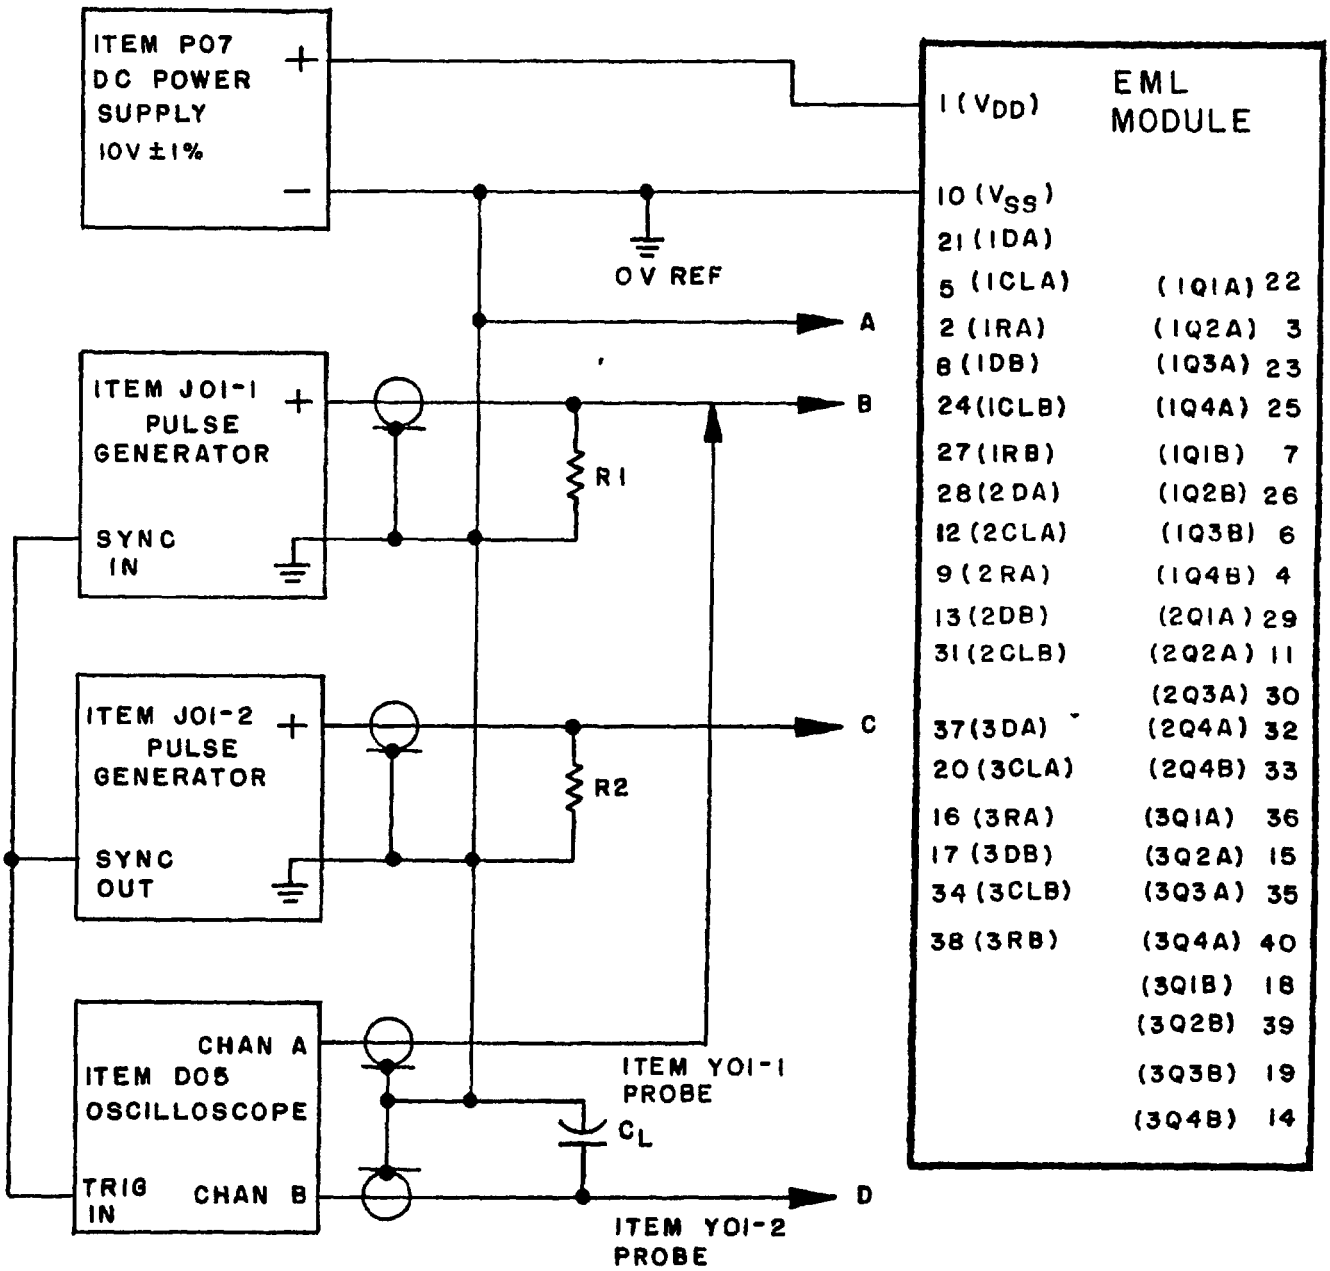

NOTES:
1. R1 = R2 = 51.1Ω ±5%, 1/2 W.
2. C_L = 50 ±5 pF (including probe and parasitic capacitance).

FIGURE 21. Transition time (t_{TLH} and t_{THL}) and propagation delay time (t_{PLH} and t_{PHL}) test circuit for tables XXII through XXV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.

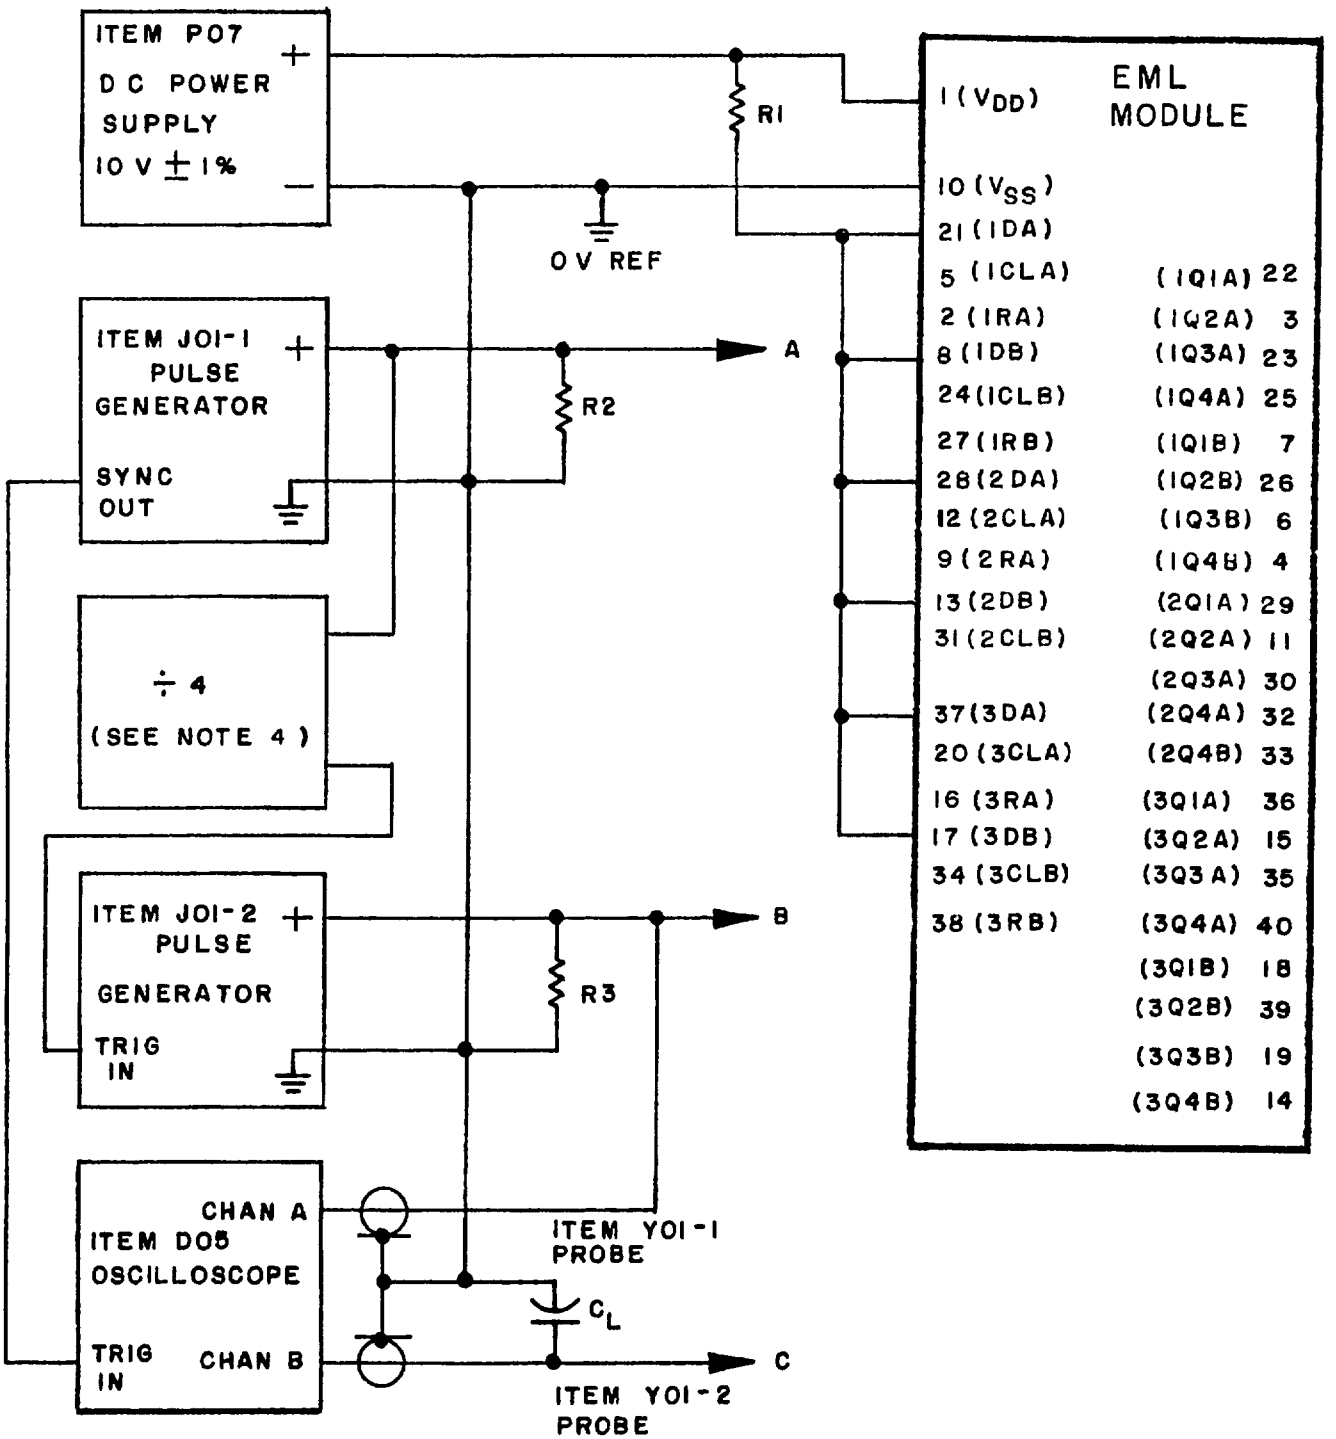

NOTES:
1. R1 = 1,000Ω ±5%, 1/4 W.
2. R2 = R3 = 50Ω ±5%, 1/2 W.
3. C_L = 50 ±5 pF (including probe and parasitic capacitance).
4. The divide by 4 function may be either a commercially available unit (such as the Tektronix Model 00501) or any circuit that will provide one trigger input to item J01-2 for every fourth output pulse of item J01-1.

FIGURE 24. Propagation delay time (t_{PHL}) test circuit for table XXVI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T17:20Z
Check the source to verify that this is the current version before use.