

# On the existence and linear approximation of the power flow solution in power distribution networks – Numerical analysis

Saverio Bolognani and Sandro Zampieri

August 7, 2014

## Abstract

This technical note reports an extensive numerical analysis of the approximate power flow method proposed in the paper by S. Bolognani and S. Zampieri, “*On the existence and linear approximation of the power flow solution in power distribution networks*” [1]. Simulations are based on a modified version of the IEEE 123 test feeder. Different variations of the testbed have then been considered, in order to assess the performance of the approximate method for a range of practical cases. The technical details of the simulations, together with the simulation results and their interpretation, are included in this document. The GNU Octave [2] and Matpower [3] code used in the simulations is available online [4].

## 1 Introduction

The testbed used in these simulations has been obtained as a modification of the IEEE 123 Test Feeder [5, 6]. The following modifications have been introduced.


- Only the three-phase overhead lines and underground cables are considered. The resulting topology is illustrated in Section 2.
- Lines are assumed symmetric. Their line impedance is reported in Section 2.
- Loads are assumed balanced and are modeled as PQ buses. All loads are located, as spot loads, at the point where their single phase feeder departs from the three phase feeder.
- Shunt capacitors are assumed balanced.
- Switches are in their normal position.
- Voltage regulators are modeled as ideal transformers with variable tap position.
- The tap changer at the substation is modeled as a slack node with variable voltage reference.
- A microgenerator is connected at bus 15, and can be operated as a PV bus.

The modified testbed is available online as a MatPower case file [4].

## 2 Grid topology

The topology of the modified testbed is represented in the attached figure, where the original bus numbers from the IEEE 123 test feeder are also reported. The network is radial, contains 56 nodes, and its segments are either three-phase overhead lines (OH) or three-phase underground cables (UG), with the following impedances. Distances (in yards) are reported in the attached figure, and corresponds to the distances in the original IEEE 123 testbed. Three-phase impedance  $Z_{OH}^{3\phi}$  in  $\Omega/\text{mile}$ :

$$\begin{bmatrix} 0.46190 + 1.0638j & 0.15583 + 0.43673j & 0.15583 + 0.43673j \\ & 0.46190 + 1.0638j & 0.15583 + 0.43673j \\ & & 0.46190 + 1.0638j \end{bmatrix}$$

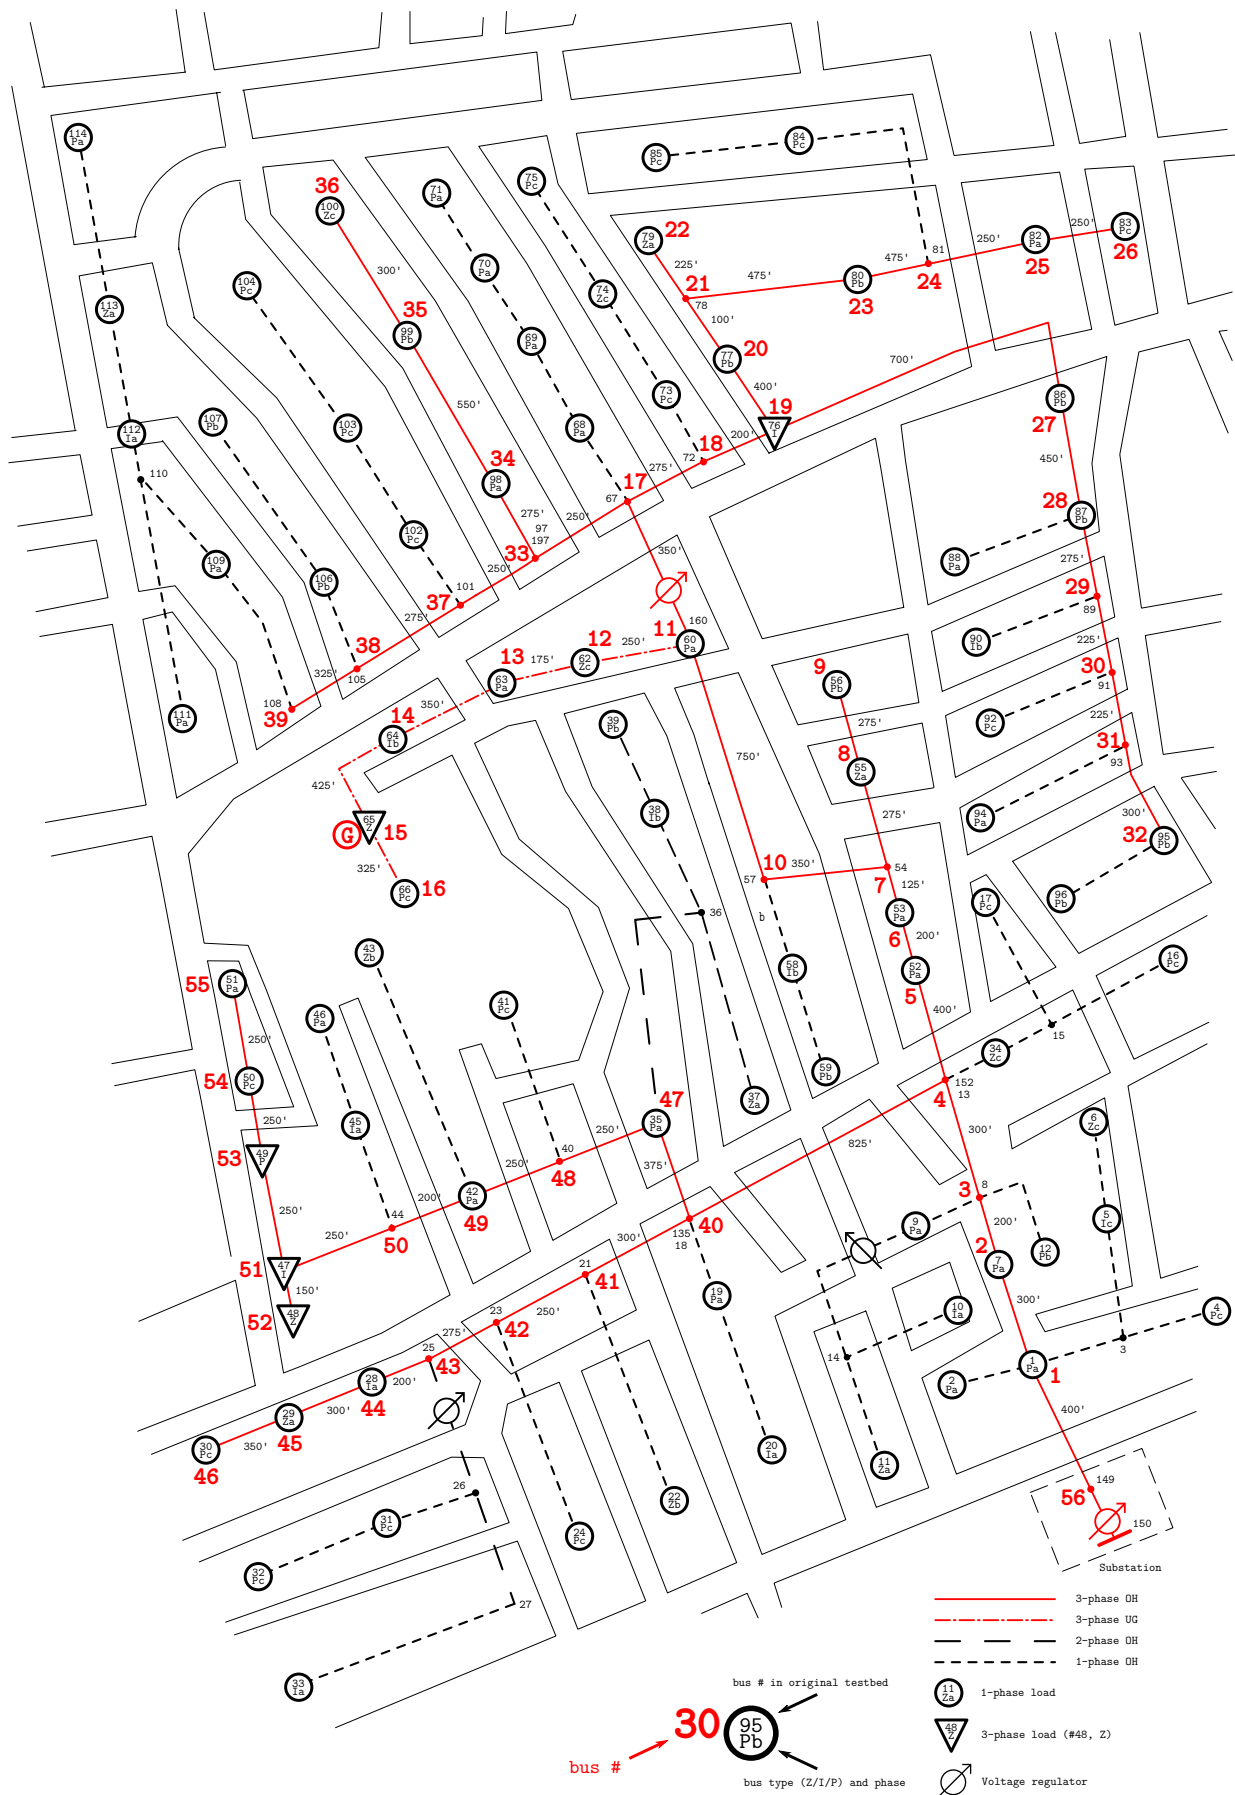

Positive sequence impedance:

$$Z_{OH} = 0.30607 + 0.62707j \text{ } [\Omega/\text{mile}]$$

Three-phase shunt admittance  $Y_{OH}^{3\phi}$  in  $\mu \text{ S}/\text{mile}$ :

$$\begin{bmatrix} 5.6848j & -1.2315j & -1.2315j \\ & 5.6848j & -1.2315j \\ & & 5.6848j \end{bmatrix}$$

Positive sequence shunt admittance:

$$Y_{OH} = 6.9163j \text{ } [\mu\text{S}/\text{mile}]$$

Three-phase impedance  $Z_{UG}^{3\phi}$  in  $\Omega/\text{mile}$ :

$$\begin{bmatrix} 1.5249 + 0.74013j & 0.51067 + 0.25690j & 0.51067 + 0.25690j \\ & 1.5249 + 0.74013j & 0.51067 + 0.25690j \\ & & 1.5249 + 0.74013j \end{bmatrix}$$

Positive sequence impedance:

$$Z_{UG} = 1.01423 + 0.48323j \text{ } [\Omega/\text{mile}]$$

Three-phase shunt admittance  $Y_{UG}^{3\phi}$  in  $\mu \text{ S}/\text{mile}$ :

$$\begin{bmatrix} 67.2242j & & \\ & 67.2242j & \\ & & 67.2242j \end{bmatrix}$$

Positive sequence shunt admittance:

$$Y_{UG} = 67.2242j \text{ } [\mu\text{S}/\text{mile}]$$

### 3 Simulations

The following scenarios have been considered.


1. **Nominal scenario** – the nominal scenario with no shunt capacitor, nominal tap position at the voltage regulator, nominal tap position at the PCC, no voltage regulation at the microgenerator, total load and load distribution as in the original IEEE 123 test feeder (but balanced on the three phases). All the following scenarios depart from the nominal scenario as detailed hereafter.
2. **Uniform overload** – the load of all the PQ buses is increased proportionally.
3. **Lumped overload** – the load of one bus is increased.
4. **Shunt capacitor** – shunt capacitors are connected for static voltage regulation.
5. **Voltage regulation** – the voltage regulator is operated at a different tap position.
6. **Tap changer** – the tap changer at the PCC is operated at a different tap position.
7. **PV bus** – a voltage-regulated microgenerator is connected to the grid.

In the following, each one of these scenarios has been detailed, and the approximate power flow solution proposed in [1] has been plotted in **red**, together with the solution returned by the MatPower nonlinear power flow solver. The nominal scenario is always plotted, as a reference, in **black**.

#### 3.1 Nominal scenario

The nominal scenario corresponds to the testbed adopted for the numerical experiments in the original paper [1]. As illustrated in the following figure, the approximation error is uniformly small across the grid, both in the voltage magnitudes and in the voltage angles.


	Nominal scenario
Maximum voltage drop	6.55%
Maximum approximation error	0.56%

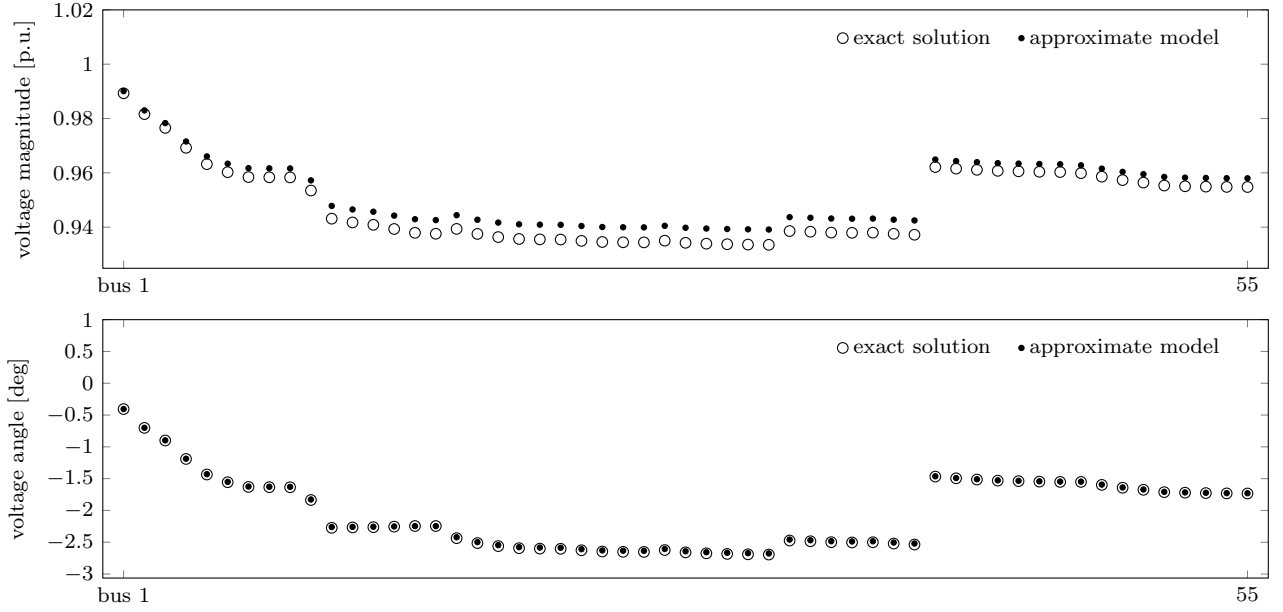

### 3.2 Uniform overload

In this scenario, the power demand of all buses has been doubled, in order to represent a case of relative overload of the power distribution grid. As illustrated in the following figure, for larger voltage drops (red), the approximation error increases compared to the nominal case (black), especially in the voltage magnitude.


	Uniform overload	Nominal scenario
Maximum voltage drop	14.55%	6.55%
Maximum approximation error	2.61%	0.56%

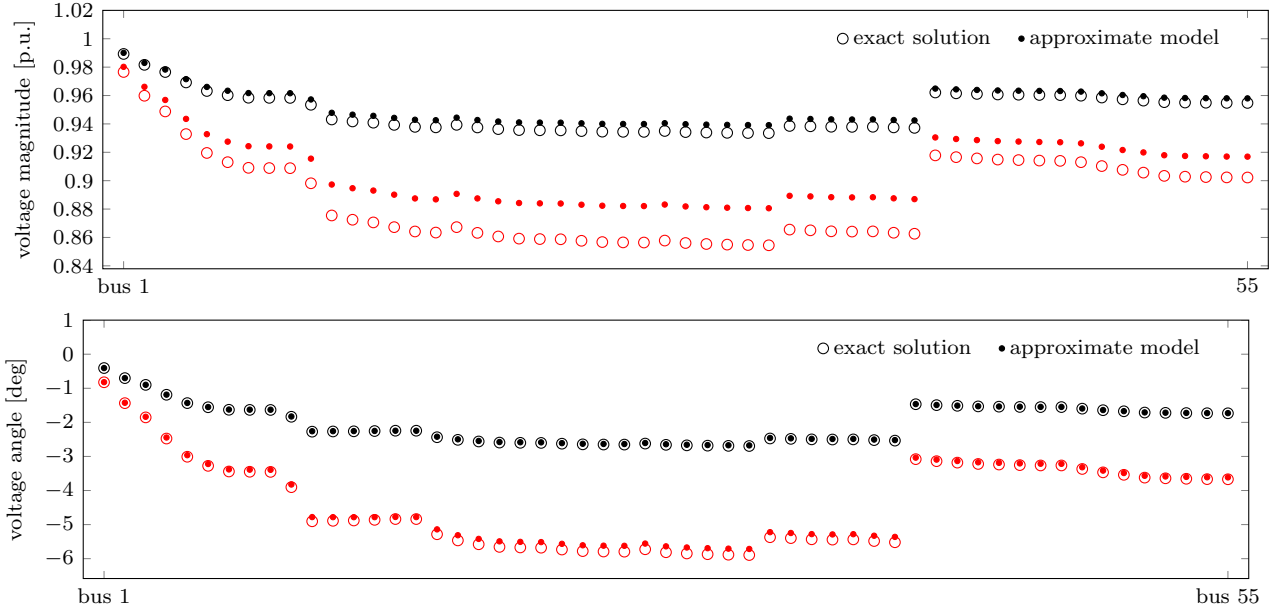

### 3.3 Lumped overload

In this scenario, the power demand of bus 32 has been increased to 1.2 MW and 0.6 MVAR. This significant lumped overload of the grid produces a localized drop in the voltage profile, which is also present in the approximate power flow solution. Also in this case, the overload condition slightly deteriorates the quality of the approximation.


	Lumped overload	Nominal scenario
Maximum voltage drop	12.51%	6.55%
Maximum approximation error	1.95%	0.56%

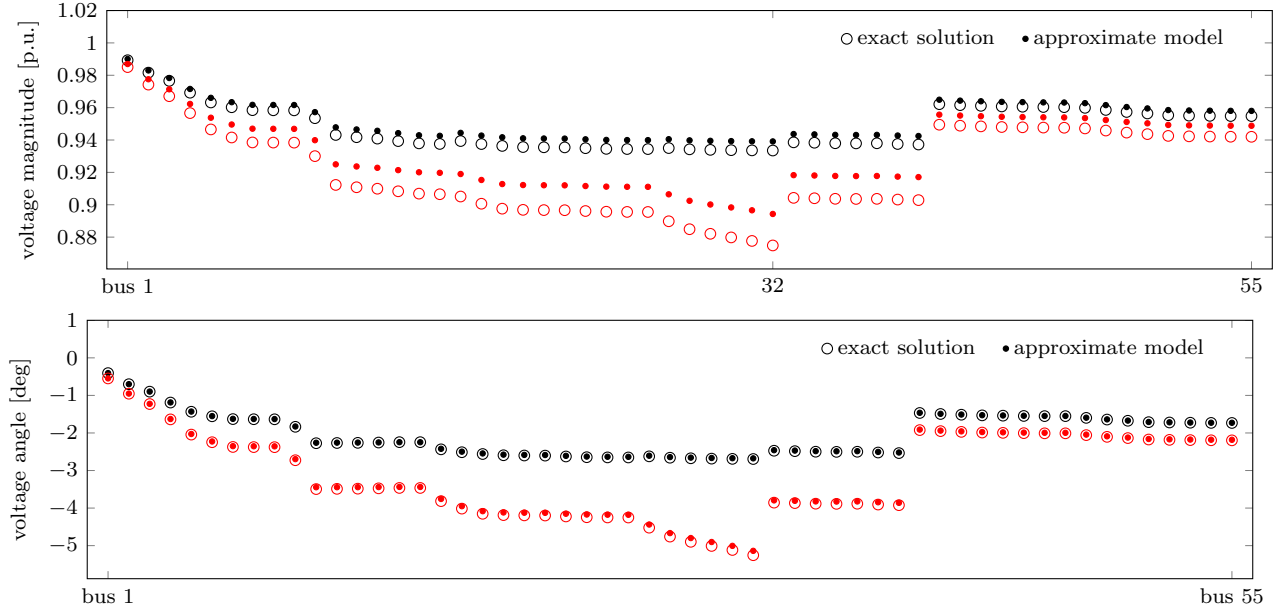

### 3.4 Shunt capacitor

In this scenario, shunt capacitors have been connected to buses 26 (600 KVAR), 28 (50 KVAR), 29 (50 KVAR), 30 (50 KVAR), according to what is suggested in the original testbed, in order to support the voltage.

	Shunt capacitor	Nominal scenario
Maximum voltage drop	4.69%	6.55%
Maximum approximation error	0.81%	0.56%

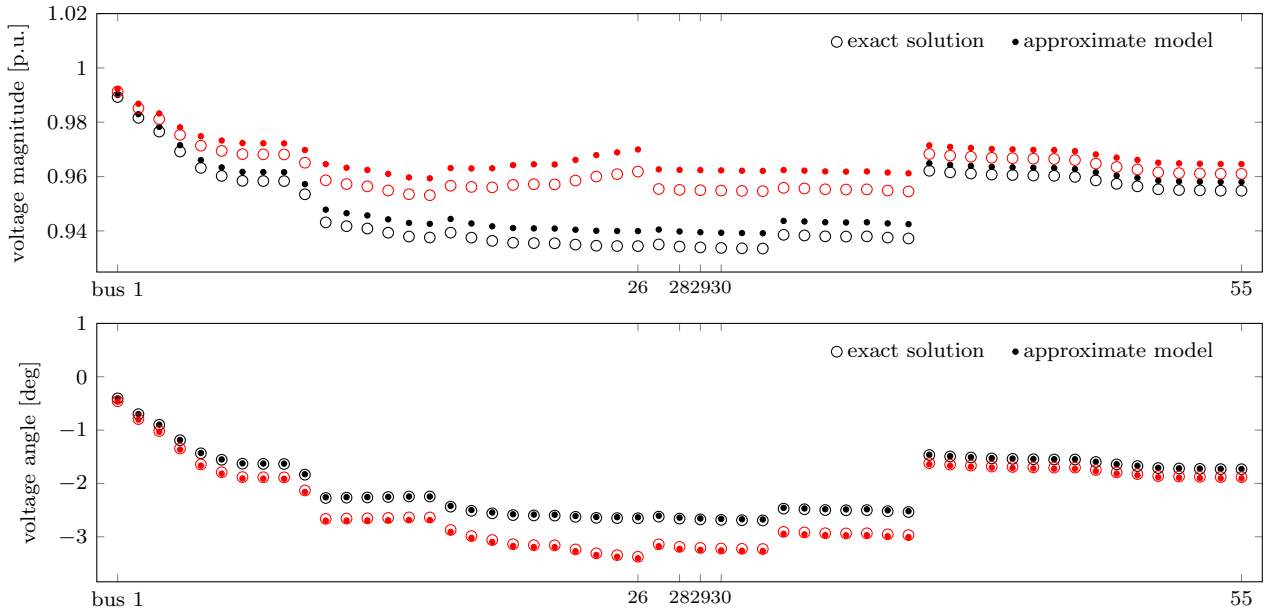


### 3.5 Voltage regulation

In this scenario, the voltage regulator that connects bus 11 with bus 17 is operated at a tap different from the nominal tap, obtaining a voltage ratio of 124/120. Because the voltage regulator is modeled as an ideal transformer, this

device can be included in the model by proper scaling of the portion of the bus admittance matrix that involves the buses fed by the voltage regulator (buses 17 to 39).


	Voltage regulation	Nominal scenario
Maximum voltage drop	6.24%	6.55%
Maximum approximation error	0.5%	0.56%

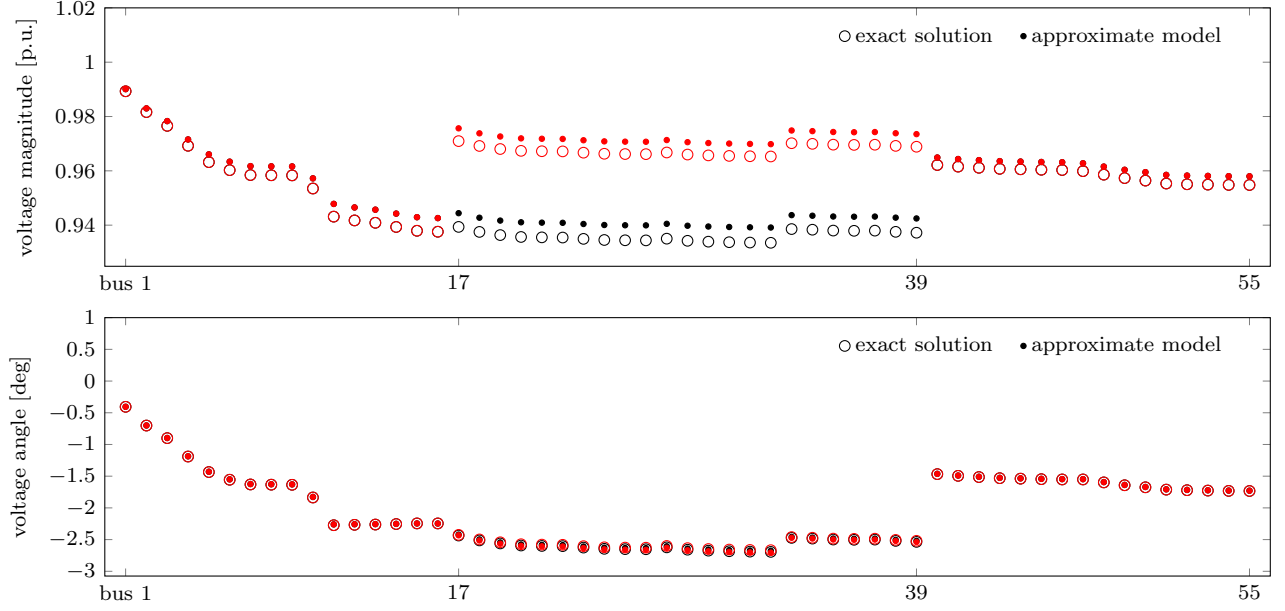

### 3.6 Tap changer

In this scenario, the tap changer at the PCC of the test feeder is operated at a tap different from the nominal tap, obtaining a secondary voltage of 124/120.


	Tap changer	Nominal scenario
Maximum voltage drop	6.40%	6.55%
Maximum approximation error	0.51%	0.56%

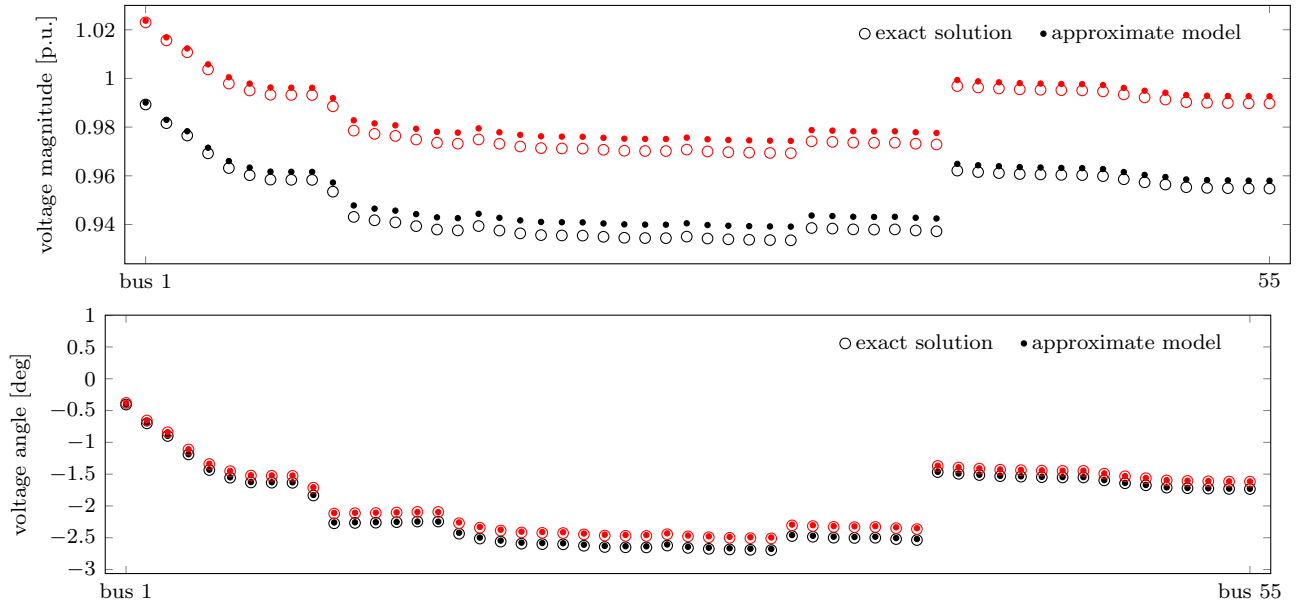

### 3.7 PV bus

In this scenario, the generator connected to bus 15 is voltage regulated, with a voltage reference of 1 p.u.

	PV bus	Nominal scenario
Maximum voltage drop	2.61%	6.55%
Maximum approximation error	0.11%	0.56%

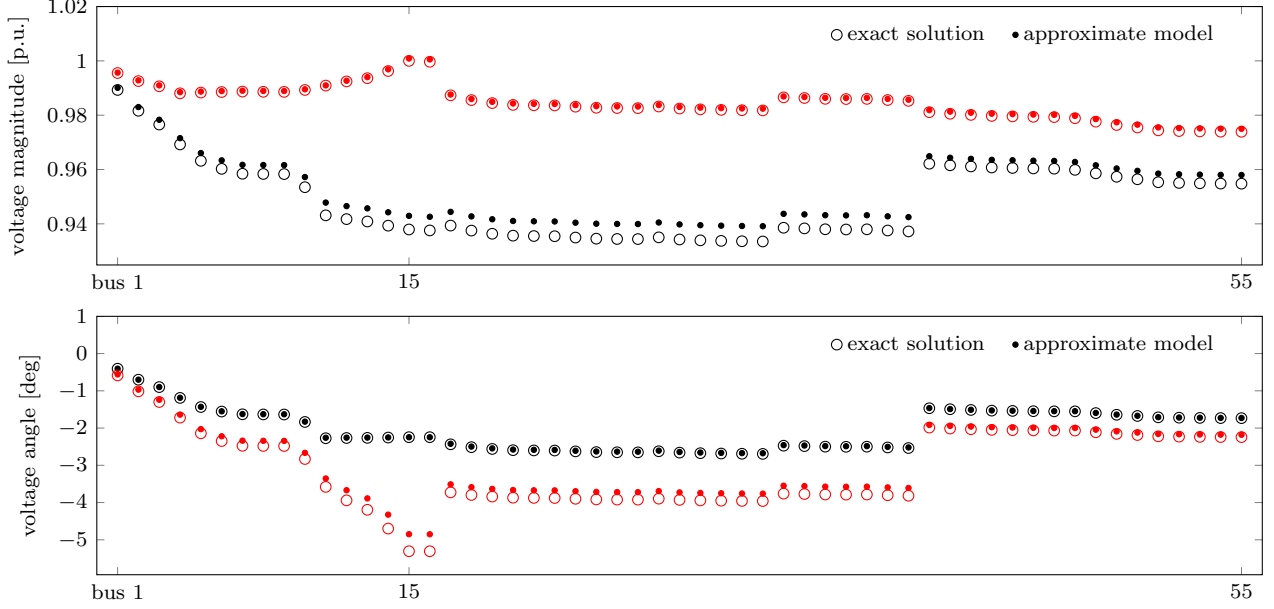

## References

- [1] S. Bolognani and S. Zampieri, "On the existence and linear approximation of the power flow solution in power distribution networks," *IEEE Trans. on Power Systems*, submitted.
- [2] Octave community, "Gnu octave 3.8.1," 2014. [Online]. Available: [www.gnu.org/software/octave/](http://www.gnu.org/software/octave/)
- [3] R. D. Zimmerman, C. E. Murillo-Sanchez, and R. J. Thomas, "Matpower: Steady-state operations, planning and analysis tools for power systems research and education," *IEEE Trans. on Power Systems*, vol. 26, no. 1, pp. 12–19, Feb. 2011.
- [4] S. Bolognani, "approx-pf - approximate linear solution of power flow equations in power distribution networks," GitHub, 2014. [Online]. Available: <http://github.com/saveriob/approx-pf>
- [5] W. H. Kersting, "Radial distribution test feeders," in *IEEE PES Winter Meeting*, vol. 2, Jan. 2001, pp. 908–912.
- [6] IEEE Power & Energy Society, "Distribution test feeders." [Online]. Available: <http://ewh.ieee.org/soc/pes/dsacom/testfeeders.html>