1. Description

1.1. Project

Project Name	BLE_LCD_PWM
Board Name	BLE_LCD_PWM
Generated with:	STM32CubeMX 4.21.0
Date	07/21/2017

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F401
MCU name	STM32F401RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

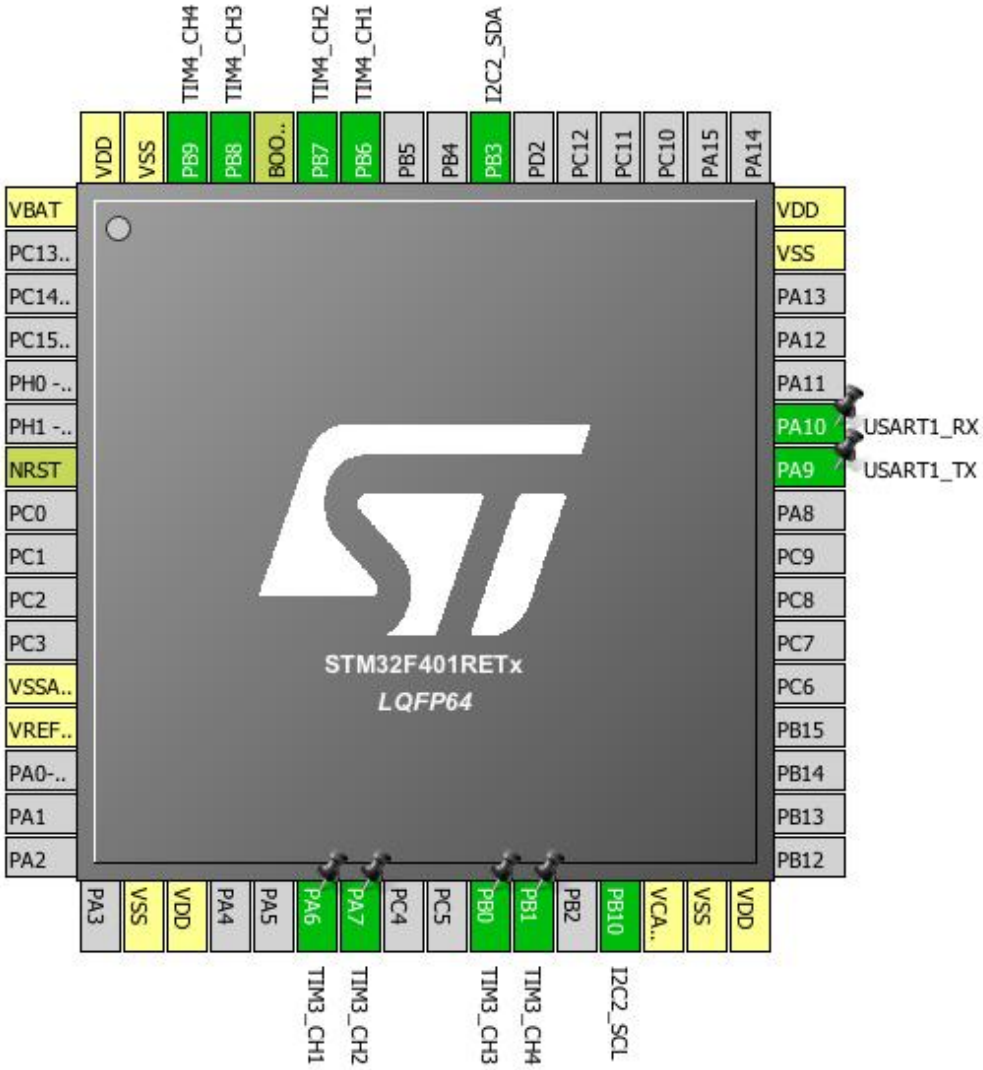

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
7	NRST	Reset		
12	VSSA/VREF-	Power		
13	VREF+	Power		
18	VSS	Power		
19	VDD	Power		
22	PA6	I/O	TIM3_CH1	
23	PA7	I/O	TIM3_CH2	
26	PB0	I/O	TIM3_CH3	
27	PB1	I/O	TIM3_CH4	
29	PB10	I/O	I2C2_SCL	
30	VCAP1	Power		
31	VSS	Power		
32	VDD	Power		
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
47	VSS	Power		
48	VDD	Power		
55	PB3	I/O	I2C2_SDA	
58	PB6	I/O	TIM4_CH1	
59	PB7	I/O	TIM4_CH2	
60	BOOT0	Boot		
61	PB8	I/O	TIM4_CH3	
62	PB9	I/O	TIM4_CH4	
63	VSS	Power		
64	VDD	Power		

4. Clock Tree Configuration

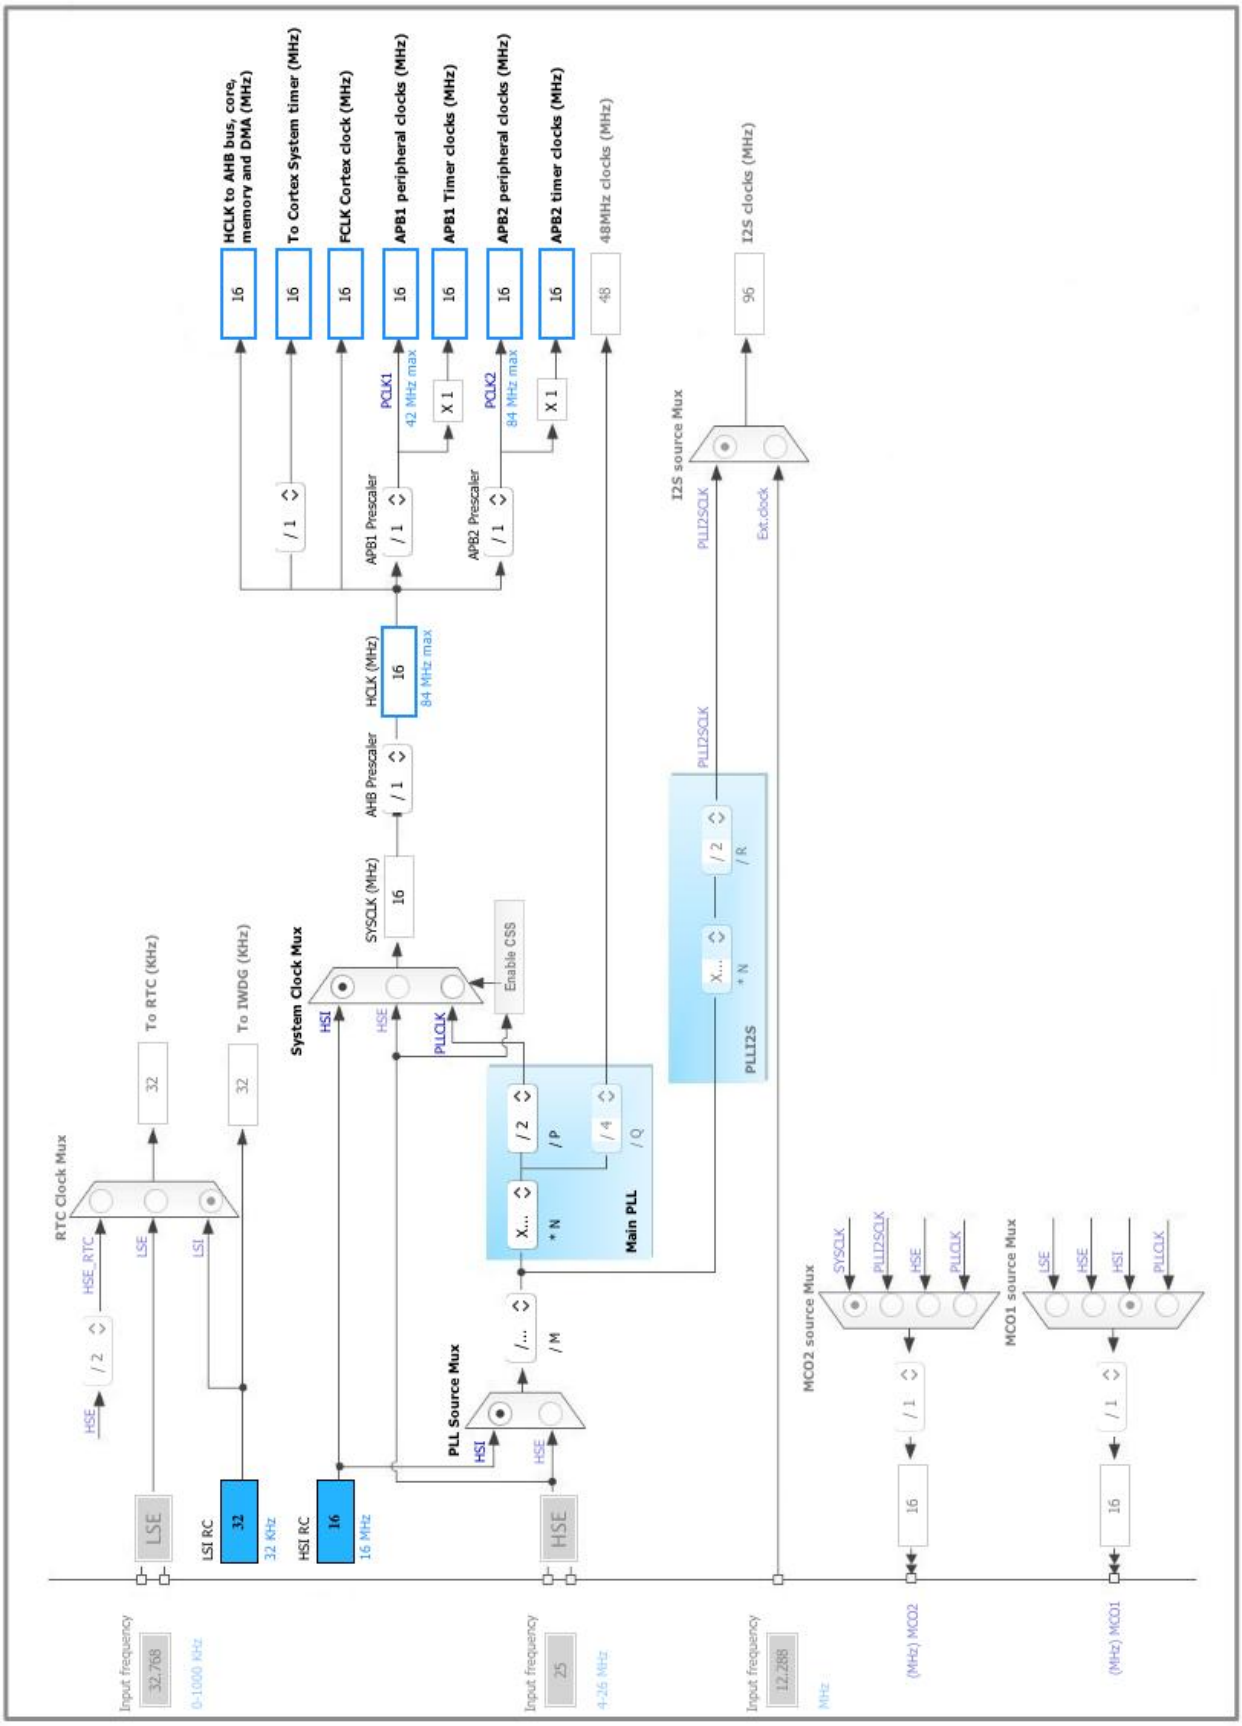

5. IPs and Middleware Configuration

5.1. I2C2

I2C: I2C

5.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

5.2. SYS

Timebase Source: SysTick

5.3. TIM3

Clock Source : Internal Clock
Channel1: PWM Generation CH1
Channel2: PWM Generation CH2
Channel3: PWM Generation CH3
Channel4: PWM Generation CH4

5.3.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**16 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**20000 ***
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 4:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

5.4. TIM4

mode: Clock Source

Channel1: PWM Generation CH1

Channel2: PWM Generation CH2

Channel3: PWM Generation CH3

Channel4: PWM Generation CH4

5.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**16 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**20000 ***
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 2:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

PWM Generation Channel 4:

Mode	PWM mode 1
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	High

5.5. USART1

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	**9600 ***
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	Pull-up	**Very High ***	
	PB3	I2C2_SDA	Alternate Function Open Drain	Pull-up	**Very High ***	
TIM3	PA6	TIM3_CH1	Alternate Function Push Pull	**Pull-down ***	Low	
	PA7	TIM3_CH2	Alternate Function Push Pull	**Pull-down ***	Low	
	PB0	TIM3_CH3	Alternate Function Push Pull	**Pull-down ***	Low	
	PB1	TIM3_CH4	Alternate Function Push Pull	**Pull-down ***	Low	
TIM4	PB6	TIM4_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB7	TIM4_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB8	TIM4_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PB9	TIM4_CH4	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	**Very High ***	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	**Very High ***	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
I2C2 event interrupt	true	1	0
I2C2 error interrupt	true	1	0
USART1 global interrupt	true	2	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM3 global interrupt	unused		
TIM4 global interrupt	unused		
FPU global interrupt	unused		

*** User modified value**

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F401
MCU	STM32F401RETx
Datasheet	025644_Rev3

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	BLE_LCD_PWM
Project Folder	/Users/danshepherd/Documents/BLE_LCD_PWM
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.16.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No