تصميم نظام تحكم لخط الإنتاج

The main focus on this task is to generate a controlling system to separate different boxes depending on their sizes. This document will explain in details all the components that should be used:

➢ **Sensor:**

Since tinkercad program was utilized in this task, all sensors were examined to help determining the best sensor that match this controlling process. **Ultrasonic distance sensor** is considered to be cheap, effective, and easy because it helps navigating the surrounding as it can measure 2cm to 400cm of non-contact objects. This can be done by basically using:

Process:
➢ Object detection:

It is important for the sensor to function if an object is placed on its designed area. For this reason, ultrasonic sensor can be utilized.

    a. Its release of ultrasonic waves can detect the presence of an object.
    b. The waves will echo or bounce back to the sensor which is taken as an indicator to start the distinguishing process. [This can be seen in the video below:
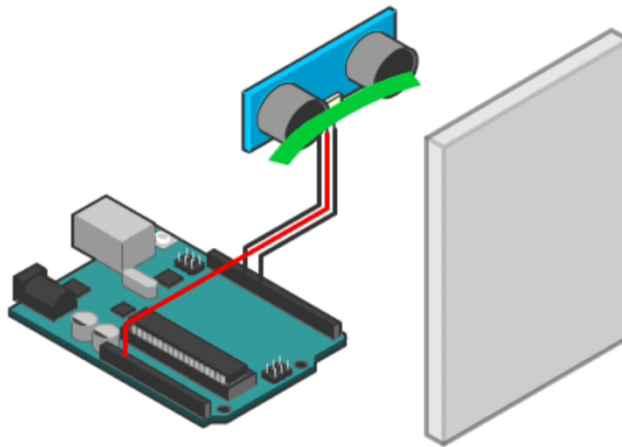

➢ Object size measurement:

The time difference between the transmission of the ultrasonic wave and the reception of the reflected wave should be calculated using the following equation; Since we know the speed of the sound wave, we can calculate the distance of the box.

$$Distance = Speed \; x \; Time$$

With all that being explained, it is clear that the distance from the sensor to the box will vary depending on the box's size. The larger the box is, the smaller the distance will be. A specific point, for example the red point shown in the picture below, can be taken as an indicator where the distance should be calculated. The picture below demonstrates this idea:
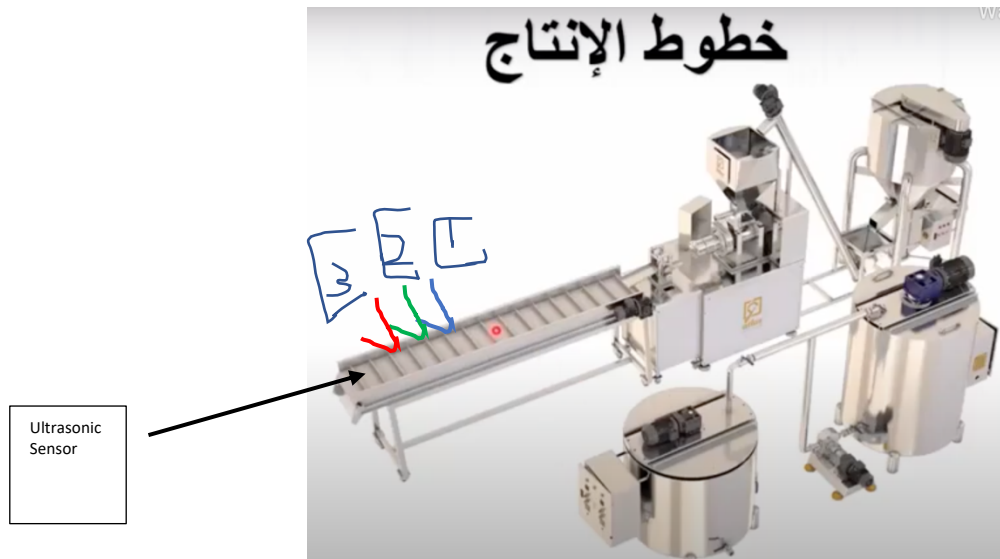
> ## Controller:

For easiness, **Arduino** will be used. It should be programmed to control the sensor in which, for example, distances will be specified in the code. Using if statement will help separating the boxes to the desired location or box.

> ## Motors:

Servo motor is considered to be the best in this process as the parts that move the boxes should be moved into specific ranges or angles.
- One servo motor can fulfil this:
  - This will help reducing number of components and cost.
  - All 3 sizes of boxes can be controlled using if statement in the code later depending on the found distance value.

> ## Design circuit:

The circuit below was created using TinkerCad online simulation. A mini board was added to represent the boxes that coming from the other part of the moving device. A specific point should be marked to calculate the distance from the sensor to the box.
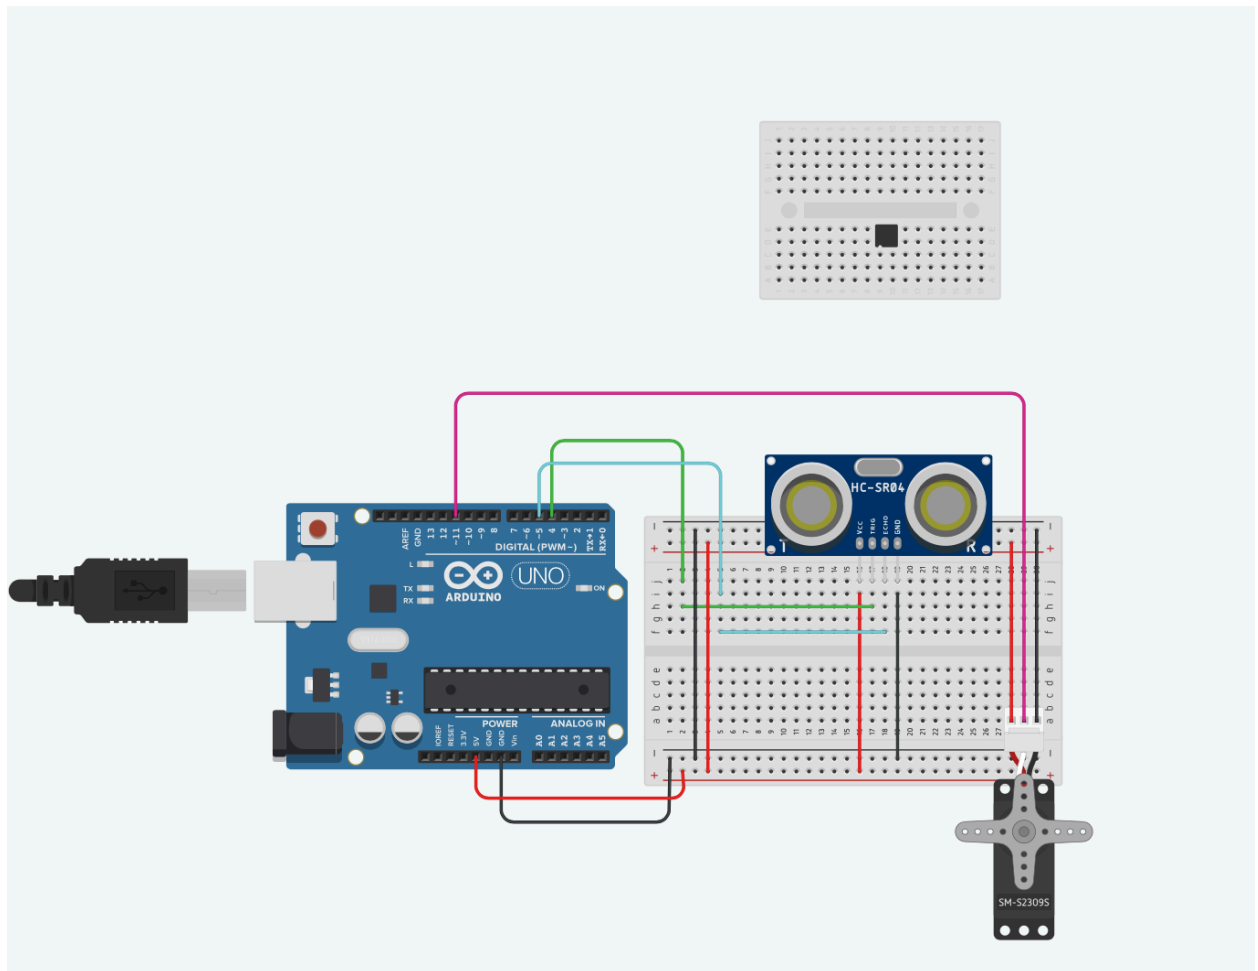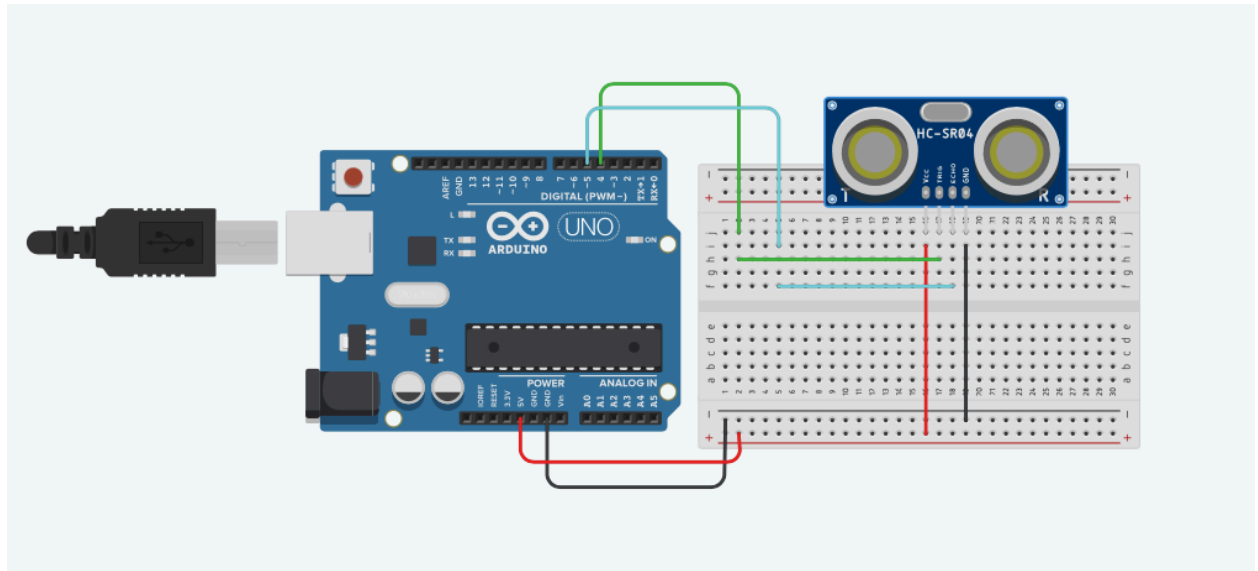
> **Write code:**

Part1: Calculating the distances:

int triggerPin = 4; //triggering on pin 7

```
int echoPin = 5; //echo on pin 8

void setup() {
        Serial.begin(9600);
        pinMode(triggerPin, OUTPUT); //defining pins
        pinMode(echoPin, INPUT);
}

void loop() {
  //triggering the wave(like blinking an LED)
        digitalWrite(triggerPin, HIGH);
        delay(10);
        digitalWrite(triggerPin, LOW);

  //a special function for listening and waiting for the wave
        float duration = pulseIn(echoPin, HIGH);
  //transforming the number to cm
        float distance = (duration/2) / 29.1;
        delay(1000);

   Serial.print("The duration for the echo to go back is: ");
        Serial.print(duration); //printing the numbers
        Serial.println(" / ");

        Serial.print("The distance from the sensor to the box is : ");
        Serial.print(distance); //printing the numbers
        Serial.print("cm"); //and the unit

        Serial.println("  "); //just printing to a new line

}
```

Part2: Controlling the boxes movement using one servo motor:
```
#include <Servo.h>

int triggerPin = 4; //triggering on pin 7
int echoPin = 5; //echo on pin 8

Servo Servo1;
int SM1_pin = 11;

void setup() {
        Serial.begin(9600);
        pinMode(triggerPin, OUTPUT); //defining pins
        pinMode(echoPin, INPUT);
        Servo1.attach(SM1_pin);
```

```
}

void loop() {
 //triggering the wave(like blinking an LED)
        digitalWrite(triggerPin, HIGH);
        delay(10);
        digitalWrite(triggerPin, LOW);

 //a special function for listening and waiting for the wave
        float duration = pulseIn(echoPin, HIGH);
 //transforming the number to cm
        float distance = (duration/2) / 29.1;
        delay(1000);

   Serial.print("The duration for the echo to go back is: ");
        Serial.print(duration); //printing the numbers
        Serial.println(" / ");

        Serial.print("The distance from the sensor to the box is : ");
        Serial.print(distance); //printing the numbers
        Serial.print("cm"); //and the unit

        Serial.println("  "); //just printing to a new line


 if (distance < 90){//largest box
  Servo1.write(0);
  delay(15);
 }
 else if (distance < 110 && distance > 90){//Middle box
  Servo1.write(180);
  delay(15);
 }
 else if (distance > 110 && distance > 120 ){//smallest box
  Servo1.write(90);
  delay(15);
 }


}
```

➢ **Run the code.**

The black box was put as a reference to indicate the starting point for the process to start recording. Increasing the box size will result the distance to decrease and this can be seen in the results below.

Simulator time: 00:00:13

Code   Stop Simulation   Export   Share

Ultrasonic Distance Sensor

Name   1

50.0in / 127.1cm

HC-SR04

Text   1 (Arduino Uno R3)

```
2    int triggerPin = 4; //triggering on pin 7
3    int echoPin = 5; //echo on pin 8
4
5    void setup() {
6        Serial.begin(9600);
7        pinMode(triggerPin, OUTPUT); //defining pins
8        pinMode(echoPin, INPUT);
9    }
10
11   void loop() {
12       //triggering the wave(like blinking an LED)
13       digitalWrite(triggerPin, HIGH);
14       delay(10);
15       digitalWrite(triggerPin, LOW);
```

Serial Monitor

```
4.83cm
The duration for the echo to go back is: 7264.00 /
The distance from the sensor to the box is : 124.81cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7264.00 /
The distance from the sensor to the box is : 124.81cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7264.00 /
The distance from the sensor to the box is : 124.81cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
```

Send   Clear

Simulator time: 00:00:17

Code   Stop Simulation   Export   Share

Ultrasonic Distance Sensor

Name   1

42.3in / 107.4cm

HC-SR04

Text   1 (Arduino Uno R3)

```
2    int triggerPin = 4; //triggering on pin 7
3    int echoPin = 5; //echo on pin 8
4
5    void setup() {
6        Serial.begin(9600);
7        pinMode(triggerPin, OUTPUT); //defining pins
8        pinMode(echoPin, INPUT);
9    }
10
11   void loop() {
12       //triggering the wave(like blinking an LED)
13       digitalWrite(triggerPin, HIGH);
14       delay(10);
15       digitalWrite(triggerPin, LOW);
```

Serial Monitor

```
.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7264.00 /
The distance from the sensor to the box is : 124.81cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7264.00 /
The distance from the sensor to the box is : 124.81cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 6296.00 /
The distance from the sensor to the box is : 108.18cm
The duration for the echo to go back is: 6140.00 /
Th
```

Send   Clear

All changes saved

Simulator time: 00:00:25   Code | Stop Simulation | Export | Share

Ultrasonic Distance Sensor
Name 1

35.0in / 89.0cm

HC-SR04

Text   1 (Arduino Uno R3)

```
 2  int triggerPin = 4; //triggering on pin 7
 3  int echoPin = 5; //echo on pin 8
 4
 5  void setup() {
 6      Serial.begin(9600);
 7      pinMode(triggerPin, OUTPUT); //defining pins
 8      pinMode(echoPin, INPUT);
 9  }
10
11  void loop() {
12    //triggering the wave(like blinking an LED)
13      digitalWrite(triggerPin, HIGH);
14      delay(10);
15      digitalWrite(triggerPin, LOW);
```

Serial Monitor

```
124.83cm
The duration for the echo to go back is: 7265.00 /
The distance from the sensor to the box is : 124.83cm
The duration for the echo to go back is: 6296.00 /
The distance from the sensor to the box is : 108.18cm
The duration for the echo to go back is: 6140.00 /
The distance from the sensor to the box is : 105.50cm
The duration for the echo to go back is: 6140.00 /
The distance from the sensor to the box is : 105.50cm
The duration for the echo to go back is: 6139.00 /
The distance from the sensor to the box is : 105.48cm
The duration for the echo to go back is: 6233.00 /
The distance from the sensor to the box is : 107.10cm
The duration for the echo to go back is: 5085.00 /
The distance from the sensor to the box is : 87.37cm
The duration for the echo to go back is: 5083.00 /
The distance from the sensor to the box is : 87.34cm
The duration for the echo to go back is: 5096.00 /
The distance from the sensor to the box is : 87.56cm
```

Send | Clear

Simulator time: 00:00:00.262   Code | Stop Simulation | Export | Share

Ultrasonic Distance Sensor
Name 1

44.2in / 112.2cm

HC-SR04

SM-S2309S

Text   1 (Arduino Uno R3)

```
22    //a special function for listening and waiting for the wave
23      float duration = pulseIn(echoPin, HIGH);
24    //transforming the number to cm
25      float distance = (duration/2) / 29.1;
26      delay(1000);
27
28      Serial.print("The duration for the echo to go back is: ");
29      Serial.print(duration); //printing the numbers
30      Serial.println(" / ");
31
32      Serial.print("The distance from the sensor to the box is : ");
33      Serial.print(distance); //printing the numbers
34      Serial.print("cm"); //and the unit
35
36      Serial.println("  "); //just printing to a new line
37
38
39    if (distance < 90){//largest box
40      Servo1.write(0);
41      delay(15);
42    }
43    else if (distance < 110 && distance > 90){//Middle box
44      Servo1.write(180);
45      delay(15);
46    }
47    else if (distance > 110 && distance > 120 ){//smallest box
48      Servo1.write(90);
49      delay(15);
50    }
51
52
53  }
```

Serial Monitor

```
The distance from the sensor to the box is : 108.78cm
The duration for the echo to go back is: 6376.00 /
The distance from the sensor to the box is : 109.55cm
The duration for the echo to go back is: 6376.00 /
The distance from the sensor to the box is : 109.55cm
The duration for the echo to go back is: 6371.00 /
The distance from the sensor to the box is : 109.47cm
The duration for the echo to go back
```

Send | Clear

Ultrasonic Distance Sensor

Name: 1

44.2in / 112.2cm

HC-SR04

SM-S2309S

Text

```
22   //a special function for listening and waiting for the wave
23       float duration = pulseIn(echoPin, HIGH);
24   //transforming the number to cm
25       float distance = (duration/2) / 29.1;
26       delay(1000);
27
28       Serial.print("The duration for the echo to go back is: ");
29       Serial.print(duration); //printing the numbers
30       Serial.println(" / ");
31
32       Serial.print("The distance from the sensor to the box is : ");
33       Serial.print(distance); //printing the numbers
34       Serial.print("cm"); //and the unit
35
36       Serial.println("  "); //just printing to a new line
37
38
39   if (distance < 90){//largest box
40     Servo1.write(0);
41     delay(15);
42   }
43   else if (distance < 110 && distance > 90){//Middle box
44    Servo1.write(180);
45     delay(15);
46   }
47   else if (distance > 110 && distance > 120 ){//smallest box
48     Servo1.write(90);
49     delay(15);
50   }
51
52
53 }
```

Serial Monitor

```
The distance from the sensor to the box is : 108.78cm
The duration for the echo to go back is: 6376.00 /
The distance from the sensor to the box is : 109.55cm
The duration for the echo to go back is: 6376.00 /
The distance from the sensor to the box is : 109.55cm
The duration for the echo to go back is: 6371.00 /
The distance from the sensor to the box is : 109.47cm
The duration for the echo to go back
```

Send   Clear