


ROHS

CONNECTOR
PIN DESCRIPTION

PIN	SIGNAL
1	SDA
2	SCL
3	PWDN
4	RESET
5	GND
6	GND
7	NC
8	NC
9	GND
10	AVDD28
11	AVDD28
12	LED+
13	MCLK
14	GND
15	MDP0
16	MDN0
17	GND
18	MCP
19	MCN
20	GND
21	MDN1
22	MDP1
23	DVDD12
24	DQVDD18

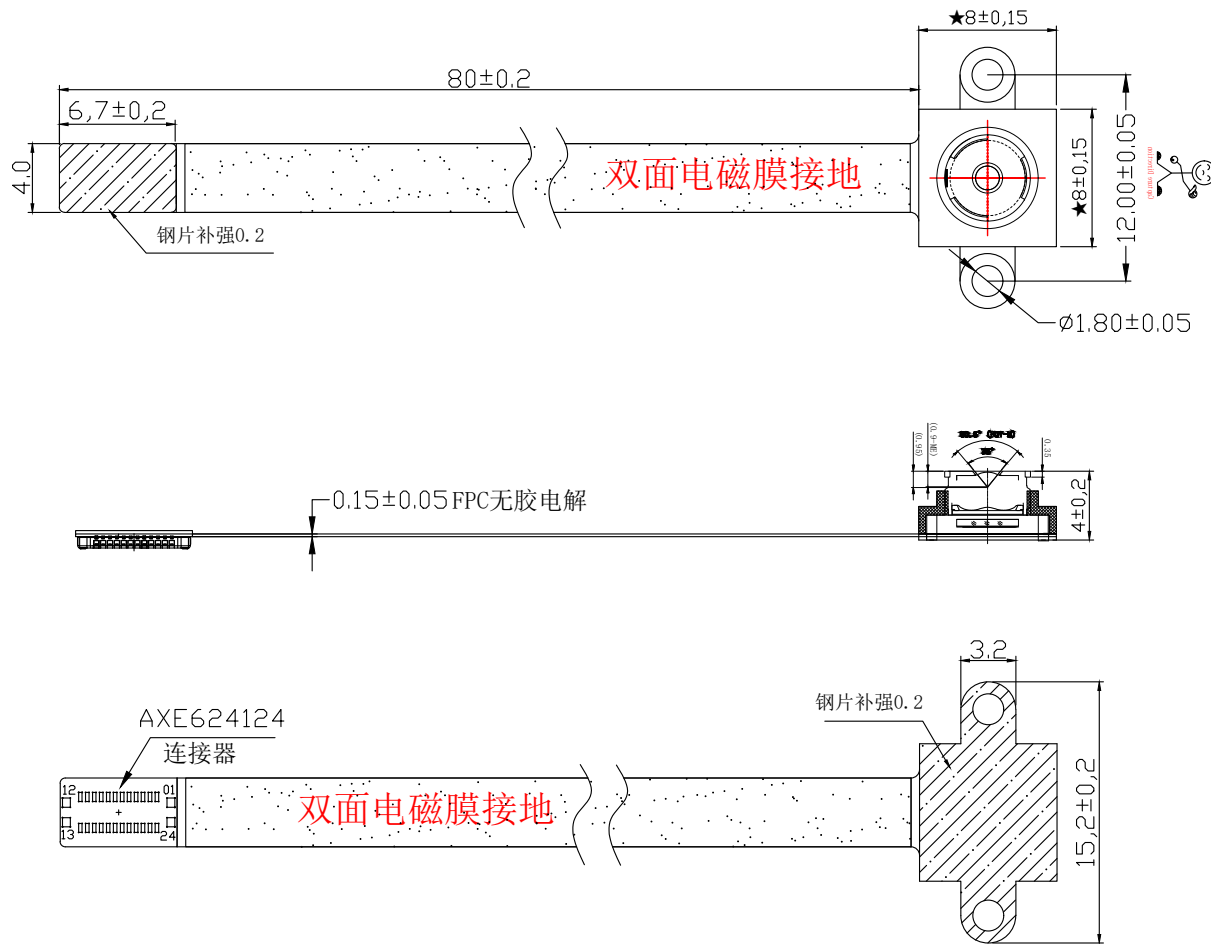

焦距 (EFL)	2.27mm	拍摄范围	30CM-2米
光圈 (F/NO)	2.2	像素数	2592*1944
视场角	D=76°	镜头类型	1/5 inch
畸变	<1.5%	感光芯片	GC5035

SELECT		✓		
level	A	B	C	D
dim.				
~ 5	±0.03	±0.05	±0.08	±0.10
5~10	±0.05	±0.08	±0.10	±0.15
10~50	±0.08	±0.10	±0.15	±0.20
50~100	±0.10	±0.15	±0.20	±0.25
100~	±0.10%	±0.15%	±0.20%	±0.30%

1/0	All	First Release	Liu	2023-08-31
REV.	Zone	Description	Approved	Date
深圳市中彩光电科技有限公司				
Drawn :	SCS	2023-12-19	Part Number: ZV-TX5M-8-GD5.2	Version: 1/0
Checked :	Huang	2023-12-19	Projection Type: Third Angle	Unit: mm
Approved :	Fang	2023-12-19	Scale: 1:1	Material: Surface Finish: -----