

EP-0225

Contents

[RPI5 PD Power](#)

[Description](#)

[Features](#)

[Gallery](#)

[How to assemble it to Raspberry Pi 5 ?](#)

[HOWTO](#)

[Turn on/off power](#)

[Always-ON switch](#)

[Power Input Warning](#)

[Package Includes](#)

[Keywords](#)


RPI5 PD Power

Description

The RPi 5 PD Power expansion board is designed to enhance the functionality of the Raspberry Pi 5 by providing Power Delivery (PD) capabilities. Named "RPi 5 PD Power," this expansion board supports an Always-ON switch, enabling automatic startup of the Raspberry Pi upon power restoration. Additionally, it offers the convenience of manual power control through a push-button mechanism.

Features

- **Power Input Options:**
 - USB PD: Default 15V input for Power Delivery.
 - DC Interface: 9-24V input through a dedicated DC interface.
 - DC Interface size: Outer 3.5mm x inner 1.35mm Negative outer, positive inner.
- **Power Output Options:**
 - USB-C Output: Delivers 40W power at 5V/8A MAX via a USB-C port.
 - USB PD 3.0 Interface: Provides 5.15V@5A output through Power Delivery 3.0.

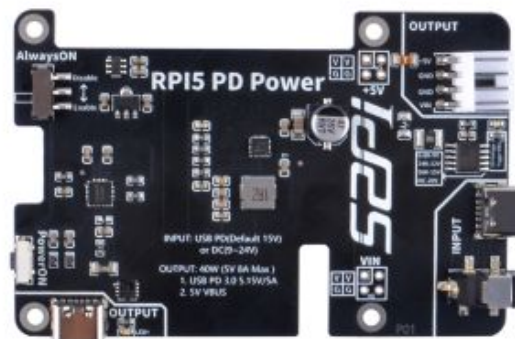

Warning:


The DC interface and the USB-C interface are mutually exclusive; they cannot be used simultaneously. Please choose either the DC interface for power input or the USB-C interface, ensuring only one connection at a time. Attempting to use both interfaces concurrently may result in functionality issues or damage to the RPi 5 PD Power expansion board.


- **5V VBUS Output:** Alternate output option for 5V power supply.
- **Always-ON Switch:**

- **Default State:**Disabled.
- **Functionality:** Requires manual activation by pressing the PowerON button for power supply during each startup.
- **Automatic Startup:**Supports automatic startup of the Raspberry Pi upon power restoration, enhancing user convenience.
- **Manual Power Control:**Long-press the PowerON switch for shutdown when the Raspberry Pi is in a powered-on state.
- **Versatile Power Management:**Flexibility in choosing power input sources and output options for diverse applications.
- **Compact and Compatible:**Designed specifically for the Raspberry Pi 5, ensuring seamless compatibility and a compact form factor.
- **User-Friendly Operation:**Intuitive push-button controls for both manual and automatic power management, enhancing user experience.



Gallery

- Product Outlook

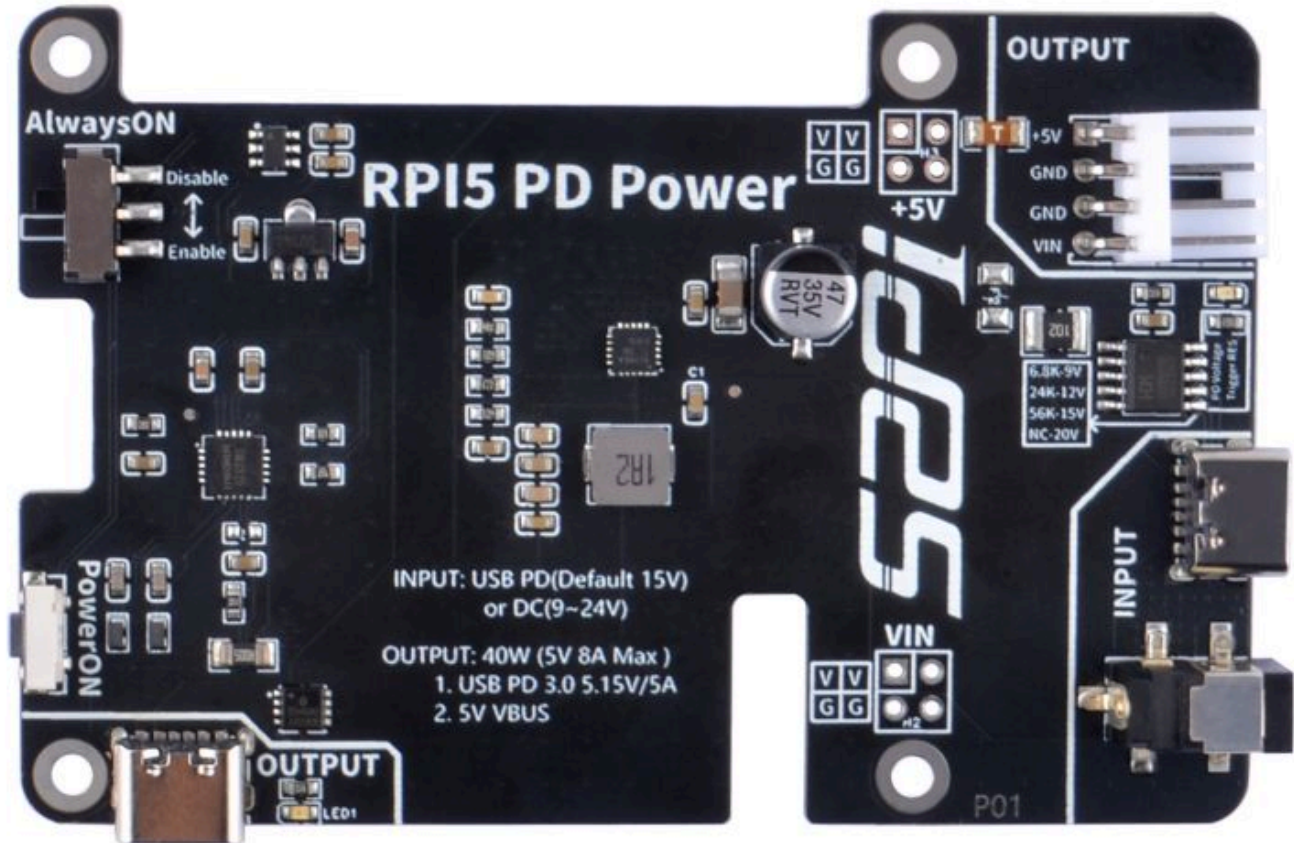

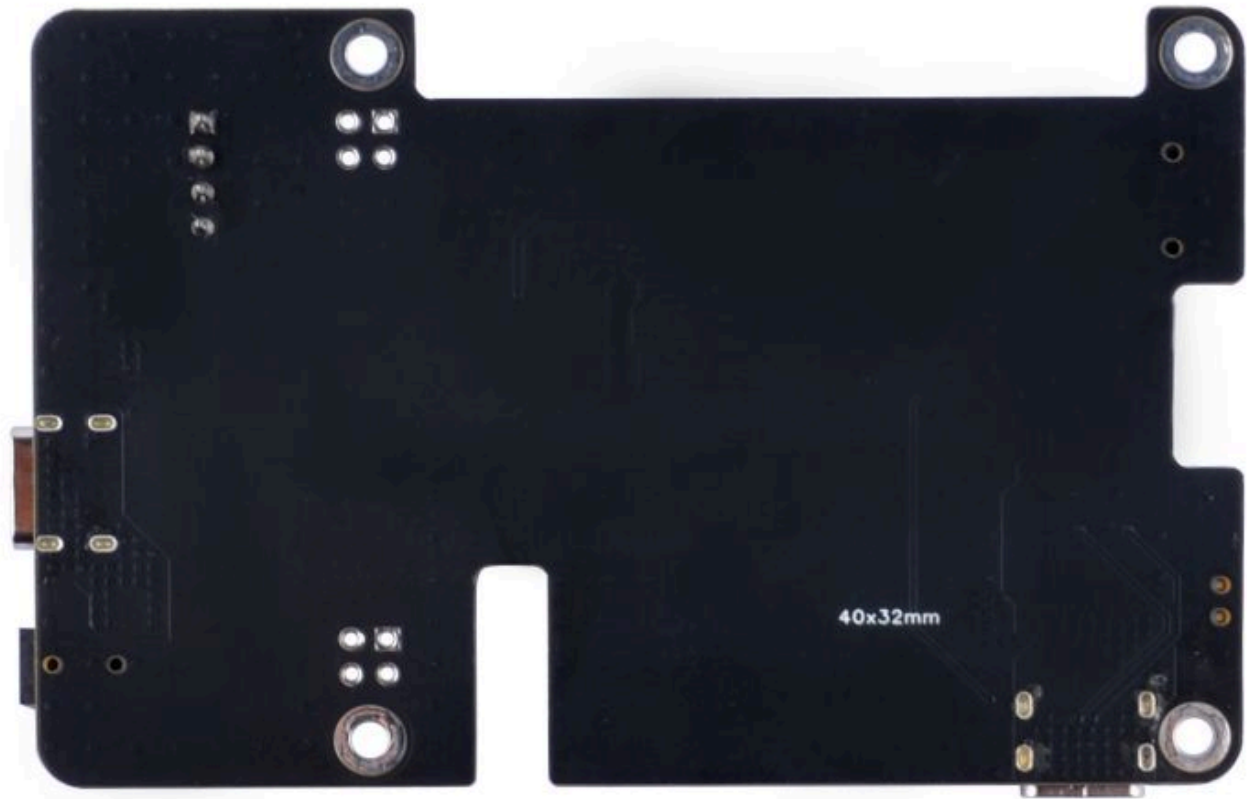


- Dimension and port definitions

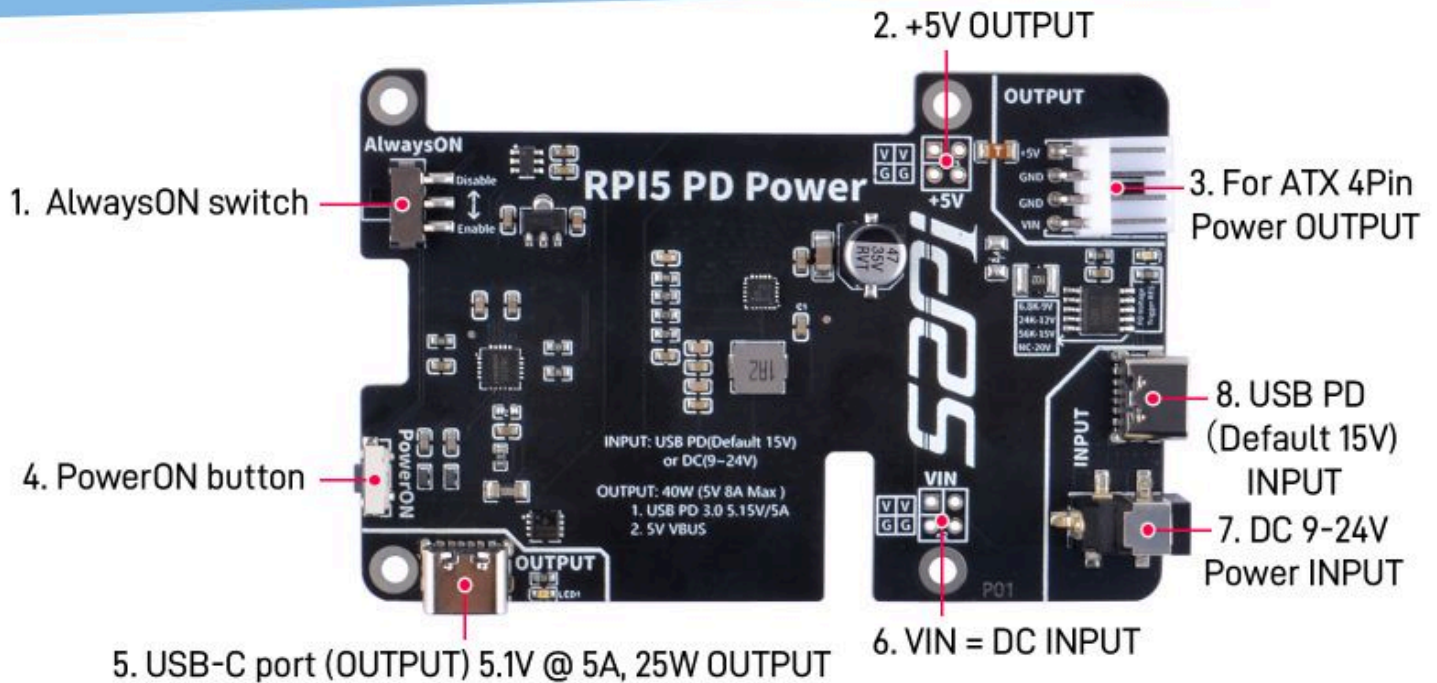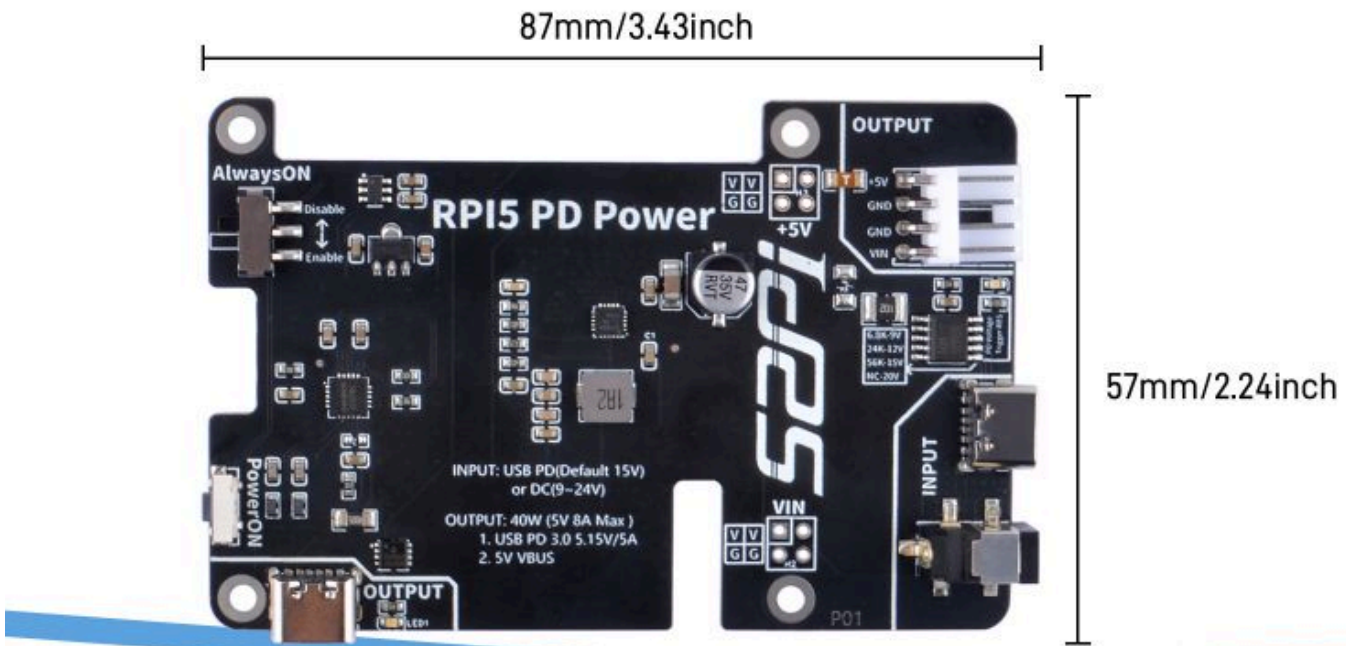


- Work with Raspberry Pi 5

Installation instructions

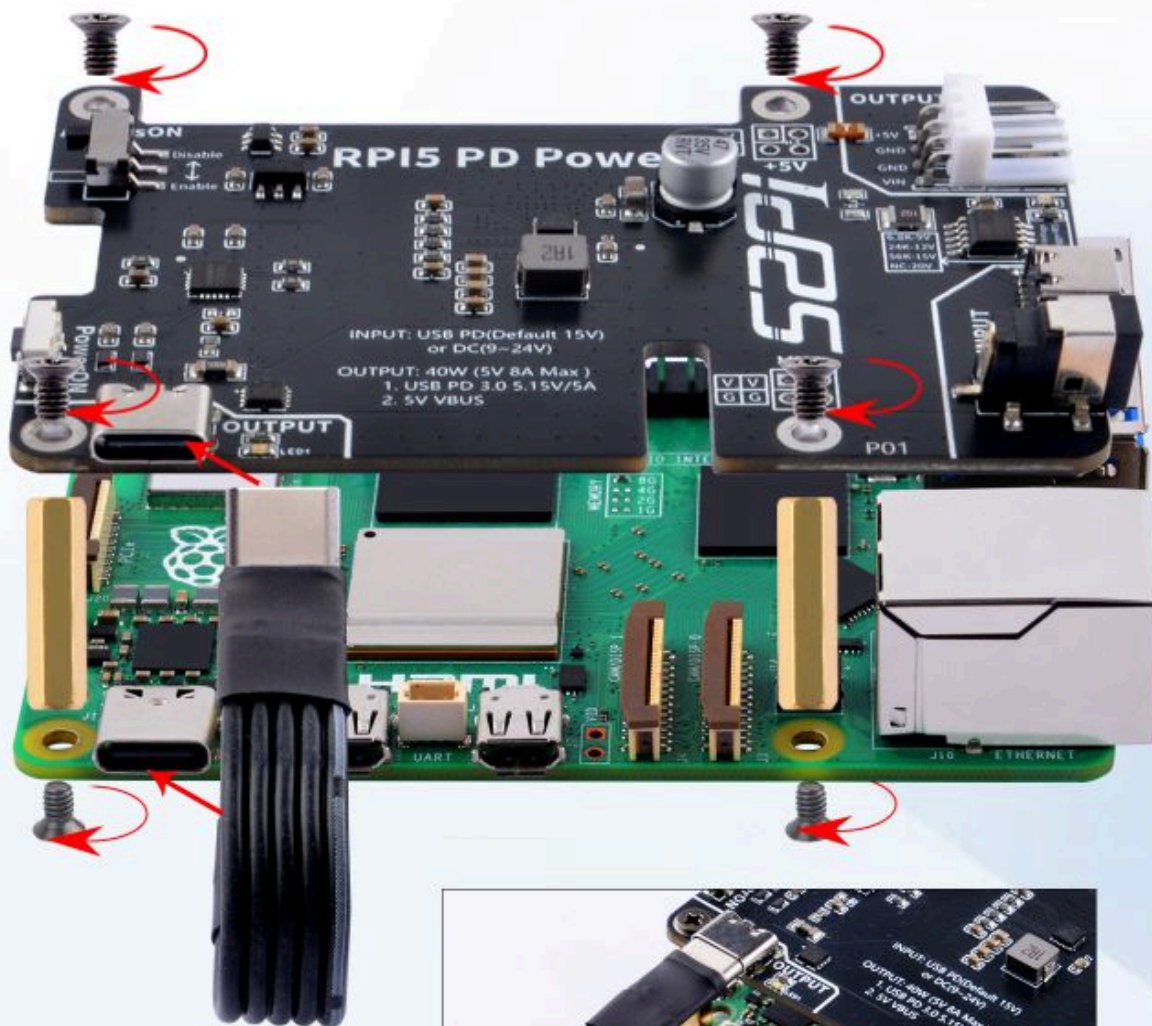

- Application scenario


- Multiple INPUT Source Selection
- Multiple OUTPUT ports
- Offering 5V@8A 40W on USB-C port
- Always-ON switch Support
- Power button : short press - turn on, long press - turn off

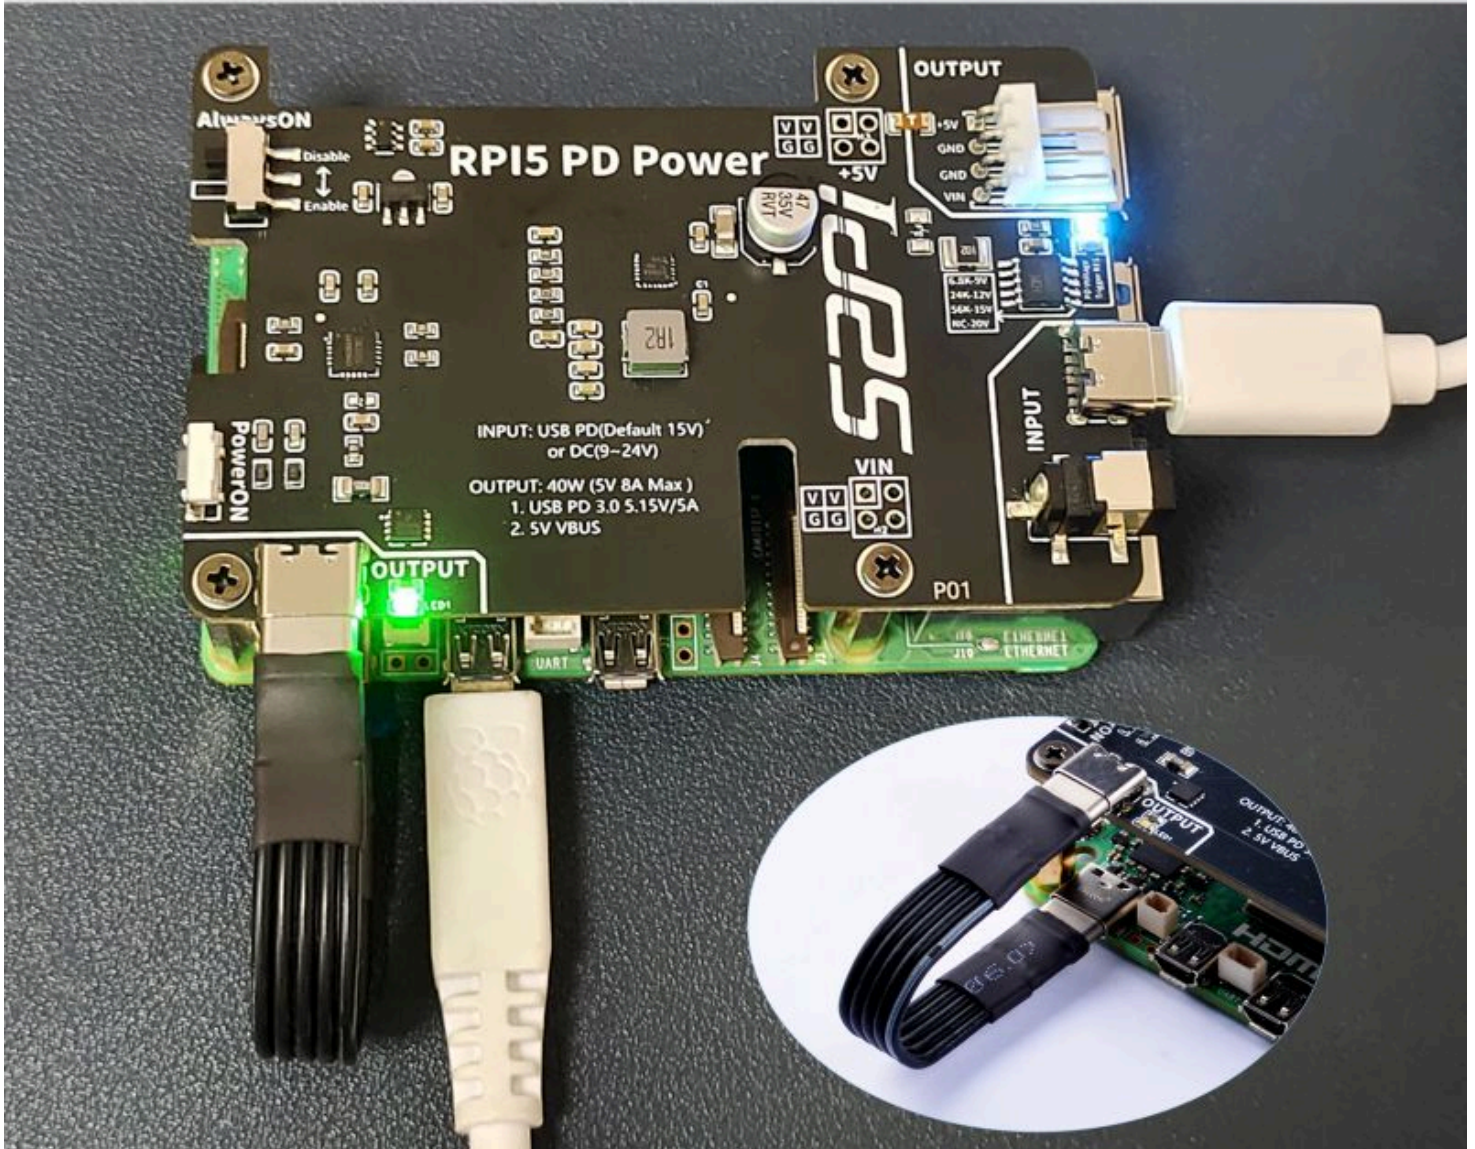

How to assemble it to Raspberry Pi 5 ?

- Please assemble P01 RPi5 DP Power board according to following figure:

Installation instructions

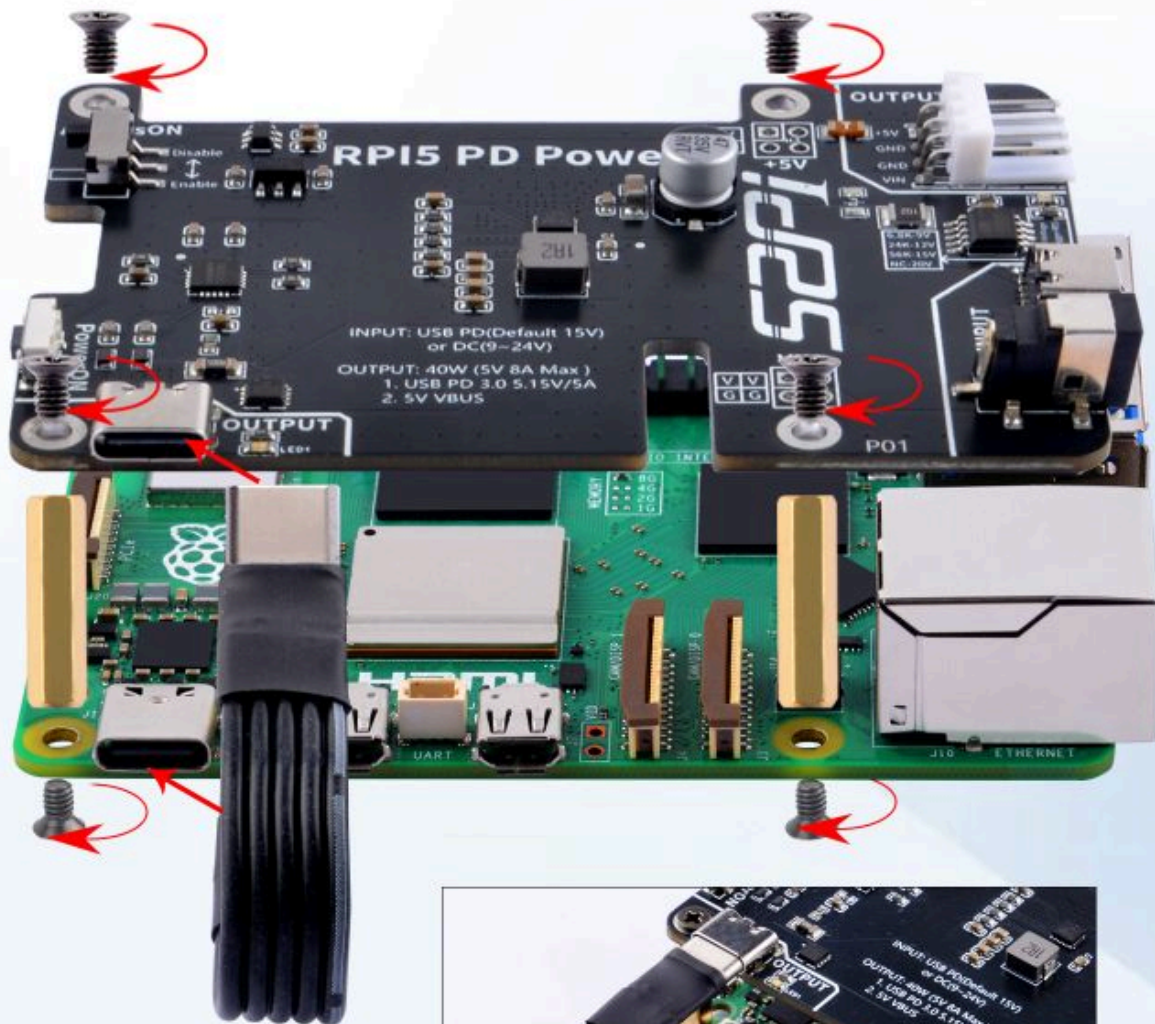

HOWTO


Turn on/off power

- Turn on the power: Short press the `POWERON` button.
- Cut off the power: Long press the `POWERON` button for more than 3 seconds.



Warning: Long press this button will cut off power from the power source directly, unsaved file on your Raspberry Pi will be lost. please shutdown the Operating system and then cut off the power!!!

1. Short Press: Turn on the power
2. Long Press: Cut off the power

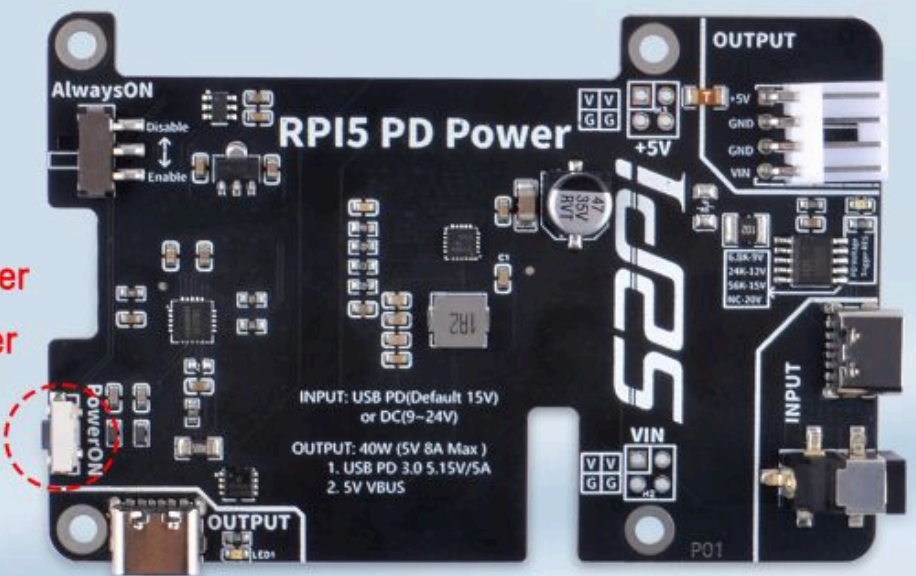


Always-ON switch

- ON Disable Position: Press the `POWERON` button everytime you want to boot up Raspberry Pi.
- ON Enable Position: Once an external power supply is connected, the device will automatically start without the need to press the PowerON button.

Power Input Warning


- Please do not connect the input power to the board at the same time!!!

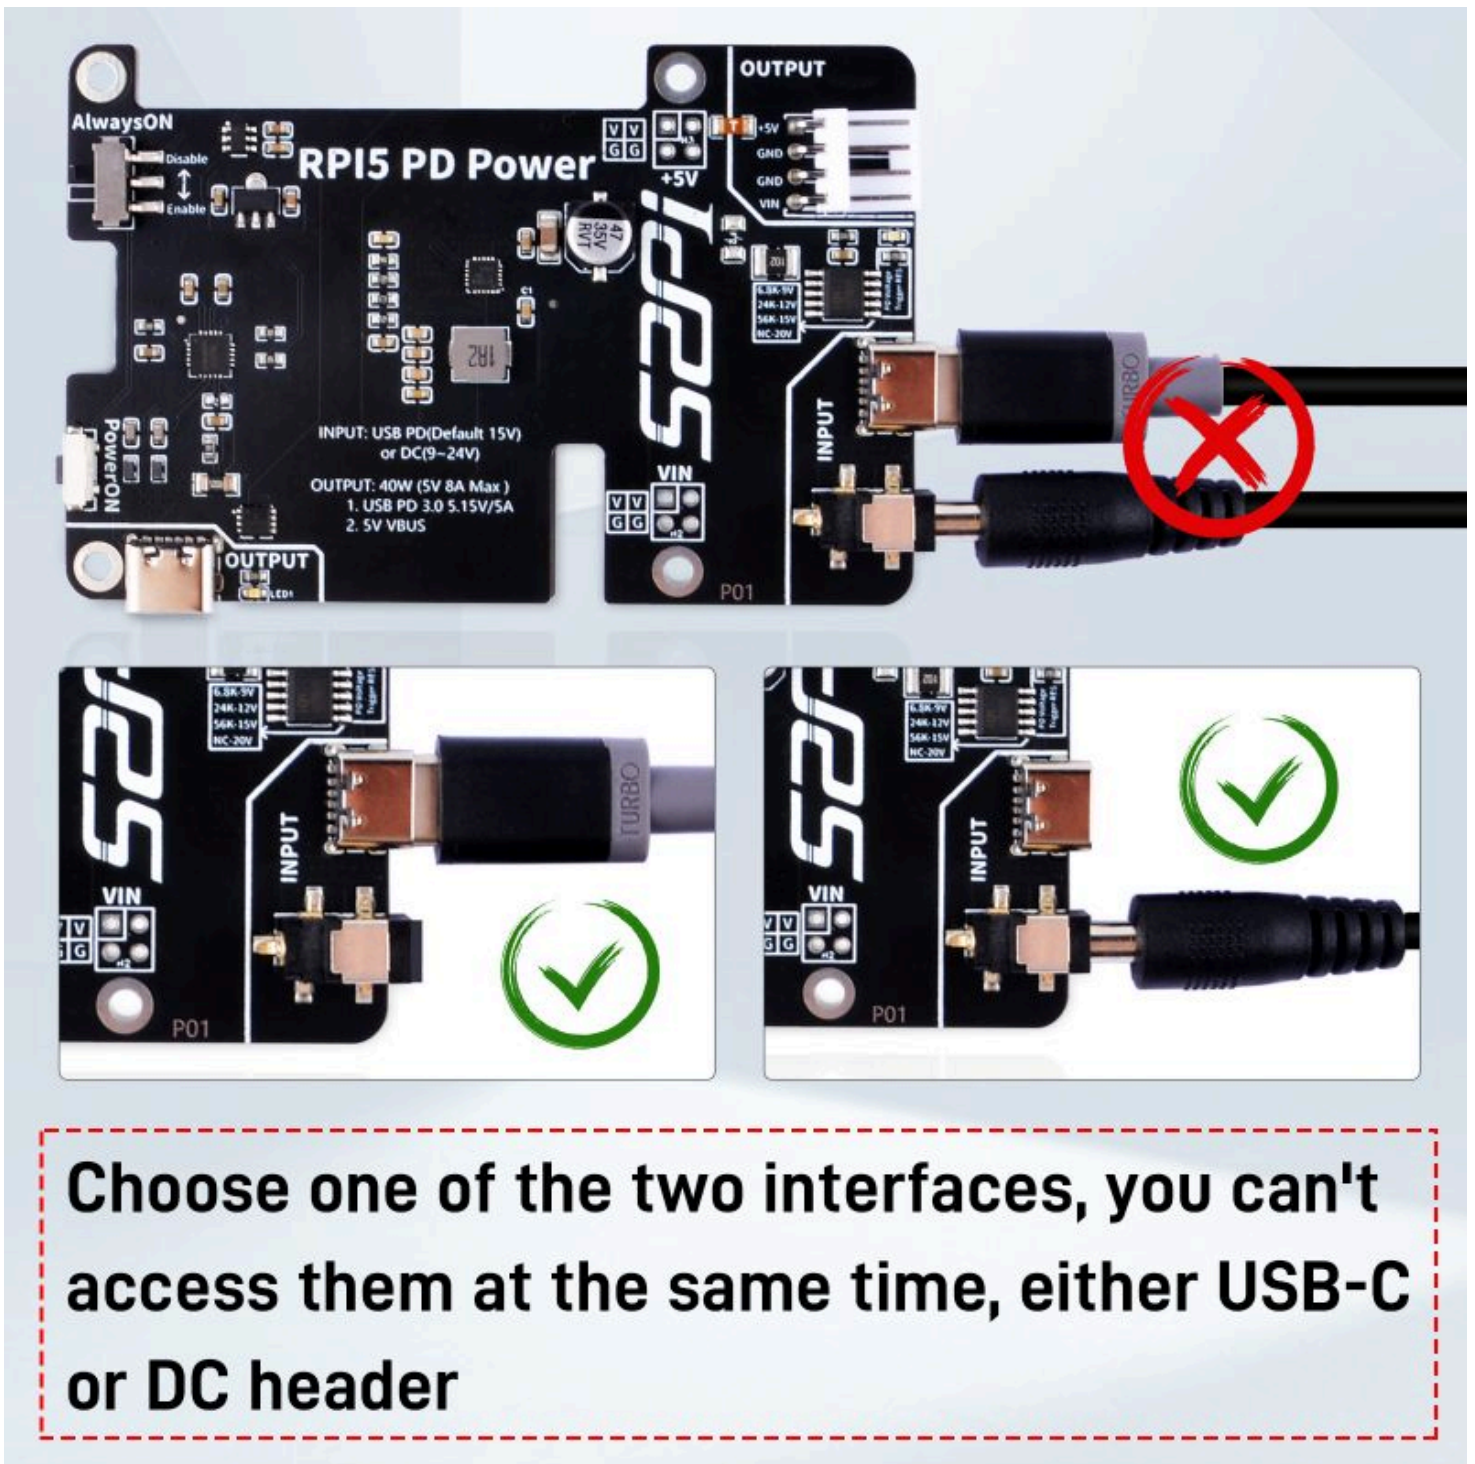

Package Includes

- 1 x RPi5 PD Power Board (codename: P01)
- 8 x M2.5x4mm Black flat head screw
- 4 x M2.5x18mm Copper pillar
- 1 x USB-C to USB-C Power cable

Package includes

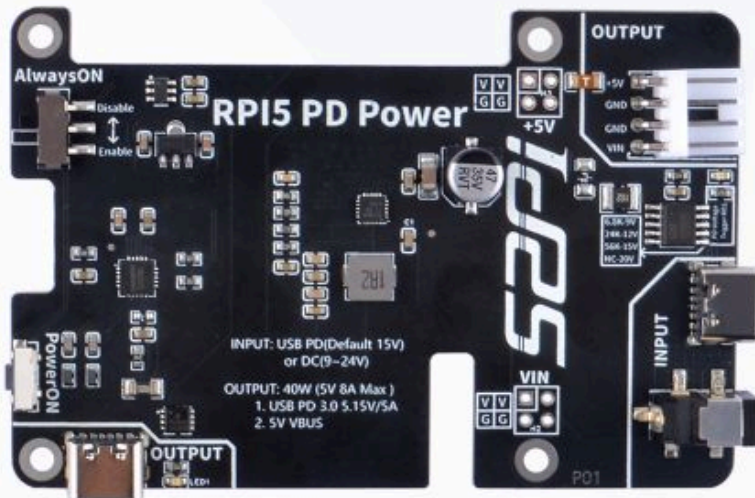

P01



8 x M2.5*4mm



1 x USB-C Power Cable



4 x M2.5*18mm

Keywords

- PD power for Raspberry Pi 5.

Retrieved from "<https://wiki.52pi.com/index.php?title=EP-0225&oldid=16234>"

This page was last edited on 26 January 2026, at 13:14.

Content is available under 知识共享署名-非商业性使用-相同方式共享 unless otherwise noted.