

Electrical Topology Diagram (Implementation v5)

As-of date: 2026-02-18

Purpose: provide a complete, install-level electrical topology for the current build scope, including all major electrical components, fuse IDs, fuse housings, planned wire gauges, and estimated one-way run lengths for procurement planning.

Related docs:

- Canonical electrical/system baseline: docs/SYSTEMS.md
- Detailed fuse matrix: docs/ELECTRICAL_fuse_schedule.md
- Battery and trunk recalculation record: docs/ELECTRICAL_battery_fuse_wire_recalc_2026-02-18.md
- Decisions and unresolved items: docs/TRACKING.md
- Procurement source of truth: bom/bom_estimated_items.csv

Sweep Outcomes Included In This Revision

- Corrected Sterling BB1248120 modeling basis to ~1500W max output (~26A at 57.6V), replacing prior 120A @ 48V planning assumption.
- Added explicit fuse-holder/housing definitions for every fuse family (Class T , Lynx MEGA , inline MIDI/ANL/AMI , PV gPV , and ATO/ATC).
- Added conductor schedule across 48V , 12V , PV, and AC segments with explicit assumptions.
- Updated 12V topology to a shared bus fed by Orion-Tr Smart and a 12V 100Ah buffer battery, with F-11 source fuse plus SW-12V-BATT manual isolation.
- Added a full-circuit estimated run-length validation pass (C-01 through C-35) and purchase-ready wire rollup totals.

Length Estimation Defaults Used In This Pass

1. Cabinet internal interconnect default: 2.5 ft one-way (ASSUMED).
2. Cabinet-to-near load branch default: 8 ft one-way (ASSUMED).
3. Cabinet-to-far load branch default: 12 ft one-way (ASSUMED).
4. AC branch to receptacle chain default: 15 ft one-way per branch leg (ASSUMED).
5. Policy lock: use the smallest gauge that meets current and voltage-drop targets; do not auto-upsize, but flag warnings when margin is tight.
6. Parallel battery bank lock: keep BATT+_A/B/C equal length and BATT-_A/B/C equal length.



Battery Fuse/Wire Recalculation Basis (2026-02-18)


- Scope in this pass is limited to battery-side and major 48V trunk paths (C-01 through C-15).
- Provisional battery listing inputs used: 51.2V 100Ah , <=200A current limit per battery.
- Conservative sizing factors used in this pass:

1. Parallel-sharing factor K_share = 1.5
2. Continuous margin factor K_cont = 1.25

- Current envelope used for battery-discharge branch sizing in current architecture: I_total = F-02 + F-05 = 125A + 40A = 165A .
- Per-battery design current: I_batt_design = (165A / 3) * 1.5 = 82.5A .
- Continuous-adjusted minimum battery branch fuse threshold: I_fuse_min = 82.5A * 1.25 = 103.1A .
- Provisional battery branch fuse selection: F-01A/B/C = 200A Class T , constrained by the provisional battery <=200A current-limit listing.
- Final lock gate: validate true 51.2V battery datasheet/manual current and terminal limits before permanent fuse lock; if lower limits are confirmed, move to 175A .
- Cable procurement remains estimate-based until CAD/field run lengths are frozen. This pass sets a no-padding 2/0 estimate baseline of 61.5 ft total (34.5 ft red, 27.0 ft black), replacing the legacy 50 ft scenario placeholder.

Complete Power Topology (48V Core + Charge Sources)

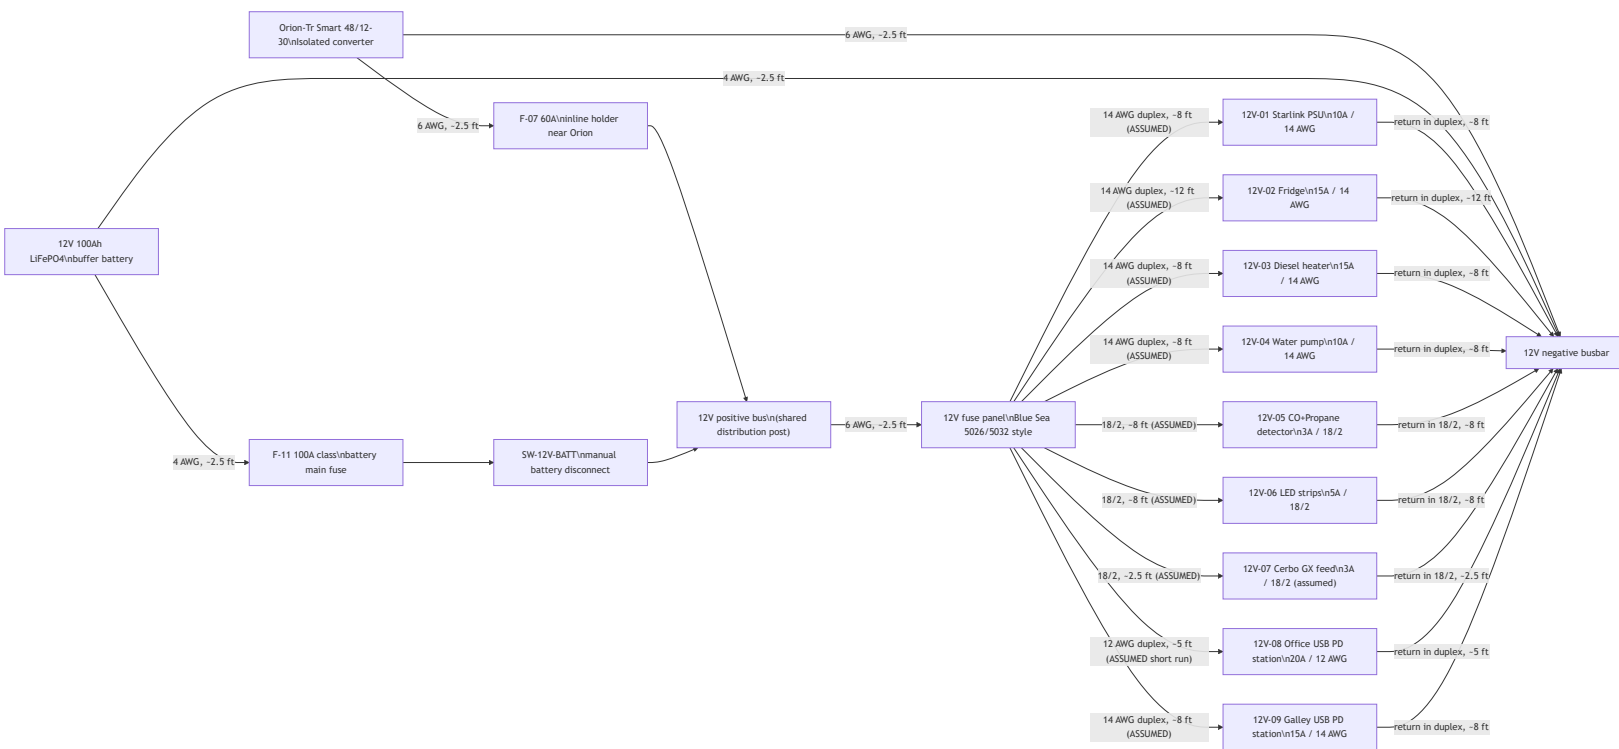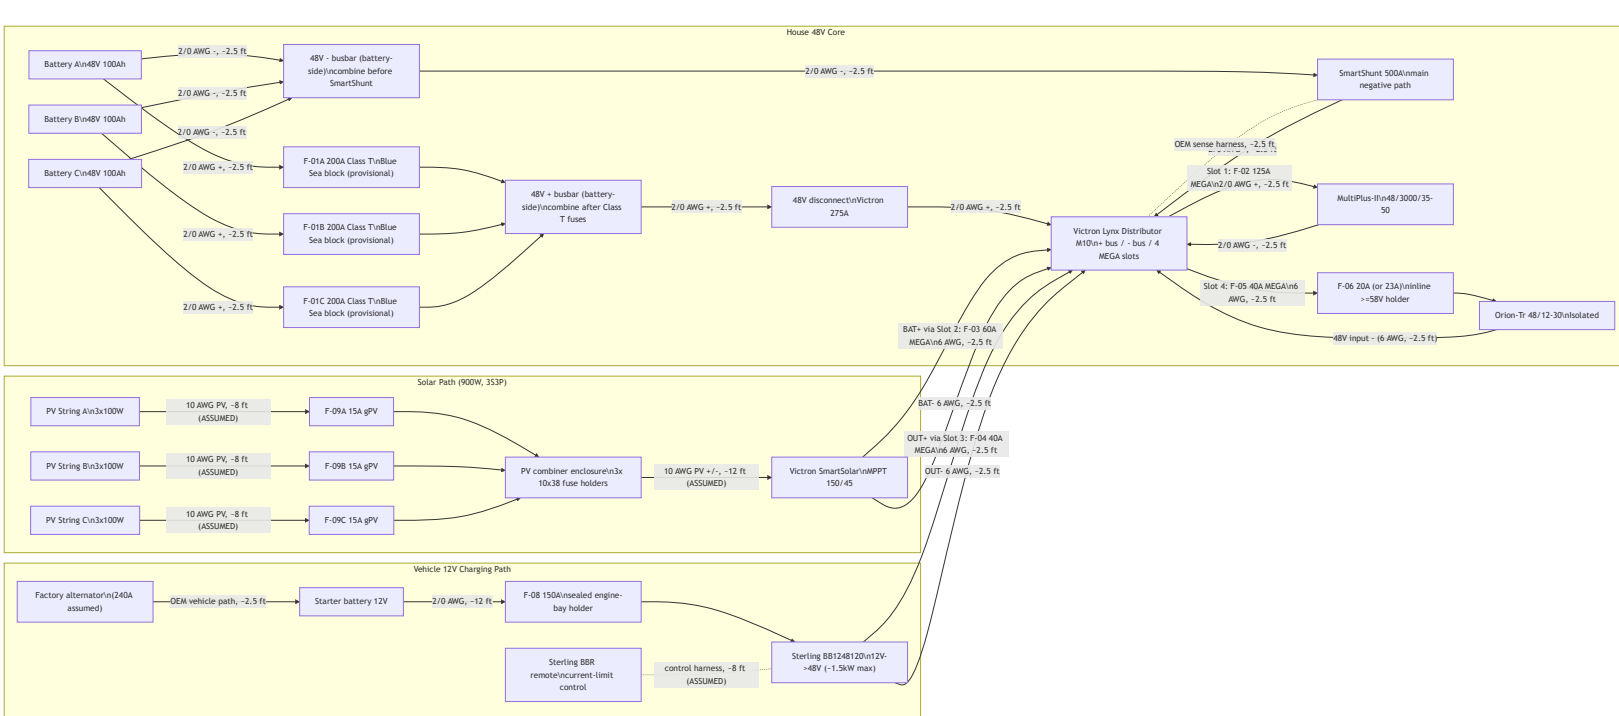

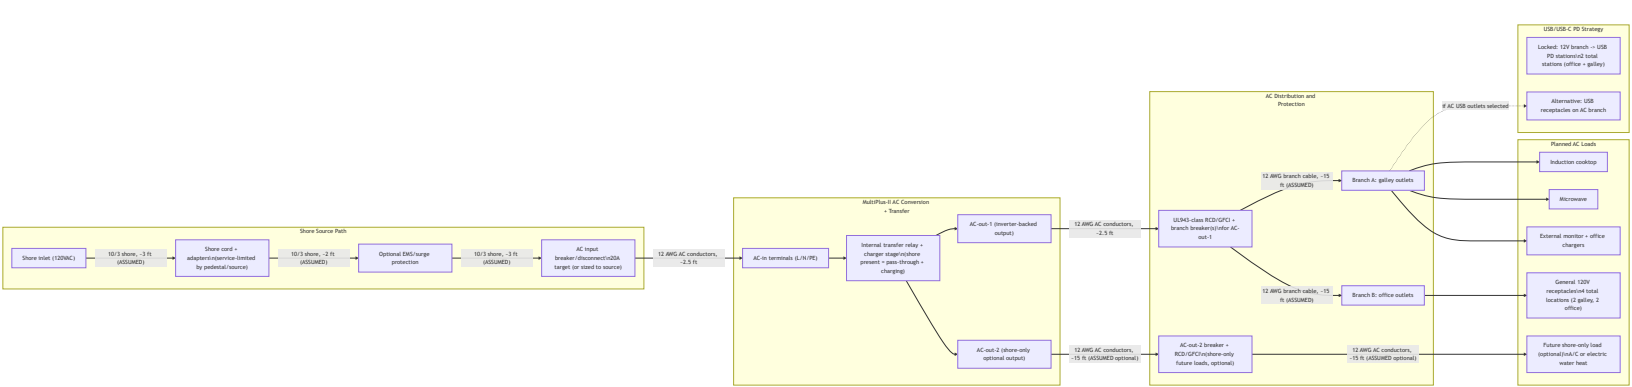

AC Operating Behavior (Expected)

- Shore present: MultiPlus transfer relay closes, AC-in is passed to AC-out paths, and charger stage charges the 48V bank.
- Shore absent: MultiPlus transfers to inverter mode and powers AC-out-1 from battery; AC-out-2 drops by design.
- Input current limit should be set to the actual shore source (15A , 20A , or 30A adapter-limited) to avoid pedestal/source breaker trips.

AC Safety/Protection Chain (What Must Exist)

- Upstream AC input protection/disconnect before MultiPlus AC-in.
- AC-out branch protection including UL943-class residual-current protection and overcurrent protection sized to branch wiring and expected load.
- Continuous equipment grounding path from shore inlet through MultiPlus and branch circuits, plus chassis bond in mobile install context.
- Neutral/ground handling must follow MultiPlus relay behavior; do not add an always-bonded downstream neutral-ground bond in branch receptacle wiring.


AC Reference Basis (Manufacturer Guidance)

- Victron MultiPlus-II 120V installation guidance (AC-in breaker sizing, UL943-class residual-current protection on outputs, and AC-out-2 shore-only behavior): https://www.victronenergy.com/media/pg/MultiPlus-II_120V/en/installation.html
- Victron MultiPlus-II datasheet (48/3000/35-50 baseline model reference): <https://www.victronenergy.com/upload/documents/Datasheet-MultiPlus-II-inverter-charger-120V-EN.pdf>

AC/USB Baseline Locked For BOM

- Shore interface: 30A RV-style inlet baseline with adapter kit for 15A / 20A hookups.
- AC input protection: dedicated AC input breaker/disconnect upstream of MultiPlus AC-in.
- AC-out-1 distribution: two protected branches (20A galley, 15A office) with GFCI-at-first-outlet strategy.
- Receptacle plan: 4 total 120V receptacle locations (2 galley, 2 office).
- USB charging plan: 2 DC-fed USB PD station assemblies on 12V branches (1 office, 1 galley) with branch baselines of 20A (office) and 15A (galley).
- AC-out-2 remains optional and not in Phase 1 procurement baseline.

Monitoring and Control Topology

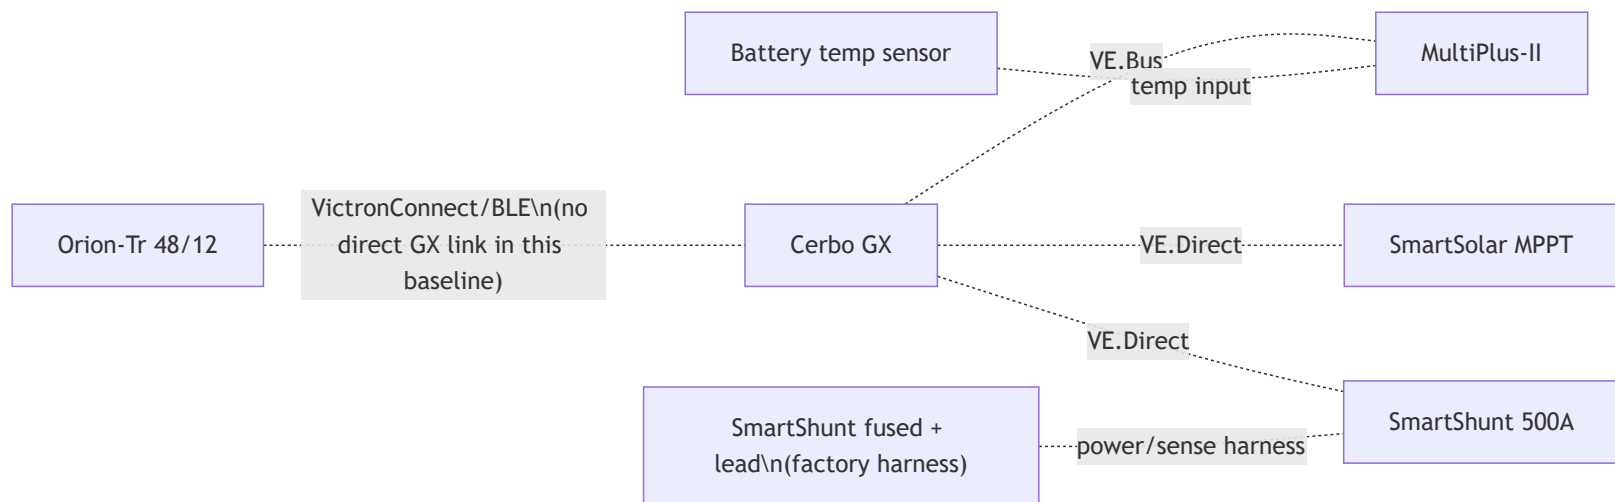

Fuse and Switch Housing Map (Where Each Item Is Physically Housed)

Item ID	Item value/type	Housing method	Location
F-01A	200A Class T (provisional)	Blue Sea Class T fuse block (110A-200A family)	Battery compartment near Battery A +
F-01B	200A Class T (provisional)	Blue Sea Class T fuse block (110A-200A family)	Battery compartment near Battery B +
F-01C	200A Class T (provisional)	Blue Sea Class T fuse block (110A-200A family)	Battery compartment near Battery C +
F-02	125A MEGA	Lynx integrated slot holder	Lynx Slot 1
F-03	60A MEGA	Lynx integrated slot holder	Lynx Slot 2
F-04	40A MEGA	Lynx integrated slot holder	Lynx Slot 3
F-05	40A MEGA	Lynx integrated slot holder	Lynx Slot 4
F-06	20A target / 23A MIDI fallback	Inline sealed holder (>=58VDC)	Electrical cabinet near Orion branch source
F-07	60A	Inline sealed holder (>=32VDC)	Electrical cabinet at Orion 12v + source end
F-08	150A	Sealed engine-bay MEGA/ANL holder	Engine bay near starter battery +
F-09A/B/C	15A gPV each	10x38 touch-safe fuse holders in PV combiner	Roof-entry combiner enclosure
F-10	Per branch (ATO/ATC)	Integrated blade sockets in 12V panel	Electrical cabinet
F-11	100A class (12V buffer battery main)	Sealed inline MIDI/AMI/ANL holder	Within ~`7" of 12V buffer battery positive post
SW-12V-BATT	Manual battery disconnect switch	Sealed rotary DC switch body	Electrical cabinet near 12V positive bus for service access
OEM-SHUNT	Factory low-current inline fuse (SmartShunt harness)	Integrated inline holder in Victron harness lead	Electrical cabinet near Lynx positive tap

Conductor Schedule (Start-to-Finish)

Segment ID	Circuit segment	Nominal voltage	Current basis	Overcurrent protection	Planned wire gauge	Estimated one-way length (this pass)
C-01	Battery A + -> F-01A	48V	Battery branch, fuse-limited	F-01A 200A provisional	2/0 AWG	2.5 ft (ASSUMED, equal-length set)
C-02	Battery B + -> F-01B	48V	Battery branch, fuse-limited	F-01B 200A provisional	2/0 AWG	2.5 ft (ASSUMED, equal-length set)
C-02C	Battery C + -> F-01C	48V	Battery branch, fuse-limited	F-01C 200A provisional	2/0 AWG	2.5 ft (ASSUMED, equal-length set)
C-03	Class T outputs -> battery-side 48v + busbar -> disconnect input	48V	Combined trunk current	F-01A/B/C	2/0 AWG each branch	2.5 ft each branch (ASSUMED, 4 conductors in rollup)
C-04	Disconnect output -> Lynx + bus	48V	Aggregate branch current (<=265A theoretical from Lynx slots)	Upstream Class T fuses	2/0 AWG	2.5 ft (ASSUMED)
C-05	Battery negatives -> battery-side 48v - busbar -	48V	Aggregate return current	N/A (main negative path)	2/0 AWG each branch	2.5 ft each branch (ASSUMED, 4

	> SmartShunt battery side					conductors in rollup)
C-06	SmartShunt load side -> Lynx - bus	48V	Aggregate return current	N/A	2/0 AWG	2.5 ft (ASSUMED)
C-06A	Lynx positive tap -> SmartShunt positive sense/power lead	48V	Shunt electronics supply (very low current)	Factory inline fuse in OEM harness	OEM harness lead	2.5 ft (ASSUMED)
C-07	Lynx Slot 1 (F-02) -> MultiPlus DC+	48V	Inverter branch, fuse-limited	F-02 125A	2/0 AWG (manual minimum AWG 1 on short runs)	2.5 ft (ASSUMED)
C-08	MultiPlus DC- -> Lynx - bus	48V	Inverter return current	F-02 protects paired positive	2/0 AWG	2.5 ft (ASSUMED)
C-09	MPPT BAT+ -> Lynx Slot 2 (F-03)	48V	Controller output (45A max)	F-03 60A	6 AWG	2.5 ft (ASSUMED)
C-10	MPPT BAT- -> Lynx - bus	48V	Controller return current	F-03 protects paired positive	6 AWG	2.5 ft (ASSUMED)
C-11	Sterling output + -> Lynx Slot 3 (F-04)	48V	Charger output (~26A nominal max)	F-04 40A	6 AWG planned (10 AWG minimum per Sterling table)	2.5 ft (ASSUMED)
C-12	Sterling output - -> Lynx - bus	48V	Charger return current	F-04 protects paired positive	6 AWG	2.5 ft (ASSUMED)
C-13	Lynx Slot 4 (F-05) -> F-06 holder	48V	Orion branch feeder, fuse-limited	F-05 40A	6 AWG	2.5 ft (ASSUMED)
C-14	F-06 -> Orion 48V + input	48V	Orion input, fuse-limited	F-06 20A/23A	6 AWG planned (8 AWG minimum per Orion table)	2.5 ft (ASSUMED)
C-15	Orion 48V - input -> Lynx - bus	48V	Orion input return current	F-06 protects paired positive	6 AWG	2.5 ft (ASSUMED)
C-16	Starter battery + -> F-08 -> Sterling input +	12V	Charger input path, fuse-limited	F-08 150A	2/0 AWG planned (2 AWG minimum per Sterling table)	12 ft (ASSUMED, long vehicle run)
C-17	Vehicle return/chassis -> Sterling input -	12V	Charger input return	F-08 protects paired positive	2/0 AWG planned	12 ft (ASSUMED, long vehicle run)
C-18	Orion 12V + -> F-07 -> shared 12V positive bus	12V	Converter output path (30A continuous, 60A fuse)	F-07 60A	6 AWG planned (8 AWG minimum per Orion table)	2.5 ft (ASSUMED)
C-19	Orion 12V - -> 12V negative busbar	12V	Converter output return	F-07 protects paired positive	6 AWG	2.5 ft (ASSUMED)
C-19A	12V buffer battery + -> F-11 -> SW-12V-BATT -> shared 12V positive bus	12V	Buffer source path and service isolation path	F-11 100A class	4 AWG planned	2.5 ft (ASSUMED)
C-19B	12V buffer battery - -> 12V negative busbar	12V	Buffer battery return path	N/A (paired with C-19A)	4 AWG planned	2.5 ft (ASSUMED)
C-19C	Shared 12V positive bus -> 12V fuse panel + bus	12V	Main 12V distribution feed path	Upstream source fuses (F-07 / F-11)	6 AWG planned	2.5 ft (ASSUMED)

c-20	12V panel -> Starlink PSU	12V	Branch load	F-10 10A	14 AWG duplex	8 ft (ASSUMED, near-load branch)
c-21	12V panel -> Fridge	12V	Branch load	F-10 15A	14 AWG duplex	12 ft (ASSUMED, far-load branch)
c-22	12V panel -> Diesel heater	12V	Branch load	F-10 15A	14 AWG duplex	8 ft (ASSUMED, near-load branch)
c-23	12V panel -> Water pump	12V	Branch load	F-10 10A	14 AWG duplex	8 ft (ASSUMED, near-load branch)
c-24	12V panel -> CO + propane detector	12V	Branch load	F-10 3A	18/2	8 ft (ASSUMED, near-load branch)
c-25	12V panel -> LED strips	12V	Branch load	F-10 5A	18/2	8 ft (ASSUMED, near-load branch)
c-26	12V panel -> Cerbo GX power feed	12V	Branch load (~3W)	F-10 3A (assumed)	18/2	2.5 ft (ASSUMED, cabinet internal)
c-27	PV strings -> F-09 combiner -> MPPT PV input	PV string voltage (3s)	String current + combiner output current	F-09A/B/C 15A each	10 AWG PV wire	12 ft trunk + 3x8 ft string legs (ASSUMED)
c-28	Shore inlet -> shore cord/adapter -> AC input breaker/disconnect	120VAC	Source-limited shore current	Source-size-matched AC breaker/disconnect (20A target baseline)	10/3 shore feed to inlet/breaker area	8 ft (ASSUMED)
c-29	AC input breaker/disconnect -> MultiPlus AC-in	120VAC	MultiPlus AC input current	Upstream AC breaker/disconnect (c-28)	12 AWG stranded AC conductors	2.5 ft (ASSUMED, cabinet internal)
c-30	MultiPlus AC-out-1 -> branch RCD/GFCI + breaker assembly	120VAC	Inverter-backed branch distribution current	UL943-class RCD/GFCI + branch breakers (20A galley, 15A office)	12 AWG stranded AC conductors	2.5 ft (ASSUMED, cabinet internal)
c-31	Branch A -> galley receptacle locations (2)	120VAC	Branch load (induction, microwave, galley outlets)	c-30 branch protection stack	12 AWG stranded AC conductors	15 ft (ASSUMED, branch leg default)
c-32	Branch B -> office receptacle locations (2)	120VAC	Branch load (monitor and office outlet use)	c-30 branch protection stack	12 AWG stranded AC conductors	15 ft (ASSUMED, branch leg default)
c-33	MultiPlus AC-out-2 (optional) -> shore-only future load branch	120VAC	Shore-only branch current	Dedicated breaker + UL943-class RCD/GFCI for AC-out-2	12 AWG stranded AC conductors	15 ft (ASSUMED, optional branch default)
c-34	12V panel -> USB PD station branch (office zone)	12V	High-demand office charging branch (100W + 65W class station budget)	F-10 branch fuse (20A)	12 AWG duplex baseline	5 ft (ASSUMED, short-run requirement)
c-35	12V panel -> USB PD station branch (galley zone)	12V	Galley charging branch (65W class USB-C plus USB-A/C loads)	F-10 branch fuse (15A)	14 AWG duplex baseline	8 ft (ASSUMED, near-load branch)

Wiring Validation Worksheet (Estimate Pass, 2026-02-18)

Calculation basis for drop screening:

- $V_{\text{drop}} = I * (2 * L_{\text{one_way}} * R_{\text{per_ft}})$

2. Resistance basis used in this pass (ohm/ft): 2/0=0.000779 , 6 AWG=0.0003951 , 4 AWG=0.0002485 , 12 AWG=0.001588 , 14 AWG=0.002525 , 18/2=0.006385 , 10 AWG=0.000999 .									
3. Design targets: <=2% on major 48V trunks, <=3% on planned 12V /AC branches.									
Circuit ID	From	To	Fuse	Current basis	Gauge	Estimated one-way length	Voltage drop %	BOM gauge bucket	Status
c-01	Battery A +	F-01A	F-01A 200A	82.5A design branch share	2/0 AWG	2.5 ft	0.06% @ 51.2V	Row 28 (2/0 red)	PASS
c-02	Battery B +	F-01B	F-01B 200A	82.5A design branch share	2/0 AWG	2.5 ft	0.06% @ 51.2V	Row 28 (2/0 red)	PASS
c-02C	Battery C +	F-01C	F-01C 200A	82.5A design branch share	2/0 AWG	2.5 ft	0.06% @ 51.2V	Row 28 (2/0 red)	PASS
c-03	Class T load studs	48V + bus / disconnect input	F-01A/B/C	82.5A per branch	2/0 AWG	2.5 ft each (x4 conductors)	0.06% @ 51.2V	Row 28 (2/0 red)	PASS
c-04	Disconnect output	Lynx + bus	Upstream Class T	165A aggregate	2/0 AWG	2.5 ft	0.13% @ 51.2V	Row 28 (2/0 red)	PASS
c-05	Battery - branches	SmartShunt battery side via 48v - bus	N/A	165A aggregate return	2/0 AWG	2.5 ft each (x4 conductors)	0.13% @ 51.2V	Row 28 (2/0 black)	PASS
c-06	SmartShunt load side	Lynx - bus	N/A	165A aggregate return	2/0 AWG	2.5 ft	0.13% @ 51.2V	Row 28 (2/0 black)	PASS
c-06A	Lynx positive tap	SmartShunt sense/power lead	OEM inline fuse	OEM harness current	OEM harness	2.5 ft	N/A (low-current OEM lead)	Row 23 (kit harness)	PASS
c-07	Lynx Slot 1 DC+	MultiPlus DC+	F-02 125A	125A	2/0 AWG	2.5 ft	0.10% @ 51.2V	Row 28 (2/0 red)	PASS
c-08	MultiPlus DC-	Lynx - bus	F-02 paired	125A	2/0 AWG	2.5 ft	0.10% @ 51.2V	Row 28 (2/0 black)	PASS
c-09	MPPT BAT+	Lynx Slot 2	F-03 60A	45A	6 AWG	2.5 ft	0.17% @ 51.2V	Row 29 (6 AWG red)	PASS
c-10	MPPT BAT-	Lynx - bus	F-03 paired	45A	6 AWG	2.5 ft	0.17% @ 51.2V	Row 29 (6 AWG black)	PASS
c-11	Sterling output +	Lynx Slot 3	F-04 40A	26A	6 AWG	2.5 ft	0.10% @ 51.2V	Row 29 (6 AWG red)	PASS
c-12	Sterling output -	Lynx - bus	F-04 paired	26A	6 AWG	2.5 ft	0.10% @ 51.2V	Row 29 (6 AWG black)	PASS
c-13	Lynx Slot 4	F-06 source side	F-05 40A	40A	6 AWG	2.5 ft	0.15% @ 51.2V	Row 29 (6 AWG red)	PASS

c-14	F-06 load side	Orion 48v +	F-06 20A/23A	20A	6 AWG	2.5 ft	0.08% @ 51.2V	Row 29 (6 AWG red)	PASS
c-15	Orion 48v -	Lynx - bus	F-06 paired	20A	6 AWG	2.5 ft	0.08% @ 51.2V	Row 29 (6 AWG black)	PASS
c-16	Starter battery +	Sterling input +	F-08 150A	125A design	2/0 AWG	12 ft	1.95% @ 12V	Row 28 (2/0 red)	PASS (near 2%; keep routing clean)
c-17	Vehicle return/chassis	Sterling input -	F-08 paired	125A design	2/0 AWG	12 ft	1.95% @ 12V	Row 28 (2/0 black)	PASS (near 2%; verify crimp/ground prep)
c-18	Orion 12v +	Shared 12v + bus	F-07 60A	30A	6 AWG	2.5 ft	0.49% @ 12V	Row 29 (6 AWG red)	PASS
c-19	Orion 12v -	12v - busbar	F-07 paired	30A	6 AWG	2.5 ft	0.49% @ 12V	Row 29 (6 AWG black)	PASS
c-19A	Buffer battery +	Shared 12v + bus (via F-11/SW)	F-11 100A	50A design	4 AWG	2.5 ft	0.52% @ 12V	Row 30 (4 AWG red)	PASS
c-19B	Buffer battery -	12v - busbar	N/A	50A design	4 AWG	2.5 ft	0.52% @ 12V	Row 30 (4 AWG black)	PASS
c-19C	Shared 12v + bus	12V fuse panel + bus	Upstream source fuses	60A screen	6 AWG	2.5 ft	0.99% @ 12V	Row 29 (6 AWG red)	PASS
c-20	12V fuse panel	Starlink PSU	F-10 10A	8A	14 AWG duplex	8 ft	2.69% @ 12V	Row 32 (14 AWG duplex)	PASS (near 3%)
c-21	12V fuse panel	Fridge	F-10 15A	7A	14 AWG duplex	12 ft	3.54% @ 12V	Row 32 (14 AWG duplex)	WARN (shorten run or move to 12 AWG)
c-22	12V fuse panel	Diesel heater	F-10 15A	10A startup screen	14 AWG duplex	8 ft	3.37% @ 12V	Row 32 (14 AWG duplex)	WARN (startup drop margin tight)
c-23	12V fuse panel	Water pump	F-10 10A	7A	14 AWG duplex	8 ft	2.36% @ 12V	Row 32 (14 AWG duplex)	PASS
c-24	12V fuse panel	CO+propane detector	F-10 3A	0.2A	18/2	8 ft	0.17% @ 12V	Row 33 (18/2)	PASS
c-25	12V fuse panel	LED strips	F-10 5A	5A	18/2	8 ft	4.26% @ 12V	Row 33 (18/2)	WARN (18/2 only if shorter run/lower current)
c-26	12V fuse panel	Cerbo GX feed	F-10 3A	0.3A	18/2	2.5 ft	0.08% @ 12V	Row 33 (18/2)	PASS
c-27	PV strings/combiner	MPPT PV input	F-09A/B/C 15A	30A trunk screen	10 AWG PV	12 ft trunk + 3x8 ft string legs	0.72% @ 100v trunk screen	Row 31 (10 AWG pair- equivalent)	PASS (string leg lengths still ASSUMED)

c-28	Shore inlet	AC input breaker/disconnect	Source-limited AC OCP	20A	10/3	8 ft	0.27% @ 120VAC	Row 114 (10/3 shore)	PASS
c-29	AC input breaker/disconnect	MultiPlus AC-in	Upstream AC OCP	20A	12 AWG AC	2.5 ft	0.13% @ 120VAC	Row 113 (12 AWG AC branch)	PASS
c-30	MultiPlus AC-out-1	Branch RCD/GFCI+breaker assembly	Branch OCP stack	20A	12 AWG AC	2.5 ft	0.13% @ 120VAC	Row 113 (12 AWG AC branch)	PASS
c-31	Branch A	Galley receptacle chain	20A branch OCP	20A	12 AWG AC	15 ft	0.79% @ 120VAC	Row 113 (12 AWG AC branch)	PASS
c-32	Branch B	Office receptacle chain	15A branch OCP	15A	12 AWG AC	15 ft	0.60% @ 120VAC	Row 113 (12 AWG AC branch)	PASS
c-33	MultiPlus AC-out-2	Optional shore-only branch	Optional branch OCP	15A	12 AWG AC	15 ft	0.60% @ 120VAC	Row 113 (12 AWG AC branch, optional)	PASS (optional)
c-34	12V fuse panel	Office USB PD station	F-10 20A	20A design cap	12 AWG duplex	5 ft	2.65% @ 12V	Row 116 (12 AWG + 14 AWG USB set)	PASS (keep <=5 ft or upsize)
c-35	12V fuse panel	Galley USB PD station	F-10 15A	8A expected	14 AWG duplex	8 ft	2.69% @ 12V	Row 116 (12 AWG + 14 AWG USB set)	PASS (near 3%; if sustained current rises, move to 12 AWG)

Wire Rollup (No-Padding Purchase Baseline)

Gauge / cable family	Estimated total	Source circuits	BOM row
2/0 AWG red	34.5 ft	C-01, C-02, C-02C, C-03, C-04, C-07, C-16	28
2/0 AWG black	27.0 ft	C-05, C-06, C-08, C-17	28
6 AWG red	15.0 ft	C-09, C-11, C-13, C-14, C-18, C-19C	29
6 AWG black	10.0 ft	C-10, C-12, C-15, C-19	29
4 AWG red	2.5 ft	C-19A	30
4 AWG black	2.5 ft	C-19B	30
10 AWG pair-equivalent (PV)	36 ft route (72 ft conductor equivalent)	C-27 (3x8 ft strings + 12 ft combiner trunk, ASSUMED)	31
14 AWG duplex	44 ft	C-20, C-21, C-22, C-23, C-35	32
18/2	18.5 ft	C-24, C-25, C-26	33
12 AWG AC branch cable	50 ft (includes optional c-33)	c-29 through c-33	113
10/3 shore feed	8 ft	C-28	114
USB branch mix (12 AWG + 14 AWG)	5 ft (12 AWG) + 8 ft (14 AWG)	C-34, C-35	116

Notes:

1. This table is a base estimate only; it intentionally excludes order padding and termination waste.
2. Apply personal order overage at checkout based on actual spool cut increments and routing confidence.
3. Parallel bank balancing is locked: `C-01/C-02/C-02C` and battery-negative branches in `C-05` remain equal length.

3x Battery Bank Bench-Build Cut List (2/0 AWG)

Purpose: make the bench build orderable without needing final camper run lengths. Treat lengths below as *bench module* lengths only; final install harnesses should be re-cut after layout freeze.

Assumptions:

1. Battery terminals are `M8` (verify your battery stud size before ordering lugs).
2. Class T fuse blocks and battery-side busbars use `3/8"` studs (treat as `M10` lugs unless your specific hardware differs).
3. Lynx Distributor is the `M10` model (main connections `M10` ; internal/fuse studs may still be `M8` depending on the position).

Cable ID	Qty	From -> To	Color	Gauge	Est. one-way length	Lug A	Lug B
BATT+_A/B/C	3	Battery + -> Class T block line side	red	2/0	2.5 ft each (ASSUMED)	M8	M10
FUSE_TO_POSBUS_A/B/C	3	Class T block load side -> 48v + busbar	red	2/0	2.5 ft each (ASSUMED)	M10	M10
POSBUS_TO_DISC	1	48v + busbar -> disconnect input	red	2/0	2.5 ft (ASSUMED)	M10	M10
DISC_TO_LYNX+	1	disconnect output -> Lynx + input	red	2/0	2.5 ft (ASSUMED)	M10	M10
BATT-_A/B/C	3	Battery - -> 48v - busbar	black	2/0	2.5 ft each (ASSUMED)	M8	M10
NEGBUS_TO_SHUNT	1	48v - busbar -> SmartShunt battery side	black	2/0	2.5 ft (ASSUMED)	M10	M10
SHUNT_TO_LYNX-	1	SmartShunt load side -> Lynx - input	black	2/0	2.5 ft (ASSUMED)	M10	M10
LYNX_SLOT1_TO_MULTII+	1	Lynx Slot 1 dc+ -> MultiPlus dc+	red	2/0	2.5 ft (ASSUMED)	M8	M8
LYNX_TO_MULTII-	1	Lynx - -> MultiPlus dc-	black	2/0	2.5 ft (ASSUMED)	M8	M8

Locked balancing rule for the `3x` parallel bank:

1. Keep `BATT+_A/B/C` equal length, same lug geometry, and same cable family.
2. Keep `BATT-_A/B/C` equal length, same lug geometry, and same cable family.
3. If an unavoidable routing offset appears in final install, log a warning and verify sharing with clamp-current checks under load and charge.

Torque reference (verify against your exact manuals/hardware):

- MultiPlus-II DC terminals: `12 Nm` (`M8` nut) per Victron installation guidance.
- SmartShunt shunt bolts: max `21 Nm` (`M10` on 500A model) per Victron installation guidance.
- Lynx Distributor `M10` model: `M10` nuts `33 Nm` (older serials may be lower), and `M8` nuts `14 Nm` per Victron Lynx installation guidance.

Additional Components Included In Topology Scope

- `48V` disconnect (`275A`)
- Pre-charge resistor (commissioning/soft-charge aid before connecting large DC loads)
- Battery-side `48V +` combine busbar (after Class T fuses)
- Battery-side `48V -` combine busbar (battery-only, before SmartShunt)
- Shared 12V positive bus/distribution post (Orion + buffer battery feed combine point)
- 12V negative busbar
- 12V buffer battery main fuse (`F-11`) and manual disconnect switch (`SW-12V-BATT`)
- Shore AC inlet + cord/adapter interface hardware
- AC input breaker/disconnect hardware (compact load-center baseline; DIN-only if swapped at SKU lock)
- AC branch RCD/GFCI + breaker hardware
- Receptacle boxes + `120V` outlets (`4` planned locations: `2` galley, `2` office)
- Optional AC-out-2 branch protection path for future shore-only loads
- USB PD station branch hardware (`2` stations: office + galley)
- Battery temperature sensor wiring to inverter/monitoring path

- SmartShunt fused positive sense/power lead (factory harness)

Assumptions (Explicit)

1. Cable sizing assumes fine-strand copper conductors (OFC welding-cable baseline for high-current DC paths), enclosed vehicle routing, and the estimated one-way lengths listed in this document.
2. Voltage-drop design intent used here: $\leq 2\%$ on major 48V power runs and $\leq 3\%$ on 12V branch circuits.
3. F-09 PV string fuse value (15A) remains provisional until final module datasheet max-series-fuse rating is confirmed.
4. Cerbo GX feed is assumed from the 12V panel (12V-07) for branch-level serviceability.
5. Orion branch remains split-protection (F-05 upstream feeder + F-06 device-level input fuse).
6. No low-voltage-disconnect (LVD) automation is included in Phase 1; protection is source fusing plus manual SW-12V-BATT isolation.
7. Big 3 alternator-upgrade path is purchase-later; this diagram captures the current stock-alternator-first architecture.
8. F-01A/B/C are provisionally set to 200A pending final 51.2V battery datasheet/manual confirmation; if validated limits are lower, shift to 175A .
9. 2/0 cable quantity planning baseline in this pass is 61.5 ft total no-padding (34.5 ft red + 27.0 ft black); user-applied order padding is intentionally deferred to checkout.

Completion Status

- DC/PV topology is complete for current BOM scope and load model scope.
- AC hierarchy is complete at architecture level, including transfer behavior, branch strategy, and protection chain.
- Full-circuit estimate pass is now documented with run lengths, voltage-drop screening, and purchase rollups.
- Remaining work is final measured-length replacement and SKU-level closeout before final cut-to-length harness production.