


Description

The μMix is a simple 3-channel mixer in a compact 2hp format. All 3 input channels are DC-coupled, allowing mixing/summing of both audio and CV signals. The module features independent level controls for each channel, with an output master level control.

Features


- Compact 2hp, 12mm-deep form factor
- 3 DC-coupled input channels
- Inputs/Outputs protected against shorts to +/-12V
- Power input reverse-polarity protection
- Current Draw: +12V: 4mA, -12V: 5mA

Module Layout

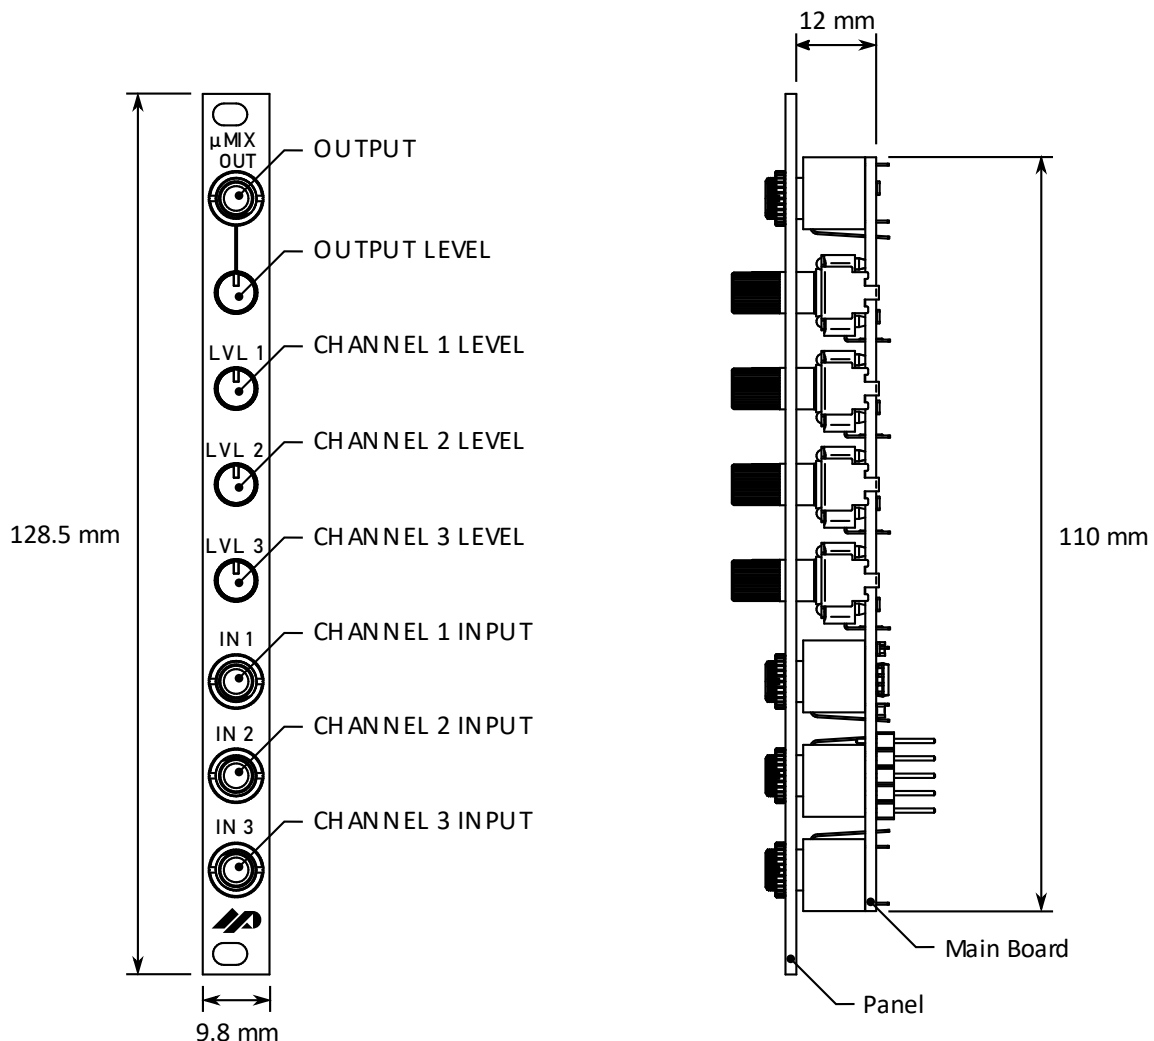

Functionality

Signals at inputs **IN 1-3** are summed and buffered to the output. Channel levels can be adjusted independently using knobs **LVL 1-3**, and the mixed output can be controlled using the master output knob. DC coupled inputs allow summing/mixing of bipolar CV signals as well as AC audio signals.

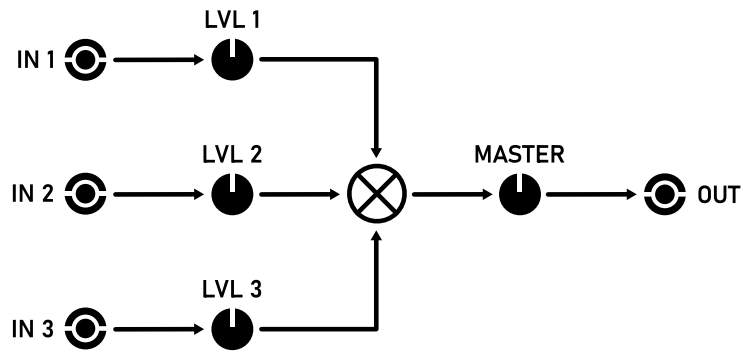

Bill of Materials

Value	Qty.	Name on Board	Description	Footprint
100k	6	R1,R2,R3,R4,R5,R6	100k 0.125W Resistor	0805
1k	1	R7	1k 0.125W Resistor	0805
100n	2	C1,C2	100n 50V Ceramic Capacitor	0805
47p	2	C3,C4	47p 50V Ceramic Capacitor	0805
TL072	1	U1	TL072 Dual Op Amp	SOIC-8 3.9mm
Schottky Diode	2	D1,D2	Schottky Diode 50V	SOD-123
3.5mm Jack	8	J1,J2,J3,J4	3.5mm Mono Switched Jack	PJ-3001F
B10k	4	RV1,RV2,RV3,RV4	10k Linear Potentiometer	RV09AF-40-20K
2.54mm Header	1	J5	2.54mm Header 5x1	2.54mm 5-Pin Vertical