
Base station carrier rev 0.1 - assembly, TOP (F) - seen from above

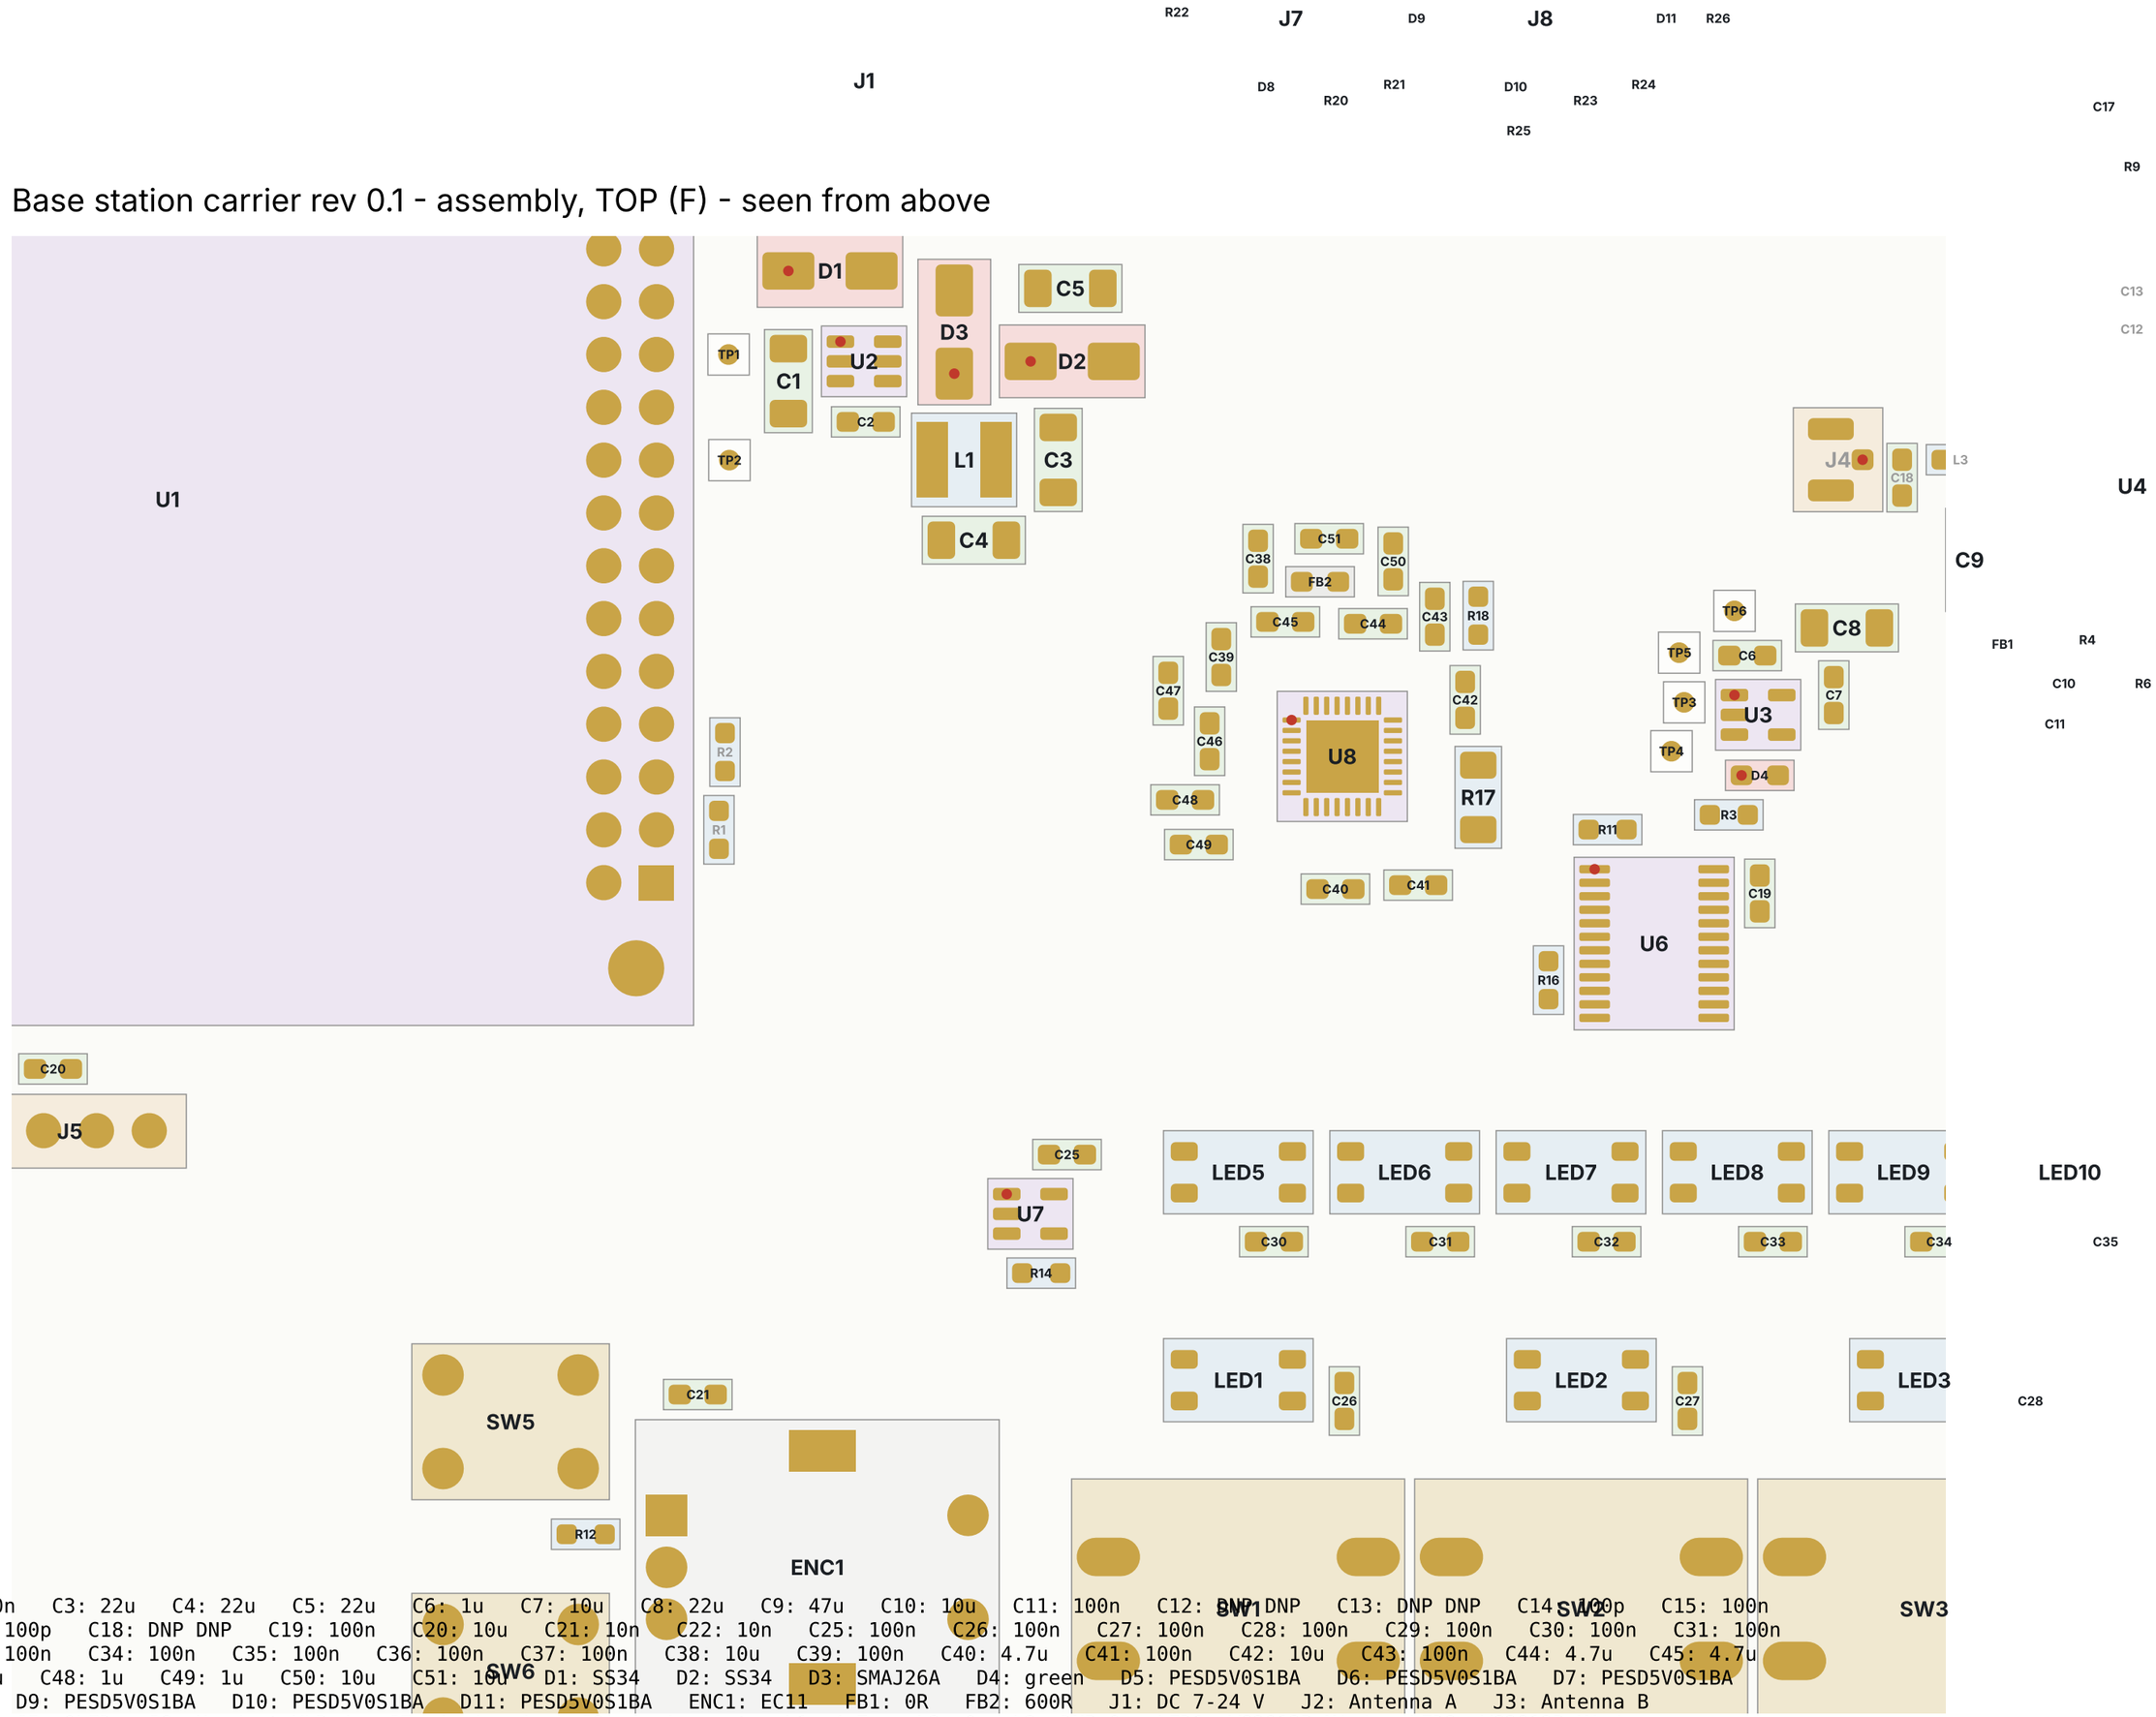


C1: 10u  C2: 100n  C3: 22u  C4: 22u  C5: 22u  C6: 1u  C7: 10u  C8: 22u  C9: 47u  C10: 10u  C11: 100n  C12: DNP DNP  C13: DNP DNP  C14: 100p  C15: 100n
C16: 100p  C17: 100p  C18: DNP DNP  C19: 100n  C20: 10u  C21: 10n  C22: 10n  C25: 100n  C26: 100n  C27: 100n  C28: 100n  C29: 100n  C30: 100n  C31: 100n
C32: 100n  C33: 100n  C34: 100n  C35: 100n  C36: 100n  C37: 100n  C38: 10u  C39: 100n  C40: 4.7u  C41: 100n  C42: 10u  C43: 100n  C44: 4.7u  C45: 4.7u
C46: 1u  C47: 1u  C48: 1u  C49: 1u  C50: 10u  C51: 10u  D1: SS34  D2: SS34  D3: SMAJ26A  D4: green  D5: PESD5V0S1BA  D6: PESD5V0S1BA  D7: PESD5V0S1BA
D8: PESD5V0S1BA  D9: PESD5V0S1BA  D10: PESD5V0S1BA  D11: PESD5V0S1BA  ENC1: EC11  FB1: 0R  FB2: 600R  J1: DC 7-24 V  J2: Antenna A  J3: Antenna B
J4: DNP 2.4 GHz  J5: OLED  J6: Headset XLR-4  J7: 4-wire in  J8: 4-wire out  L1: 4.7u  L2: 0  L3: DNP 0  LED1: WS2812B-Mini  LED2: WS2812B-Mini
LED3: WS2812B-Mini  LED4: WS2812B-Mini  LED5: WS2812B-Mini  LED6: WS2812B-Mini  LED7: WS2812B-Mini  LED8: WS2812B-Mini  LED9: WS2812B-Mini  LED10: WS2812B-Mini
LED11: WS2812B-Mini  LED12: WS2812B-Mini  R1: DNP 4.7k  R2: DNP 4.7k  R3: 1k  R4: 470  R5: 470  R6: 470  R7: 470  R8: 100k  R9: 1k  R10: 1k  R11: 10k
R12: 10k  R13: 10k  R14: 33  R15: DNP 0  R16: 100k  R17: 0  R18: 0  R19: DNP 0  R20: 10k  R21: 10k  R22: 4.7k  R23: 100  R24: 100  R25: 10k  R26: 10k
SW1: Talk 1  SW2: Talk 2  SW3: Talk 3  SW4: Talk 4  SW5: Menu  SW6: Back  TP1: P4_IO27  TP2: NANO_3V3  TP3: VIN  TP4: 5V  TP5: 3V3  TP6: GND
U1: ESP32-P4-NANO  U2: AP63205WU  U3: TLV75733  U4: LR2021  U5: PE4259  U6: TCA9555PWR  U7: 74AHCT1G125  U8: NAU88C22
Grey labels: not fitted (DNP).  Red dot: LED cathode / pin 1.  Grey pads: the other side.  Board frame in mm, origin at the centre.