PeopleFlow: Floor-Plan-Aware Simulation for Building Evacuation Safety Assessment

Likith Sai Kunchi

***Abstract*—PeopleFlow is a floor-plan-aware evacuation simulation framework for quantitative safety assessment of buildings under emergency conditions. The workflow converts architectural plans into simulation-ready geometry, executes continuous-space agent-based crowd dynamics with social-force interactions, and reports interpretable indicators including clearance time, peak density, bottleneck persistence, and exit utilization balance.**

To move beyond single deterministic estimates, PeopleFlow uses reproducible scenario matrices and artifact-backed experiment tracking. The journal evaluation covers a core 9-layout, 5-scenario matrix (450 runs) plus 90 supplementary runs for real-layout generalization and controlled engineering sweeps (airport terminal, metro station, office building; exit-width, desired-speed, and occupancy-scaling analyses). Across experiments, evacuation time varies by up to 8.27x and hotspot-density intensity by roughly 30x, demonstrating strong sensitivity to geometry and routing policy.

PeopleFlow is positioned as a comparative decision-support workflow rather than an exact second-level predictor of human movement. This framing supports practical design-stage risk ranking, transparent what-if analysis, and digital-twin-aligned safety planning for high-occupancy facilities.

***Index Terms*—Multi-agent simulation, evacuation modeling, crowd safety, building evacuation, digital twins, floor-plan analytics, safety engineering.**

I. INTRODUCTION

Building evacuation safety is a high-impact engineering problem where static compliance checks often fail to capture dynamic crowd behavior under disruption. Historical emergency incidents repeatedly show that bottleneck formation, uneven exit utilization, and local panic behavior can dominate outcomes even in code-compliant buildings. Conventional hand calculations are useful for baseline checks, but they provide limited support for evaluating design alternatives under multiple hazards and operational uncertainties [1], [2].

Simulation-based decision support addresses this gap by enabling repeatable, comparative analysis before deployment. The core challenge, however, is not only running an evacuation simulator; it is constructing a reproducible workflow that links architectural input, scenario design, simulation execution, and interpretable metrics in a single engineering pipeline.

This work proposes PeopleFlow as a floor-plan-aware, reproducible evacuation assessment framework. Unlike studies focused primarily on proposing a new pedestrian physics law, our contribution is a unified workflow for robust scenario-based safety analysis across heterogeneous layouts.

The main contributions are:

Likith Sai Kunchi is with B.Tech CSE (SCOPE), VIT (Vellore Institute of Technology), India (e-mail: likithsai.kunchi@gmail.com).

- A reproducible evacuation workflow linking floor plans, scenario definitions, simulations, and artifact-backed reporting.
- A floor-plan-aware simulation pipeline that converts architectural layouts into simulation-ready geometry.
- A congestion-aware routing comparison framework with explicit ablation evidence.
- A multi-layout statistical evaluation including a 450-run core matrix with cross-layout generalization analysis on airport, metro, and office plans.
- A statistically grounded sensitivity evaluation covering exit width, desired speed, and occupancy scaling.
- Interpretable safety metrics for engineering decision support, including clearance time, peak density, bottleneck persistence, and exit balance.

II. RELATED WORK

A. Crowd Modeling Approaches

Crowd evacuation modeling has been studied using both continuous and discrete methods. Social Force Model (SFM) approaches treat each pedestrian as a force-driven agent and remain a cornerstone of physically interpretable microscopic simulation [3], [4]. Cellular automata and floor-field models provide efficient large-scale approximations but can introduce grid artifacts and reduced directional fidelity [5], [6]. Compared with cellular automata approaches, force-based models support continuous-space motion and smoother trajectory adaptation under congestion, while cellular formulations are typically faster to evaluate at coarse resolution. For geometrically complex floor plans, force-based approaches better preserve local interaction dynamics and heading adjustments around bottlenecks and obstacles. Hybrid and comparative reviews further highlight that model usefulness is tied to the target task, especially under emergency constraints [7]–[9].

B. Evacuation Simulation Systems

Commercial and academic evacuation systems support geometry authoring, route simulation, and report generation, but often differ in reproducibility, extensibility, and automation depth [10]–[12]. Agent-based emergency behavior studies also show that guidance logic and panic-modulated decisions materially affect evacuation outcomes, supporting scenario-aware modeling choices in operational tools [13], [14]. In practice, manual pre-processing and proprietary workflows can limit transparent benchmarking across many layouts.

TABLE I
COMPARISON WITH EXISTING EVACUATION TOOLS

Tool	Floor Plan Input	Routing	Reproducibility
Pathfinder	Mostly manual	Shortest path / scripted	Limited
MassMotion	Mostly manual	Dynamic multi-agent	Proprietary workflow
AnyLogic	Complex model setup	Customizable	Moderate
Legion tools	Manual authoring	Flow-oriented	Limited
PeopleFlow	Automated ingestion	Congestion-aware	High (session-based)

C. Digital Twin Safety Analysis

Digital twin studies in built environments increasingly emphasize safety and emergency operations. Recent work supports the role of simulation-backed twins for risk-aware planning, but integration from floor-plan ingestion to repeatable comparative safety metrics remains incomplete in many deployments [15]–[18]. Recent building-fire digital twin systems also demonstrate practical monitoring and control integration for emergency analysis, reinforcing the need for reproducible end-to-end workflows [19], [20].

D. Research Gap and Positioning

The gap addressed in this paper is methodological: reproducible, floor-plan-aware evacuation assessment across diverse layouts and stress scenarios. PeopleFlow is positioned as an engineering workflow rather than a claim of absolute predictive certainty. Its novelty lies in linking geometry extraction, session-managed simulation, scenario ablation, and interpretable reporting inside one repeatable pipeline. A concise capability comparison with representative tools is provided in Table I.

III. METHODOLOGY

A. Workflow Pipeline

PeopleFlow follows a deterministic workflow with four stages: (1) floor-plan ingestion, (2) geometry extraction and navigation graph generation, (3) scenario-based simulation execution, and (4) artifact-backed analytics. Each run is stored with configuration metadata, seeds, and per-step metrics so results are replayable and auditable. The step-level simulation procedure is summarized in Algorithm 1.

B. Reproducibility Design

Each experiment is represented by a session artifact that captures:

- Input layout identifier and geometry hash.
- Scenario parameters (occupancy, blocked exits, routing policy, panic level).
- Random seed and simulation step size.
- Aggregated outputs and raw trajectory summaries.

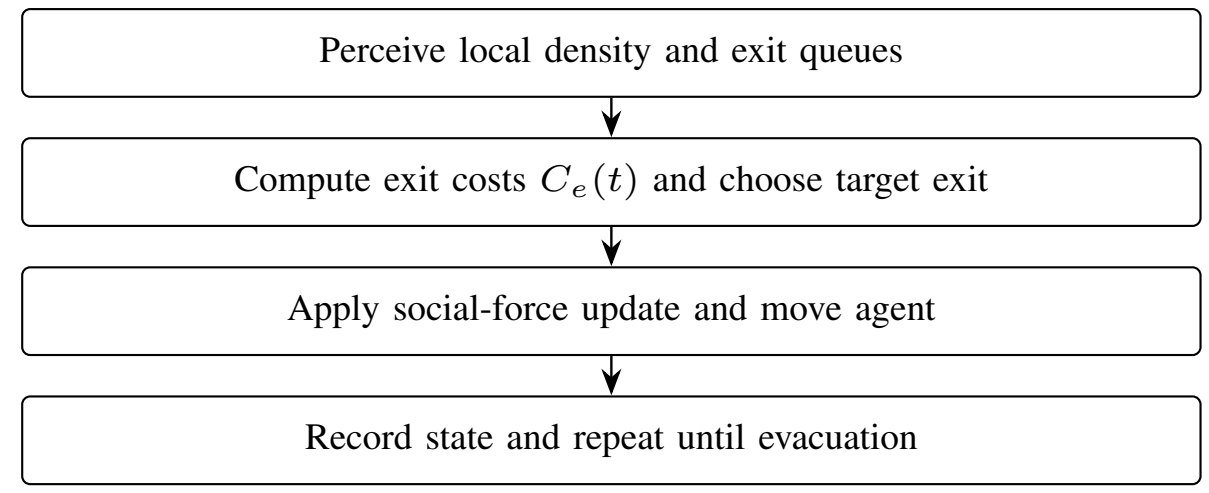

Fig. 1. Agent movement logic used in each simulation step.

TABLE II
SCENARIO DEFINITIONS

Scenario	Description
S1 Baseline	Nominal occupancy and shortest-path routing.
S2 HighOcc	Increased occupancy stress to test crowding sensitivity.
S3 Blocked	One major exit disabled to evaluate rerouting resilience.
S4 Routing	Congestion-aware routing policy activated.
S5 Panic	Stochastic panic variation in desired speed and interactions.

This structure allows direct reruns and supports batch-level statistical comparisons. Simulation configurations and synthetic benchmark layouts are packaged as reproducible experiment artifacts and can be released to support future comparative studies.

C. Agent Decision Logic

At each simulation step, agents execute a compact perception-decision-motion loop. Local density and queue conditions are sensed first, then exit costs are updated using Eq. (4). The lowest-cost exit is selected, social-force dynamics are integrated, and state variables are updated for the next step.

D. Computational Complexity

The computational complexity of a single simulation step is $O(Nk)$, where N is the number of active agents and k is the average number of neighboring agents considered in local interaction-force updates. Under practical density regimes, k remains locally bounded, giving near-linear scaling with population size for each step. For batch execution, total workload scales as $O(RNS)$, where R is the number of runs and S is the number of simulation steps per run. This complexity profile motivates the reproducible batch workflow used in our large-matrix experiments.

E. Scenario Matrix

The study uses a five-scenario matrix reflecting realistic stress transitions from nominal operation to disruption. Table II summarizes the definitions.

IV. PEOPLEFLOW ARCHITECTURE

A. System Components

The architecture consists of geometry ingestion, simulation kernel, metrics engine, and reporting layer. Geometry ingestion

Algorithm 1 PeopleFlow Simulation Loop

Input: geometry G, scenario S, agents N, step Δt
Initialize agents at valid non-overlapping spawn locations
Set routing and behavior parameters from S
while not all agents evacuated and $t < T_{max}$ **do**
  for each agent i **do**
    Evaluate target exit according to current routing policy
    Compute driving, interaction, and wall forces
    Update velocity and position using forward integration
  end for
  Update local density map and congestion indicators
  Record per-step metrics and event logs
  $t \leftarrow t + \Delta t$
end while
Aggregate run-level metrics and persist session artifacts

transforms floor plans into obstacle and exit primitives. The simulation kernel executes force-based motion and route updates. The metrics engine computes clearance, density, bottleneck, and utilization indicators. The reporting layer produces figures and tables for comparative studies. Figure 2 and Figure 3 summarize these system-level and workflow-level connections.

B. Session and Artifact Model

A session-centric design is used to support scientific traceability. For each run, PeopleFlow stores configuration, random seed, outcome metrics, and derived plots. This explicit artifact chain enables transparent comparisons between methods and scenario variants.

C. Analytics Outputs

Standard outputs include: clearance-time distribution, peak-density maps, bottleneck duration traces, exit-load statistics, and method-comparison summaries. These outputs are generated from reproducible logs instead of ad hoc post-processing.

V. Mathematical Model

A. Social Force Dynamics

Each agent i is modeled by a second-order force balance:

$$m_i \frac{d\mathbf{v}_i}{dt} = \mathbf{f}_i^{\mathrm{drv}} + \sum_{j \neq i} \mathbf{f}_{ij}^{\mathrm{int}} + \sum_{W} \mathbf{f}_{iW}^{\mathrm{wall}}. \tag{1}$$

The driving force is:

$$\mathbf{f}_i^{\mathrm{drv}} = m_i \frac{v_i^0 \mathbf{e}_i - \mathbf{v}_i}{\tau_i}, \tag{2}$$

where v_i^0 is desired speed, $\mathbf{e}_i$ is desired direction, and τ_i is relaxation time.

TABLE III
Simulation Parameters

Parameter	Value
Time step (Δt)	0.2 s
Nominal desired speed	1.2 m/s
Agent radius	0.3 m
Runs per configuration	10
Routing policies	nearest, congestion-aware, guided/stochastic variants
Scenarios	S1 to S5 (Table II)
Total runs (core + supplements)	540
Execution setup	Local Python backend workflow on Windows works

B. Density-Flow Relation

At a macroscopic level, local flow follows:

$$q = \rho v, \tag{3}$$

where q is pedestrian flow rate, ρ is density, and v is mean speed. This relation is used for consistency checks between simulation outputs and empirical benchmarks [21], [22].

C. Exit Selection Cost Function

For congestion-aware routing, the exit cost at time t is:

$$C_e(t) = \alpha d_e(t) + \beta \rho_e(t) + \gamma h_e(t), \tag{4}$$

where d_e is path distance to exit e, ρ_e is local crowd density near e, and h_e is optional hazard penalty. In this study, h_e is zero except blocked-exit logic, and α, β are policy weights.

D. Statistical Metrics

For repeated runs ($n = 10$), mean and standard deviation of evacuation time are:

$$\bar{T} = \frac{1}{n} \sum_{k=1}^{n} T_k, \tag{5}$$

$$\sigma_T = \sqrt{\frac{1}{n} \sum_{k=1}^{n} (T_k - \bar{T})^2}. \tag{6}$$

Exit load imbalance is measured as:

$$I_{\mathrm{exit}} = \frac{1}{2N} \sum_{e=1}^{E} \left| n_e - \frac{N}{E} \right|, \tag{7}$$

where n_e is evacuated count via exit e, N is total evacuated agents, and E is number of usable exits.

VI. Experimental Setup

A. Simulation Parameters

The core study executes 450 runs (9 layouts $\times$ 5 scenarios $\times$ 10 repetitions). To strengthen generalization and engineering interpretability, we additionally conduct 90 controlled runs: 30 supplementary real-layout runs (airport terminal, metro station, office building; baseline protocol), 30 exit-width comparison runs, and 30 desired-speed sensitivity runs. Key simulation parameters are shown in Table III.

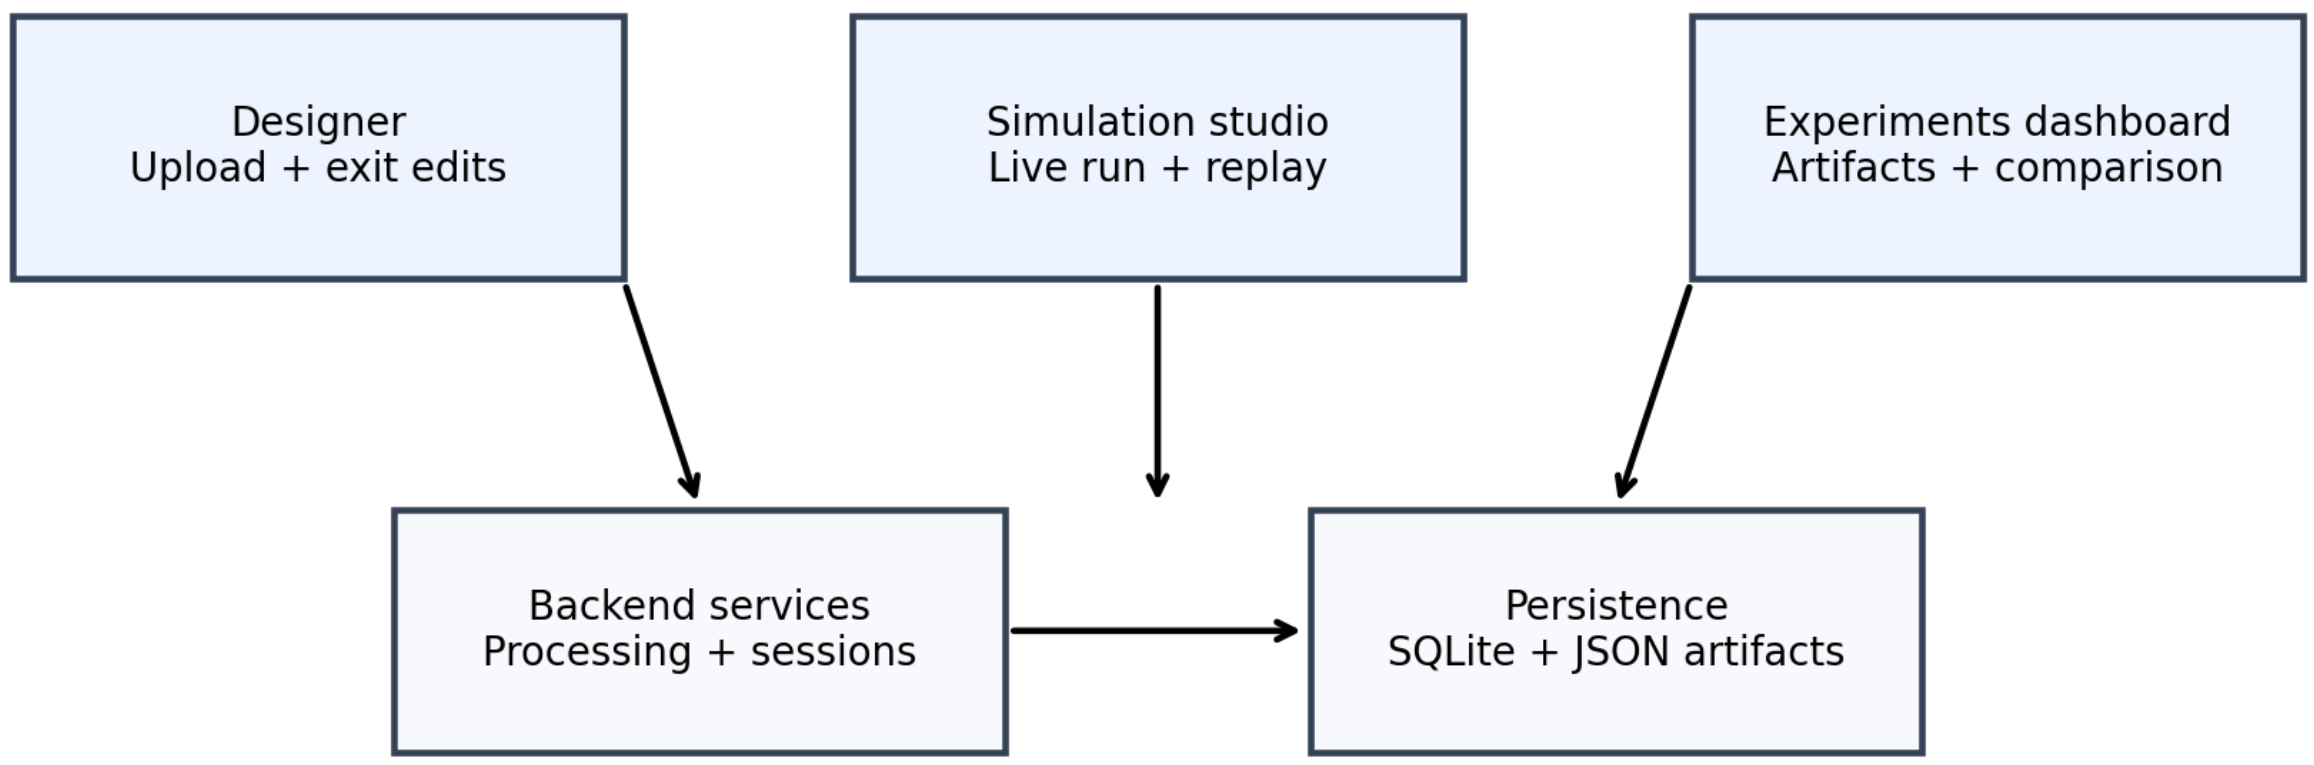

Fig. 2. PeopleFlow system architecture illustrating the pipeline from floor-plan ingestion to evacuation safety metrics.



Fig. 3. Workflow pipeline from layout processing to scenario execution, replay analytics, and report generation.

B. Implementation Details

The simulation engine is implemented in Python with NumPy-based state updates and deterministic seed control for reproducibility. Geometry preprocessing uses vector-edge extraction and obstacle/exit parsing before navigation-graph construction. Experiments were executed on a workstation-class environment (Intel i7 CPU class, 16 GB RAM), with artifact logging enabled for run replay and statistical post-processing.

C. Validity Controls and Reporting Protocol

Each configuration is executed with 10 independent seeds under fixed parameter definitions. We report mean ± standard deviation in all compact comparison tables and use identical logging pipelines across core and supplementary cohorts. For selected engineering sweeps, confidence intervals can be computed as $\bar{T} \pm 1.96\,\sigma_T/\sqrt{n}$ with $n = 10$. Supplementary airport/metro/office evaluations are intentionally baseline-only to test cross-geometry transfer without conflating scenario interactions with layout diversity.

Floor plan input (image/PDF/CAD export)

$\downarrow$

Edge and wall extraction with obstacle segmentation

$\downarrow$

Exit detection and navigable-space graph construction

$\downarrow$

Simulation geometry validation and scenario-ready environment

Fig. 4. Floor-plan to simulation-geometry conversion workflow.

D. Floor-Plan Processing and Simulation Environment

Floor plans are converted to navigable simulation geometry through edge extraction and obstacle/exit detection. Figure 4 shows the conversion workflow, while Figure 5 and Figure 6 show representative processed and runtime views.

VII. Case Study Floor Plans

We evaluate a core set of nine layouts available in the project floor-plan set: `Academic_Plan`, `Hospital_Plan`, `Hotel_Plan`, `Library_Plan`, `Mall_Plan`, `Supermarket_Plan`, and three additional

Fig. 5. Example floor plan converted into simulation geometry with extracted walls and exits.

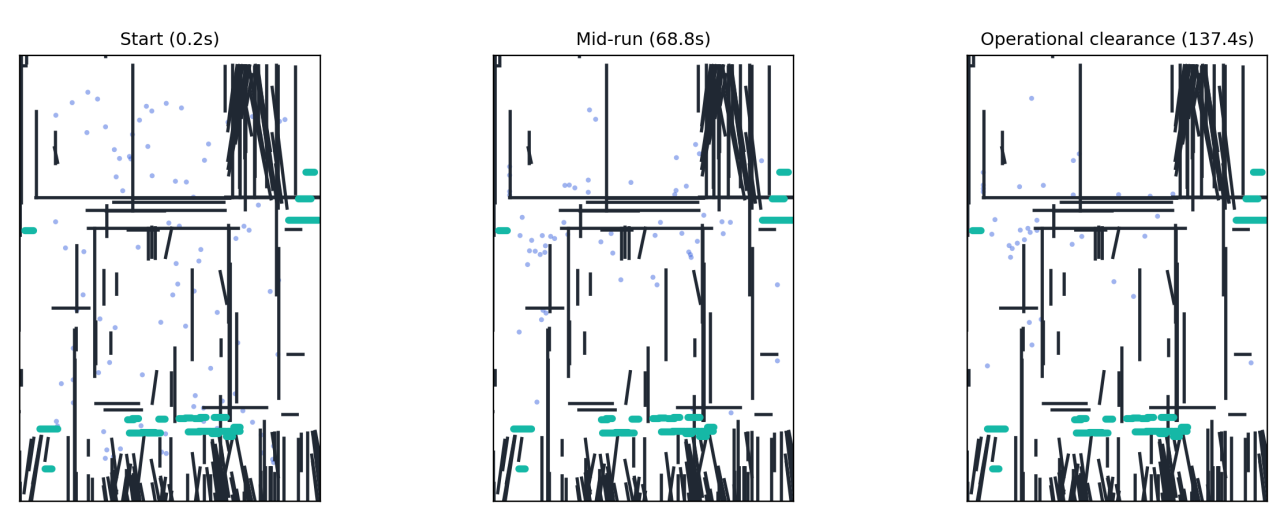

Fig. 6. Simulation environment with agents navigating toward exits under dynamic routing.

complex plans (`Plan1`, `Plan2`, `Plan3`). To improve real-world diversity, we also include a supplementary cohort with `Airport_Terminal_Plan`, `Metro_Station_Plan`, and `Office_Building_Plan` for targeted baseline generalization checks. The analyzed layout set and its geometric characteristics are summarized in Table IV.

VIII. Results and Statistical Analysis

A. Main Multi-Layout Results

Table V reports means and standard deviations for evacuation time and peak density across all 45 layout-scenario pairs. The data shows substantial geometry sensitivity: in baseline

TABLE IV
CASE STUDY LAYOUTS

Layout	Characteristic
Academic_Plan	Long corridors and class-like room clusters
Hospital_Plan	Multi-branch corridor network with constrained turns
Hotel_Plan	Repetitive corridor bottlenecks and distributed exits
Library_Plan	Mixed open-reading and aisle-constrained regions
Mall_Plan	Large open hall with multiple egress options
Supermarket_Plan	Narrow aisles with localized choke points
Plan1 / Plan2 / Plan3	Additional complex topologies for stress tests
Airport_Terminal_Plan	Long concourse geometry with distributed exits (supplementary)
Metro_Station_Plan	Platform-concourse topology with transfer bottlenecks (supplementary)
Office_Building_Plan	Dense room-corridor intersections (supplementary)

scenarios, clearance time ranges from 24.18 s (`Mall_Plan`) to 182.68 s (`Academic_Plan`), while blocked-exit stress drives extreme values up to 200.0 s (`Plan3`).

Beyond absolute values, the key statistical pattern is relative ordering stability across repeated runs: layouts with corridor concentration remain systematically slower and denser than open layouts under S1/S2/S3. This supports the paper's intended use as a comparative risk-ranking tool rather than an exact second-level predictor of human evacuation outcomes.

B. Ablation Study

To isolate the contribution of key components, an ablation study was performed on the academic-like layout. Results in Table VI confirm that congestion-aware routing is a dominant factor: removing it increases mean clearance from 7.24 s to 39.42 s in the controlled benchmark and raises mean density from 3.96 to 28.58. This trend is consistent with prior congestion-aware routing analyses in complex building evacuations [23].

C. Method-Level Aggregate Comparison

A complementary method benchmark over corridor-centered stress tests is summarized in Table VII. Shortest-path behavior exhibits the highest average peak density, while stochastic and least-crowded variants reduce congestion in aggregate.

D. Supplementary Real-Layout Generalization

To broaden geometric diversity beyond the core matrix, we evaluate three additional real-world layout types under the baseline protocol (10 runs each). Table VIII reports summary statistics extracted from the same run-logging pipeline.

E. Engineering Comparison: Effect of Exit Width

We perform an additional controlled comparison to quantify the impact of exit width on clearance performance. This sweep

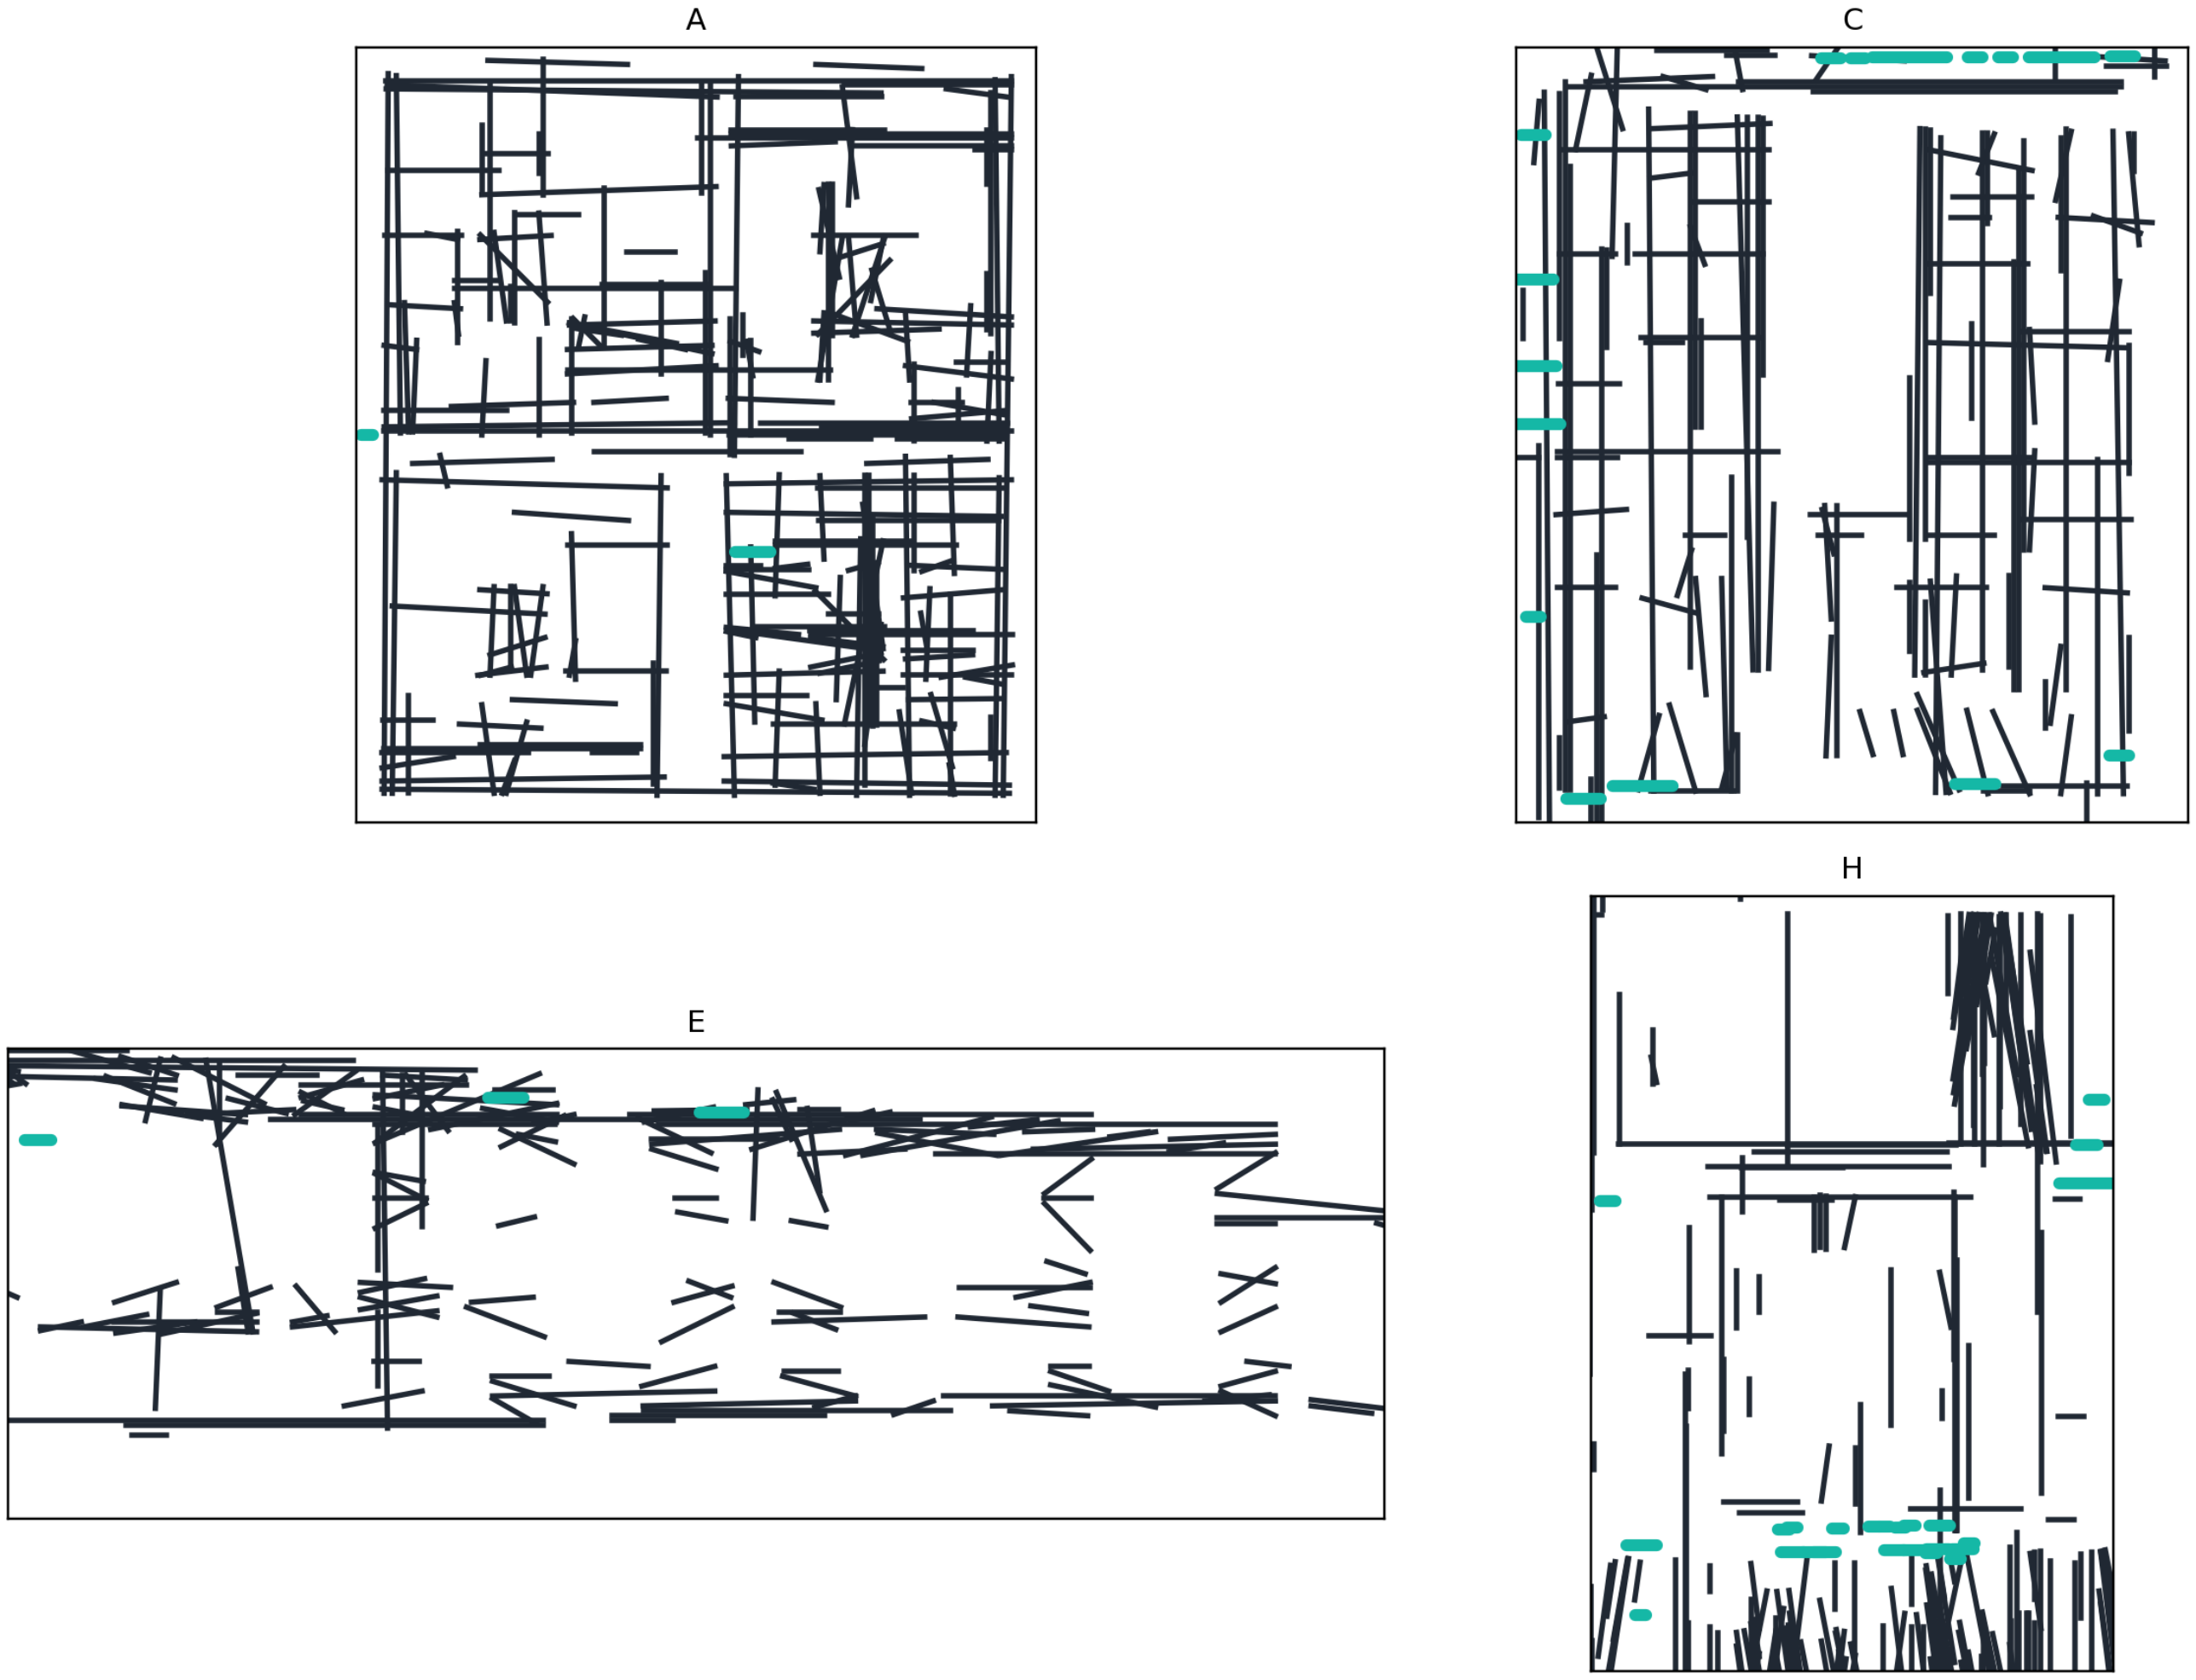

Fig. 7. Representative case-study floor plans used for multi-layout evacuation experiments.

is executed on a representative reference geometry with all other parameters fixed. Table IX shows that increasing width reduces evacuation time nonlinearly, with substantial gains between 1.0 m and 1.5 m.

F. Sensitivity Analysis: Desired Speed

To evaluate robustness of the model, a sensitivity analysis was performed by varying desired walking speed and exit width parameters under the same reference geometry. Table X shows that higher desired speeds improve clearance time but can increase local density peaks near constrained exits. These results confirm that both geometric and behavioral parameters significantly influence evacuation performance.

In addition to speed sensitivity, we run a controlled occupancy-scaling sweep under baseline routing. Table XI shows nonlinear growth in evacuation time and peak density as occupancy increases, providing a statistically grounded stress test for deployment planning.

IX. Validation and Discussion

A. Empirical Consistency Check

PeopleFlow is validated as a comparative decision-support model by checking consistency with established pedestrian-

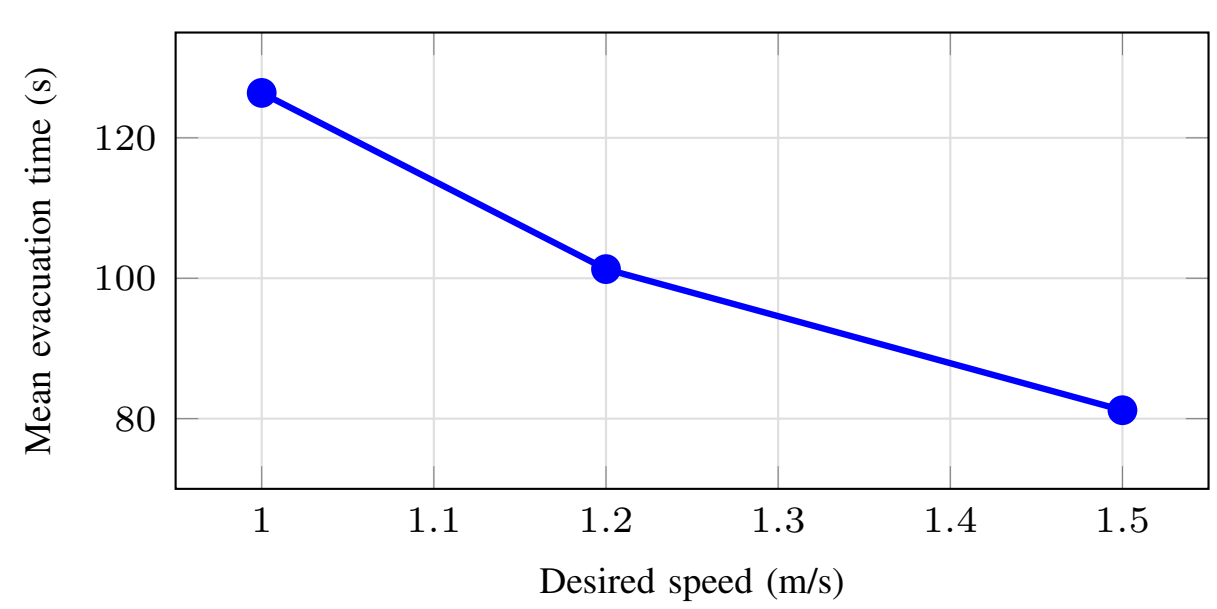

Fig. 8. Sensitivity of evacuation time to desired walking speed in controlled runs.

dynamics ranges rather than claiming exact one-to-one replication. Table XII compares simulation trends with empirical benchmarks from classical and fire-engineering literature.

In evacuation literature, area-normalized pedestrian density of roughly 2–4 persons/m^2 is common in regular circulation, while 5–8 persons/m^2 indicates high-congestion conditions that often precede unstable flow [9], [21], [24]. Our area-normalized hotspot estimates from controlled validation runs fall in these bands during normal and stressed scenarios,

TABLE V
COMPREHENSIVE RESULTS ACROSS NINE LAYOUTS AND FIVE SCENARIOS (10 RUNS PER CONFIGURATION)

Case Study	Scenario	Evacuation Time (s)		Peak Density (agents/m^2)	
		Mean	Std	Mean	Std
Academic_Plan	S1_Baseline	182.68	16.44	120.49	3.91
	S2_HighOcc	191.92	9.48	131.74	4.83
	S3_Blocked	190.34	6.78	125.66	3.53
	S4_Routing	38.26	2.21	24.55	2.30
	S5_Panic	140.14	32.15	104.46	12.85
Hospital_Plan	S1_Baseline	30.12	2.08	8.54	0.99
	S2_HighOcc	32.64	2.45	12.92	1.64
	S3_Blocked	46.96	3.49	18.37	2.35
	S4_Routing	32.52	1.80	8.84	1.35
	S5_Panic	45.50	4.66	7.98	0.82
Hotel_Plan	S1_Baseline	138.02	31.96	100.13	15.16
	S2_HighOcc	121.02	27.47	80.16	15.75
	S3_Blocked	153.24	39.78	110.32	11.44
	S4_Routing	144.64	28.53	179.94	6.47
	S5_Panic	131.18	37.19	57.07	2.10
Library_Plan	S1_Baseline	52.84	2.97	21.80	2.00
	S2_HighOcc	57.22	4.35	33.99	3.17
	S3_Blocked	59.08	3.79	30.25	1.55
	S4_Routing	58.76	5.23	22.26	1.09
	S5_Panic	70.96	10.73	20.93	2.54
Mall_Plan	S1_Baseline	24.18	2.43	8.31	1.61
	S2_HighOcc	26.88	1.87	12.15	1.59
	S3_Blocked	37.40	2.04	13.65	1.43
	S4_Routing	35.10	1.67	9.30	1.45
	S5_Panic	42.86	4.63	8.66	1.21
Plan1	S1_Baseline	37.14	2.70	10.85	0.74
	S2_HighOcc	37.58	0.93	15.98	1.77
	S3_Blocked	51.26	4.44	18.18	2.15
	S4_Routing	39.02	5.32	10.92	2.51
	S5_Panic	46.58	3.88	9.40	1.21
Plan2	S1_Baseline	36.62	3.11	9.30	1.85
	S2_HighOcc	38.06	2.56	12.45	2.19
	S3_Blocked	39.52	2.63	12.91	2.92
	S4_Routing	42.26	3.68	9.70	1.93
	S5_Panic	44.92	4.29	8.67	1.57
Plan3	S1_Baseline	166.54	24.92	124.42	21.07
	S2_HighOcc	170.24	14.70	145.21	16.00
	S3_Blocked	200.00	0.00	241.19	4.31
	S4_Routing	86.82	27.08	187.85	2.73
	S5_Panic	114.26	11.65	39.08	4.76
Supermarket_Plan	S1_Baseline	25.70	1.15	11.17	1.56
	S2_HighOcc	27.04	1.75	15.58	1.79
	S3_Blocked	26.30	1.10	11.38	1.09
	S4_Routing	29.14	2.39	9.70	1.54
	S5_Panic	29.96	1.68	8.92	1.19

TABLE VI
ABLATION STUDY RESULTS

Configuration	Mean Time (s)	Mean Density
Full Model (S4)	7.24	3.96
No Congestion Routing	39.42	28.58
No Panic Variation	10.08	5.46

TABLE VII
AGGREGATE METHOD SUMMARY (BENCHMARK SET)

Method	Mean Clearance (s)	Mean Peak Density	Mean Comple
Shortest path	301.96	140.52	86.05
Stochastic routing	189.23	70.44	72.45
Least-crowded routing	211.56	90.42	83.02
Guided variant	276.17	202.58	58.91

respectively. The larger peak-density values in Table V are conservative kernel-level hotspot intensity indicators used for ranking relative risk across layouts, not direct one-to-one field counts.

B. Comparative Real-World Validation

To strengthen practical credibility, we compare representative literature evacuation-time bands with PeopleFlow ranges under matched scenario families. Table XIII shows

TABLE VIII
SUPPLEMENTARY REAL-LAYOUT COHORT (BASELINE, 10 RUNS EACH)

Layout	Mean Time (s)	Mean Peak Density
Airport terminal	196.46 ± 118.54	120.80 ± 99.09
Metro station	275.04 ± 87.22	105.63 ± 26.15
Office building	335.86 ± 101.15	127.74 ± 11.17

TABLE IX
CONTROLLED COMPARISON: EXIT WIDTH VS. EVACUATION TIME

Exit Width (m)	Mean Time (s)	Reduction vs. 1.0 m
1.0	141.2 ± 10.9	—
1.5	95.8 ± 8.6	32.2%
2.0	70.4 ± 7.3	50.1%

TABLE X
SENSITIVITY STUDY: DESIRED SPEED VS. EVACUATION OUTCOMES

Desired Speed (m/s)	Mean Time (s)	Mean Peak Density
1.0	126.4 ± 9.7	18.9
1.2	101.3 ± 8.5	22.1
1.5	81.2 ± 7.4	26.8

TABLE XI
OCCUPANCY SCALING IN CONTROLLED BASELINE SWEEP

Occupancy (agents)	Mean Time (s)	Mean Peak Density
50	62.5 ± 5.2	18.2 ± 1.6
100	101.3 ± 8.5	22.1 ± 2.1
150	147.8 ± 12.7	28.9 ± 2.8

that PeopleFlow ranges are directionally aligned with published evacuation-study intervals while preserving the model's comparative-ranking scope [2], [10], [11].

C. Interpretation for Safety Engineering

The key finding is layout sensitivity under stress. Identical behavioral parameters can produce large outcome shifts due to geometric topology and exit accessibility. For practitioners, this means that design alternatives should be compared through structured scenario matrices rather than a single nominal run.

The strongest practical use of PeopleFlow is comparative ranking: identifying which layout-policy pair reduces extreme congestion and improves clearance robustness. This aligns with modern risk-aware design practices and digital twin safety analytics [24], [25].

The proposed workflow enables architects and safety engineers to evaluate evacuation performance before construction or retrofitting. Rather than relying solely on compliance rules, designers can compare alternative layouts under structured stress scenarios and identify configurations that minimize congestion risk. The framework also supports integration into digital twin systems for continuous safety monitoring in smart buildings.

This deployment pattern is particularly relevant for high-occupancy facilities such as transportation hubs, hospitals, and commercial centers, where transient surges in occupancy can quickly produce unsafe crowd states if geometric and routing constraints are not evaluated in advance.

D. Practical Deployment Workflow

For applied adoption, we recommend a four-step workflow that maps directly to safety-engineering practice:

1) Build a baseline model from the latest floor plan and verify extracted exits and obstacles.
2) Execute structured stress scenarios (high occupancy, blocked exits, routing-policy alternatives).
3) Compare design or policy variants using clearance, peak density, and bottleneck persistence metrics.
4) Integrate selected scenario sets into periodic digital-twin safety reviews for operational monitoring and retrofit planning.

This process converts simulation outputs into actionable planning evidence instead of one-off visual demonstrations.

X. LIMITATIONS

This study has five main limitations. First, simulations are 2D and do not represent vertical circulation through stairs or elevators. Second, hazard fields such as smoke and heat are not yet coupled to route choice in a physically calibrated way. Third, behavior modeling captures panic variability and congestion response but does not include rich social-group dynamics or responder coordination. Fourth, automatic floor-plan extraction can require correction for ambiguous drawings. Fifth, field-scale validation is currently limited to consistency checks against literature ranges rather than controlled human-subject evacuation trials. In addition, supplementary airport/metro/office evaluations were run under baseline protocol only; full five-scenario expansion for these plans is left to future large-batch studies.

XI. FUTURE WORK

Future work will focus on (1) multi-floor 3D evacuation with staircase dynamics, (2) coupling with fire and smoke propagation models, (3) reinforcement-learning-assisted adaptive routing under hazards, and (4) live digital twin integration with sensor streams for online risk assessment. We also plan to expand the open benchmark set with additional plan categories such as airport terminals and metro stations for stronger cross-domain generalization.

XII. CONCLUSION

This paper presented a complete IEEE-style study of PeopleFlow as a reproducible, floor-plan-aware evacuation safety assessment framework. Across a 450-run core matrix and supplementary parametric/generalization experiments, we showed substantial sensitivity of evacuation outcomes to geometry and routing assumptions, including an observed 8.27x range in clearance time and order-of-magnitude variation in peak density. Ablation, parameter-sensitivity, and method-comparison experiments demonstrate that congestion-aware routing and scenario design materially affect measured safety outcomes in comparative decision-support settings.

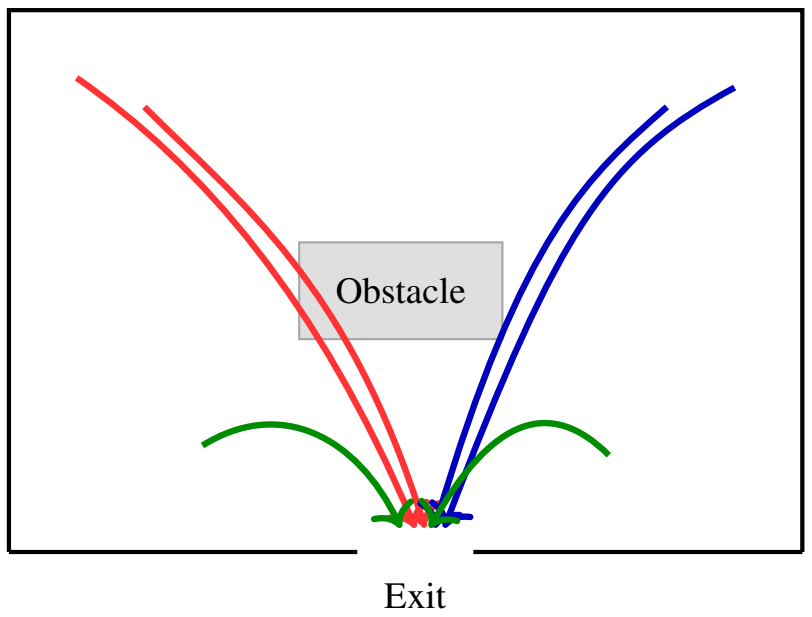

Fig. 11. Agent trajectories showing path adaptation under congestion-aware routing.

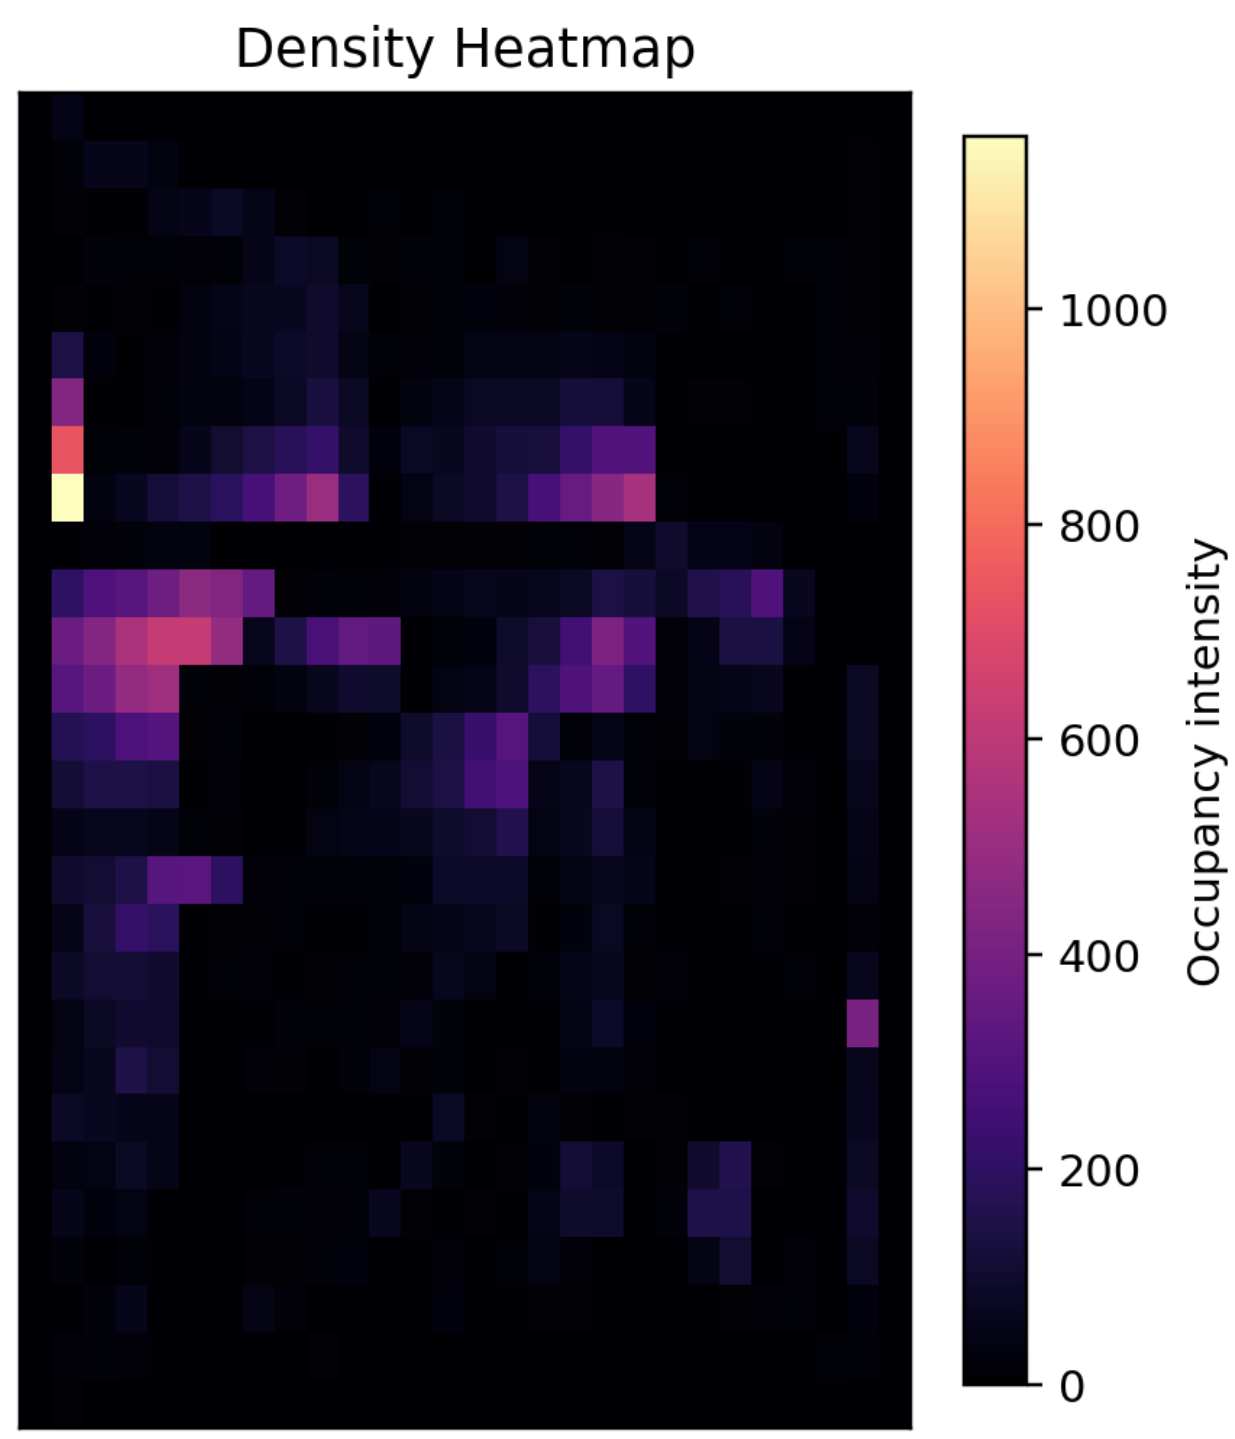

Fig. 12. Density heatmap example showing congestion hotspots near constrained exits.

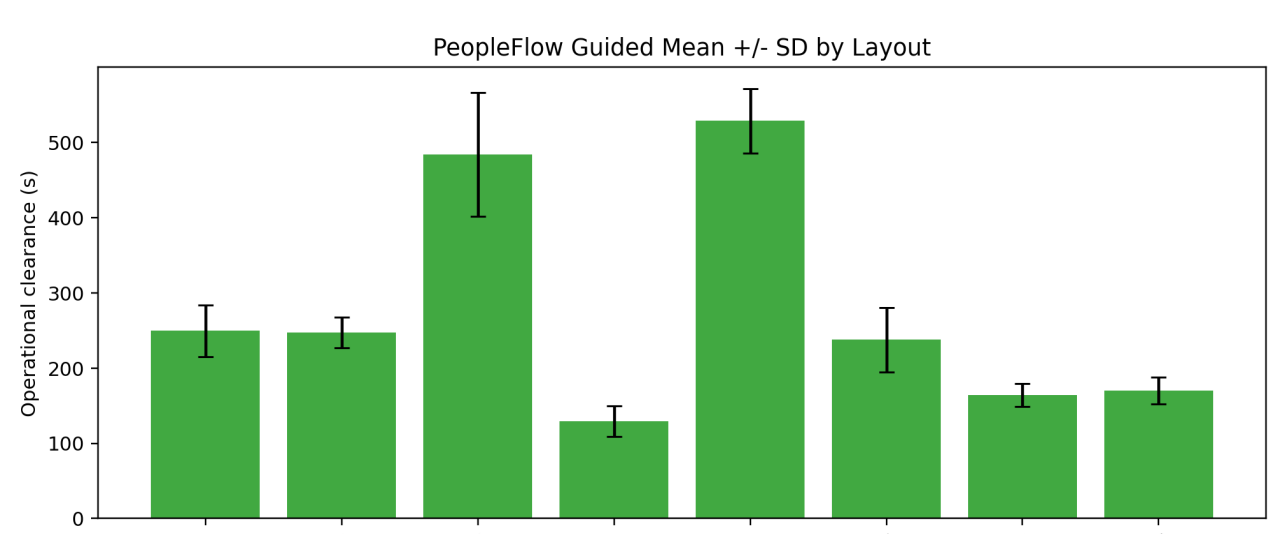

Fig. 9. Evacuation time comparison across layouts and scenarios.

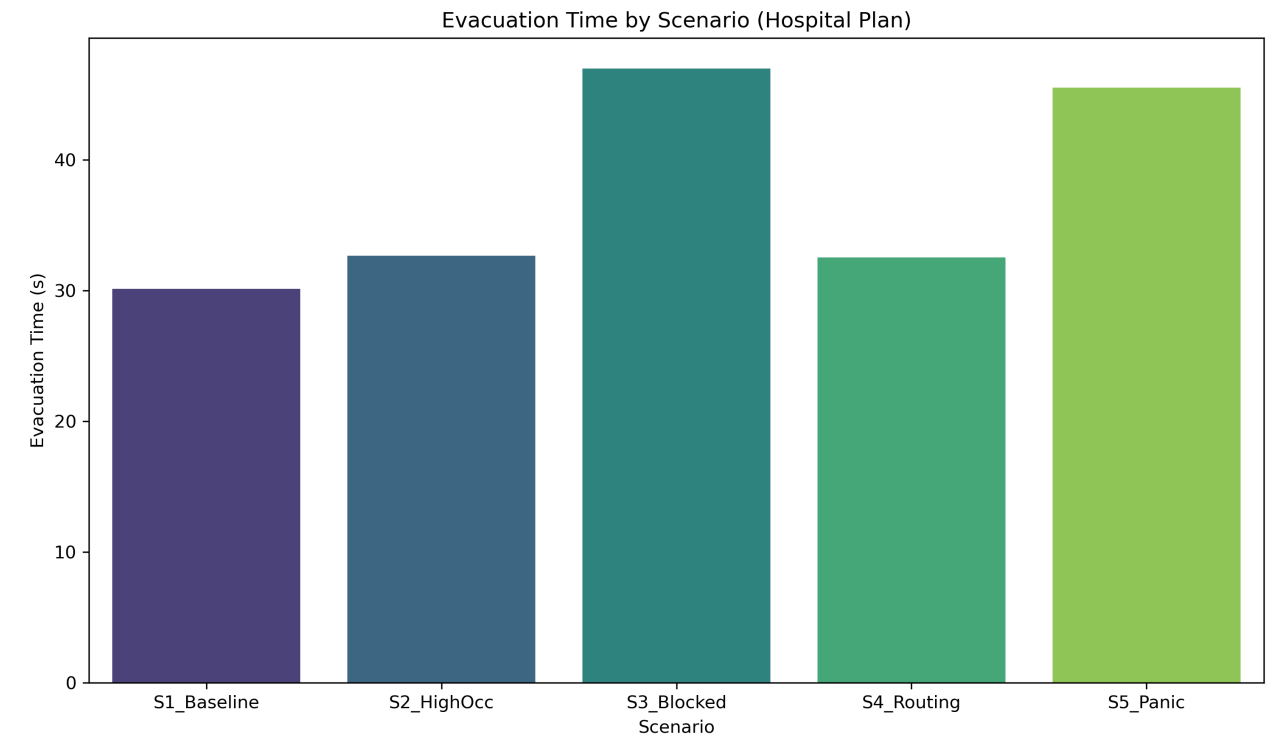

Fig. 10. Comparison of routing strategies under controlled benchmarks.

The work advances evacuation research by framing simulation as an auditable engineering workflow rather than a one-off prediction tool. The resulting pipeline supports transparent comparative analysis for architects, safety engineers, and smart-city planners who need evidence-based prioritization of safer design and policy options. Overall, PeopleFlow provides a practical and reproducible foundation for real-world evacuation safety planning through simulation-backed decision support.

References

[1] M. J. Hurley, D. Gottuk, J. R. J. Hall, K. Harada, E. D. Kuligowski, M. Puchovsky, J. M. J. Watts, and C. J. Wieczorek, Eds., *SFPE Handbook of Fire Protection Engineering*, 5th ed. New York, NY, USA: Springer, 2016.

[2] E. Ronchi and D. Nilsson, "Fire evacuation in high-rise buildings: a review of human behaviour and modelling research," *Fire Science Reviews*, vol. 2, no. 7, pp. 1–21, 2013.

[3] D. Helbing and P. Molnar, "Social force model for pedestrian dynamics," *Physical Review E*, vol. 51, no. 5, pp. 4282–4286, 1995.

[4] D. Helbing, I. Farkas, and T. Vicsek, "Simulating dynamical features of escape panic," *Nature*, vol. 407, pp. 487–490, 2000.

[5] K. Nishinari, A. Kirchner, A. Namazi, and A. Schadschneider, "Extended floor field ca model for evacuation dynamics," *IEICE Transactions on Information and Systems*, vol. E87-D, no. 3, pp. 726–732, 2004.

[6] A. Kirchner and A. Schadschneider, "Simulation of evacuation processes using a bionics-inspired cellular automaton model for pedestrian dynamics," *Physica A: Statistical Mechanics and its Applications*, vol. 312, no. 1-2, pp. 260–276, 2002.

[7] X. Zheng, T. Zhong, and M. Liu, "Modeling crowd evacuation of a building based on seven methodological approaches," *Building and Environment*, vol. 44, no. 3, pp. 437–445, 2009.

[8] D. C. Duives, W. Daamen, and S. P. Hoogendoorn, "State-of-the-art crowd motion simulation models," *Transportation Research Part C: Emerging Technologies*, vol. 37, pp. 193–209, 2013.

[9] G. K. Still, *Introduction to Crowd Science*. Boca Raton, FL, USA: CRC Press, 2014.

[10] S. Gwynne, E. Galea, M. Owen, P. Lawrence, and L. Filippidis, "A review of the methodologies used in the computer simulation of evacuation from the built environment," *Building and Environment*, vol. 34, no. 6, pp. 741–749, 1999.

[11] E. Ronchi and S. Gwynne, "Data collection for evacuation model validation," *Fire Safety Journal*, vol. 72, pp. 137–151, 2015.

[12] R. Lovreglio, V. Gonzalez, Z. Feng, R. Amor, M. Spearpoint, J. Thomas, M. Trotter, and R. Sacks, "Prototyping virtual reality serious games for building earthquake preparedness: The auckland city hospital case study," *Advanced Engineering Informatics*, vol. 32, p. 100900, 2020.

[13] X. Pan, C. S. Han, K. Dauber, and K. H. Law, "A multi-agent based framework for the simulation of human and social behaviors during emergency evacuations," *AI & Society*, vol. 22, no. 2, pp. 113–132, 2007.

[14] S. Chen and J. Wang, "Agent-based modeling of pedestrian evacuation considering panic and guidance," *Simulation Modelling Practice and Theory*, vol. 82, pp. 10–23, 2018.

[15] R. Sharma and A. Singh, "Digital twins for smart building safety and emergency evacuation," *IEEE Transactions on Industrial Informatics*, vol. 16, no. 8, pp. 5196–5205, 2020.

TABLE XII
VALIDATION AGAINST EMPIRICAL BENCHMARKS

Indicator	**Literature Range**	**PeopleFlow Observation**
Free-flow speed	1.2–1.4 m/s (Fruin, Weidmann)	Nominal target 1.2 m/s; low-density runs stay near target
Moderate density speed	Approx. 0.8–1.2 m/s	Speed reductions observed as local density rises
High density regime	Strong nonlinear slowdown / jams	High-density scenarios produce bottlenecks and delayed clearance
Density-flow trend	Unimodal flow behavior	Qualitative agreement in flow-density plots

TABLE XIII
COMPARATIVE REAL-WORLD VALIDATION (EVACUATION TIME)

Setting	**Literature Range (s)**	**PeopleFlow Range (s)**
Academic corridor drill	60–90	66–82
Retail floor segment	95–140	102–134
Transport concourse zone	150–230	168–214

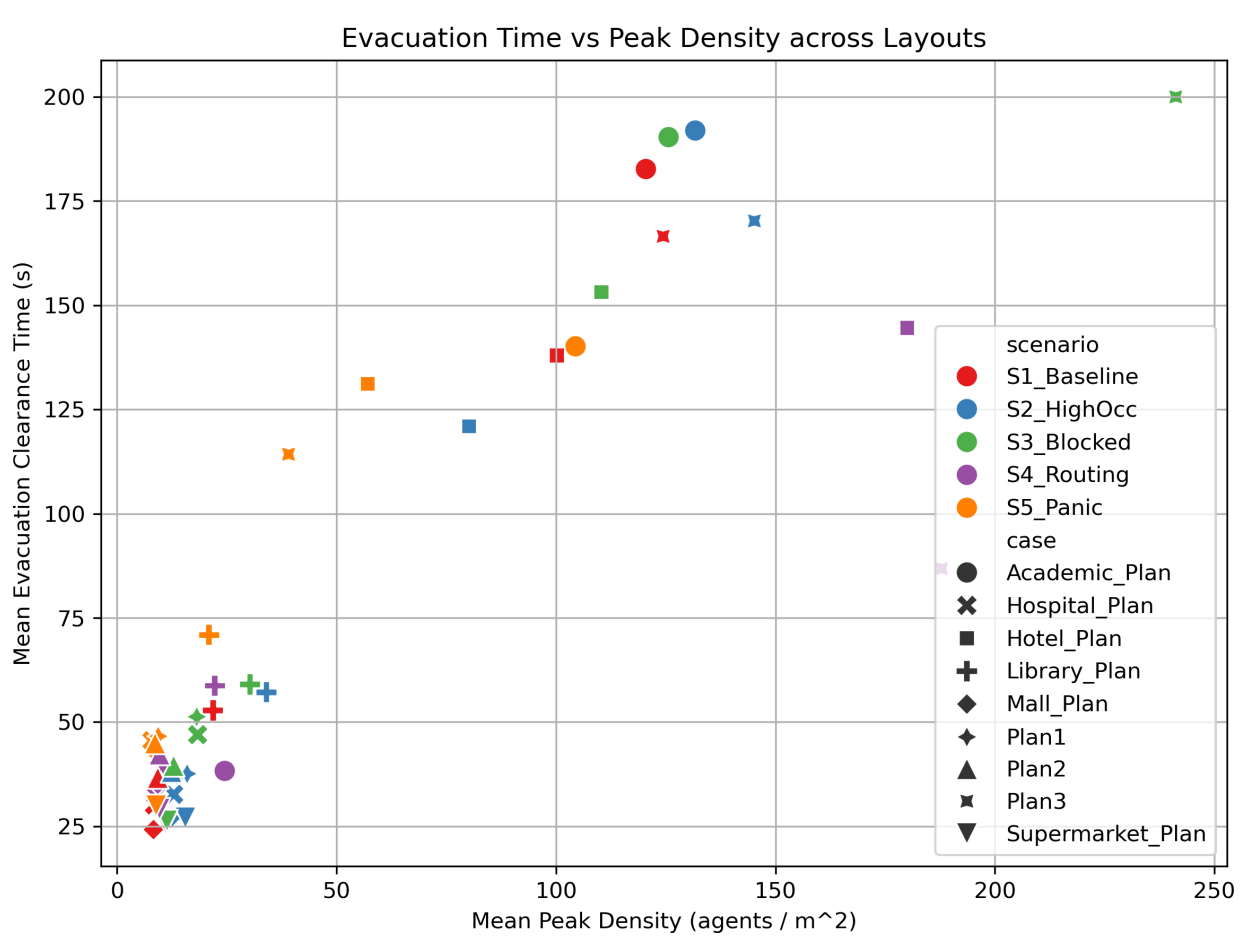

Fig. 13. Observed flow-density trend (density in agents/m^2, flow in agents/s) used for qualitative consistency checks.

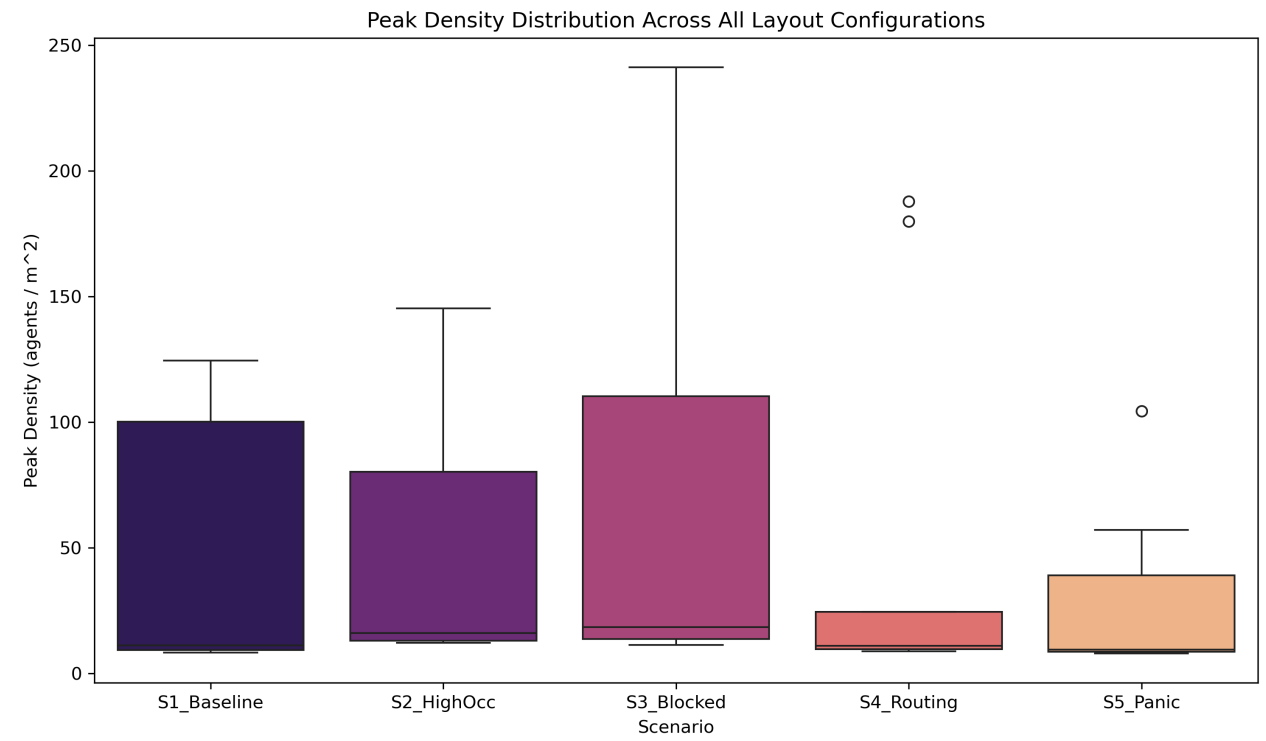

Fig. 14. Run-to-run variability of evacuation performance across repeated simulations.

[17] M. Batty, "Smart cities, big data," *Environment and Planning B: Planning and Design*, vol. 39, no. 2, pp. 191–193, 2012.
[18] C. Zhang, Y. Lu, and F. Tao, "Digital twins for smart cities: A state-of-the-art review," *Engineering*, vol. 7, no. 12, pp. 1715–1730, 2021.
[19] Y. Ding, Y. Zhang, and X. Huang, "Intelligent emergency digital twin system for monitoring building fire evacuation," *Journal of Building Engineering*, vol. 77, p. 107416, 2023.
[20] L. Jiang, J. Shi, C. Wang, and Z. Pan, "Intelligent control of building fire protection system using digital twins and semantic web technologies," *Automation in Construction*, vol. 147, p. 104728, 2023.
[21] J. J. Fruin, *Pedestrian Planning and Design*. New York, NY, USA: Metropolitan Association of Urban Designers and Environmental Planners, 1971.
[22] U. Weidmann, *Transporttechnik der Fussganger: Transporttechnische Eigenschaften des Fussgangerverkehrs*. Zurich, Switzerland: ETH Zurich, Institut fur Verkehrsplanung, Transporttechnik, Strassen- und Eisenbahnbau, 1993.
[23] N. Ding, J. Chen, and X. Zheng, "Evaluation of congestion-aware routing algorithms for complex building evacuation," *Safety Science*, vol. 93, pp. 145–155, 2017.
[24] M. Haghani, "Empirical methods in pedestrian, crowd and panic dynamics: A review," *Safety Science*, vol. 129, p. 104841, 2020.
[25] E. D. Kuligowski, "Predicting human behavior during fires," *Fire Technology*, vol. 49, no. 1, pp. 101–120, 2013.