7-segment display

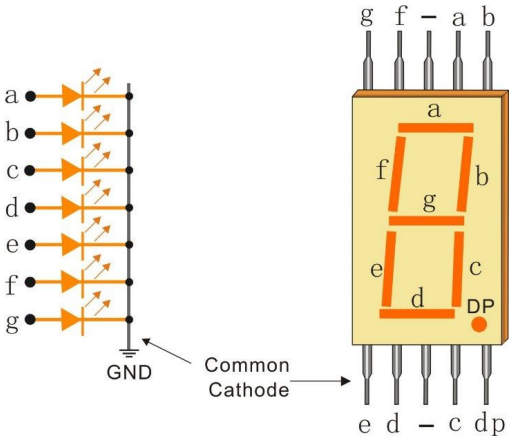

Number	g f e d c b a	Hexadecimal
0	0 1 1 1 1 1 1	3F
1	0 0 0 0 1 1 0	06
2	1 0 1 1 0 1 1	5B
3	1 0 0 1 1 1 1	4F
4	1 1 0 0 1 1 0	66
5	1 1 0 1 1 0 1	6D
6	1 1 1 1 1 0 1	7D
7	0 0 0 0 1 1 1	07
8	1 1 1 1 1 1 1	7F
9	1 1 0 1 1 1 1	6F

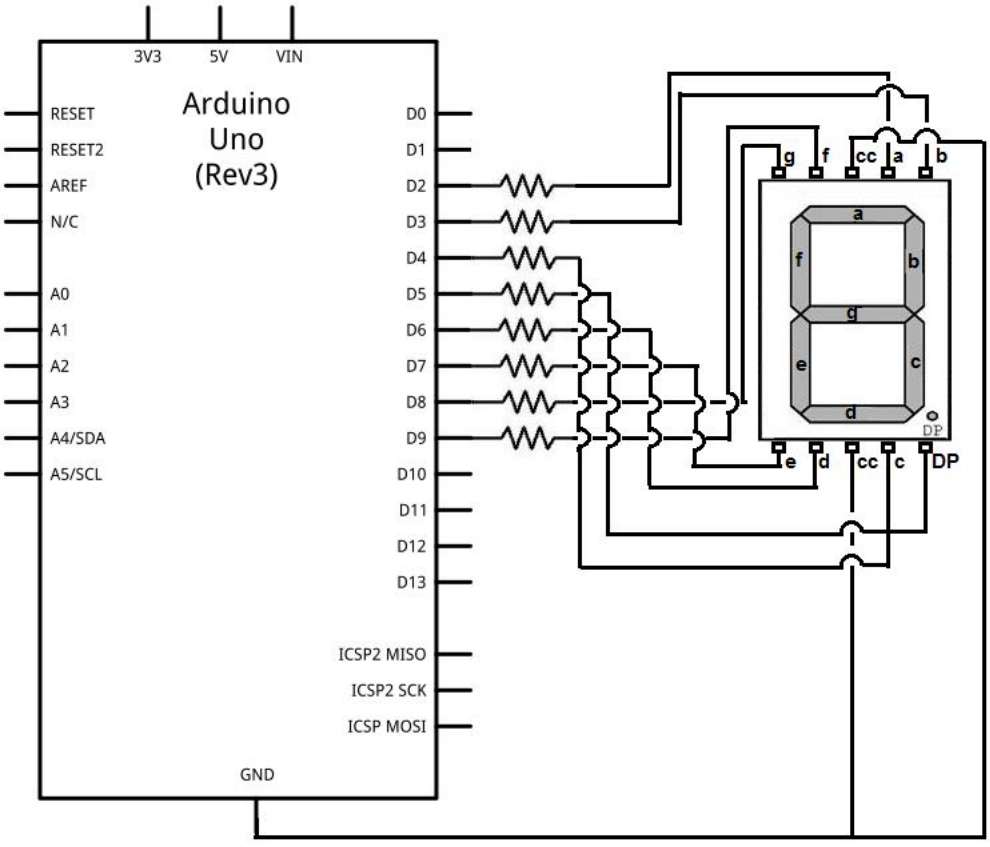

HC595 8-Bit Shift Register

The SNx4HC595 is an 8-bit shift register that feeds an 8-bit D-type storage register. Both the shift register clock (SRCLK) and storage register clock (RCLK) are positive-edge triggered. If both clocks are connected together, the shift register always is one clock pulse ahead of the storage register.

The SNx4HC595 devices are 8-bit Serial-In, Parallel-Out Shift Registers. They have a wide operating current of 2 V to 6 V, and the high-current 3-state outputs can drive up to 15 LSTTL Loads. The devices have a low power consumption of 80-µA (Maximum) ICC. Additionally, the devices have a low input current of 1 µA (Maximum) and a ±6-mA Output Drive at 5 V.

Features

- 8-bit serial-in, parallel-out shift
- Wide operating voltage range of 2 V to 6 V

Applications

- Network switches
- Power infrastructure
- LED displays
- Servers

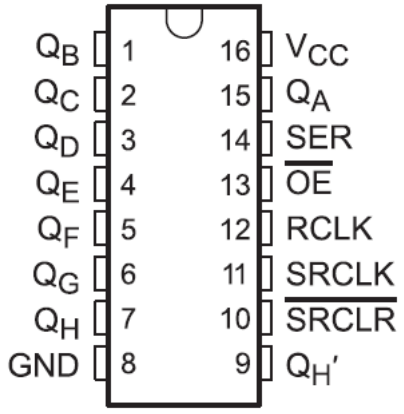

D, N, NS, J, DB, or PW Package
16-Pin SOIC, PDIP, SO, CDIP, SSOP, or TSSOP
Top View

Table 8-1. Function Table

INPUTS					FUNCTION
SER	SRCLK	$\overline{SRCLR}$	RCLK	$\overline{OE}$	
X	X	X	X	H	Outputs Q_A – Q_H are disabled.
X	X	X	X	L	Outputs Q_A – Q_H are enabled.
X	X	L	X	X	Shift register is cleared.
L	↑	H	X	X	First stage of the shift register goes low. Other stages store the data of previous stage, respectively.
H	↑	H	X	X	First stage of the shift register goes high. Other stages store the data of previous stage, respectively.
X	X	X	↑	X	Shift-register data is stored in the storage register.

LM35

Features

- Calibrated Directly in Celsius (Centigrade)
- Linear + 10-mV/°C Scale Factor
- 0.5°C Ensured Accuracy (at 25°C)
- Rated for Full −55°C to 150°C Range
- Suitable for Remote Applications
- Low-Cost Due to Wafer-Level Trimming
- Operates From 4 V to 30 V
- Less Than 60-μA Current Drain
- Low Self-Heating, 0.08°C in Still Air
- Non-Linearity Only ±¼°C Typical
- Low-Impedance Output, 0.1 Ω for 1-mA Load

LP Package
3-Pin TO-92
(Bottom View)



Applications

- Power Supplies
- Battery Management
- HVAC
- Appliances

Basic Centigrade Temperature Sensor
(2°C to 150°C)

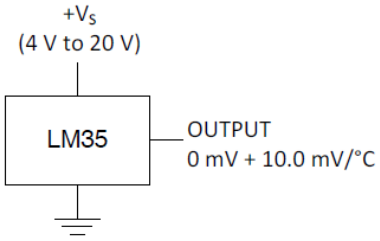

Full-Range Centigrade Temperature Sensor



Choose $R_1 = -V_S / 50\ \mu A$
$V_{OUT} = 1500$ mV at 150°C
$V_{OUT} = 250$ mV at 25°C
$V_{OUT} = -550$ mV at –55°C