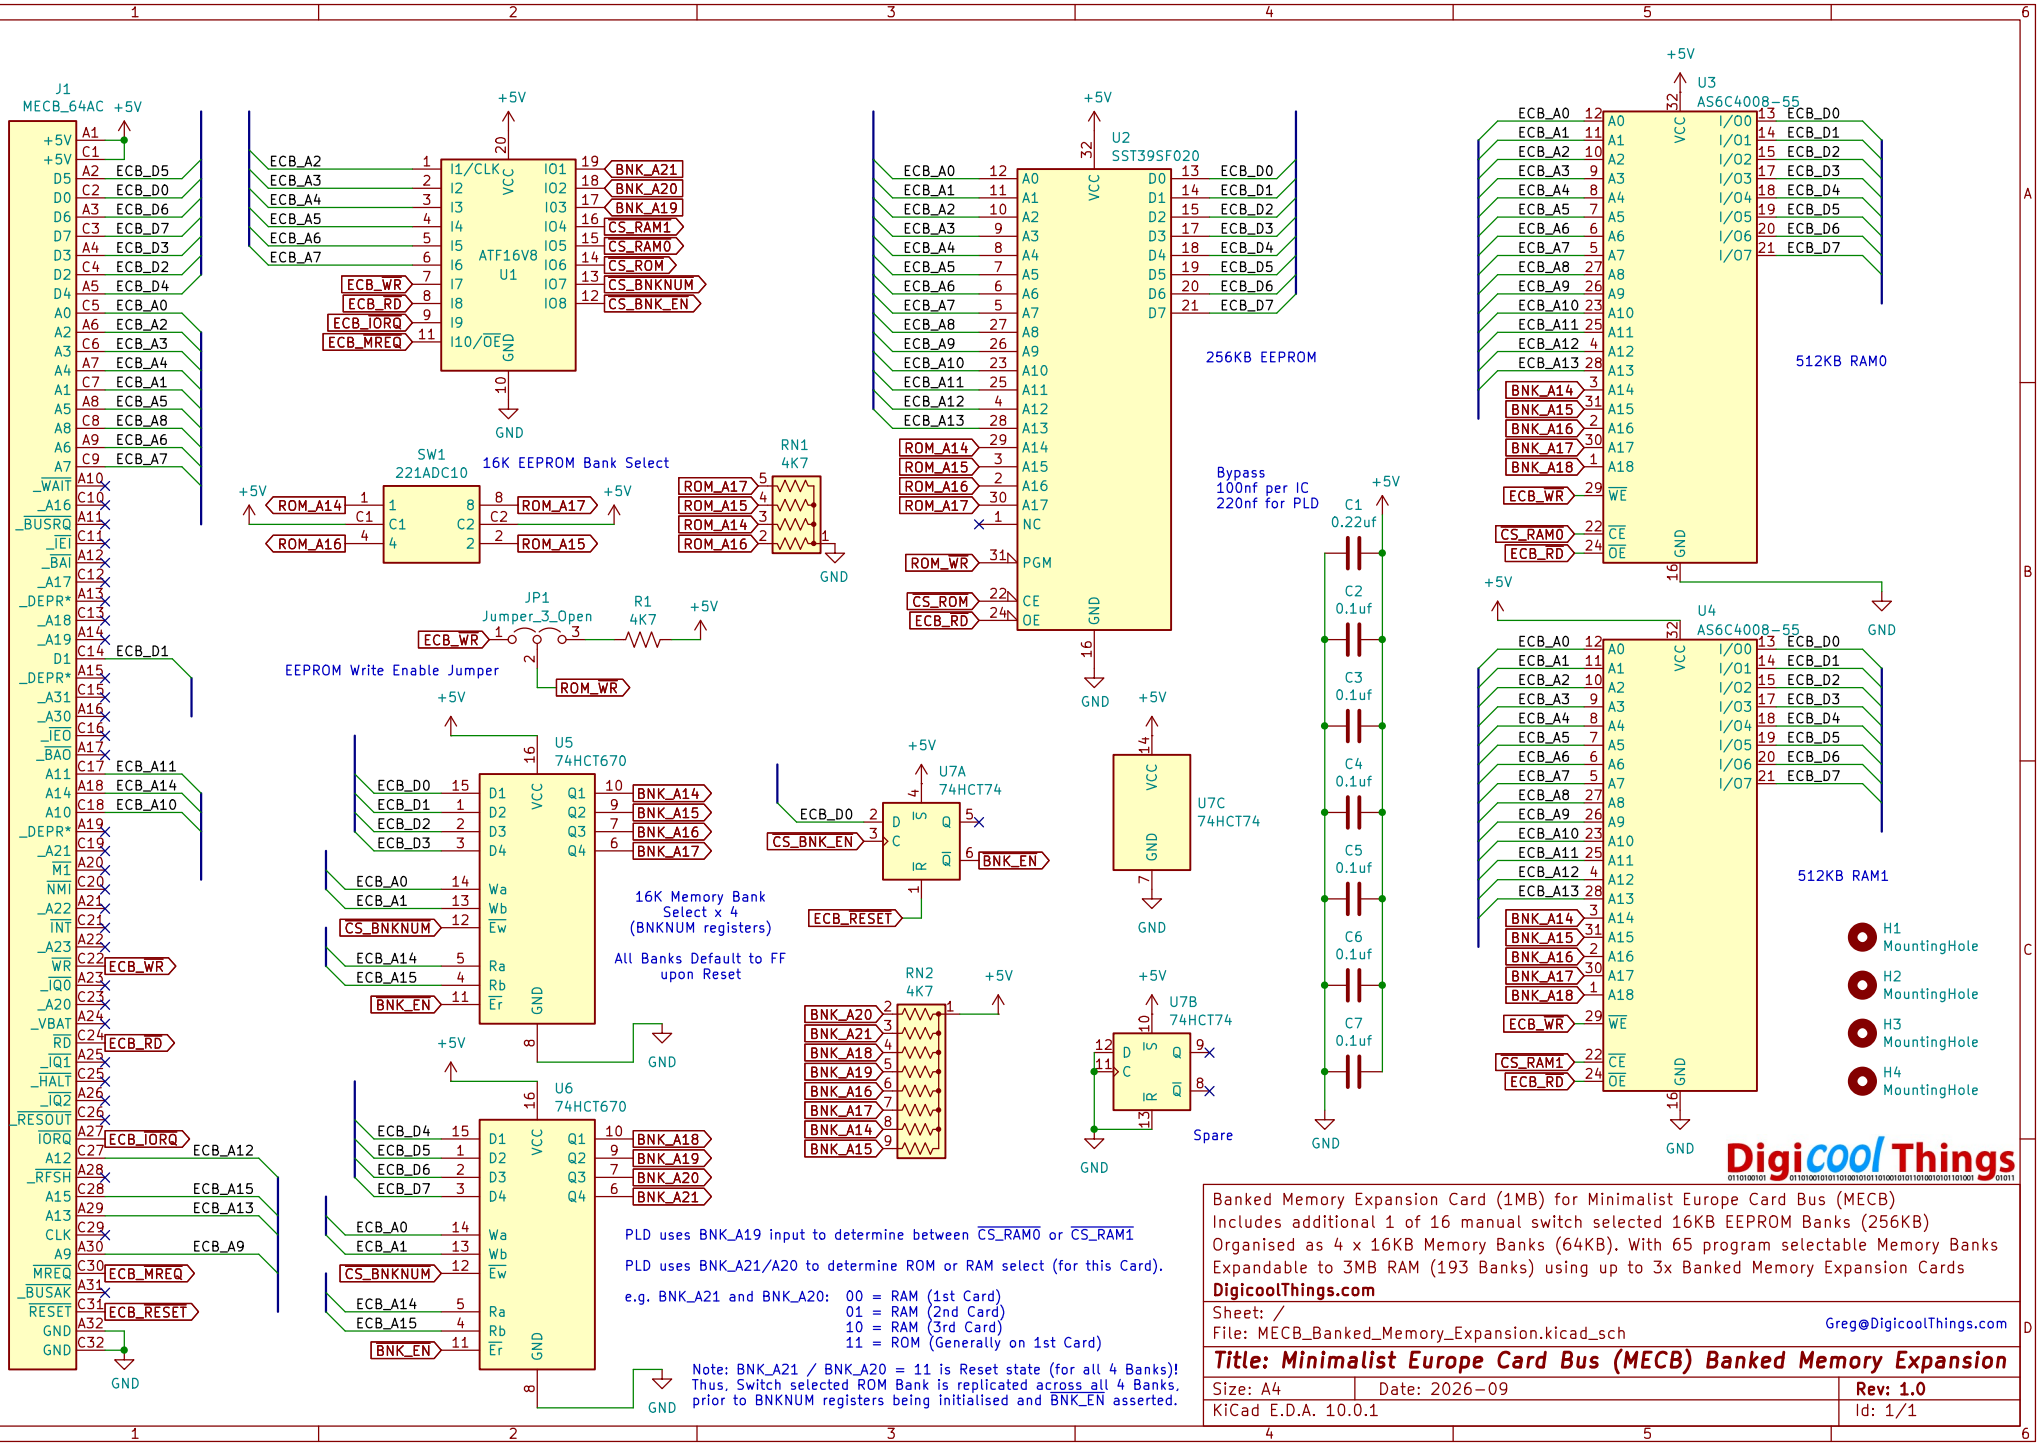

J1
MECB_64AC
U1
ATF16V8
U2
SST39SF020
256KB EEPROM
U3
AS6C4008-55
512KB RAM0
U4
AS6C4008-55
512KB RAM1
SW1
221ADC10
16K EEPROM Bank Select
RN1
4K7
JP1
Jumper_3_Open
R1
4K7
EEPROM Write Enable Jumper
Bypass
100nf per IC
220nf for PLD
C1
0.22uf
C2
0.1uf
C3
0.1uf
C4
0.1uf
C5
0.1uf
C6
0.1uf
C7
0.1uf
U5
74HCT670
U6
74HCT670
16K Memory Bank
Select x 4
(BNKNUM registers)
All Banks Default to FF
upon Reset
U7A
74HCT74
U7B
74HCT74
U7C
74HCT74
Spare
RN2
4K7
PLD uses BNK_A19 input to determine between CS_RAM0 or CS_RAM1
PLD uses BNK_A21/A20 to determine ROM or RAM select (for this Card).
e.g. BNK_A21 and BNK_A20: 00 = RAM (1st Card)
01 = RAM (2nd Card)
10 = RAM (3rd Card)
11 = ROM (Generally on 1st Card)
Note: BNK_A21 / BNK_A20 = 11 is Reset state (for all 4 Banks)!
Thus, Switch selected ROM Bank is replicated across all 4 Banks,
prior to BNKNUM registers being initialised and BNK_EN asserted.
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
Digicool Things
Banked Memory Expansion Card (1MB) for Minimalist Europe Card Bus (MECB)
Includes additional 1 of 16 manual switch selected 16KB EEPROM Banks (256KB)
Organised as 4 x 16KB Memory Banks (64KB). With 65 program selectable Memory Banks
Expandable to 3MB RAM (193 Banks) using up to 3x Banked Memory Expansion Cards
DigicoolThings.com
Sheet: /
File: MECB_Banked_Memory_Expansion.kicad_sch
Greg@DigicoolThings.com
Title: Minimalist Europe Card Bus (MECB) Banked Memory Expansion
Size: A4
Date: 2026-09
Rev: 1.0
KiCad E.D.A. 10.0.1
Id: 1/1