# ASSEMBLY INSTRUCTION

| | |
|---|---|
| Ⓐ X1 | Ⓕ X1  |
| Ⓑ X1 | Ⓖ X5 (M6x30) |
| Ⓒ X1 | Ⓗ X4 (M6x16) |
| Ⓓ X1  | Ⓘ X1 (M6) |
| Ⓔ X1 | |

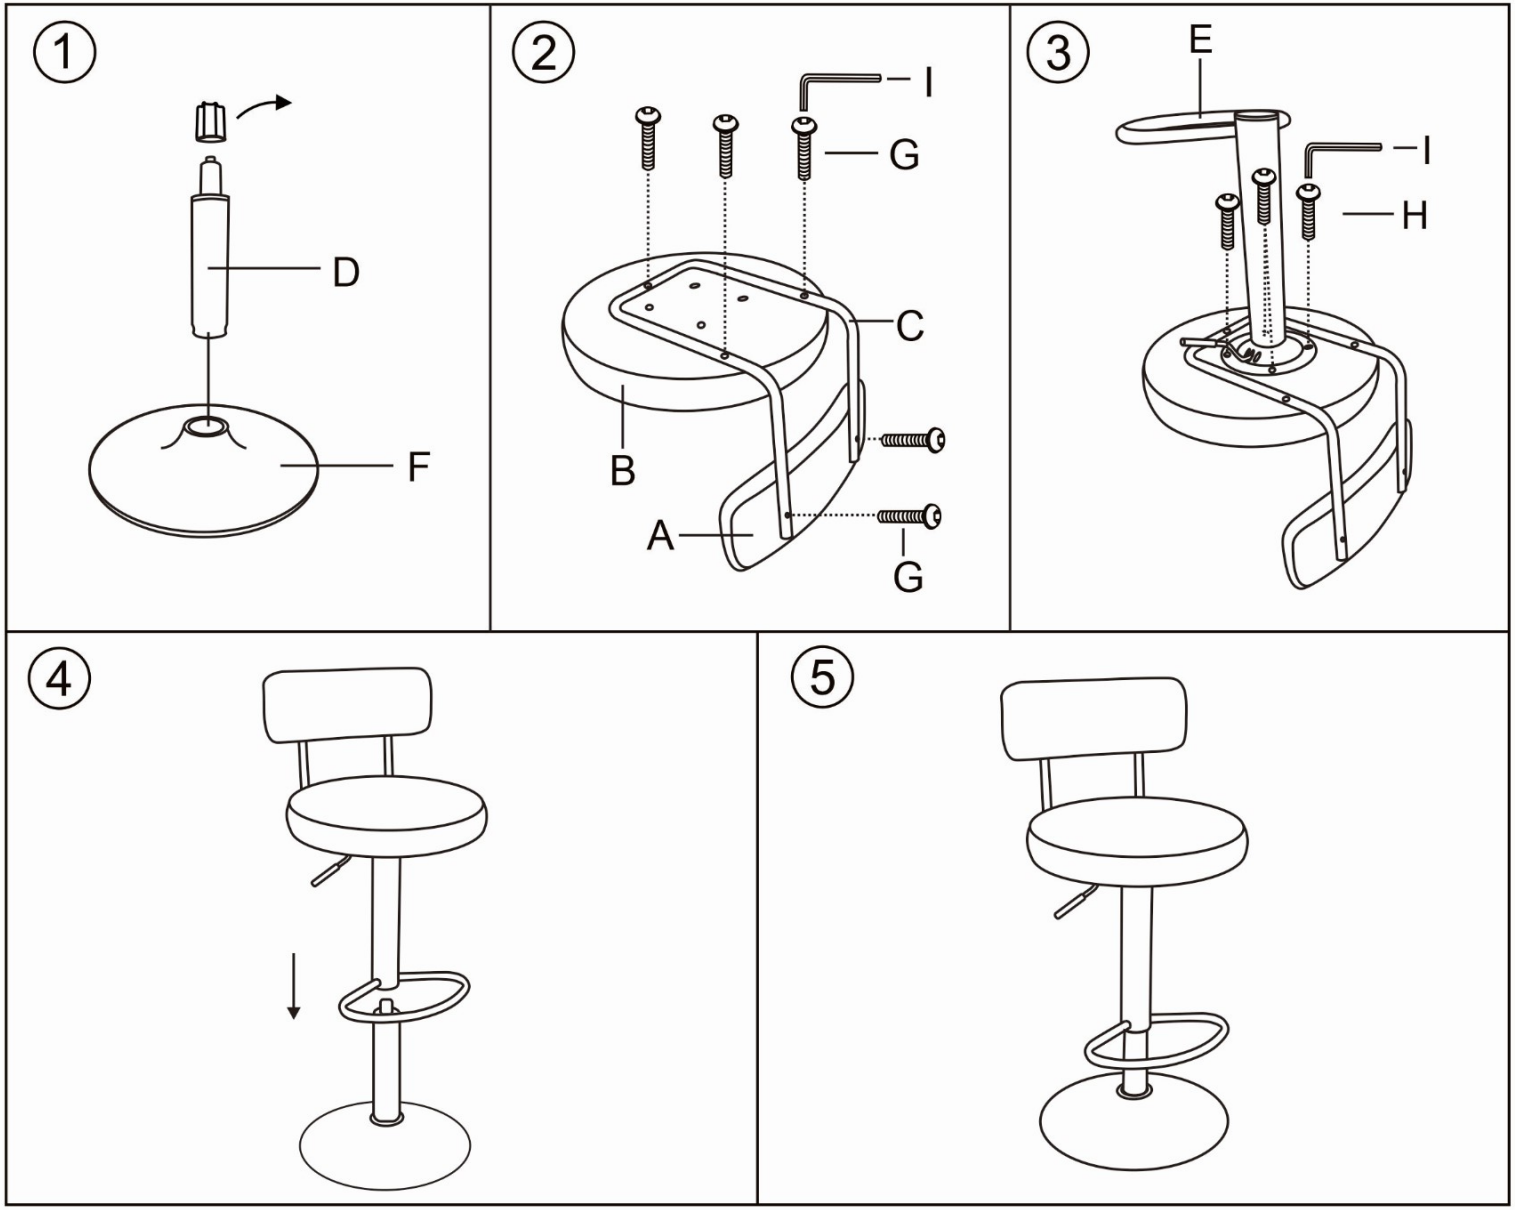


Note: 1 Install the back firstly, then install the seat cushion.
2 Put all the screws into the holes site, and then tighten them.
Do not tighten one by one.