



CAN: controller → transceiver → protected daisy-chain bus

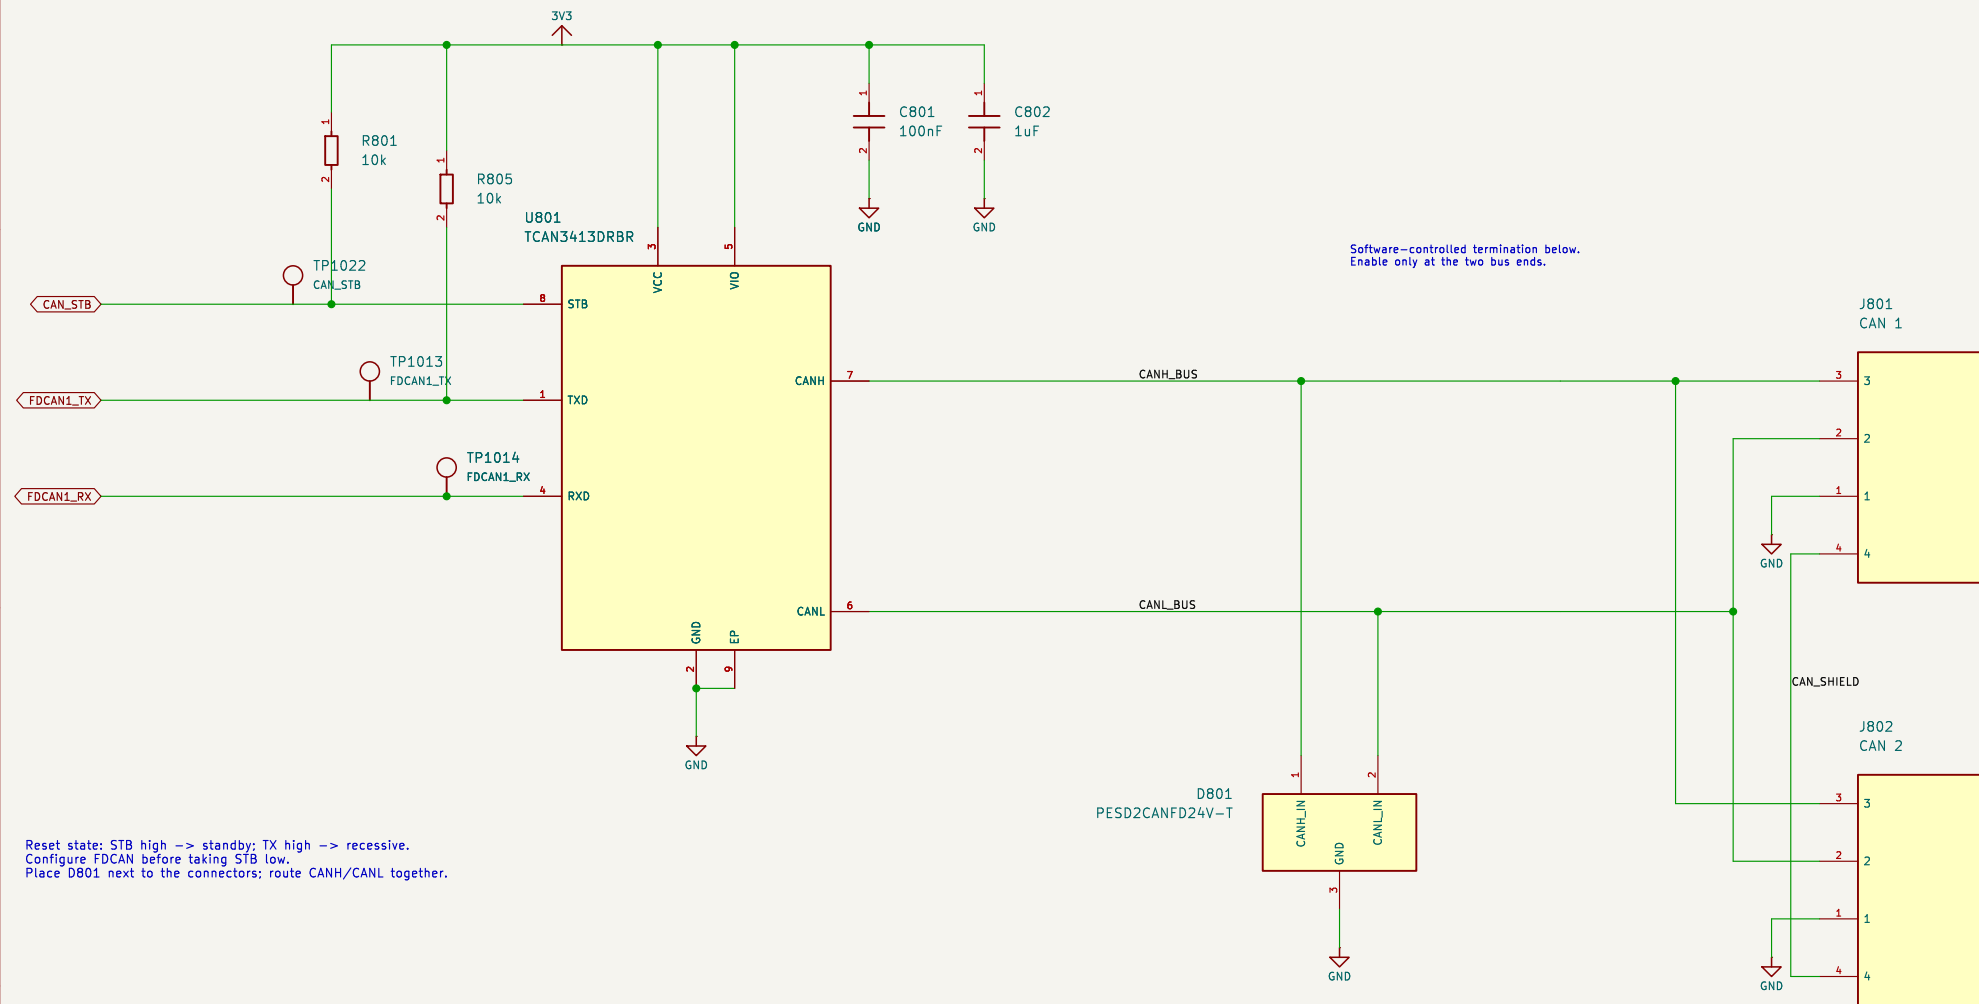

Both headers: 1 GND | 2 CANL | 3 CANH | 4 shield/drain. Pin 4 carries no supply.

SOFTWARE-CONTROLLED 120 OHM TERMINATION

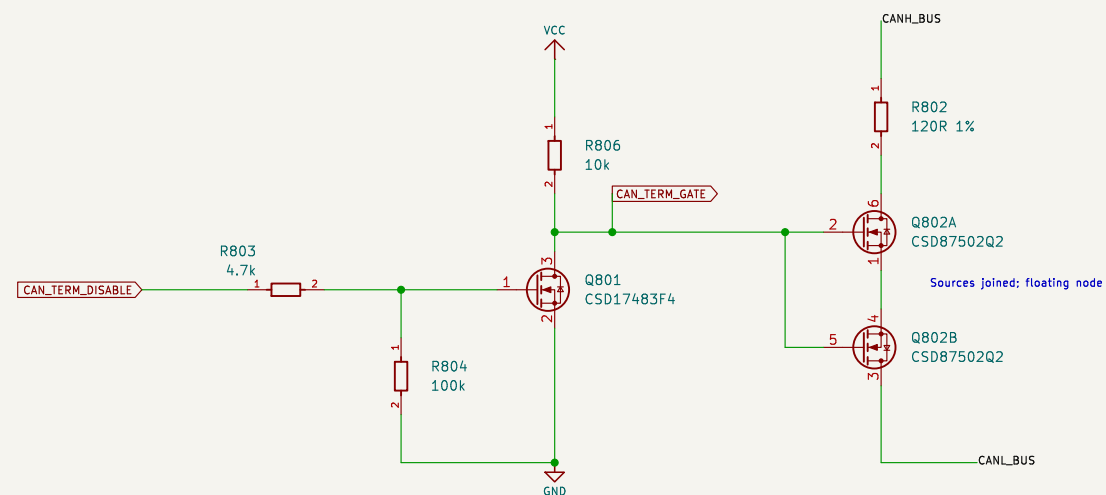

CONTROL (PC15, former status LED GPIO)
HIGH: termination OFF; RGB indicator BLUE.
LOW / reset Hi-Z: termination ON; indicator PURPLE.
ON requires the 10 V VCC rail.

Set PC15 before releasing CAN_STB. Allow 1 ms for gate settling; change only while CAN is idle. Enable only at the two physical bus ends. Do not blink this GPIO as a general status LED.

10 V gate pull-up provides full enhancement at normal CAN levels. Intended bus range: 0 to 5 V vs local GND.
30 V MOSFETs: this branch does not retain the transceiver's full bus-fault / common-mode tolerance.
Q802 exposed drain lands: D1 = pin 6, D2 = pin 3.
Footprint assignment deferred to PCB work.

MOSFET termination on PC15; purple ON, blue OFF

ShiroFOC

Sheet: /CAN interface/

File: 10_CAN.kicad_sch

Title: CAN / CAN-FD interface

Size: A3

Date: 2026-10-06

Rev: A3-CAN-Term

Id: 11/12

