
RS485 typically only uses A and B. Unless shielded cables are used.
DMX typically uses A, B and GND (Shield).
RS485 Ground can be connected to board ground, if needed.

[UART]

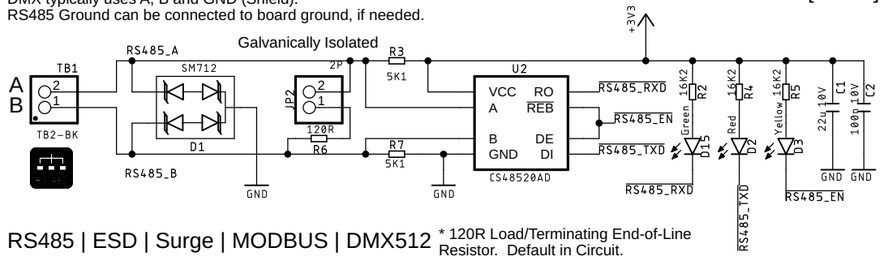

RS485 | ESD | Surge | MODBUS | DMX512


* 120R Load/Terminating End-of-Line Resistor. Default in Circuit.

ESP32-C6 U.FL Version
IPEX MHF3 Coax Connectors

~Mandatory Boot States
GP8 High
GP9 High

Variants:
* ESP32-C6-MINI-1U-H4


- Bluetooth
 Bluetooth LE
 Bluetooth 5.3
 Bluetooth Mesh
- Wi-Fi 6
 2.4 GHz
 802.11ax (20 MHz bandwidth)
 802.11b/g/n (20/40 MHz BW)
- Thread 1.4
 802.15.4
 Thread Mesh
- Zigbee 3.0
 802.15.4
 Zigbee Mesh

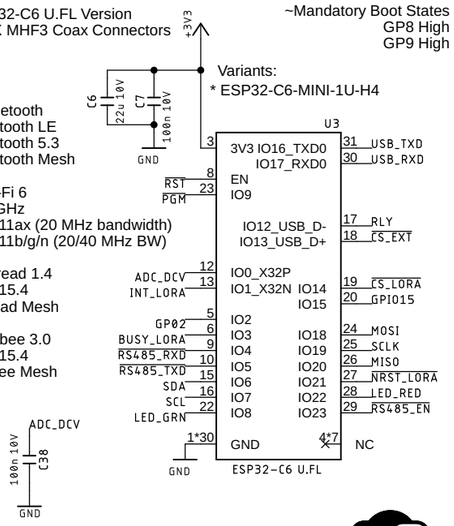

MCU | ESP32-C6

[SPI]


SX1268 is compatible with Radio Tranceiver SX1278 and SX1276

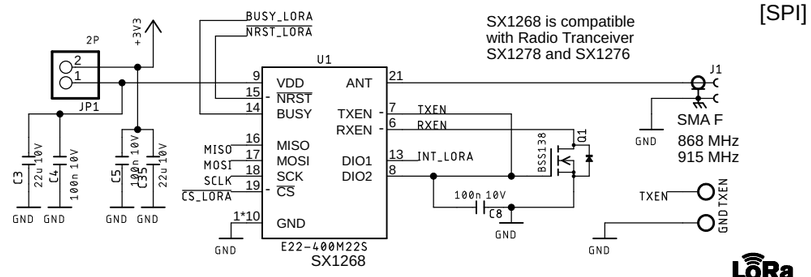


LoRa | EByte E22-400M22S | SX1268

[I2C]


JST-12 SH VERT 1.0MM

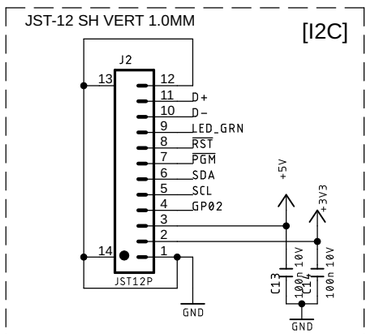

Expansion Interface | OLED (3V3)

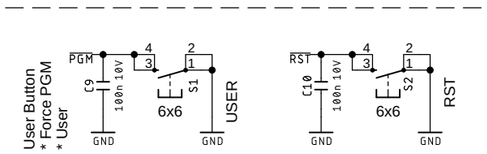

Tactile Switches | Reset | Usr/Pgm

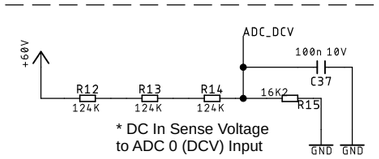


* DC In Sense Voltage to ADC 0 (DCV) Input


Appx DCV/ADC

05 V - 0.17 V
12 V - 0.40 V
20 V - 0.67 V
30 V - 1.01 V
40 V - 1.35 V
50 V - 1.69 V
60 V - 2.03 V
70 V - 2.37 V
75 V - 2.54 V

ADC DC Volts

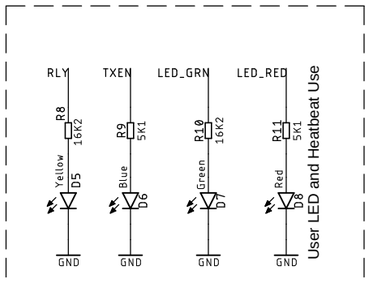


Status | LED

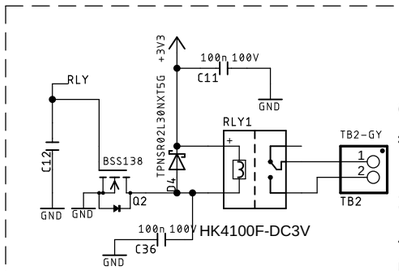

Relay Output (Galvanically Isolated)


JST-6 SH VERT 1.0MM

[SPI]




SPI Expansion | MicroSD (3V3)

[I2C]




Temperature | TMP102

[I2C]




EEPROM | 24C64



GPIO Pullups

External GPIO

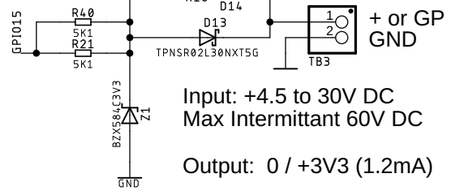


Input: +4.5 to 30V DC
Max Intermittant 60V DC

Output: 0 / +3V3 (1.2mA)

GPIO15 | GPIO Input or Output

! Beware of any High Voltages

DC In 5-60V. Maximum 75V Input.
Permanant damage WILL occur > 75V !
* Reverse Polarity Protected
* Fuse Hold 500mA Trip 1A Resettable

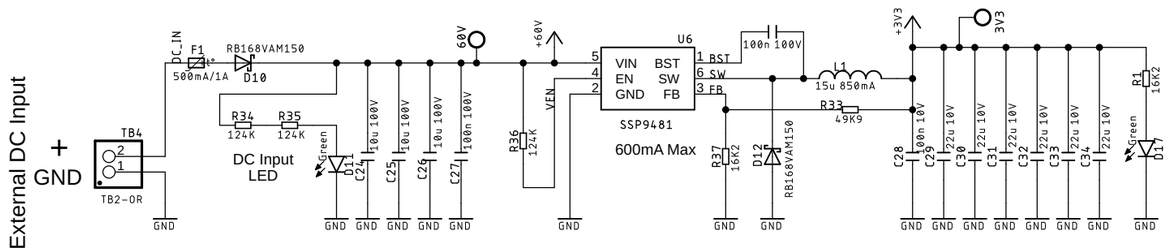


High Voltage Power Suppy | HVDC SMPS 3V3 DC-DC


USB UART providing Arduino/PlatformIO Flashing ESP32-C6 DEV MODULE Compatibility
Board compatible with esp32-c6-devkitm-1 and adafruit_feather_esp32c6

GPIO9 + Reset

Flash Boot	High
UART Download	Low

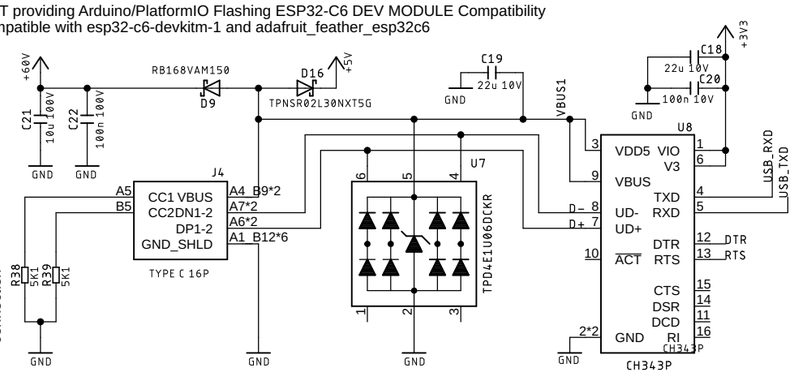

Auto Flash



USB | USB UART | Serial Monitoring | USB Flashing | Debug | ESD | 5V Power

Enclosure VG-P41F 80x54x32 Main PCB 79x49mm

For further information and code examples, please see our code and GitHub WIKI pages. ditronix.net | GitHub.com/DitroniX | Hackster.io/DitroniX

Components optimised for BOM

DitroniX
Home Automation | Internet of Things | Energy Monitoring

Production

(C)2021-2026 - DitroniX - Dave Williams G8PUO

ESP32-C6 SX1268 SDK **ditronix.net** DitroniX Ltd – UK	ESPKite ESP32C6 E22-400M22S SX1268 1.2605.102	
	ESPKITE-LORA-ESP32-C6-RS485-CONTROLLER-SDK	
Sheet: 1/1	Drwg/Chk: **Dave Williams**	18/05/2026 18:32