

Harnessing Bayesian Filter for Addressing Uncertain Variability in Chance-Constrained FDUC

Yiping Yuan, *Member, IEEE*, Zhou Liu, *Senior Member, IEEE*, Weihao Hu, *Senior Member, IEEE*, Yuming Zhao, *Member, IEEE*, Marjan Popov, *Fellow, IEEE*, Qi Huang, *Fellow, IEEE*, Zhe Chen, *Fellow, IEEE*

Abstract—The influence of uncertain variability characteristic from converter-interfaced generators becomes significant in power system operation. This paper proposes a new Bayesian-filter-derived system frequency response (SFR) method and a chance-constrained frequency dynamic unit commitment model to achieve suitable frequency resource management with uncertain variability characteristics. The SFR is modeled as a sequential deterministic process in a Bayesian filter framework, where the impact of uncertain variability characteristics is treated as a stochastic sequence following specific probabilistic density functions, and the calculation of frequency derivation and rescheduled output of different generators participating in SFR are alternately performed. In contrast to prior methodologies, such as the analytical and time-discretized methods, the proposed SFR method can assess the change of frequency derivation and offers an estimation of the posterior distribution. Furthermore, the proposed SFR method is reshaped as a set of chance-constrained frequency dynamic restrictions and integrated into unit commitment, and a refined frequency dynamic unit commitment is extended. Several results on a modified version of the IEEE 6 bus test system and a 118 bus test system are implemented to check the validity of the proposed SFR method and unit commitment model.

Index Terms—Uncertain variability, Bayesian filter, system frequency response, converter-interfaced generators, frequency dynamic unit commitment.

NOMENCLATURE

Index and set

b	Index of bus, $b \in [1, 2, \dots, NB]$
e	Index of Battery Electrical Storage System (BESS), $e \in [1, 2, \dots, NE]$
g	Index of conventional generators, $g \in [1, 2, \dots, NG]$
l	Index of transmission line, $l \in [1, 2, \dots, NL]$
q	Index of hyperplane, $q \in [1, 2, \dots, NQ]$
s	Index of stochastic scenario, $s \in [1, 2, \dots, NS]$
t	Index of scheduling period, $t \in [1, 2, \dots, NT]$
w	Index of wind farms, $w \in [1, 2, \dots, NW]$
z	Index of unit's production cost blocks, $z \in [1, 2, \dots, NZ]$

Parameters

δt	discretized time step (0.05s in this paper)
ϵ	Risk of confidence level
$\eta_e^{\text{dis/ch}}$	Discharging/charging efficiency of BESS e
$\gamma_g^{\text{ru/sd}}$	Ramp-up/ramp-down rate of conventional unit g
$\gamma_g^{\text{su/sd}}$	Start-up/shut-down capacity of conventional unit g
$\kappa_{l,b}$	Generator-shift-distribution-factor between line l and injected power located at bus b
$\omega_g^{(z)}$	Intercept of production cost block z of unit g
π_q	Probability of sampled residuals
π_s	Possibility of stochastic scenario s
Δf_{max}^E	Threshold of frequency nadir
Δp_{add}^E	Additional power of BESS
Δp_{add}^G	Additional power of conventional units
Δp_{add}^W	Additional power of wind farms
Δp_{step}	Mismatch power disturbance
$c_g^{\text{up/dw/nl}}$	Shut-up/shut-down/no-load cost of unit g

D_g	Damping of conventional generators
e^{VoLL}	Risk cost of Value-of-Lost-Load (VoLL)
F_g^z	Slope of cost block z of conventional unit g
F_g	Fraction representing total power generated by turbine of conventional reheated generators
K_g	Gain of conventional generators
$k_g^{(z)}$	Slope of operation cost block z of unit g
M	A big number
M_e	Inertia of BESS e
M_g	Inertia of conventional generators
M_w	Inertia of converters with virtual inertia control
$p_e^{\text{dis/ch, max}}$	Discharging/charging capacity of BESS e
$p_g^{\text{min/max}}$	Min/max output of conventional unit g
p_l^{max}	Capacity of transmission line l
$p_{w,s,t}$	Output of wind farm w at time t under scenario s
R_g	Droop of conventional generators
R_w	Droop of converters with droop control
$RoCoF_{\text{max}}$	Threshold of Rate-of-Change-of-Frequency (RoCoF)
t_0	Initial time of power disturbance
T_E	Aggregated time constant of BESS with droop control
T_e	Time constant of BESS e
$T_{G,t}$	Aggregated time constant of conventional units
T_g	Time constant of conventional generators
T_W	Aggregated time constant of converters
T_w	Time constant of converters
z_q	Auxiliary binary decision variables

Variables

$\Delta p_{d,s,t}$	Forced-load-curtailment at time t under scenario s
$\Delta p_{w,s,t}$	Wind curtailment at time t under scenario s
$D_{\text{equ},t}$	Aggregated equivalent damping at time t
$D_{G,t}$	Aggregated damping of conventional units at time t
$F_{G,t}$	Aggregated fraction of mechanical power generated by conventional reheated units at time t
$K_{G,t}$	Aggregated gain of conventional units at time t
$M_{\text{equ},t}$	Aggregated equivalent inertia at time t
$M_{E,t}$	Aggregated inertia of BESS at time t
$M_{G,t}$	Aggregated inertia of conventional units at time t
$M_{W,t}$	Aggregated inertia of converters at time t
$p_{e,s,t}^{\text{dis/ch}}$	Discharge/charge power of BESS e at time t under scenario s
$p_{g,s,t}$	Power of unit g at time t under scenario s
$p_{g,s,t}^{(z)}$	Output of conventional unit g at time t under scenario s corresponding to related cost block z
$R_{G,t}$	Aggregated droop of conventional units at time t
$R_{W,t}$	Aggregated droop of converters at time t
$u_{e,s,t}^{\text{ch}}$	Charge status of BESS at time t under scenario s
$u_{e,s,t}^{\text{dis}}$	Discharge status of BESS at time t under scenario s
$u_{g,t}$	Shut-up decision of conventional unit g at time t
$v_{g,t}$	Shut-down decision of conventional unit g at time t
$x_{g,t}$	Operation status of conventional unit g at time t

I. INTRODUCTION

THE increasing penetration of renewable energy has given rise to a risk of instability frequency dynamics and

scheduled commitments due to these converter-interfaced generators' uncertain output features and decoupling frequency supporting capabilities. To address this problem, sufficient frequency regulation resources and associated modeling methods become essential to guarantee the validity of scheduled commitments. As such, finding an accurate and efficient SFR method facilitates subsequent frequency security analysis and scheduled commitment calculating.

Existing studies on modeling frequency dynamics can be categorized into analytical and discretized methods. The analytical model aims to reflect the average response of all generators following a mismatch power disturbance. It is broadly based on a center-of-inertia (CoI) theorem, where homogeneous generators with similar P-F characteristics are abstracted into an aggregated unit. The derived aggregated unit usually keeps a one- or two-order form for fetching analytical formulation. Ref. 1 proposed a two-order transfer function of reheated thermal generators and constructed a simplified SFR model for conventional thermal-generators-dominated systems. Ref. 2 proposed a refined frequency-regulation parameters identification method for such systems consisting of multiple machines with heterogeneous parameters and derived a refined analytical SFR model. Ref. 3 incorporated the one-order P-F characteristics from converter-interfaced generators into the baseline model and extended a flexible SFR model for such systems with a high share of renewable energy. These aforementioned analytical models generally produce similar results, where the impact of specific generators on the average response of frequency dynamics lies in the selection of local frequency-regulation parameters. Another explanation for such settings is that complicated and heterogeneous control schemes would complicate the union transfer function of the whole system and result in a resolvable form.

Conversely, the discretized method provides more flexibility and effectiveness when modeling frequency dynamics against mismatched power disturbances. This model uses deterministic or stochastic finite differential techniques to capture the trajectory of frequency dynamics at each time intervals. Ref. 4 derived a discretized expression related to P-F characteristics of heterogeneous generators and proposed a discretized SFR method; Ref. 5 took account of the time-relay characteristic of converters and carried out a revised discretized SFR method. Ref. 6 derived the discretized form representing the P-F characteristic of flywheel storage and constructed a timed discretized SFR model. Ref. 7 derived the complete SFR form of the system considering converters and conventional generators. These previous discretized models mainly emphasize the chronological change of frequency dynamics in such a power system, considering various frequency control schemes. Nevertheless, the uncertain variability property of converter-interfaced generators participating in frequency supporting has yet to be thoroughly discussed.

To incorporate the uncertain variability characteristic from converter-interfaced generators into frequency dynamic. Ref. 8 treated the uncertain variability factors as an $\hat{i}$ to process that is expressed by stochastic differential equations. Since the uncertain factors in the $\hat{i}$ to process are broadly like a Gaussian distribution following good conjugation properties,

the frequency dynamic derived from the $\hat{i}$ to process keeps an analytical solution. These uncertain variability factors usually depend on frequency derivations; the suggested distribution of uncertain variability characteristics is conditional and unknown. From this perspective, existing methods considering uncertain variability factors based on the $\hat{i}$ to process cannot reflect the dependable uncertain variability factors on frequency dynamic.

It is essential to review critical frequency characteristics for scheduled problems like unit commitment, optimal power flow, and economic dispatch to meet frequency security requirements. Ref.7 constructed RoCoF, nadir, and Qss constraints derived from analytical SFR models and developed a frequency-constrained unit commitment (FCUC). However, the challenge with FCUC and other similar frequency-constrained dispatch models is linearizing nonlinear frequency constraints. To address this, Ref.8 constructed a max-affine-derived linear frequency nadir constraint and incorporated it into FCUC. Ref.9 utilized a specific neural network to establish linear regression relationships between maximum frequency derivation and various frequency-regulating parameters. Ref.10 applied the most miniature square model to calculate the regression parameters of the derived linearized nadir constraint. Alternatively, Ref. 10 sorted out a sequence of discretized frequency derivation constraints over a predetermined simulated horizon. Since these frequency derivation constraints for each time slice must consist of RoCoF, nadir, and Qss types, this method usually has a high level of accuracy yet with more complexity. While these multiple generators participating in SFR usually keep an apparent P-F characteristic, the uncertain variability characteristic of intermittent resources is implicitly ignored throughout the dynamic response process. However, their P-F characteristic has been reconsidered with free-noise assumptions.

Motivated by such concerns, this work constructs a new SFR model considering uncertain variability factors from converter-interfaced generators. Since the uncertain variability characteristic retreats as a stochastic waveform sequence and can be measured by phase measurement unit (PMU), the estimation of frequency derivation through the proposed model is more accurate with the help of PMU data. In addition, the probabilistic density distribution of frequency derivation considering uncertain variability factors can also be derived. Subsequently, chronological derivation and related probabilistic distribution of frequency dynamic are abstracted, reformulated as chance-constrained frequency constraints, and subsequently integrated into UC studies. Accordingly, a refined chance-constrained FCUC is developed.

To summarize, two significant contributions in this work are described below, 1) A new SFR model is proposed, considering uncertain variability factors in converter-interfaced generators. The proposed model can estimate frequency derivation and associated probabilistic distribution against mismatch power disturbance. 2) an extended chance-constraint FCUC is constructed. Both probabilistic properties of frequency derivation under an uncertain variability environment can be smoothly incorporated.

The remainder of this paper is organized: Section 2 intro-

duces a Bayesian-filter-derived SFR model. Section 3 constructs chance-constraint frequency dynamic constraints. 4 extends the formulation of chance-constraint FCUC. Section 5 verifies the effectiveness of the proposed model in a modified IEEE 14 bus test system and IEEE 118 bus test system, and Section 6 summarizes the primary findings and conclusions presented in this research.

II. MODELING BF-SFR THROUGH BAYESIAN-FILTER

This section analyzes the impact of uncertain variability factors on the SFR and constructs a new Bayesian-filter-based SFR model to address that. Furthermore, the section derives the posterior of frequency derivation against mismatch power cases and sequentially describes its calculation process through the sequential importance sampling (SIS) algorithm.

Homogeneous generators are usually treated as one equivalent unit with aggregated parameters for simplification. Therefore, the union frequency dynamic for the system consisting of conventional generators, converters-interfaced generators (renewable energy), and battery energy systems (BESS) can be rewritten as,

$$(2H_G s + D_G) \Delta f(s) = \frac{1}{s} \Delta p_{step} - \left(\frac{K_G(1 + F_G T_G s)}{R_G(1 + T_G s)} + \frac{K_W}{R_W(1 + T_W s)} + \frac{K_W(2H_W s + D_W)}{1 + T_W s} + \frac{1}{R_E(1 + T_E s)} \right) \Delta f(s) \quad (1)$$

The t -domain mathematical form of (1) can be transferred by utilizing the inverse Laplace transformation,

$$2H_\Sigma \Delta f'(t) + D_\Sigma \Delta f(t) = \Delta p(t) \quad (2a)$$

$$\Delta p(t) = \Delta p_{step} - (\Delta p_G(t) + \Delta p_W(t) + \Delta p_E(t)) \quad (2b)$$

$$M_\Sigma = M_G + M_W, D_\Sigma = D_G + D_W + R_W^{-1} + R_E^{-1} \quad (2c)$$

$$\Delta p_G(t) = K_G F_G R_G^{-1} \Delta f(t) - K_G(1 - F_G) R_G^{-1} e^{-\frac{1}{T_G} t} \int_0^t e^{\frac{1}{T_G} \kappa} \Delta f'(\kappa) d\kappa \quad (2d)$$

$$\Delta p_W(t) = (K_W R_W^{-1}) \Delta f(t) + (2H_W \Delta f'(t) + D_W \Delta f(t)) \quad (2e)$$

$$\Delta p_E(t) = (R_E^{-1}) \Delta f(t) \quad (2f)$$

where Eqs. (2a) and (2b) describes the chronological change of $\Delta f(t)$ over the entire dynamic horizons; Eq. (2c) denotes equivalent frequency parameters consisting of CoI-based inertia constant and droop constant; Eqs. (2c) to (2e) describes the scheduled output of different generators, respectively. Furthermore, by replacing $\Delta f'(t) = [\Delta f(t) - \Delta f(t - \delta t)] / \delta t$ into Eqs. (2a) and (2d), the time-discretized SFR concerning $\Delta f(t)$, as well as rescheduled output $\langle \Delta p_G(t), \Delta p_W(t) \rangle$ from conventional generators and converter-interfaced ones can be estimated,

$$\Delta f(t) = \frac{1}{2} H_\Sigma^{-1} \Delta p(t) \delta t - \left(1 - \frac{1}{2} D_\Sigma H_\Sigma^{-1} \right) \Delta f(t - \delta t) \delta t \quad (3a)$$

$$\Delta p_G(t) = K_G R_G^{-1} \Delta f(t) - \Lambda \int_0^t e^{\frac{1}{T_G} \kappa} d\kappa \quad (3b)$$

$$\begin{aligned} (\Delta f(t) - \Delta f(t - \Delta t)) dt : \Lambda &= K_G(1 - F_G) R_G^{-1} e^{-\frac{1}{T_G} t} \\ \Delta p_W(t) &= (K_W R_W^{-1} + D_W + 2H_W \delta t) \Delta f(t) - 2H_W \delta t \Delta f(t - \delta t) \end{aligned} \quad (3c)$$

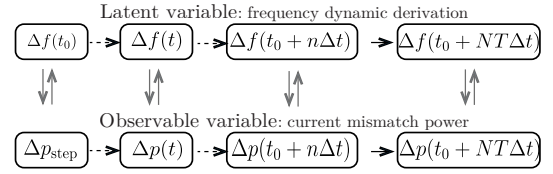


Figure 1. The discretized recurrence process of frequency derivation in the proposed BF-SFR method

In Eqs. (3b) and (3c), $\langle \Delta p_G(t), \Delta p_W(t) \rangle$ can be recursively calculated after observing $\Delta f(t - \delta t)$ and $\Delta f(t)$. Nevertheless, the impact of uncertain variability factors is implicitly ignored. Generally speaking, uncertain variability factors are divided into two parts; the first part comes from the restriction of $\Delta p_G(t)$ denoted by $\bar{p}_G, \bar{p}_W$, it means that the adjustable output of generators using Eqs. (3b) and (3c) cannot be kept due to generators' output limitation; the latter part is caused by the unforeseeable uncertain derivations produced by intermittent converter-interfaced generators. To address that, let $\Delta \omega_1(t) = -(\lceil \Delta p_G(t), \bar{p}_G \rceil + \lceil \Delta p_W(t), p_W(t) \rceil)$ represent the corrected term caused by generators' output limitation, and similarly, let $\Delta \omega_2(t) = \text{Normal}(t; \mu, \sigma)$ denote uncertain derivations from converter-interfaced generators. Hence, the impact of uncertain variability factors can be estimated by adding $\Delta \omega_1$ and $\Delta \omega_2$ together. So, the SFR considering uncertain variability factors can be derived,

$$\begin{aligned} \Delta f(t) &= \frac{1}{2} H_\Sigma^{-1} \Delta p(t) \delta t - \left(1 - \frac{1}{2} D_\Sigma H_\Sigma^{-1} \right) \Delta f(t - \delta t) \delta t + \\ \Delta \omega : \Delta \omega &= \Delta \omega_1(t) + \Delta \omega_2(t) \end{aligned} \quad (4a)$$

The stochastic differential equation (SDE) defined in Eq. (4) does not have an analytical solution due to the independence between uncertain variability factors and $\Delta f(t)$. To solve this, a Bayesian filter framework is introduced to estimate the posterior distribution of $\Delta f(t)$. Let $\mathcal{P}(\Delta f(t)), \mathcal{P}(\Delta p(t))$, respectively, enforces the probabilistic density distribution of $\Delta f(t)$ and $\Delta p(t)$, then, the posterior distribution of $\Delta f(t)$ can be estimated by,

$$\begin{aligned} \text{posterior} : \mathcal{P}(\Delta f(t) | \Delta p(t_0 : t); \Delta \omega) &= \underbrace{\mathcal{P}(\Delta p(t) | \Delta f(t); \Delta \omega)}_{\text{likelihood function}} \\ &\underbrace{\mathcal{P}(\Delta f(t) | \Delta p(t_0 : t - \delta t); \Delta \omega) \mathcal{P}^{-1}(\Delta p(t) | \Delta p(t_0 : t - \delta t); \Delta \omega)}_{\text{prior function}} \end{aligned} \quad (5a)$$

where *likelihood function* in (5) declares coupling properties between $\Delta p(t)$ and $\Delta f(t)$; and *prior function* describes the sequential recursive process from $\Delta f(t_0 : t - \delta t)$ to $\Delta f(t)$. Using the prior and predicated processes of the Bayesian filter written probabilistically, the impact of uncertain variability factors denoted by $\Delta \omega$ can be well incorporated over the entire frequency dynamic process. In which, *prior function* can be recursively calculated as follows,

$$\begin{aligned} \text{prior} : \mathcal{P}(\Delta f(t) | \Delta p(t_0 : t - \delta t), \Delta \omega) &= \int (\mathcal{P}(\Delta f(t) | \\ \Delta f(t_0 : t - \delta t), \Delta \omega) \cdot \mathcal{P}(\Delta f(t - \delta t) | \Delta p(t_0 : t - \delta t), \Delta \omega)) d\Delta f(t) \end{aligned} \quad (6a)$$

In Eqs. (5) and (6), *prior function* and *posterior function* can not be directly solved because their distributional types and

expressions are unknown. Therefore, a sequential importance sampling (SIS) algorithm is applied here to address this issue. Let $\mathcal{Q}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega)$ denote the importance density, which can be treated as the replaceable proposed function for generating samples (filters); and $\lambda(\Delta f(t_0:t))$ describes the importance weight, which are approximations to the posterior probabilistic of the samples following (7a), then, (6) can be estimated as the product between the importance density and weight,

$$\mathcal{P}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega) = \quad (7a)$$

$$\mathcal{Q}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega) \cdot \lambda(\Delta f(t_0:t))$$

$$\text{weight} : \lambda(\Delta f(t_0:t)) = \frac{\mathcal{P}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega)}{\mathcal{Q}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega)} \quad (7b)$$

$$\text{density} : \mathcal{Q}(\Delta f(t)|\Delta p(t_0:t);\Delta\omega) = \frac{\mathcal{Q}(\Delta f(t)|\Delta f(t_0:t-\delta t);\Delta\omega)}{\mathcal{Q}(\Delta f(t-\delta t)|\Delta p(t_0:t-\delta t);\Delta\omega)} \quad (7c)$$

By supposing the recursive type of the importance density and sequentially transferring it as (7c), the similar recursive form of importance weight can be derived as,

$$\text{recursive weight} : \lambda(\Delta f(t_0:t)) = \lambda(\Delta f(t_0:t-\delta t)) \cdot \quad (8a)$$

$$\mathcal{P}(\Delta p(t)|\Delta f(t_0:t);\Delta\omega) \left(\frac{\mathcal{P}(\Delta f(t)|\Delta f(t_0:t-\delta t);\Delta\omega)}{\mathcal{Q}(\Delta f(t)|\Delta f(t_0:t-\delta t);\Delta\omega)} \right)$$

Let $\mathcal{Q}(\Delta f(t)|\Delta f(t_0:t-\delta t);\Delta\omega)$ equals to the transfer function $\mathcal{P}(\Delta f(t)|\Delta f(t_0:t-\delta t);\Delta\omega)$, and then, (8a) can be rewritten as,

$$\lambda(\Delta f(t_0:t)) = \lambda(\Delta f(t_0:t-\delta t)) \cdot \mathcal{P}(\Delta p(t)|\Delta f(t_0:t);\Delta\omega) \quad (9a)$$

By combining (9a) and (7a), the posterior of the importance density concerning (7c) can be directly derived. Subsequently, by updating the weight through (7b) and sequentially substituting Eqs. (7b) and (7c) into (7a), the posterior distribution of $\Delta f(t)$ concerning (5) can be recursively solved. For intuitively illustrating the implementing process of the posterior distribution of $\Delta f(t)$.

III. FREQUENCY CONSTRAINT REFORMULATION

This section examines the represented criteria of frequency dynamic requirements, including RoCoF, nadir, and frequency containment reserve (FCR). These needs are reevaluated and integrated into the restrictions considered in UC problems. Fig. 2 visualizes the physical significance of these feature criteria. Remarkably, the reconstructed chance-constrained frequency nadir constraint is derived from the proposed BF-SFR approach derived in section II, other constraints related to RoCoF and FCR can be found in [1–9].

A. RoCoF constraint

To mitigate rapid changes in the inertia response, the change of RoCoF, indicated as $\Delta f'(t)$, is necessary. It is required that $\Delta f'(t)$ does not exceed the maximum rate of change of frequency, denoted as $RoCoF_{\max}$, i.e., $\Delta f'(t) \leq RoCoF_{\max}$. Since $\max\{\Delta f'(t)\} = \Delta p_{\text{step}}/M_{\text{equ}} : M_{\text{equ}} = M_G + M_W$, [10], associated RoCoF constraint can be obtained,

$$\begin{aligned} \Delta p_{\text{step}}/M_{\text{equ}} &\leq RoCoF_{\max} \\ \iff M_G &\geq \Delta p_{\text{step}}/RoCoF_{\max} - M_W, \forall g, t \\ \iff \sum_{g=1}^{NG} M_g x_{g,t} &\geq \frac{\Delta p_{\text{step}}}{RoCoF_{\max}} - \sum_{w=1}^{NW} M_w, \forall g, t \end{aligned} \quad (10)$$

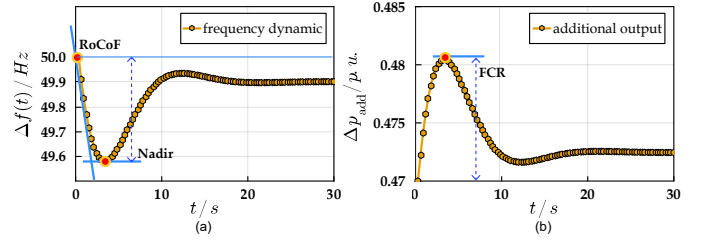


Figure 2. Three frequency dynamic requirements: RoCoF, nadir and FCR

B. FCR constraint

To guarantee sufficient frequency reserve provided by grid-connected units, conventional generators, converters, and BESS must be capable of serving as reserves during imbalanced disturbances, [5, 11]. In combination with (3), the binding of the additional power $\langle \Delta p_{\text{add}}^G, \Delta p_{\text{add}}^W, \Delta p_{\text{add}}^E \rangle$ from different units is obtained, i.e., $\sum_{g=1}^{NG} p_{g,s,t} \geq \Delta p_{\text{add}}^G(t)$; $\sum_{w=1}^{NW} p_{w,s,t} \geq \Delta p_{\text{add}}^W(t)$ and $\sum_{e=1}^{NE} p_{e,s,t} \geq \Delta p_{\text{add}}^E(t), \forall s, t$. By replacing $\langle \Delta p_{\text{add}}^G(t), \Delta p_{\text{add}}^W(t), \Delta p_{\text{add}}^E(t) \rangle$ with their analytical formulations in ?????, another equivalent constraint regarding FCR can be derived,

$$\sum_{w=0}^{NW} (p_w^{\max} - p_{w,s,t}) \geq R_W^{-1} \Delta f(t) \quad (11a)$$

$$\sum_{e=0}^{NE} (p_e^{\max} - p_{e,s,t}^{\text{dis}}) \geq R_E^{-1} \Delta f(t) \quad (11b)$$

$$\sum_{g=0}^{NG} (p_g^{\max} - p_{g,s,t}) \geq K_G R_G^{-1} \Delta f(t) - K_G (1 - F_G) \quad (11c)$$

Note that the upper bound of $\Delta f(t)$ in (11) is predetermined as $\Delta f_{\max}$, therefore, a concise form of (11a) and (11b) can be calculated by replacing $\Delta f(t)$ with $\Delta f_{\max}$,

$$\sum_{w=0}^{NW} (p_w^{\max} - p_{w,s,t}) \geq \Delta f_{\max}/R_W, \forall s, t \quad (12a)$$

$$\sum_{e=0}^{NE} (p_e^{\max} - p_{e,s,t}^{\text{dis}}) \geq \Delta f_{\max}/R_E, \forall s, t \quad (12b)$$

In the context of the FCR constraint (11c) pertaining to conventional generators, the right-hand side of (11c) can be rephrased as,

$$\begin{aligned} &K_G R_G^{-1} \Delta f(t) - (K_G (1 - F_G) R_G^{-1} RoCoF_{\max}) (n\delta t) \\ &\leq K_G R_G^{-1} \Delta f(t) - (K_G (1 - F_G) R_G^{-1} RoCoF_{\max}) \\ &\quad \left(e^{-\frac{1}{T_G}(t)} \sum_{i=0}^n e^{\frac{1}{T_G}(t_0+i\delta t)} \right) \delta t \\ &\leq K_G R_G^{-1} \Delta f(t) - K_G (1 - F_G) R_G^{-1} \times \\ &\quad e^{-\frac{1}{T_G}(t)} \left(\sum_{i=0}^n e^{\frac{1}{T_G}(t_0+i\delta t)} \Delta f'(t_0+i\delta t) \right) \delta t \\ &\leq K_G R_G^{-1} \Delta f(t) \leq K_G R_G^{-1} \Delta f_{\max} \end{aligned} \quad (13)$$

By substituting the maximum limit of changeable output in (13) into (14), a relaxed constraint on the FCR for conventional generators is calculated,

$$\sum_{g=1}^{NG} (p_g^{\max} - p_{g,s,t}) \geq K_G R_G^{-1} \Delta f_{\max}, \forall s, t \quad (14)$$

C. (chance-constraint) nadir constraint reformulation

To avoid the occurrence of $\Delta f(t)$ beyond its predetermined threshold $\Delta f_{\max}$, it is essential to impose nadir constraint on the potential fluctuation of $\Delta f_{\text{nadir}} = \max\{\Delta f(t)\}$, ensuring that Δf_{nadir} does not exceed $\Delta f_{\max}$, i.e., $\Delta f_{\text{nadir}} \leq \Delta f_{\max}$. Note that the probabilistic density distribution of $\mathcal{P}(\Delta f(t))$

may be effectively determined using the BF-SFR method, as a result, a chance-constrained nadir constraint can be formulated as follows:

$$\mathcal{P}(\Delta f_{\text{nadir}} \leq \Delta f_{\text{max}}) \geq 1 - \epsilon \quad (15)$$

where ϵ is the confidence risk level associated with the chance constraint (15); Δf_{nadir} is closely dependent with the initial imbalance disturbance Δp_{step} , aggregated frequency parameters of various grid-connected units $\langle M_G, D_G, R_G, K_G, T_G, R_W, R_E \rangle$ and external UV characteristic $\langle \mu_1, \sigma_1, \mu_2, \sigma_2 \rangle$. For simplification purpose, let $\wp = \langle M_G, D_G, R_G, K_G, T_G, R_W, R_E \rangle$ and $\zeta = \langle \mu_1, \sigma_1, \mu_2, \sigma_2 \rangle$, and then, Δf_{nadir} can be rewritten a nonlinear mapping function $\Psi(\wp, \zeta)$, i.e., $\Delta f_{\text{nadir}} = \Psi(\wp, \zeta)$. Furthermore, a Sampled Average Approximate (SAA) method is used to construct the deterministic convex formulation of (15) which can be readily identified by any off-the-shelf MIP solvers and subsequently integrate it into UC. To achieve that, by introducing a set of binary indicator variable $z_q \in \{0, 1\} : q \in \{1, 2, \dots, NQ\}$ and using the Big-M method [4, 5], Eq. (15) can be equivalently reformulated with a set of linearised constraints as follows,

$$\Psi(\wp, \hat{\zeta}^{(q)}) \leq \Delta f_{\text{max}} + M z_q, \sum_{q=1}^{NQ} \pi_q z_q \leq \epsilon, \forall q \quad (16)$$

where (16) represents an approximately mix-integer linearized constraints of (15). $z_q = 0$ indicates an active constraint where the *nadir* must be required for the predefined uncertain variability condition; $z_q = 1$ describes an inactive constraint where the (15) at the predefined sampled uncertain condition q could be ignored. Accordingly, the redesigned chance constraint (16) has been reshaped as an equivalence of restricting the number of $z_q, 1 \leq q \leq NQ$ to be ones. It is important to mention that the mathematical reformulation of the similar type constraint (15) are not limited to the form (16). By directly introducing z_q but no longer introducing M , a bi-linear type mixed integer reformulation of (15) is also feasible, that is,

$$\left[\Psi(\wp, \hat{\zeta}^{(q)}) - \Delta f_{\text{max}} \right] (1 - z_q) \leq 0, \sum_{q=1}^{NQ} \pi_q z_q \leq \epsilon, \forall q \quad (17)$$

The boxed term in Eq. (17) can be rewritten as $\Psi(\wp, \hat{\zeta}^{(q)}) - z_q \Psi(\wp, \hat{\zeta}^{(q)}) - (1 - z_q) \Delta f_{\text{max}} \leq 0, \forall q$ where the nonlinear term $\Psi(\wp, \hat{\zeta}^{(q)})$ needs to be further linearized and the bi-linear term $\langle z_q \times \Psi(\wp, \hat{\zeta}^{(q)}) \rangle$ should be reformulated through McCormick linearization method. For pretending the resulting constraint from being excessive complexity, (16) is utilized to approximate (15). Note that (16) cannot be directly incorporated into UC due to the nonlinear property of $\Psi(\wp, \hat{\zeta}^{(q)})$, therefore, a “max-affine” PWL method, [12–14], is implemented to estimate the original value of $\Psi(\wp, \hat{\zeta}^{(q)})$.

Let $\hat{\Psi}(\wp, \hat{\zeta}^{(q)}) = \max \left(\alpha_{\iota,1}^{(q)} \tilde{H}_{\text{equ}}^{(q)} + \alpha_{\iota,2}^{(q)} \tilde{D}_{\text{equ}}^{(q)} + \alpha_{\iota,3}^{(q)} \left(\frac{\tilde{F}_G^{(q)}}{\tilde{R}_G^{(q)}} \right) + \alpha_{\iota,4}^{(q)} \right)$ describe the approximated fitting function of $\hat{\Psi}(\wp, \hat{\zeta}^{(q)})$ given a stochastic uncertain realization $\hat{\zeta}^{(q)}$; $\langle \tilde{H}_{\text{equ}}^{(q)}, \tilde{D}_{\text{equ}}^{(q)}, \tilde{F}_G^{(q)}, \tilde{R}_G^{(q)} \rangle$ denotes a possible set of aggregated frequency parameters with the respect of $\hat{\zeta}^{(q)}$. In such a situation, $\hat{\Psi}(\wp, \hat{\zeta}^{(q)})$ can be evaluated by observing the maximum value of constructed hyperplane $\Theta_{\iota \in \{1,2,3,4\}}^{(q)}$ where $\Theta_{\iota}^{(q)} = \alpha_{\iota,1}^{(q)} \tilde{H}_{\text{equ}}^{(q)} + \alpha_{\iota,2}^{(q)} \tilde{D}_{\text{equ}}^{(q)} +$

$\alpha_{\iota,3}^{(q)} \left(\frac{\tilde{F}_G^{(q)}}{\tilde{R}_G^{(q)}} \right)$. Particularly, the selection of fitting parameters $\langle \alpha_{\iota,1}^{(q)}, \alpha_{\iota,2}^{(q)}, \alpha_{\iota,3}^{(q)}, \alpha_{\iota,4}^{(q)} \rangle$ can be solved by minimizing the lose function defined by $\vartheta_{\text{loss}} = \hat{\Psi}(\wp, \hat{\zeta}^{(q)}) - \Psi(\wp, \hat{\zeta}^{(q)})$. As such, the below lists a detailed optimization model for the calculation of fitting parameters.

$$\min \sum_{r=1}^{NR} \left(\max \left(\alpha_{\iota,1}^{(q)} \tilde{H}_{\text{equ}}^{(q)} + \alpha_{\iota,2}^{(q)} \tilde{D}_{\text{equ}}^{(q)} + \alpha_{\iota,3}^{(q)} \left(\frac{\tilde{F}_G^{(q)}}{\tilde{R}_G^{(q)}} \right) + \alpha_{\iota,4}^{(q)} - \Psi(\wp, \hat{\zeta}^{(q)}) \right)^2, \forall \iota \in \{1, 2, 3\} \right) \quad (18)$$

In Eq. (18), the inner “max” operator automatically selects the most suitable hyperplane closet to each evaluation point, and the outer “min” operator guarantees the global accuracy between the pre-selected hyperplane and all evaluation points. In terms of problem-solving, (18) can be solved by directly calling Ipopt solver or reformulating it as its recursive form and subsequently invoking existing MIP solver, e.g., Gurobi, IBM CPLEX, etc. More detailed on the calculation of (18) can be found in [4, 5]

Substituting $\hat{\Psi}(\wp, \hat{\zeta}^{(q)})$ derived from Eq. (18) into Eq. (16), a convex form of (16) can be obtained as follows,

$$\alpha_{\iota,1}^{(q)} H_{\text{equ}} + \alpha_{\iota,2}^{(q)} D_{\text{equ}} + \alpha_{\iota,3}^{(q)} (F_G/R_G) + \alpha_{\iota,4}^{(q)} \leq \Delta f_{\text{max}} + M z_q; \sum_{q=1}^{NQ} \pi_q z_q \leq \epsilon, \forall q, \iota \in \{1, 2, 3, 4\} \quad (19)$$

IV. PROPOSED UC MODEL:CCFDUC

This section presents a comprehensive articulation of CCFDUC in this work. The form of the suggested UC model can be constructed by adding frequency dynamic restrictions from section III into the baseline UC problem.

$$\min \sum_{t=1}^{NT} \left[\sum_{g=1}^{NG} \left(c_g^{\text{up}} u_{g,t} + c_g^{\text{dw}} u_{g,t} + c_g^{\text{nl}} u_{g,t} \right) + \sum_{s=1}^{NS} \pi_s \left(\sum_{g=1}^{NG} \sum_{z=1}^{NZ} F_g^z \left(p_{g,s,t}^{(z)} \right) + e^{\text{VoLL}} \sum_{d=1}^{ND} p_{d,s,t} \right) \right] \quad (20a)$$

$$s.t., \sum_{m=\lceil t-T_g^{\text{su}}+1,0 \rceil}^t u_{g,m} \leq x_{g,t}, \forall g, t \quad (20b)$$

$$\sum_{m=\lceil t-T_g^{\text{sd}}+1,0 \rceil}^t u_{g,m} \leq 1 - x_{g,t}, \forall g, t \quad (20c)$$

$$x_{g,t} - x_{g,t-1} = u_{g,t} - v_{g,t}, \forall g, t \quad (20d)$$

$$u_{g,t} + v_{g,t} \leq 1, \forall g, t \quad (20e)$$

$$\sum_{g=1}^{NG} p_{g,s,t} + \sum_w^{NW} (p_{w,s,t} - \Delta p_{w,s,t}) + \sum_{e=1}^{NE} \left(p_{e,s,t}^{\text{dis}} - \Delta p_{e,s,t}^{\text{ch}} \right) - \sum_{d=1}^{ND} (p_{d,t} - \Delta p_{d,s,t}) = 0, \forall g, w, e, s, t \quad (20f)$$

$$|\sum_{b=1}^{NB} \kappa_{l,b} \left(\sum_{g=1}^{NG_b} p_{g,s,t} + \sum_{w=1}^{NW_b} (p_{w,s,t} - \Delta p_{w,s,t}) + \sum_{e=1}^{NE_b} \left(p_{e,s,t}^{\text{dis}} - \Delta p_{e,s,t}^{\text{ch}} \right) - \sum_{d=1}^{ND} (p_{d,t} - \Delta p_{d,s,t}) \right)| \leq p_i^{\text{max}}, \forall t, l, s \quad (20g)$$

$$p_{g,s,t} - p_{g,s,t-1} \leq \gamma_g^{\text{ru}} x_{g,t} + p_g^{\text{max}} (1 - x_{g,t}) + \gamma_g^{\text{su}} (x_{g,t} - x_{g,t-1}), \forall g, s, t \quad (20h)$$

$$p_{g,s,t-1} - p_{g,s,t} \leq \gamma_g^{\text{rd}} x_{g,t} + p_g^{\text{max}} (1 - x_{g,t-1}) + \gamma_g^{\text{sd}} (x_{g,t-1} - x_{g,t}), \forall g, s, t \quad (20i)$$

$$\sum_{g=1}^{NG} (x_{g,t} p_g^{\text{max}} - p_{g,s,t}) + \sum_{e=1}^{NE} (p_{e,s,t}^{\text{dis,max}} - p_{e,s,t}^{\text{dis}}) \geq \varrho_1^+ \sum_{d=1}^{ND} p_{d,t} + \varrho_2^+ \sum_{e=1}^{NE} p_{w,s,t}^{\text{max}}, \forall s, t \quad (20j)$$

$$\sum_{g=1}^{NG} (p_{g,s,t} - x_{g,t} p_g^{\text{min}}) + \sum_{e=1}^{NE} (p_{e,s,t}^{\text{ch,max}} - p_{e,s,t}^{\text{ch}}) \geq$$

$$\varrho_1^- \sum_{d=1}^{ND} p_{d,t} + \varrho_2^- \sum_{e=1}^{NE} p_{w,s,t}^{\max}, \forall s, t \quad (20k)$$

$$x_{g,t} p_g^{\max} \leq p_{g,s,t} \leq x_{g,t} p_g^{\max}, \forall s, t \quad (20l)$$

$$0 \leq \Delta p_{w,s,t} \leq p_{w,s,t}^{\max}, \forall w, s, t \quad (20m)$$

$$0 \leq \Delta p_{d,s,t} \leq p_{d,t}, \forall d, s, t \quad (20n)$$

$$0 \leq p_{e,s,t}^{\text{dis}} \leq u_{e,s,t}^{\text{dis}} p_e^{\text{dis,max}}, \forall e, s, t \quad (20o)$$

$$0 \leq p_{e,s,t}^{\text{ch}} \leq u_{e,s,t}^{\text{ch}} p_e^{\text{ch,max}}, \forall e, s, t \quad (20p)$$

$$q_{e,s,t+1} = q_{e,s,t} + \left(\eta_e^{\text{ch}} p_{e,s,t}^{\text{ch}} - \eta_e^{\text{dis}} p_{e,s,t}^{\text{dis}} \right) \delta t, \forall e, s, t \quad (20q)$$

$$q_{e,s,t=1} = q_{e,s,t=NT}, \forall e, s, t \quad (20r)$$

$$u_{e,s,t}^{\text{dis}} + u_{e,s,t}^{\text{ch}} \leq 1, \forall e, s, t \quad (20s)$$

$$p_{g,s,t} = \sum_{z=1}^{NZ} p_{g,s,t}^{(z)}, \forall z, g, s, t \quad (20t)$$

$$0 \leq p_{g,s,t}^{(z)} \leq x_{g,t} p_{g,s,t}^{\max}, \forall z, g, s, t \quad (20u)$$

$$F_g^z(p_{g,s,t}^{(z)}) \geq k_g^{(z)} p_{g,s,t}^{(z)} + x_{g,t} \omega_g^{(z)}, \forall z, g, s, t \quad (20v)$$

$$\sum_{g=1}^{NG} M_g x_{g,t} \geq \Delta p_{\text{step}} / \text{RoCoF}_{\max} - \sum_{w=1}^{MW} M_w, \forall t \quad (21a)$$

$$\sum_{g=1}^{NG} (p_g^{\max} - p_{g,s,t}) \geq K_G R_G^{-1} \Delta f_{\max}, \forall s, t \quad (21b)$$

$$\sum_{w=0}^{NG} (p_w^{\max} - p_{w,s,t}) \geq \Delta f_{\max} / R_W, \forall s, t \quad (21c)$$

$$\sum_{e=0}^{NE} (p_e^{\max} - p_{e,s,t}^{\text{dis}}) \geq \Delta f_{\max} / R_E, \forall s, t \quad (21d)$$

$$\sum_{q=1}^{NQ} \pi_q \phi_{q,t} \leq \epsilon, \forall q, t \quad (21e)$$

$$\alpha_{\iota,1}^{(q)} H_{\text{equ},t} + \alpha_{\iota,2}^{(q)} D_{\text{equ},t} + \alpha_{\iota,3}^{(q)} (F_{G,t} / R_{G,t}) + \alpha_{\iota,4}^{(q)} \leq \Delta f_{\max} + M \phi_{q,t}, \forall q, \iota \in \{1, 2, 3, 4\} \quad (21f)$$

$$M_{\text{equ},t} = p_{\text{base}}^{-1} \left(\sum_{g=1}^{NG} (M_g p_g^{\max}) x_{g,t} + \sum_{w=1}^{NW} (M_w p_{w,s,t}) \right) \quad (21g)$$

$$D_{\text{equ},t} = p_{\text{base}}^{-1} \left(\sum_{g=1}^{NG} (D_g p_g^{\max}) x_{g,t} + \sum_{w=1}^{NW} (R_w^{-1} p_{w,s,t}) + \sum_{e=1}^{NE} (R_e^{-1} p_e^{\max}) \right), \forall t \quad (21h)$$

$$R_{G,t}^{-1} = p_{\text{base}}^{-1} \sum_{g=1}^{NG} (K_g R_g^{-1} p_g^{\max}) x_{g,t}, \forall t \quad (21i)$$

$$F_{G,t} = p_{\text{base}}^{-1} \sum_{g=1}^{NG} (K_g F_g R_g^{-1} p_g^{\max}) x_{g,t}, \forall t \quad (21j)$$

$$R_{W,t}^{-1} = p_{\text{base}}^{-1} \sum_{w=1}^{NW} (K_w R_w^{-1} p_{w,s,t}), \forall t \quad (21k)$$

$$R_{E,t}^{-1} = p_{\text{base}}^{-1} \sum_{e=1}^{NE} (K_e R_e^{-1} p_e^{\max}), \forall t \quad (21l)$$

$$x_{g,t} \in \{0, 1\}, u_{g,t} \in \{0, 1\}, v_{g,t} \in \{0, 1\}, u_{e,s,t}^{\text{dis/ch}} \in \{0, 1\} \quad (21m)$$

$$p_{g,s,t} \in \mathbb{R}^+, \Delta p_{w,s,t} \in \mathbb{R}^+, \Delta p_{d,s,t} \in \mathbb{R}^+, p_{g,s,t}^{\text{dis/ch}} \in \mathbb{R}^+ \quad (21n)$$

In the above formulation, Eqs. (20a)-(20v) define a baseline UC model, [5], Eqs. (21a)-(21l) denote frequency dynamic constraints in line with the actual frequency requirements. It worth noting that the newly redesigned nadir constraint (21e)-(21f) is based on BF-SFR which is significantly different with previous SFR approach or UC studies.

Next, Eq. (20a) denotes the objective of the UC problem; it seeks to minimize the overall cost associated with conventional generators. Constraints (20b) and (20c) specify the minimum up-time and down-time requirements for all conventional generators, respectively. Constraints (20d) and (20e) ensure the coherence of the shut-up/shut-down choice and the operational condition of any individual conventional generator. Constraint (20f) delineates the constraint pertaining to the online power balance restriction. Constraint (20g) denotes the constraint that

represents the capacity of each transmission line. Constraints (20h) and (20i) ensure the compliance of the up-forward and down-forward ramping rates of each conventional generator throughout consecutive dispatching periods. Constraints (20j) and (20k) delineate the stipulation for the provision of up-forward and down-forward spinning reserve capacity generated by individual conventional generator. Constraint (20l) indicate the minimize/minimize power of multiple generators. Constraints (20m) and (20n) introduce limitations on the amount of abandoned wind output and forced-load-curtailment. Constraints (20o) and (20p) specify the binding of charging/discharging capacities for each BESS. Constraint (20q) signifies a coupling restriction between the energy of BESS and the corresponding discharging/charging decisions. Constraint (20r) establishes a periodic energy regulation policy for each BESS. Constraint (20s) underscores the exclusiveness of the discharging and charging choices made by each BESS. Constraint (20t) enforces that the output of individual conventional generator is equal to the total of the segmented outputs generated on each block of its linearized fuel cost curve. Constraint (20u) enforces the binding restriction of each segmented output. Constraint (20v) specifies the operational cost associated with each particular conventional generator. Constraints (21a) to (21f) correspond to the RoCoF, nadir and FCR constraint, respectively. It is noteworthy to mention that the original chance nadir constraint (15) has been transformed into a collection of convex constraints using SAA. Constraints (21g) to (21j) declare aggregated values of the system inertia, damping, droop and fraction of output generated by reheaters. Constraints (21k) and (21l) represent the aggregated droop coefficient of wind farms and BESS. Constraint (21m) and (21n) describe the feasible region of binary decision variables and continuous decision variables, respectively.

V. CASE STUDIES AND ANALYSIS

This section uses two cases, including a modified version of IEEE 6-bus test system and IEEE 118-bus test system to check the validness and scalability of CCFDUC in this work. Both experiments are carried out in Julia (version 1.9.2)/JuMP (version 1.13.0) environment, [15], using Gurobi (version 10.0) on a Dell Precision T5820 Tower workstation with Intel(R) Xeon(R)W-2133 CPU@3.60 GHz & RAM 12.0GB.

A. Modified IEEE 6 bus test system

The system comprises 6 buses, 7 lines, and 3 conventional generators. Besides, the system contains 4 wind farms located on bus 1 and 2 BESS at bus 2. The installed capacity generated by conventional generators is 240MW; the capacity of each wind farm is 50MW, and the similar one of each BESS is 50MW. In such a condition, the percentage of wind farms for the peak load is 29.40%. Besides, a standardized value method is used to construct the boundary condition: the baseline power is 100MW and the baseline frequency is 50Hz. Other parameters including units' shut-up/shut-down time, ramping rate restrictions, maximum/minimum outputs, demand consumption and network topology parameters can be referred to [6]. The chronological load curve and the stochastic scenarios of wind farms are illustrated in Fig. 3. Table. I sorts out the frequency regulation parameters of different generators.

Table I

FREQUENCY DYNAMIC PARAMETERS OF DIFFERENT GENERATORS.							
Gen.NO.	Type	H	K	F	R	D	T
1	Thermal	7	0.9	0.04	0.04	0.06	8
2	Thermal	5.5	0.95	0.03	0.03	0.1	8
3	Thermal	3.5	0.98	0.25	0.05	0.18	8
4	Wind farms	—	1	—	0.04	—	0.06
5	Wind farms	6	1	—	—	0.6	0.06
6	BESS	—	0.5	—	0.04	—	0.06

A.1. Simulator v.s. BF-SFR(the proposed)

A simulator on SFR at a MATLAB 2022a simulink environment is used to compare the feasibility of BF-SFR. Both grid-connected generators with similar types are abstracted as an aggregated generators participating in frequency regulations. Especially, a step type mismatch power Δp_{step} (approximately equal to 20% loads) is simulated using simulator and compared against BF-SFR. Two residual settings are selected to compare their impacts on the frequency dynamic: *i*): a little residual condition: it assumes that the obtained power derivation should be derivative from real signals with a minor probability, and the residual is assumed to be followed a normal distribution i.e., $\langle \varpi, \sigma \rangle \in N(0, 0.001)$ where $\langle \varpi, \sigma \rangle$ denotes the expectation and standard deviation of measured UV errors. In such a setting, the impact of UV from wind farm power fluctuation could be neglect; *ii*): a relatively large residual condition: this case assumes that the power derivations follow a normal distribution as $\langle \varpi, \sigma \rangle \in N(0, 0.01)$ due to the backward of measuring terminal devices or a significant power changing of wind farms. Fig. 4 shows different SFR curves solved by BF-SFR/simulator under two residual conditions mentioned before. For a comprehensive comparison of BF-SFR/simulator with different grid-connected generator types and different UV settings, the impact of introducing wind farms into frequency supporting is considered in Fig. 4. Accordingly, “Case 1” in Fig. 4 represents the frequency dynamic curve without (“w/o”) considering frequency supporting of wind farms, whilst “Case 2” represents the curve with (“w/”) considering the frequency regulation produced by wind farms.

In Fig. 4, both curves of $\Delta f(t)$ solved by simulator and BF-SFR are close, it demonstrates the validness of the BF-SFR. Specially, the maximum value of $\Delta f(t)$ in Case 2 no matter in Fig. 4(a) or Fig. 4(b) is much minor than its counterpart in Case 1, leading to smoother frequency dynamic response and better frequency security performance. It declares that the security of frequency dynamic would be improved if additional frequency supporting generated by wind farms is integrated. Furthermore, the changing of $\Delta f(t)$ in a large residual setting is significantly intense than that in the minor residual situation. It depicts that the UV characteristic of intermittent resource cannot be ignored, especially in the low-inertia grid caused by a high share of renewable resource.

Another feature of BF-SFR different from previous analytical SFR, time-discretized SFR and simulator is that BF-SFR can not only capture the chronological changing trajectory of $\Delta f(t)$ with multiple control schemes but also provide its posterior information, e.g., CDF, PDF, $1/2$ and $1/4$ quartiles, etc. Fig. 5 shows the posterior probabilistic density distribution and associated quartile level of $\Delta f(t)$ under different residual conditions. Fig. 6 illustrates the union probabilistic density distribution of $\Delta f(t)$ in the entire simulation analysis interval (0s – 30s).

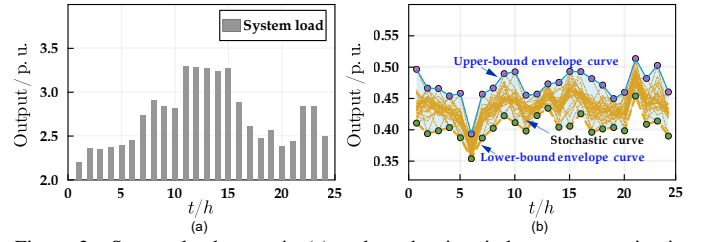


Figure 3. System load curve in (a) and stochastic wind power scenarios in (b) in the modified IEEE 6 bus test system.

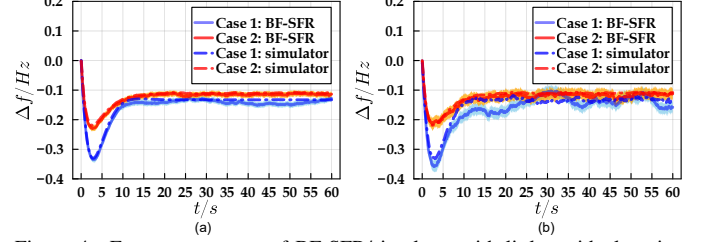


Figure 4. Frequency curves of BF-SFR/simulator with little residual setting in (a) and large residual condition in (b).

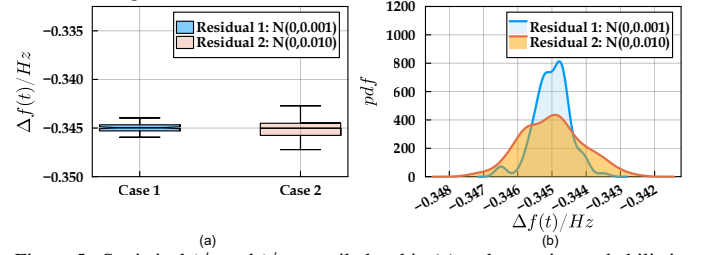


Figure 5. Statistical $1/2$ and $1/4$ quantile level in (a) and posterior probabilistic density distribution in (b) of $\Delta f(t)$ at time-to-nadir under different residual conditions.

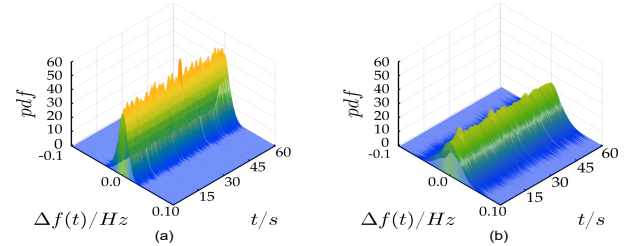


Figure 6. Union probabilistic density distribution of $\Delta f(t)$: $t \in [0s, 60s]$ under minor residual condition $N(0, 0.001)$ in (a) and relatively large residual condition $N(0, 0.01)$ in (b).

In Fig. 6, the probabilistic density distribution of $\Delta f(t)$ converges to a certain distribution at the end of the simulation time, it reflects that SFR in this case has a stationary probabilistic distribution. Especially, the distribution of $\Delta f(t)$ at the minor residual condition is sharper than its counterpart at the relatively large residual condition, leading to reduced uncertain risks. Hence, the security of frequency dynamic can be well maintained if limited UV factors are incorporated. On the contrary, if there are a great number of UV derivation from converters introducing into the grid, the possible value of $\Delta f(t)$ would become broader, it leads to a difficult prediction and re-dispatching issue. Therefore, the binding of SFR at a significant UV residual condition is essential by defining the $1/2$ quartile and $1/4$ quartile filtered from sampled frequency dynamic *filters* (see Fig. 5(b)) through the proposed BF-SFR method.

A.2. TUC v.s. FDUC v.s. CCFCUC(the proposed)

To check the performance of introducing frequency dynamic requirements via BF-SFR into UC problems, TUC, [16], and recent previous frequency-dynamic UC (FDUC) model, [5], are applied as benchmarks and sequentially compared with the

Table II
SCHEDULED COST INCLUDING UNITS' SHUT-ON COST, SHUT-DOWN COST
AND FUEL COST PRODUCED BY TUC/FDUC/CCFDUC.

Models	shut-up cost	shut-down cost	fuel cost	total cost
TUC	$9.10 \times 10^3 \$$	$3.50 \times 10^3 \$$	$4.04 \times 10^5 \$$	$4.10 \times 10^5 \$$
FDUC	$9.10 \times 10^3 \$$	—	$4.81 \times 10^5 \$$	$4.90 \times 10^5 \$$
CCFDUC	$9.10 \times 10^3 \$$	—	$4.82 \times 10^4 \$$	$4.91 \times 10^5 \$$

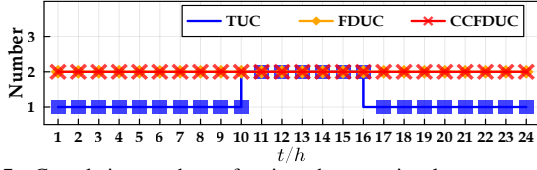


Figure 7. Cumulative numbers of activated conventional generators through TUC/FDUC/CCFDUC in the modified IEEE 6 bus test system.

proposed CCFDUC model (see (20a) – (21n)). The differences between FDUC and CCFDUC lie in the construction of frequency nadir constraints. In the context of boundary conditions representing frequency dynamic requirements, the limit of RoCoF and nadir are, respectively, $1.0 Hz/s$ and $0.5 Hz$. The residual condition describing UV derivation during frequency dynamic processes is $(\varpi, \sigma) \in N(0, 0.001)$. Accordingly, Fig. 10 compares the calculated scheduled costs and commitment results produced by TUC, FDUC and CCFDUC.

In Table III, both schedule costs solved by FDUC/CCFDUC are close, it demonstrates the feasibility of integrating SFR via BF-SFR into UC. In comparison with the latter two frequency-dynamic UC models, all units' fuel cost through TUC is minor than that through FCUC and CCFDUC, while units' shut-on/shut-down costs using TUC are higher than its counterpart. It reflects that more conventional generators run at a bit uneconomical level in FDUC/CCFDUC over the entire dispatching horizons but only similar activated generators exist in TUC during limited peak-load periods for the sake of active power balance restriction. Note that FDUC/CCFDUC consider the frequency supporting benefit from wind farms and BESS, these grid-connected devices must preserve a certain frequency containment reserve for keeping adequate frequency regulation capacities. In this perspective, these grid-connected generators other than conventional generators through FDUC/CCFDUC run at a lack of economic point compared with the one via TUC. Therefore, activated conventional generators through FDUC/CCFDUC must produce more output for keeping active power balance. The comparison of accumulated output of conventional generators through TUC ($24.976 MW$), FDUC ($26.404 MW$ in Fig. 8(a)) and CCFDUC ($26.402 MW$ in Fig. 8(b)) demonstrated this explanation.

Furthermore, the number of activated conventional generators in Fig. 7 through TUC is broadly minor than that through FDUC/CCFDUC expect for limited peak-load periods. This issue can be more pronounced at 1h–9h and 17h–24h. During these period internals, only G1 is activated through TUC but G1 and G2 keep online through FDUC/CCFDUC. It is because that the scheduled generators produced by frequency-dynamic UC schemes must dispatch more conventional generators to keep online in order to maintain an appropriate inertia level, but this issue is implicitly ignored in the TUC. Therefore, a conclusion can be drawn that the impact of incorporating SFR problems into UC would bring more generators to keep online to maintain a suitable inertia degree and frequency supporting

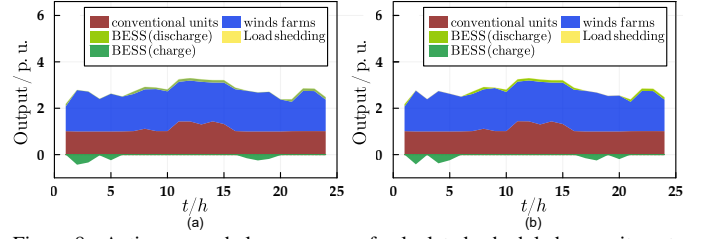


Figure 8. Active power balance curves of calculated scheduled commitments produced by TUC/FDUC/CCFDUC in the modified IEEE 6 bus test system.

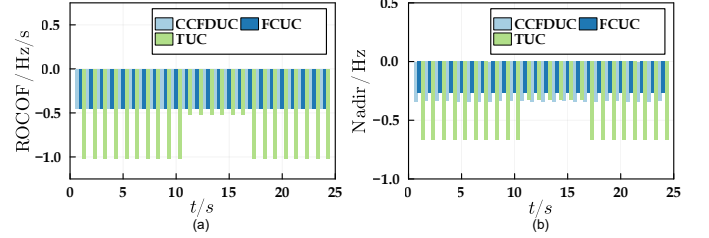


Figure 9. The distribution of RoCoF in (a) and nadir in (b) corresponding to scheduled commitments through TUC/FDUC/CCFDUC in the modified IEEE 6 bus test system.

capacity, resulting in safer frequency dynamic response against mismatch power disturbance.

To compare the effectiveness of introducing SFR via BF-SFR into UC studies, Fig. 9 statistics chronological curves of RoCoF and frequency nadir regarding scheduled commitments produced by TUC/FDUC/CCFDUC. It can be found that the scheduled results through FDUC/CCFDUC satisfy predefined frequency dynamic thresholds, but TUC does not. As a result, the necessity of introducing SFR into UC issues can be well demonstrated.

Nevertheless, the values of RoCoF/nadir with similar commitment results in Fig. 9 solved by TUC and FDUC/CCFDUC still has a slight difference. This phenomenon can be found and highlighted at 11h–16h in Fig. 9. At these periods, both calculated commitment results through TUC/FDUC/CCFDUC are similar, i.e., G1/G2 is on and G3 is off. In spite of this, there still exist several improvements of RoCoF and frequency nadir in the scheduled results produced by FDUC/CCFDUC. It is because that wind farms and BESS are took into account to participate into frequency supporting within FDUC/CCFDUC but TUC does not. Since the maximum of RoCoF is inversely proportional to the system inertia according to eq.(10), thereby, the integrating of wind farm with VI control can increase the system inertia and reduce RoCoF, and the benefit of droop-controlled wind farm and BESS results in an increase in available frequency regulation capacity, facilitating smoother frequency response and adequate frequency reserve inspired by Eqs. (11), (14) and (19). The specific frequency curve of scheduled commitments via TUC/FDUC/CCFDUC at $t = 10h$ in Fig. 10 verified this explanation. It can be found in Fig. 10 that the frequency nadir using FDUC/CCFDUC is smaller than that through TUC, leading to smoother frequency response curve and adequate frequency reserve.

Next, Fig. 14 explores the evolution of scheduling results via CCFDUC with various residual settings. The scheduling cost will rise with the increase of external residual influences; in the meantime, the risk of abandoned wind output and forced-load-curtailment for preventing power-balance violation would also increase. As the residual changes within a relatively low interval between 1×10^{-3} and 2×10^{-3} , the scheduling cost

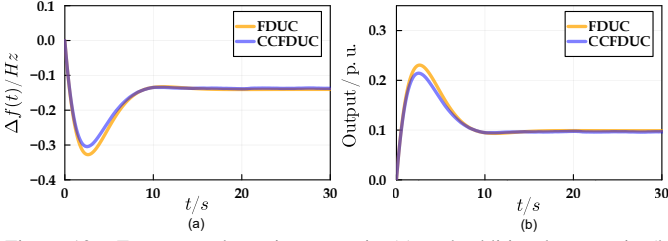


Figure 10. Frequency dynamic curves in (a) and additional output in (b) through TUC/FDUC/CCFDUC in the modified IEEE 6 bus test system.

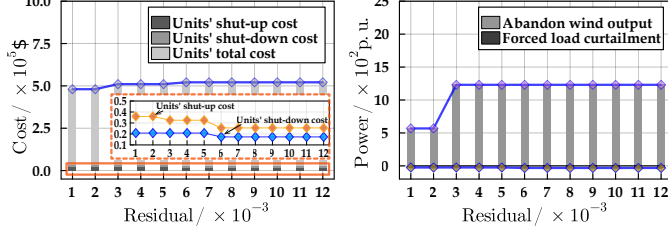


Figure 11. Change of scheduled cost and abandoned power through CCFDUC with different residual settings.

Table III

SCHEDULED COST INCLUDING UNITS' SHUT-ON COST, SHUT-DOWN COST AND FUEL COST PRODUCED BY TUC/FDUC/CCFDUC.

Models	shut-up cost	shut-down cost	fuel cost	total cost
TUC	$1.54 \times 10^4 \$$	$0.31 \times 10^4 \$$	$1.62 \times 10^6 \$$	$1.64 \times 10^6 \$$
FDUC	$4.18 \times 10^4 \$$	$2.71 \times 10^4 \$$	$1.73 \times 10^6 \$$	$1.81 \times 10^6 \$$
CCFDUC	$3.49 \times 10^4 \$$	$1.67 \times 10^4 \$$	$1.81 \times 10^6 \$$	$1.86 \times 10^6 \$$

through CCFDUC increases slowly, it indicates that the minor residual has a negligible effect on the final scheduling result. However, when the residual changes from 2×10^{-3} to 3×10^{-3} , the scheduling results have a relatively obvious increase. This is mainly because some inactivated units in previous minor residual settings are required to be shut up in such condition. And, when the residual continuously increases from 3×10^{-3} to 10×10^{-3} , due to the fact that more units keep active and the system inertia has maintained at a relatively high degree, hence, the scheduling cost and power abandonment growth are maintained at a relatively flat curve. From this perspective, the necessity and significance of introducing UV into UC studies is well clarified.

B. Modified IEEE 118 test system

The system contains 54 conventional units, 186 lines and 91 loads. The cumulative installed capacity of conventional generators amounts to 7,220MW, while the peak-load reaches 5,516.08MW. In addition, the system encompasses 3 wind farms (G55, G56, G57), located on buses (24, 25, 26), respectively. Each wind farm has a installed capacity of 500MW. The criteria of RoCoF and nadir are 2.0Hz/s and 0.5Hz. More boundaries about all units' physical operation parameters and frequency parameters can be found in Ref. [17]. an increase of load (approximately 10% of peak load) is chosen to define a representative power disturbance. Table II presents the dispatching costs through TUC/FDUC/CCFDUC. Meanwhile, Fig. 14 statistics the number of activated generators over the dispatching horizon. Figure 19 illustrates the change of RoCoF and nadir in relation to various obtained scheduling commitments through TUC/FDUC/CCFDUC.

In table II, the scheduled costs and activated units' number through FDUC/CCFDUC exhibit a bit greater value compared to those through TUC. The major distinction for this difference lies in a reconsideration of frequency dynamic requirements.

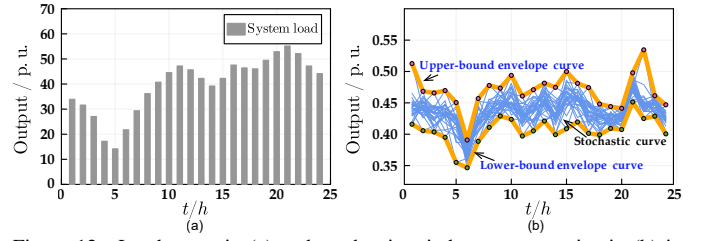


Figure 12. Load curve in (a) and stochastic wind power scenarios in (b) in the modified IEEE 118 bus test system.

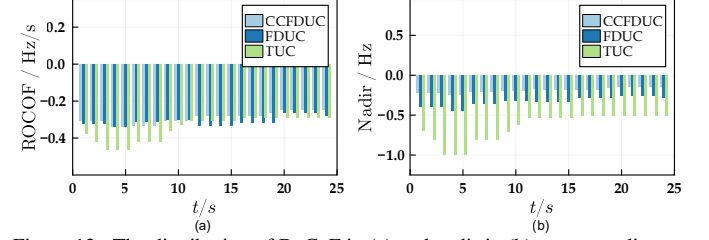


Figure 13. The distribution of RoCoF in (a) and nadir in (b) corresponding to scheduled commitments through TUC/FDUC/CCFDUC in the modified IEEE 118 bus test system.

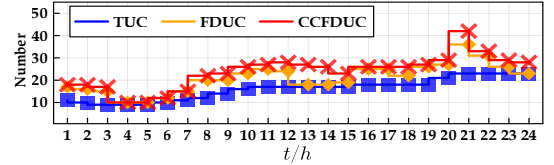


Figure 14. Cumulative numbers of activated conventional generators through TUC/FDUC/CCFDUC in the modified IEEE 118 bus test system.

Such units with adequate frequency regulation capabilities are prioritized in FDUC/CCFDUC, and this selection of active generators utilizing this logicism is particularly evident during low-load periods (see scheduling periods 3h–6h in Fig. 14). It can be observed in Fig. 14 that the number of activated generators through TUC is lower compared to those activated through FDUC/CCFDUC. It is because that the system necessitates a restricted number of conventional generators for maintaining power balance. Nevertheless, these activated generators behind TUC may not provide an adequate level of the system inertia, resulting in a limited capability for these units to keep frequency dynamic security. Therefore, supplementary generators are compelled to remain operational with a reduced output so as to sustain the required amount of the system inertia.

The number of activated generators using FDUC and CCFDUC exhibits similarity, hence reinforcing the validity of the suggested model. Nevertheless, there are still minor disparities in the scheduled results employed by these two models under restricted dispatching intervals. For instance, at a specific time of 21h, the number of conventional generators determined by FDUC is 36, but the number determined using CCFDUC is 40. The discrepancy between FDUC/CCFDUC can be attributed to the altered formulation of frequency restrictions that pertain to frequency dynamic security. The frequency constraints in FDUC stem from an analytical SFR approach, [12, 18, 19], with an implicitly free UV assumption. In contrast, the frequency limits in CCFDUC are based on the BF-SFR that incorporates specific UV assumptions. Given the consideration of both the advantages of additional frequency control through converters and the associated fluctuations that may lead to UV residuals, CCFDUC tends to strike a balance, and this balance involves maximizing the incorporation of converters to enhance system

frequency security while mitigating the adverse impact of UV issues. Noted that the nadir exhibited by CCFDUC is superior to that of FDUC. This indicates a higher level of robustness in terms of scheduling obligations.

VI. CONCLUSION

This paper presents a novel well-designed BF-SFR method for encoding frequency dynamic requirements in CCFDUC. The suggested model allows for a flexible consideration of sophisticated frequency control schemes and stochastic residuals representing UV issues. Furthermore, the convex reformulation of the chance-constraint nadir constraints derived from BF-SFR is discussed. Two cases are then carried out to check the validness and scalability of BF-SFR and FDUC methodologies.

Three findings indicate that: *i*) The trajectory of frequency derivation solved by BF-SFR is consistent with the simulated curve, and the probabilistic distribution of frequency derivation under different residual settings can be well visualized through BF-SFR. *ii*) Introducing frequency dynamic requirement in UC problems may increase the scheduled cost and the number of grid-connected generators, nevertheless, the resulting scheduling result from FDUC/CCFDUC is beneficial in terms of ensuring system frequency security. *iii*) CCFDUC has better performance in balancing the participation of converters in frequency support and avoiding excessive UV perturbations.

REFERENCES

- [1] J. F. Restrepo and F. D. Galiana, "Unit commitment with primary frequency regulation constraints," *IEEE Trans. Power Syst.*, vol. 20, no. 4, pp. 1836–1842, 2005.
- [2] F. Teng, V. Trovato, and G. Strbac, "Stochastic scheduling with inertia-dependent fast frequency response requirements," *IEEE Trans. Power Syst.*, vol. 31, no. 2, pp. 1557–1566, 2015.
- [3] Z. Chu, U. Markovic, G. Hug, and F. Teng, "Towards optimal system scheduling with synthetic inertia provision from wind turbines," *IEEE Trans. Power Syst.*, vol. 35, no. 5, pp. 4056–4066, 2020.
- [4] T. Ding, Z. Zeng, M. Qu, J. P. Catalão, and M. Shahidepour, "Two-stage chance-constrained stochastic thermal unit commitment for optimal provision of virtual inertia in wind-storage systems," *IEEE Trans. Power Syst.*, vol. 36, no. 4, pp. 3520–3530, 2021.
- [5] Z. Zhang, E. Du, F. Teng, N. Zhang, and C. Kang, "Modeling frequency dynamics in unit commitment with a high share of renewable energy," *IEEE Trans. Power Syst.*, vol. 35, no. 6, pp. 4383–4395, 2020.
- [6] Y. Zhang, H. Cui, J. Liu, F. Qiu, T. Hong, R. Yao, and F. Li, "Encoding frequency constraints in preventive unit commitment using deep learning with region-of-interest active sampling," *IEEE Trans. Power Syst.*, vol. 37, no. 3, pp. 1942–1955, 2021.
- [7] S. S. Oskouee, S. Kamali, and T. Amraee, "Primary frequency support in unit commitment using a multi-area frequency model with flywheel energy storage," *IEEE Trans. Power Syst.*, vol. 36, no. 6, pp. 5105–5119, 2021.
- [8] E. Perroy, D. Lucas, and V. Debusschere, "Provision of frequency containment reserve through large industrial end-users pooling," *IEEE Trans. Smart Grid*, vol. 11, no. 1, pp. 26–36, 2019.
- [9] Z. Wang and Y. Liu, "Adaptive terminal sliding mode based load frequency control for multi-area interconnected power systems with pv and energy storage," *IEEE Access*, vol. 9, pp. 120 185–120 192, 2021.
- [10] M. Garcia and R. Baldick, "Requirements for interdependent reserve types providing primary frequency control," *IEEE Trans. Power Syst.*, vol. 37, no. 1, pp. 51–64, 2021.
- [11] L. Yang, Z. Li, Y. Xu, J. Zhou, and H. Sun, "Frequency constrained scheduling under multiple uncertainties via data-driven distributionally robust chance-constrained approach," *IEEE Trans. Sustain Energy*, vol. 14, no. 2, pp. 763–776, 2023.
- [12] M. Paturet, U. Markovic, S. Delikaraoglou, E. Vrettos, P. Aristidou, and G. Hug, "Stochastic unit commitment in low-inertia grids," *IEEE Trans. Power Syst.*, vol. 35, no. 5, pp. 3448–3458, 2020.
- [13] H. Zhang, R. Li, Y. Chen, Z. Chu, M. Sun, and F. Teng, "Risk-aware objective-based forecasting in inertia management," *IEEE Trans. Power Syst.*, pp. 1–11, 2023.
- [14] Y. Yuan, Y. Zhang, J. Wang, Z. Liu, and Z. Chen, "Enhanced frequency-constrained unit commitment considering variable-droop frequency control from converter-based generator," *IEEE Trans. Power Syst.*, vol. 38, no. 2, pp. 1094–1110, 2023.
- [15] M. Lubin, O. Dowson, J. Dias Garcia, J. Huchette, and B. Legat, "JuMP 1.0: Recent improvements to a modeling language for mathematical optimization," *Math Program Comput*, 2023.
- [16] Y. Zhang, J. Wang, B. Zeng, and Z. Hu, "Chance-constrained two-stage unit commitment under uncertain load and wind power output using bilinear benders decomposition," *IEEE Trans. Power Syst.*, vol. 32, no. 5, pp. 3637–3647, 2017.
- [17] P. Demetriou, M. Asprou, J. Quiros-Tortos, and E. Kyriakides, "Dynamic iee test systems for transient analysis," *IEEE Syst J*, vol. 11, no. 4, pp. 2108–2117, 2015.
- [18] P. M. Anderson and M. Mirheydar, "A low-order system frequency response model," *IEEE Trans. Power Syst.*, vol. 5, no. 3, pp. 720–729, 1990.
- [19] Q. Shi, F. Li, and H. Cui, "Analytical method to aggregate multi-machine sfr model with applications in power system dynamic studies," *IEEE Trans. Power Syst.*, vol. 33, no. 6, pp. 6355–6367, 2018.