



1. Description

1.1. Project

Project Name	ClimateNode360
Board Name	custom
Generated with:	STM32CubeMX 6.18.0
Date	07/22/2026


1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103C8Tx
MCU Package	LQFP48
MCU Pin number	48

1.3. Core(s) information

Core(s)	Arm Cortex-M3
---------	---------------

2. Pinout Configuration

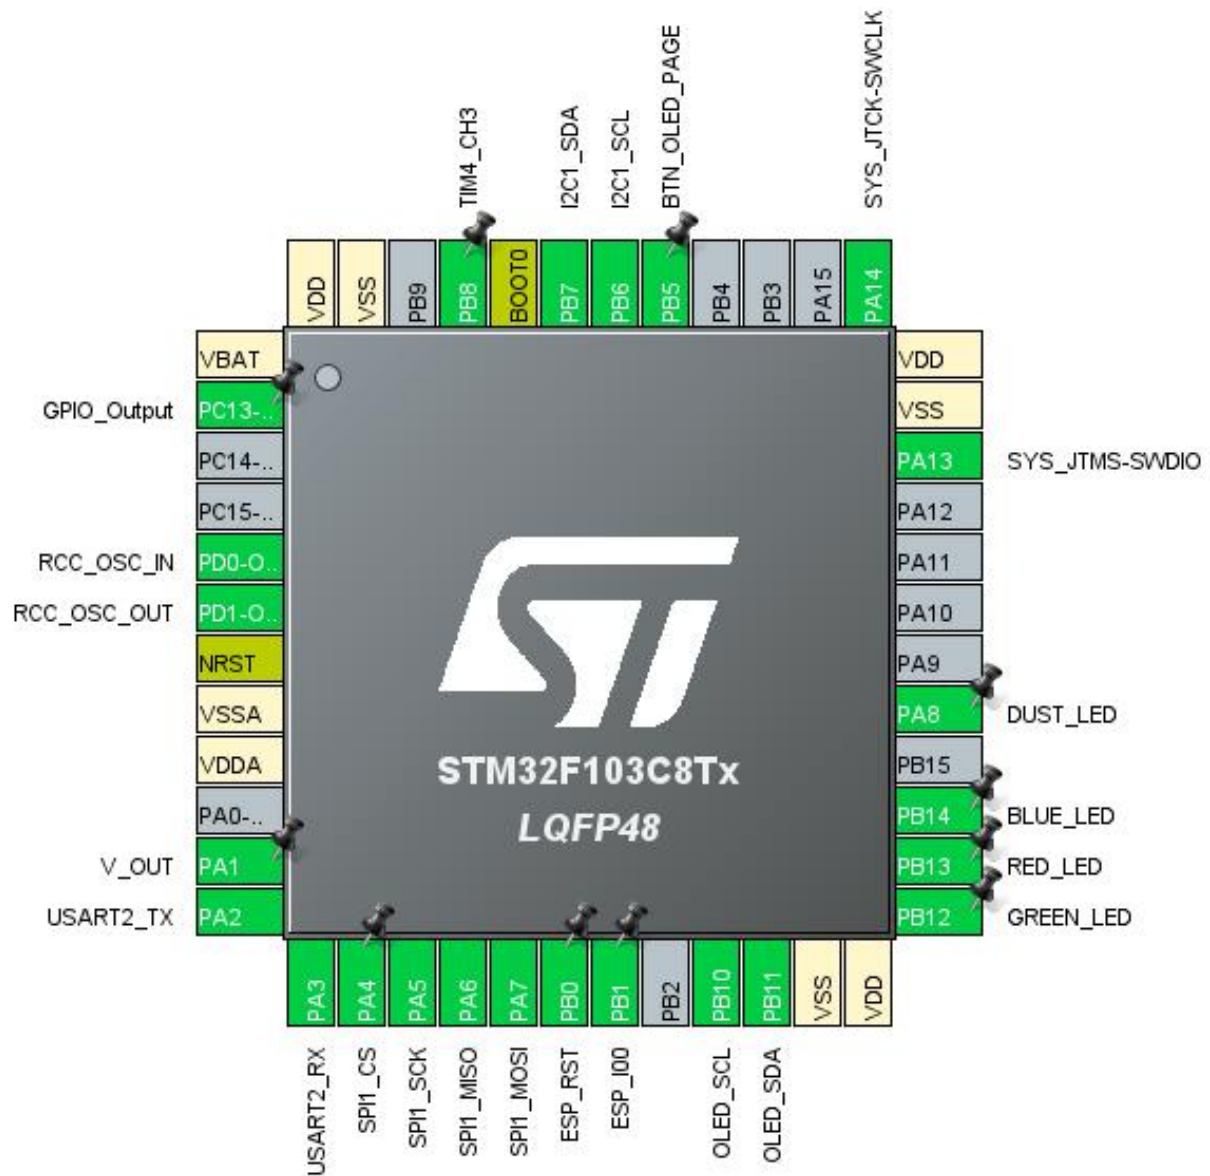


3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13-TAMPER-RTC *	I/O	GPIO_Output	
5	PD0-OSC_IN	I/O	RCC_OSC_IN	
6	PD1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	VSSA	Power		
9	VDDA	Power		
11	PA1	I/O	ADC1_IN1	V_OUT
12	PA2	I/O	USART2_TX	
13	PA3	I/O	USART2_RX	
14	PA4 *	I/O	GPIO_Output	SPI1_CS
15	PA5	I/O	SPI1_SCK	
16	PA6	I/O	SPI1_MISO	
17	PA7	I/O	SPI1_MOSI	
18	PB0 *	I/O	GPIO_Output	ESP_RST
19	PB1 *	I/O	GPIO_Output	ESP_I00
21	PB10	I/O	I2C2_SCL	OLED_SCL
22	PB11	I/O	I2C2_SDA	OLED_SDA
23	VSS	Power		
24	VDD	Power		
25	PB12 *	I/O	GPIO_Output	GREEN_LED
26	PB13 *	I/O	GPIO_Output	RED_LED
27	PB14 *	I/O	GPIO_Output	BLUE_LED
29	PA8 *	I/O	GPIO_Output	DUST_LED
34	PA13	I/O	SYS_JTMS-SWDIO	
35	VSS	Power		
36	VDD	Power		
37	PA14	I/O	SYS_JTCK-SWCLK	
41	PB5 *	I/O	GPIO_Input	BTN_OLED_PAGE
42	PB6	I/O	I2C1_SCL	
43	PB7	I/O	I2C1_SDA	
44	BOOT0	Boot		
45	PB8	I/O	TIM4_CH3	
47	VSS	Power		
48	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

RIF configuration not available for STM32F103C8Tx

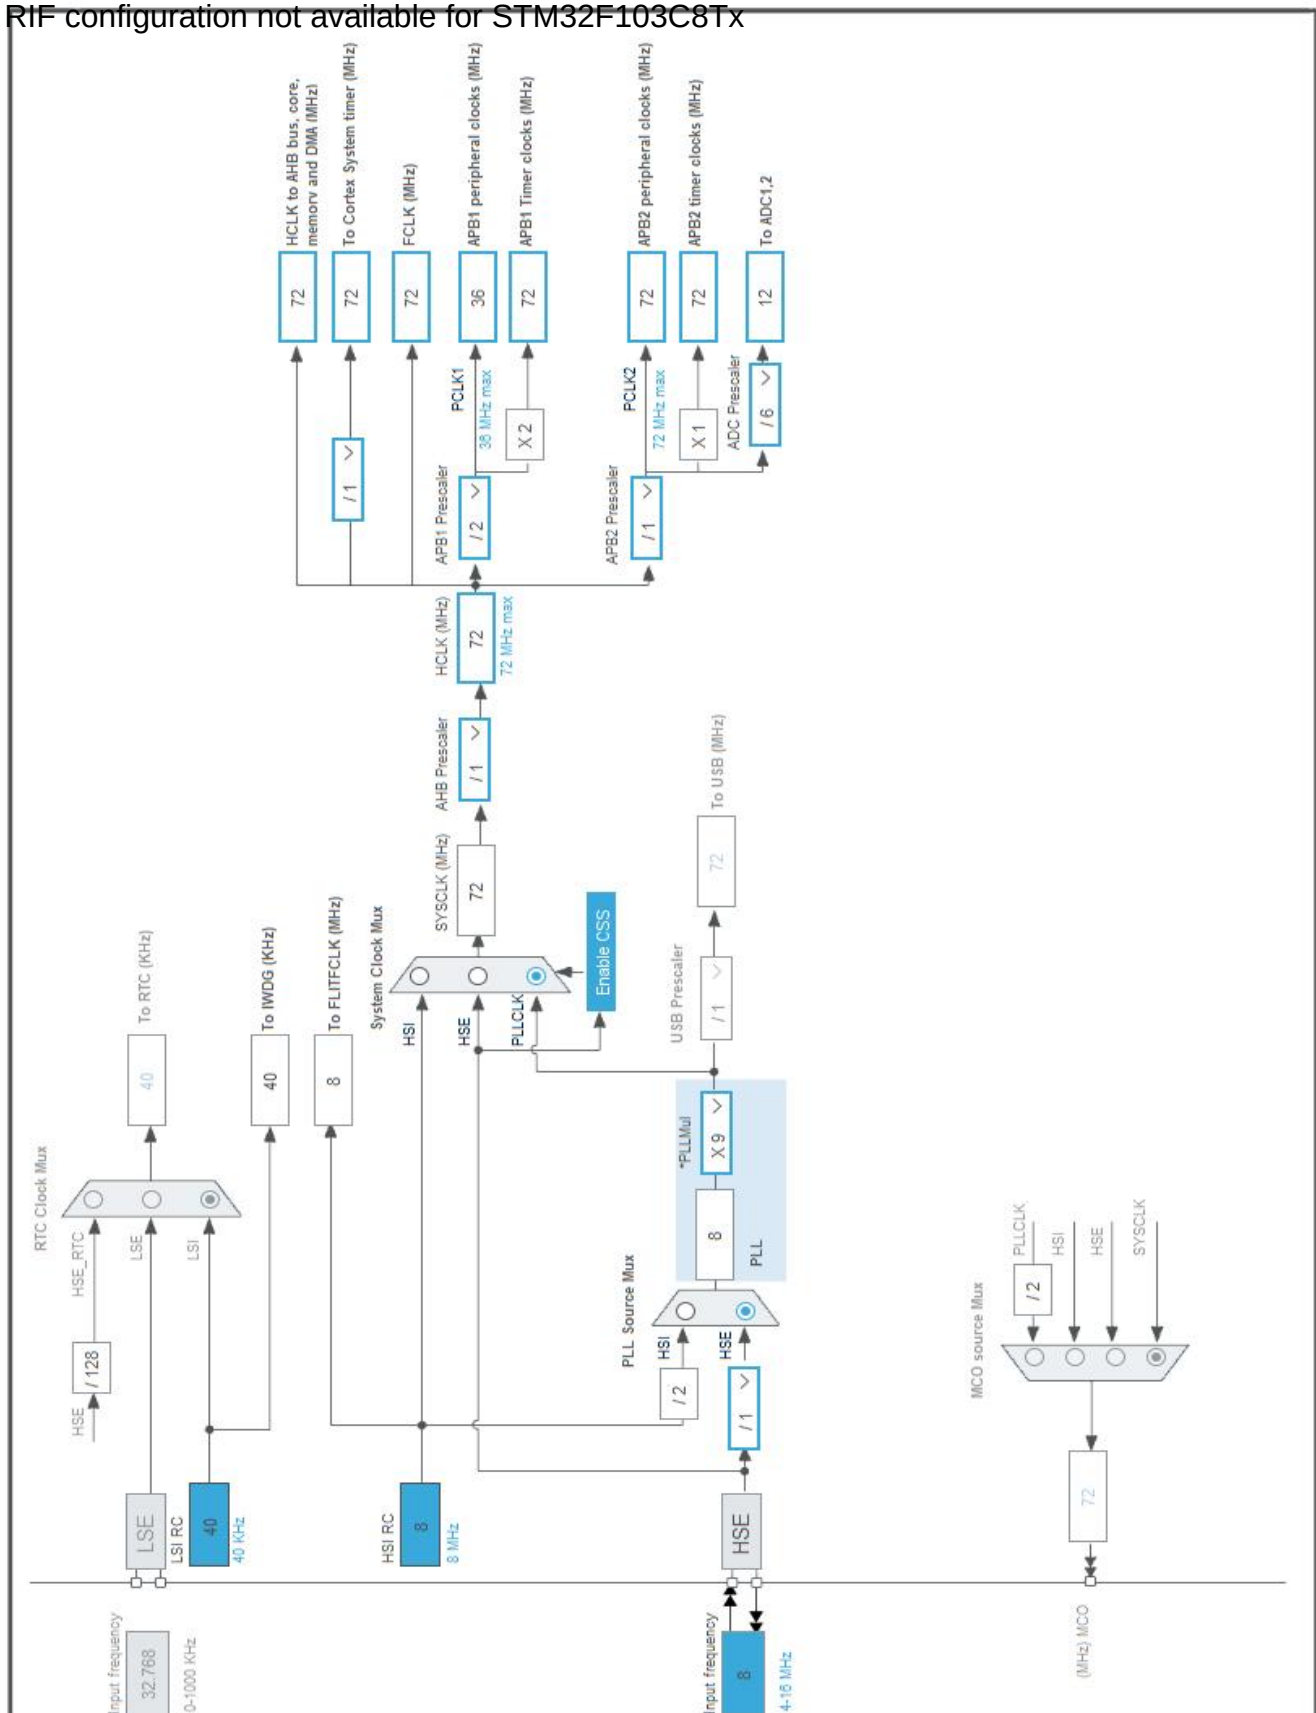

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103C8Tx
Datasheet	DS5319 Rev17

1.2. Parameter Selection

Temperature	25
Vdd	3.3

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator_LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	27 mA	14 μ A
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	100.1	105
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	2.71 mA
Battery Life	1 month, 21 days, 17 hours	Average DMIPS	61.0 DMIPS

1.6. Chart

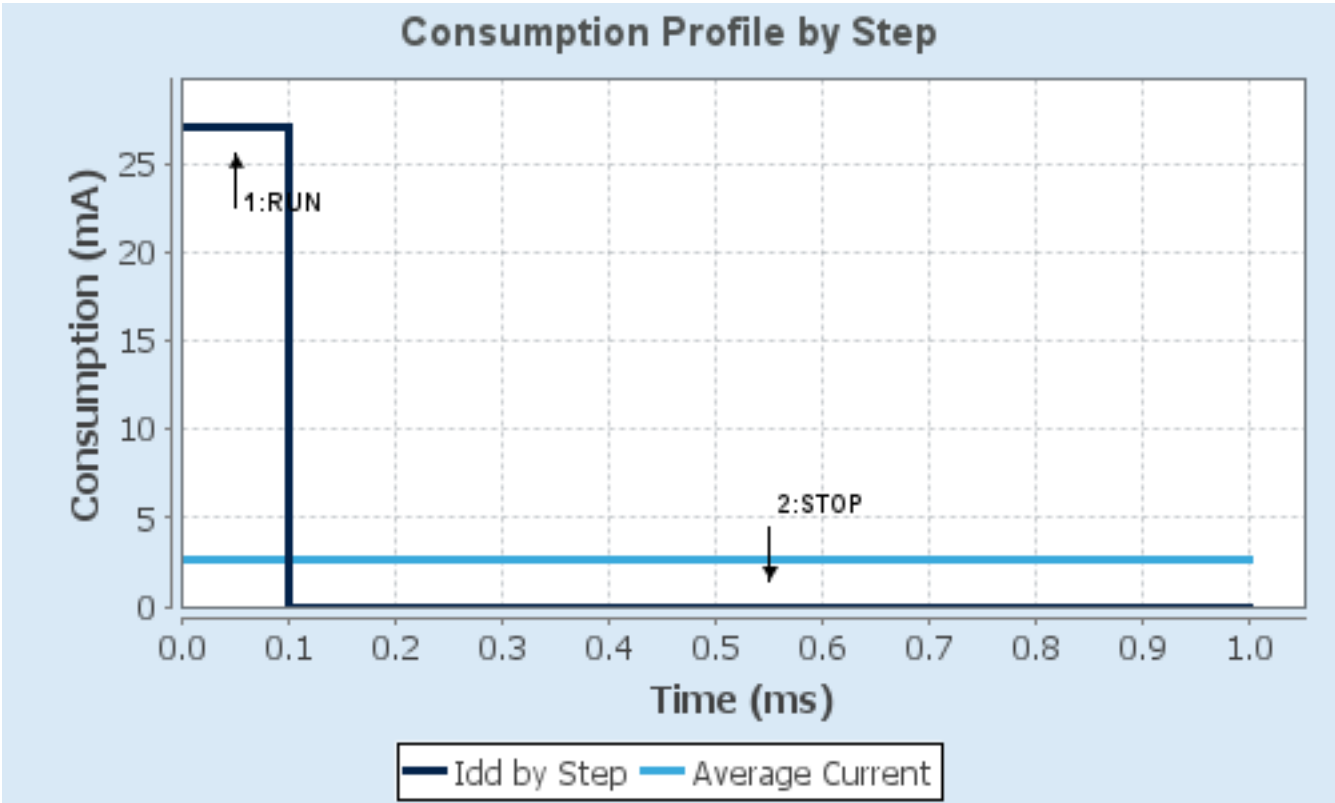

2. Software Project

2.1. Project Settings

Name	Value
Project Name	ClimateNode360
Project Folder	H:\Programing_Files_IoT\STM32CubeIDE\workspace_2.1.1\STM32F103C8T6\CI
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.7
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_ADC1_Init	ADC1
5	MX_I2C1_Init	I2C1
6	MX_I2C2_Init	I2C2
7	MX_TIM2_Init	TIM2
8	MX_SPI1_Init	SPI1
9	MX_USART2_UART_Init	USART2
10	MX_IWDG_Init	IWDG
11	MX_FATFS_Init	FATFS

Rank	Function Name	Peripheral Instance Name
12	MX_TIM4_Init	TIM4

3. Peripherals and Middlewares Configuration

3.1. ADC1

mode: IN1

3.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode Independent mode

ADC_Settings:

Data Alignment Right alignment

Scan Conversion Mode Disabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

ADC_Regular_ConversionMode:

Enable Regular Conversions Enable

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

Rank 1

Channel Channel 1

Sampling Time **28.5 Cycles ***

ADC_Injected_ConversionMode:

Enable Injected Conversions Disable

WatchDog:

Enable Analog WatchDog Mode false

3.2. I2C1

I2C: I2C

3.2.1. Parameter Settings:

Master Features:

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features:

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

3.3. I2C2

I2C: I2C

3.3.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

3.4. IWDG

mode: Activated

3.4.1. Parameter Settings:

Clocking:

IWDG counter clock prescaler	256 *
IWDG down-counter reload value	4095

3.5. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

3.5.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

3.6. SPI1

Mode: Full-Duplex Master

3.6.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	256 *
Baud Rate	281.25 KBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

3.7. SYS

Debug: Serial Wire

Timebase Source: SysTick

3.8. TIM2

Clock Source : Internal Clock

3.8.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

3.9. TIM4

mode: Clock Source

Channel3: PWM Generation CH3

3.9.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	71 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

3.10. USART2

Mode: Asynchronous

3.10.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

3.11. FATFS

mode: User-defined

3.11.1. Set Defines:

Version:

FATFS version R0.11

Function Parameters:

FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FASTSEEK (Fast seek function)	Enabled
USE_LABEL (Volume label functions)	Disabled
USE_FORWARD (Forward function)	Disabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Multilingual Latin 1 (OEM)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled
USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_TINY (Tiny mode)	Disabled
FS_NORTC (Timestamp feature)	Dynamic timestamp
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Disabled
FS_TIMEOUT (Timeout ticks)	1000
FS_LOCK (Number of files opened simultaneously)	2

* User modified value

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA1	ADC1_IN1	Analog mode	n/a	n/a	V_OUT
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	n/a	High *	
	PB7	I2C1_SDA	Alternate Function Open Drain	n/a	High *	
I2C2	PB10	I2C2_SCL	Alternate Function Open Drain	n/a	High *	OLED_SCL
	PB11	I2C2_SDA	Alternate Function Open Drain	n/a	High *	OLED_SDA
RCC	PD0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PD1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	n/a	High *	
	PA6	SPI1_MISO	Input mode	Pull-up *	n/a	
	PA7	SPI1_MOSI	Alternate Function Push Pull	n/a	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM4	PB8	TIM4_CH3	Alternate Function Push Pull	n/a	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	n/a	High *	
	PA3	USART2_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PC13-TAMPER-RTC	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI1_CS
	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ESP_RST
	PB1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	ESP_I00
	PB12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	GREEN_LED
	PB13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	RED_LED
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	BLUE_LED
	PA8	GPIO_Output	Output Open Drain *	No pull-up and no pull-down	Low	DUST_LED
	PB5	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BTN_OLED_PAGE

4.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA1_Channel1	Peripheral To Memory	Low
I2C2_TX	DMA1_Channel4	Memory To Peripheral	Low
USART2_TX	DMA1_Channel7	Memory To Peripheral	Low

ADC1: DMA1_Channel1 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Half Word
 Memory Data Width: Half Word

I2C2_TX: DMA1_Channel4 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

USART2_TX: DMA1_Channel7 DMA request Settings:

Mode: Normal
 Peripheral Increment: Disable
 Memory Increment: **Enable ***
 Peripheral Data Width: Byte
 Memory Data Width: Byte

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
DMA1 channel1 global interrupt	true	0	0
DMA1 channel4 global interrupt	true	0	0
DMA1 channel7 global interrupt	true	0	0
I2C2 event interrupt	true	0	0
I2C2 error interrupt	true	0	0
USART2 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1 and ADC2 global interrupts	unused		
TIM2 global interrupt	unused		
TIM4 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
DMA1 channel1 global interrupt	false	true	true
DMA1 channel4 global interrupt	false	true	true
DMA1 channel7 global interrupt	false	true	true
I2C2 event interrupt	false	true	true
I2C2 error interrupt	false	true	true
USART2 global interrupt	false	true	true

*** User modified value**

5. System Views

5.1. Category view

5.1.1. Current

Middleware				
FATFS				
System Core	Analog	Timers	Connectivity	Computing
DMA	ADC1	TIM2	I2C1	
GPIO		TIM4	I2C2	
IWDG			SPI1	
IVIC			USART2	
RCC				
SYS				

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32f1_bsd1.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32f1-ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32f1_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval_tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32c5.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/1239988349.pdf
Product Certifications	https://www.st.com/resource/en/certification_document/stm32_authentication_can.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2586-getting-started-with-stm32f10xxx-hardware-development-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2604-stm32f101xx-and-stm32f103xx-rtc-calibration-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an2945-stm8s-and-stm32-mcus-a-consistent-832bit-product-line-for-painless-migration-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3070-managing-the-driver-enable-signal-for-rs485-and-iolink-communications-with-the-stm32s-usart-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3095-stevalisv002v1-stevalisv002v2-3-kw-gridconnected-pv-system-based-on-the-stm32f103xx-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3108-stlm75-firmware-library-for-the-stm32f10x-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3128-stm32-embedded-graphic-objectstouchscreen-library-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3364-migration-and-compatibility-guidelines-for-stm32-microcontroller-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3422-migration-of-microcontroller-applications-from-stm32f1-to-stm32l1-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3427-migrating-a-microcontroller-application-from-stm32f1-to-stm32f2-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3429-stm32-proprietary-code-protection-overview-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an3961-stevalime003v1-demonstration-board-based-on-the-sthv748-ultrasound-pulser-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4070-250-w-grid-connected-microinverter-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4076-two-or-three-shunt-resistor-based-current-sensing-circuit-design-in-3phase-inverters-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4088-migrating-between-stm32f1-and-stm32f0-series-microcontrollers-

stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application_note/an4228-migrating-from-stm32f1-series-to-stm32f3-series-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4649-migrating-from-stm32f1-series-to-stm32l4-series--stm32l4-series-micronrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4724-stm32cube-firmware-examples-for-stm32f1-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4904-migration-of-microcontroller-applications-from-stm32f1-series-to-stm32f4-access-lines-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-

usb-typec-power-delivery-for-stm32-mcus-and-mpus-
stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signal-to-noise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4908-getting-started-with-uart-automatic-baud-rate-detection-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3154-how-to-use-can-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2606-introduction-to

	system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3126-how-to-use-dac-for-audio-and-waveform-generation-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3155-how-to-use-usart-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an3156-how-to-use-usb-dfu-protocol-in-bootloader-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4776-how-to-use-generalpurpose-timer-peripheral-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4989-introduction-to-debug-toolbox-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an6363-introduction-to-clock-requirements-and-calibration-for-stm32-mcus-stmicroelectronics.pdf
Device Option Lists	https://www.st.com/resource/en/device_option_list/opl_stm32f103_64k.zip
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es096-stm32f101x8b-stm32f102x8b-and-stm32f103x8b-mediumdensity-device-limitations-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/cd00161566.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0056-stm32f10xxx20xxx21xxx1xxxx-cortexm3-programming-manual-stmicroelectronics.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0075-stm32f10xxx-flash-memory-microcontrollers-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0008-stm32f101xx-stm32f102xx-stm32f103xx-stm32f105xx-and-stm32f107xx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn0516-overview-of-the-stm32f0xf100xxf103xx-and-stm32f2xxf30xf4xx-mcus-pmsm-singledual-foc-sdk-v40-stmicroelectronics.pdf

Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-devices-in-bga-packages-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um1561-stevalisv003v1-firmware-user-manual-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um1573-st7540-power-line-modem-firmware-stack-stmicroelectronics.pdf