


Features: 1.Wide range of applications 2.Onboard mature and stable ESP32E module, large-capacity 4M Byte Flash; 3.The I/O ports and UART program download ports of the ESP32 module are all led out to facilitate secondary development; 4.Power supply voltage AC220V/DC5-30V; 5.Onboard ESP32 module IO0 programmable button and reset button; Specification: AC/DC powered ESP32 four-way relay development board equipped with EsP32E WiFi&BLE; module, all I/O ports are led out, support Ac220V/DC5-30V power supply mode.For ESP32 Secondary development and learning, smart home wireless control and other occasions.Board size: 93*87mm Weight: 92g Packing list: 1*AC/DC power supply ESP32 four-way relay module 2*10 double row PIN 1*6 single row PIN4.1*Single line cap


ESP32 WIFIBluetoothBLE

Four-way relay module

LC-Relay-ESP32-4R-A2

Secondary development of ESP32-WRoOM development board

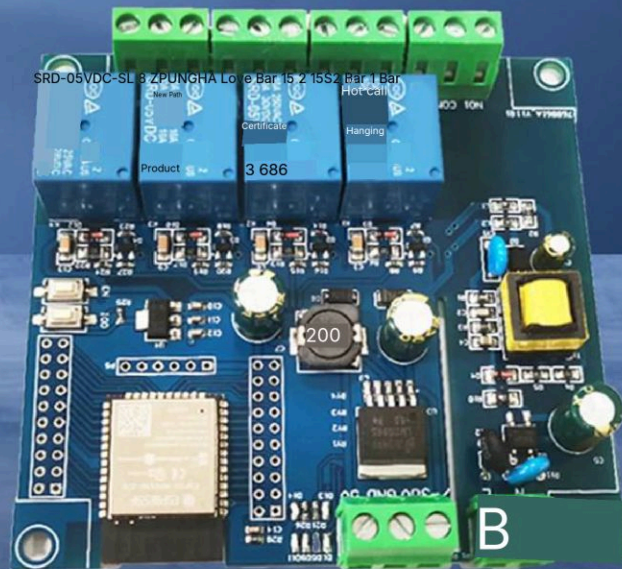

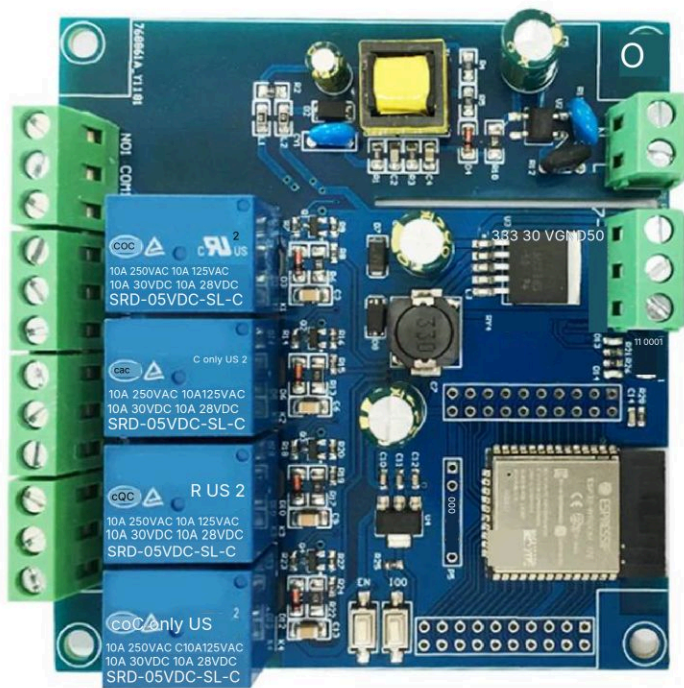

AC220V/DC5-30V

ESP32 four-way relay module

ESP32-WROoMdevelopment board

Provide For ADN reference code




ESP32WIFIE Bluetooth BLE four-way relay module

Hardware introduction and description


1.Boardsize:93*87mm

Weight: 92g

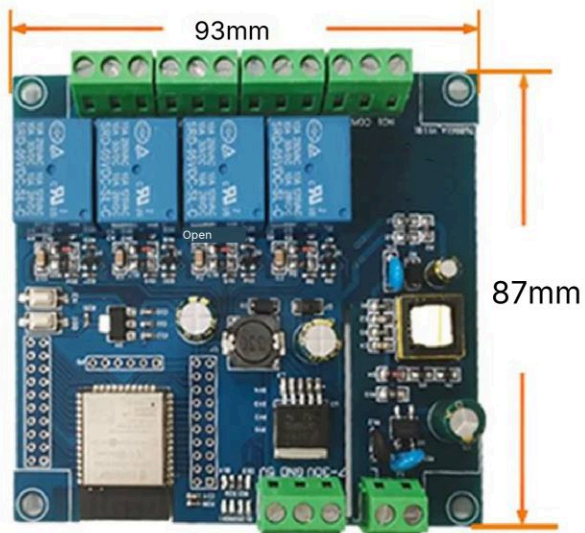




[b]

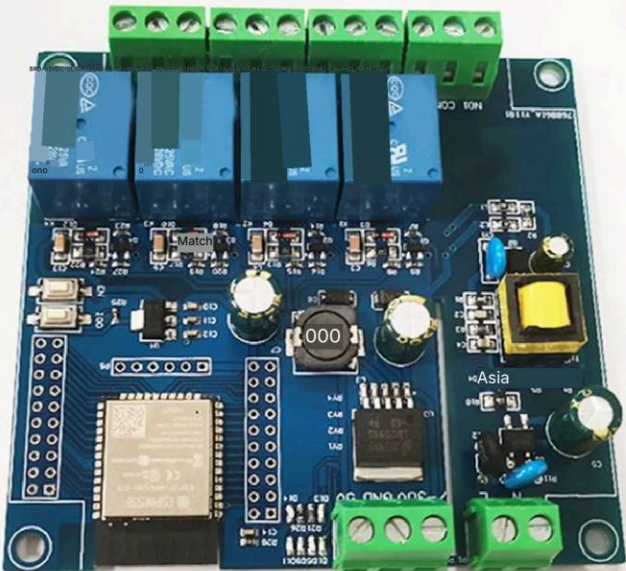

2, interface introduction

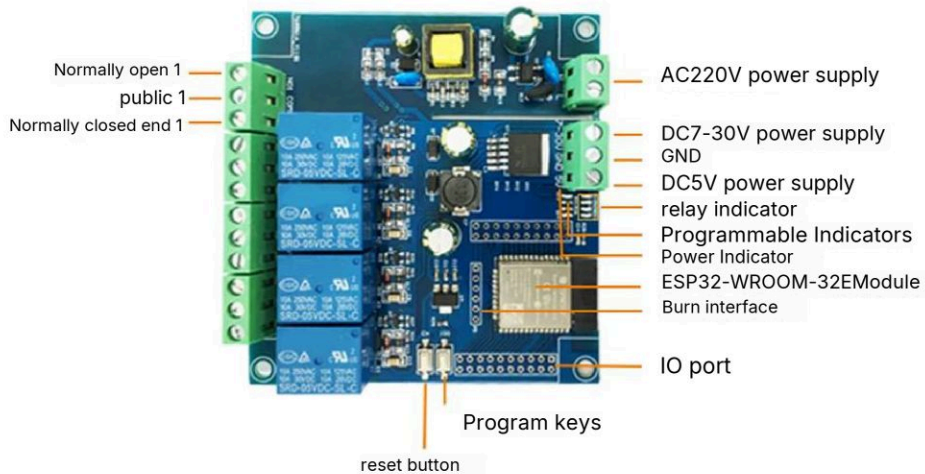

Programming port: GND,RX,TX,5VofESP32 are connectedto GND,TX,RX,5Vofexternal TTL serial port module respectively.IO0 needs to be connected to GND when downloading, and then disconnect the connection between IO0 and GND after downloading; connect;

Relay output:

NC:Normally closed terminal,short-circuit withCOMbefore the relay picks up,and hangs after picking up;

COM:Common terminal;


NO: Normally open,the relay is suspended before closing, and short-circuited withCOM after closing.

1.AC/DCpowered ESP32 WIFI Bluetooth BLE four-way relay module

2.2*10 double row PIN

3.1*6single row PIN

4.1" Single Wire Cap

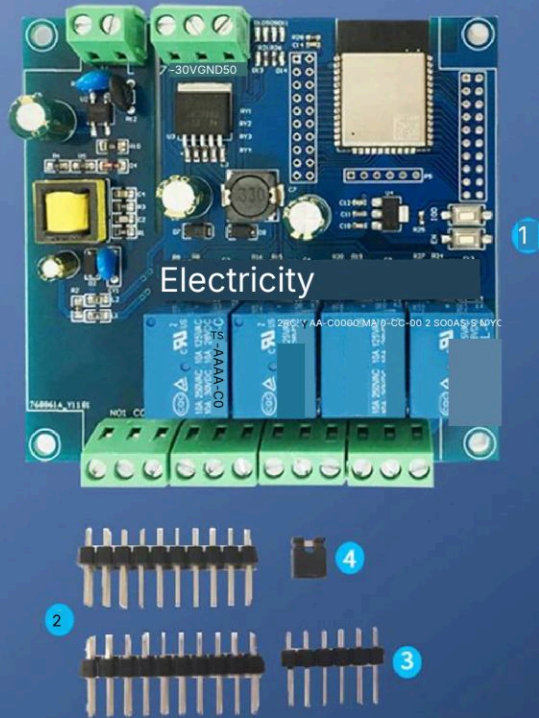

1ESP32four-wayrelaymoduledevelopmentboard


1

Onboard mature and stable ESP32-WROOM-32E module
Large capacity 4M Byte Flash;



2

The I/O ports and UART
program download ports of
the ESP32 module are all led
out to facilitate secondary
development;

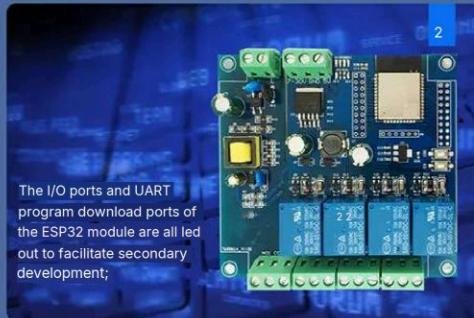


3

Power supply voltage AC220V/DC5-30V;




4

On-board EsP32 module cuts programming button and reset button

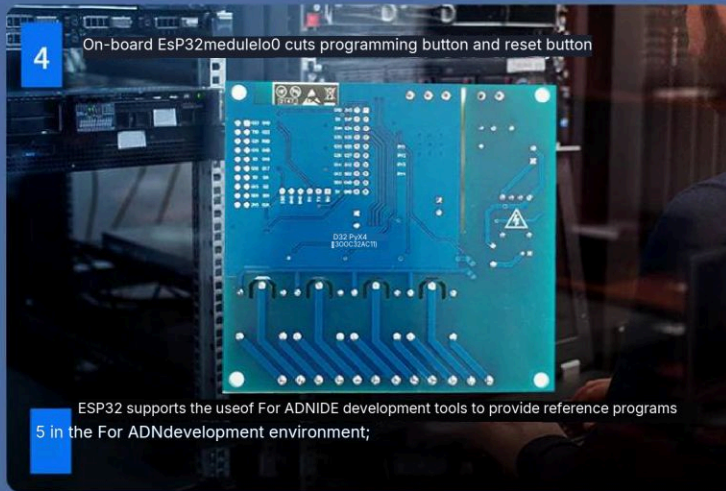


ESP32 supports the use of For ADNIDE development tools to provide reference programs 5 in the For ADN development environment;

6 Onboard 4-way 5V relay, output switch signal, Suitable for controlling loads whose working voltage is within AC250V/DC30V

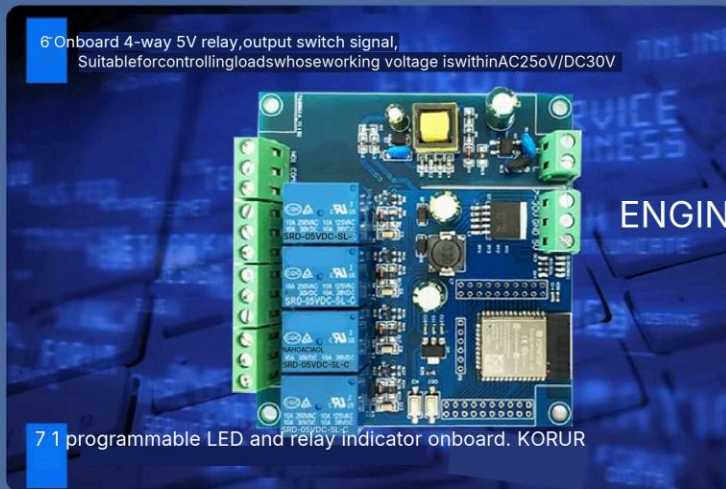


7 1 programmable LED and relay indicator onboard. KORUR


3. Find the installation path of the For ADN software, enter the hardware folder and create a new blank folder named espressif

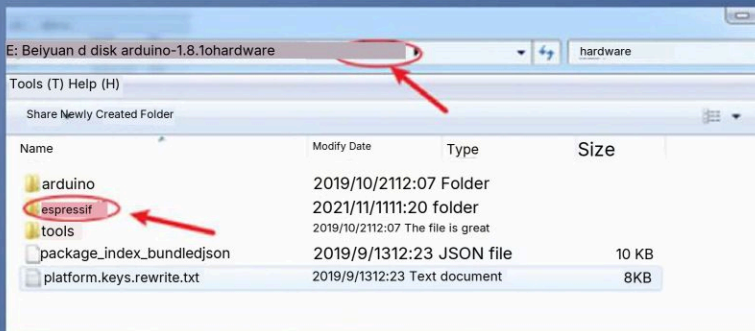


4, and then create a new blank folder named esp32 under the spre-sif folder

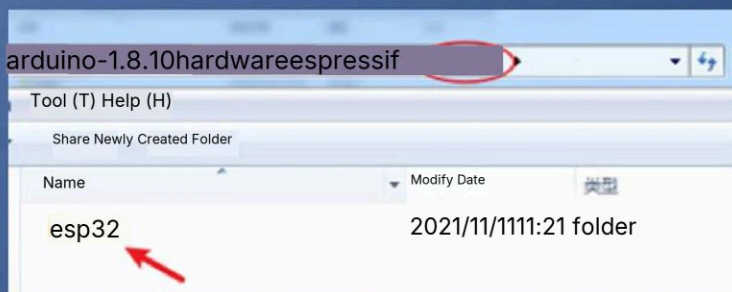

5.Unzip the downloaded compressed package and copy.the content to the esp32 folder.

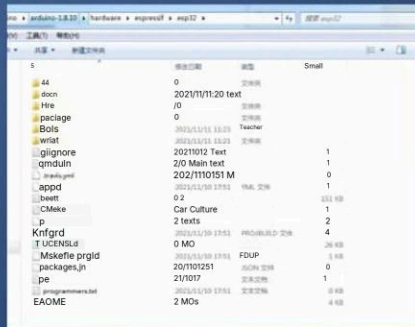

6.Enter the tools folder and click get.exe to run the program.(provided that your computer is already installed)

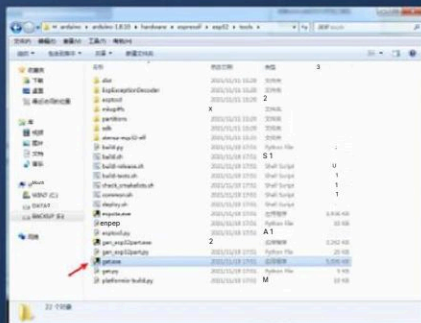

Restart the For ADN software, open the tool, development board, and select ESP Dev Module as the development board to indicate that the installation is successful.

5. Program download


1. Use the jumper cap to connect the IO0 and GND pins, prepare a TTL serial port module (such as FT232) and plug it into the computer USB. The connection method between the serial port module and the development board is as follows:

TTL serial port module	ESP32 development board
GND	GND
TX	RX
RX	TX
5V	5V

2. Click Tools-->Development Board in the menu bar, select the development board as ESP32 Dev Module

3. Open the program to be downloaded, click Tools-->Port in the menu bar to select the correct port number

4. After clicking "Upload" the program will be automatically compiled and downloaded to the development board, as follows:

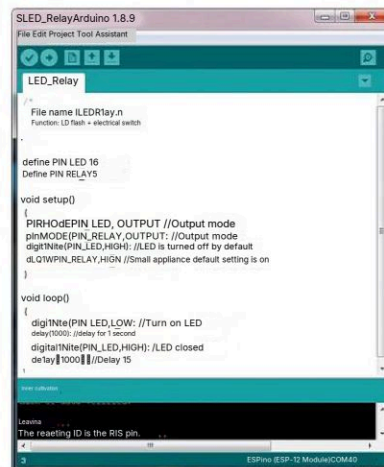

5. Finally, disconnect the connection between IO0 and GND, power on the development board again or press the reset button to run the program.

*Above from:

https://blog.csdn.net/Naisu_kun/article/details/84958561#_35

*toolsburn:

https://blog.csdn.net/qq_23940143/article/details/89841134