

# A Closed-Loop Subspace–RFS Framework for DOA Estimation and Multi-Target Tracking

Jin Ho Choi, *Member, IEEE*

**Abstract**—We present a closed-loop subspace–RFS framework that couples direction-of-arrival (DOA) estimation with random-finite-set (RFS) multi-target tracking and, unlike prior open-loop cascades, analyzes the coupling itself. The closed loop is *front-end-agnostic*: the tracker’s temporal prediction is fed back to refine the signal subspace of any subspace DOA estimator. We instantiate it with a higher-order-cumulant front-end (COP, which extends operation to the underdetermined regime  $K > M-1$ ; the resulting tracker is COP-RFS) and a covariance front-end (MUSIC). Our central contributions are theoretical: (i) a posterior Cramér–Rao bound for the *complete closed-loop* estimator–tracker, proving the temporal prior restores identifiability exactly where the data-only bound diverges; and (ii) a recasting of the subspace refinement as minimum-variance inverse-variance fusion on the Grassmann manifold, with a validation gate guaranteeing the loop never degrades performance. The framework is also *back-end-agnostic*, integrating track-oriented PHD, labeled multi-Bernoulli (LMB), and  $\delta$ -GLMB filters; a physics-based constant-acceleration model makes the  $\delta$ -GLMB back-end best for maneuvering targets, yielding our recommended configuration—a gated closed-loop front-end (COP, or the lower-variance MUSIC when determined) driving a physics-based, interchangeable SOTA back-end (here,  $\delta$ -GLMB). Monte-Carlo experiments (up to 500 trials, 95% confidence intervals) show that COP-RFS detects significantly more targets than a MUSIC–PHD baseline when  $K > M-1$ , and that the gated loop lowers low-SNR localization error by up to 56% for both front-ends while cutting moving-target identity switches by 15%, matching the open-loop baseline otherwise. We delineate the operating regime in which the higher-order front-end is advantageous rather than claiming uniform superiority.

**Index Terms**—Direction-of-arrival estimation, high-resolution, higher-order cumulants, underdetermined systems, multi-target tracking, probability hypothesis density filter, random finite sets, constrained optimization.

## I. INTRODUCTION

High-resolution direction-of-arrival (DOA) estimation is a fundamental problem in array signal processing with critical applications in radar, sonar, communications, and defense systems [2], [3]. Classical high-resolution subspace methods such as MUSIC [4], ESPRIT [5], and Capon’s MVDR beamformer [6] achieve super-resolution beyond the Rayleigh limit but are restricted to the *overdetermined* case where the number of sources  $K$  does not exceed  $M-1$ , the number of sensors minus one. This constraint poses a significant challenge in modern defense scenarios where a sensor array may face more incoming threats than its aperture can nominally resolve.

Higher-order statistics (HOS) offer a principled approach to overcome this limitation [7], [8]. By exploiting the  $2\rho$ th-order cumulant structure of received signals, Choi and Yoo [1] proposed a high-resolution Subspace Constrained Optimization of the Pseudo-spectrum (COP) algorithm, which extends the effective array aperture through a *virtual array* of size  $M_v = \rho(M-1) + 1$ , thereby resolving up to  $\rho(M-1)$  sources—far exceeding the classical  $M-1$  limit. Alternative approaches to the underdetermined DOA problem include sparse array designs such as nested arrays [9] and coprime arrays [10]–[12], as well as sparsity-based and sparse-Bayesian-learning methods [13]–[15]. However, these approaches either require specialized array geometries or assume signal sparsity, whereas COP operates on standard ULAs and exploits higher-order cumulant structure. A key advantage of higher-order cumulants is the automatic suppression of Gaussian noise, since all cumulants of order greater than two vanish for Gaussian processes [16]—a robustness that holds even for spatially-colored, unknown noise. These strengths come at the cost of higher estimation variance; a central premise of this work is that embedding HOS *within a closed loop* turns that liability into a net gain, as the tracker’s temporal prior supplies exactly the variance reduction that HOS lacks.

While the COP algorithm addresses the static underdetermined DOA problem, practical defense applications require *multi-target tracking*: maintaining continuous trajectories across successive radar scans even as targets maneuver, appear, or cross. Existing DOA-tracking pipelines typically chain a covariance-based estimator (MUSIC, ESPRIT) with a Bayesian tracker (Kalman, PHD) in an *open-loop* fashion, where the tracker consumes DOA estimates but provides no feedback to the estimator. This design has two weaknesses: (i) the estimator cannot resolve  $K > M-1$  sources, and (ii) the tracker receives no help from higher-order signal structure.

The GM-PHD filter [17] provides an efficient approximation for RFS-based multi-target tracking, but the standard predict–update formulation does not maintain explicit track identity. Several extensions have addressed this limitation: Panta et al. [18] introduced data association schemes for the GM-PHD filter, Clark and Vo [19] analyzed convergence properties, and Georgescu and Willett [20] applied the GM-PHD to phased array DOA tracking. More fundamentally, the labeled multi-Bernoulli (LMB) and  $\delta$ -GLMB filters [21], [22] solve the track identity problem within the RFS-theoretic framework itself. However, none of these works exploit higher-order cumulant structure for the DOA estimation front-end, nor do they establish a closed-loop feedback between tracker predictions and the estimation subspace.

This paper proposes a *gated closed-loop subspace–RFS*

J. H. Choi is with SmartEAR AI, Daegu, South Korea (e-mail: jinho-choi@smartear.co.kr).

Manuscript received XXXX XX, 2026; revised XXXX XX, 2026.

*framework* (Fig. 1) that, unlike prior open-loop cascades, makes the estimator–tracker *coupling* the object of design and analysis: a subspace DOA front-end feeds a random-finite-set (RFS) tracker whose temporal prediction is fed back—through a two-stage validation gate and a Temporal-COP (T-COP) refinement—to sharpen the estimator. The framework is deliberately modular: *front-end-agnostic* (higher-order-cumulant COP, yielding COP-RFS for the underdetermined regime  $K > M-1$ , or covariance MUSIC) and *back-end-agnostic* (PHD, LMB, or  $\delta$ -GLMB). Its *recommended configuration*—the destination of this paper—is a gated closed-loop front-end (COP, or MUSIC when determined) driving a *physics-based*, interchangeable SOTA back-end ( $\delta$ -GLMB), robust across source count, SNR, motion, and signal type. The principal contributions are:

**Contribution 1 (Theory): A posteriori CRB for the complete closed loop.** We derive the first Cramér–Rao bound for the coupled higher-order-cumulant/RFS tracker (Theorem 1), via the posterior-CRB recursion. It proves that the temporal prior strictly tightens the bound in the Löwner order and, crucially, that it *restores identifiability*—keeping the bound finite—precisely in the underdetermined regime where the data-only bound diverges. This replaces the unsupported “exact” static cumulant CRLB of the conference version with an honest, closed-loop analysis.

**Contribution 2 (Theory): Provably minimum-variance T-COP refinement.** We recast tracker-aided T-COP subspace refinement as a basis-invariant inverse-variance fusion on the Grassmann manifold and prove it is minimum-variance (Theorem 2), with an explicit prior-accuracy condition  $\|\mathbf{b}\|^2 < D(\sigma_e^2 + \sigma_p^2)$  under which it strictly reduces estimation error. A validation gate enforces this condition, so the closed loop *never degrades* performance—improving when the prior is accurate (low SNR, slow targets) and falling back to open-loop COP otherwise. This corrects the gauge-dependent linear interpolation of the conference version.

**Contribution 3 (Practice): Underdetermined capability and honest evaluation.** A physics-based track-oriented PHD (TO-PHD) back-end preserves track identity through crossings via predict–identify–update association. Through Monte-Carlo experiments (up to 500 trials) with 95% confidence intervals, and against MUSIC and closed-loop-MUSIC baselines, we show that COP-RFS detects significantly more targets than the cascade baseline when  $K > M-1$ , and we *delineate the operating regime* in which the higher-order front-end is advantageous rather than claiming uniform superiority. A  $2 \times 2$  (front-end  $\times$  loop) study confirms that the closed-loop refinement improves *both* the COP and MUSIC front-ends, establishing it as a front-end-agnostic principle rather than a COP-specific trick. A tracking back-end ablation (standard GM-PHD, our TO-PHD, the labeled multi-Bernoulli (LMB) filter, and the full  $\delta$ -GLMB filter) further shows the framework is *back-end-agnostic*: all three labeled trackers cut identity switches by an order of magnitude over GM-PHD, with the full  $\delta$ -GLMB giving the cleanest identity, LMB the best aggregate accuracy, and TO-PHD a lightweight alternative. Endowing the  $\delta$ -GLMB with a physics-based constant-acceleration model makes it best-in-class for *maneuvering* targets, yielding our

recommended configuration: a gated closed-loop front-end driving a physics-based, interchangeable SOTA back-end ( $\delta$ -GLMB). Sequential-deflation COP (SD-COP) is included as a supporting mechanism for the super-underdetermined regime.

The remainder develops each component of this system: the signal/cumulant model (§II) and closed-loop T-COP front-end (§III); the track-oriented PHD back-end (§IV); the CRLB (§V) and the two central theorems (§VI); and the Monte-Carlo evaluation (§VII).

## II. SIGNAL MODEL AND HIGHER-ORDER CUMULANTS

### A. Array Signal Model

Consider a ULA with  $M$  sensors and inter-element spacing  $d = \lambda/2$ , where  $\lambda$  is the wavelength. In the presence of  $K$  narrowband far-field sources impinging from directions  $\{\theta_k\}_{k=1}^K$ , the received signal vector at snapshot  $t$  is

$$\mathbf{x}(t) = \mathbf{A}(\boldsymbol{\theta}) \mathbf{s}(t) + \mathbf{n}(t), \quad t = 1, \dots, T \quad (1)$$

where  $\mathbf{A}(\boldsymbol{\theta}) = [\mathbf{a}(\theta_1), \dots, \mathbf{a}(\theta_K)] \in \mathbb{C}^{M \times K}$  is the steering matrix with

$$\mathbf{a}(\theta) = [1 \quad e^{j2\pi d \sin \theta} \quad \dots \quad e^{j2\pi(M-1)d \sin \theta}]^T, \quad (2)$$

$\mathbf{s}(t) \in \mathbb{C}^K$  contains the source signals, and  $\mathbf{n}(t) \sim \mathcal{CN}(\mathbf{0}, \sigma^2 \mathbf{I}_M)$  is additive white Gaussian noise. When  $K > M-1$ , the system (1) is *underdetermined*, and classical subspace methods based on the second-order covariance matrix  $\mathbf{R} = \mathbb{E}[\mathbf{x}\mathbf{x}^H]$  cannot resolve all sources.

### B. Higher-Order Cumulant Matrix

The  $2\rho$ th-order cumulant of the received signal exploits the non-Gaussian structure of source signals to extend the effective aperture [1], [23]. For  $\rho = 2$  (fourth-order), the cumulant element is defined as

$$c_4(i_1, i_2, i_3, i_4) = \text{cum}(x_{i_1}, x_{i_2}, x_{i_3}^*, x_{i_4}^*) \quad (3)$$

where  $\text{cum}(\cdot)$  denotes the joint cumulant. Using the sum co-array structure, the lag index  $\tau = (i_1 + i_2) - (i_3 + i_4)$  ranges over  $[0, 2(M-1)]$ , yielding a virtual array of size

$$M_v = \rho(M-1) + 1. \quad (4)$$

The cumulant matrix  $\mathbf{C}_{2\rho} \in \mathbb{C}^{M_v \times M_v}$  has the Hermitian Toeplitz structure

$$\mathbf{C}_{2\rho} = \mathbf{A}_v(\boldsymbol{\theta}) \boldsymbol{\Gamma}_s \mathbf{A}_v^H(\boldsymbol{\theta}) \quad (5)$$

where  $\mathbf{A}_v(\boldsymbol{\theta}) \in \mathbb{C}^{M_v \times K}$  is the *virtual* steering matrix with extended aperture, and  $\boldsymbol{\Gamma}_s = \text{diag}(\gamma_1, \dots, \gamma_K)$  contains the source cumulant powers. The diagonal structure of  $\boldsymbol{\Gamma}_s$  in (5)—and hence the rank- $K$  virtual-array model—holds under the standard higher-order-statistics assumptions [7], [8], [23]: the  $K$  source signals are (A1) mutually statistically independent, (A2) non-Gaussian, and (A3) possess nonzero  $2\rho$ th-order autocumulants  $\gamma_k \neq 0$ . Under (A1)–(A3) all cross-cumulants between distinct sources vanish, so that the  $2\rho$ th-order cumulant tensor, reindexed by the sum-co-array lag  $\tau = (i_1 + i_2) - (i_3 + i_4)$ , collapses to the Hermitian Toeplitz matrix (5) with  $\mathbf{A}_v$  of full column rank  $K \leq M_v - 1$ ;

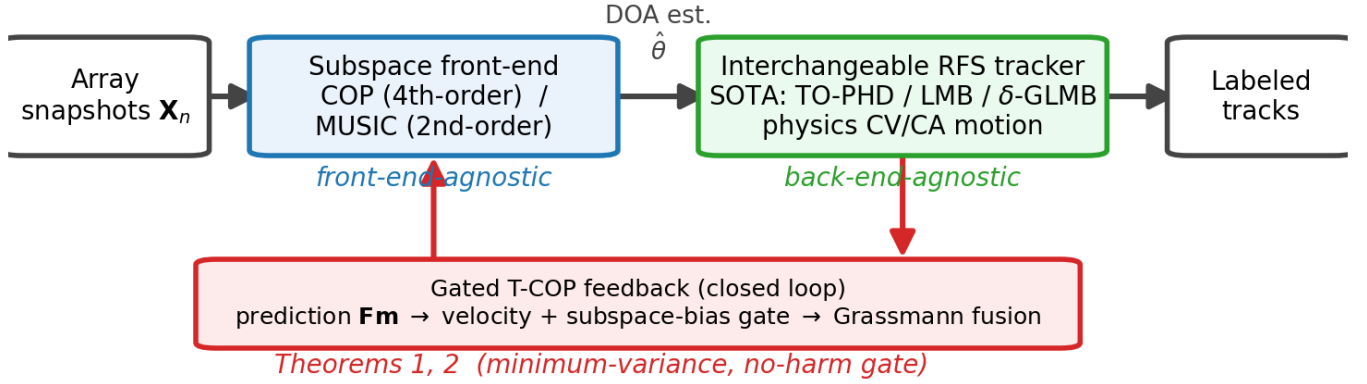


Fig. 1: The proposed gated closed-loop subspace-RFS framework. A front-end-agnostic subspace estimator (COP or MUSIC) feeds a back-end-agnostic RFS tracker (TO-PHD, LMB, or  $\delta$ -GLMB with physics-based CV/CA motion); the tracker's prediction is fed back through a validation gate and a minimum-variance T-COP refinement (Theorems 1–2) that guarantees the loop never degrades the open-loop estimate. The recommended configuration is a gated front-end (COP or MUSIC by regime) driving a physics-based, interchangeable SOTA back-end (here  $\delta$ -GLMB).

the detailed tensor-to-matrix reduction is given in [1], [23]. For Gaussian or vanishing-cumulant sources the higher-order gain degenerates and the classical  $M - 1$  limit is recovered. Crucially, *Gaussian noise does not contribute to (5)* since all cumulants of order  $> 2$  vanish for Gaussian processes [16]. This provides two key advantages:

- 1) **Extended degrees of freedom:** The virtual array  $M_v = \rho(M-1)+1$  resolves up to  $K_{\max} = \rho(M-1)$  sources—a factor- $\rho$  improvement over the classical  $M - 1$  limit, and the basis of the underdetermined capability.
- 2) **Gaussian-noise immunity:** Because all cumulants of order  $> 2$  vanish for Gaussian processes, the cumulant domain is insensitive to additive Gaussian noise of *arbitrary* covariance—including spatially-colored, unknown noise—whereas covariance-based methods require a known or white noise model. The effective cumulant-domain SNR scales as  $p_s^{\rho}/\sigma_c^2 \propto \text{SNR}^{\rho}$ .

The price of these advantages is a higher *estimation variance*: for a given snapshot count, fourth-order cumulants are noisier than the second-order covariance. A central theme of this paper is that the *closed loop offsets exactly this penalty*: the tracker-aided refinement of Section III-B (Theorem 2) provably reduces the cumulant-subspace error by a factor  $1/(1+\kappa)$ , so the higher-order aperture and noise immunity are obtained at a near-second-order variance. The higher-order front-end and the temporal feedback are thus *complementary*—HOS supplies the degrees of freedom and noise robustness that the loop cannot, while the loop supplies the variance reduction that HOS needs.

For  $M = 8$  sensors and  $\rho = 2$ , this yields  $M_v = 15$  virtual elements capable of resolving up to  $K_{\max} = 14$  sources—double the classical limit of 7.

**Remark (Dual-pathway construction).** The same virtual array (4) also arises by combining  $\rho$  second-order covariance matrices of *non-stationary* sources [1], attaining the extended aperture  $M_v = \rho(M-1)+1$  at second-order estimation variance—substantially lower than direct cumulant estimation. We use direct fourth-order cumulants here for generality; the

lower-variance pathway is the natural choice for non-stationary sources and narrows COP's variance gap relative to second-order methods.

### III. COP ALGORITHM FAMILY

#### A. Subspace COP (Base Algorithm)

The COP algorithm [1] performs DOA estimation by jointly optimizing over the signal and noise subspaces of the virtual cumulant matrix. The number of sources  $K$  is assumed known or estimated via information-theoretic criteria such as MDL [24]. Given the eigendecomposition

$$\mathbf{C}_{2\rho} = \mathbf{U}_s \mathbf{\Lambda}_s \mathbf{U}_s^H + \mathbf{U}_n \mathbf{\Lambda}_n \mathbf{U}_n^H \quad (6)$$

where  $\mathbf{U}_s \in \mathbb{C}^{M_v \times K}$  and  $\mathbf{U}_n \in \mathbb{C}^{M_v \times (M_v - K)}$  span the signal and noise subspaces, respectively, the COP pseudo-spectrum is

$$P_{\text{COP}}(\theta) = \frac{\mathbf{a}_v^H(\theta) \mathbf{U}_s \mathbf{U}_s^H \mathbf{a}_v(\theta)}{\mathbf{a}_v^H(\theta) \mathbf{U}_n \mathbf{U}_n^H \mathbf{a}_v(\theta)} \quad (7)$$

which simultaneously maximizes the signal subspace projection (numerator) and minimizes the noise subspace projection (denominator).

**Peak detection.** The DOA estimates are extracted from  $P_{\text{COP}}(\theta)$  via local maximum finding with minimum-separation gating. Specifically, a scan angle  $\theta_i$  is identified as a *local peak* if

$$P_{\text{COP}}(\theta_i) > P_{\text{COP}}(\theta_{i-1}) \text{ and } P_{\text{COP}}(\theta_i) > P_{\text{COP}}(\theta_{i+1}). \quad (8)$$

All local peaks are ranked by descending amplitude, and the top  $K$  peaks are selected subject to a minimum angular separation constraint  $|\hat{\theta}_j - \hat{\theta}_k| > \delta_{\min}$  for all previously selected estimates, where  $\delta_{\min} = 1^\circ$  prevents multiple detections from the same mainlobe. The resulting DOA estimates  $\{\hat{\theta}_k\}_{k=1}^K$  are sorted in ascending order.

### B. Temporal COP (T-COP)

For non-stationary scenarios where source DOAs change between radar scans, batch cumulant estimation becomes sub-optimal [25]. T-COP introduces temporal accumulation with exponential forgetting:

$$\hat{\mathbf{C}}_{2\rho}^{(n)} = \alpha \hat{\mathbf{C}}_{2\rho}^{(n-1)} + (1 - \alpha) \mathbf{C}_{2\rho}^{(n)} \quad (9)$$

where  $\hat{\mathbf{C}}_{2\rho}^{(n)}$  is the accumulated cumulant estimate at scan  $n$ ,  $\mathbf{C}_{2\rho}^{(n)}$  is the instantaneous cumulant from the current scan, and  $\alpha \in (0, 1)$  is the forgetting factor. With per-scan weights  $w_i = (1 - \alpha)\alpha^i$ , the effective number of snapshots after  $n$  scans is the *Kish effective sample size*—the squared sum of the weights divided by the sum of their squares—scaled by the per-scan snapshot count  $T$ :

$$\begin{aligned} T_{\text{eff}}^{(n)} &= T \frac{\left(\sum_{i=0}^{n-1} w_i\right)^2}{\sum_{i=0}^{n-1} w_i^2} \\ &= T \frac{(1 - \alpha^n)^2 (1 + \alpha)}{(1 - \alpha)(1 - \alpha^{2n})} \xrightarrow{n \rightarrow \infty} T \frac{1 + \alpha}{1 - \alpha}, \end{aligned} \quad (10)$$

which grows monotonically to a finite steady state. We emphasize that the naive geometric weight sum  $T(1 - \alpha^n)/(1 - \alpha)$  is *not* the effective sample size, since it ignores the unequal squared contributions of the exponential weights; (10) follows directly from  $\text{Var}(\hat{\mathbf{C}}_{2\rho}^{(n)}) \propto \sum_i w_i^2$  for the weighted estimator. The T-COP pseudo-spectrum at scan  $n$  is computed as

$$P_{\text{T-COP}}^{(n)}(\theta) = \frac{\mathbf{a}_v^H(\theta) \hat{\mathbf{U}}_s^{(n)} \hat{\mathbf{U}}_s^{(n)H} \mathbf{a}_v(\theta)}{\mathbf{a}_v^H(\theta) \hat{\mathbf{U}}_n^{(n)} \hat{\mathbf{U}}_n^{(n)H} \mathbf{a}_v(\theta)} \quad (11)$$

where  $\hat{\mathbf{U}}_s^{(n)}$  and  $\hat{\mathbf{U}}_n^{(n)}$  are the signal and noise subspaces of  $\hat{\mathbf{C}}_{2\rho}^{(n)}$ .

**Tracker-aided subspace refinement.** When a multi-target tracker provides predicted DOAs  $\{\hat{\theta}_k^{\text{pred}}\}_{k=1}^{\hat{K}}$ —the constant-velocity *prediction*  $\hat{\theta}_k^{\text{pred}} = \theta_k + \dot{\theta}_k \Delta t$  propagated to the current scan, so that the prior stays unbiased even for moving targets—T-COP incorporates this prior information. The prior signal subspace is constructed from the predicted steering vectors:

$$\mathbf{U}_s^{\text{prior}} = \text{orth}\left(\mathbf{A}_v(\hat{\boldsymbol{\theta}}^{\text{pred}})\right) \in \mathbb{C}^{M_v \times \hat{K}} \quad (12)$$

and the refined subspace is obtained by an inverse-variance (BLUE) fusion on the Grassmann tangent space [26]. Unlike the gauge-dependent linear interpolation  $\text{orth}((1 - w_p)\mathbf{U}_s + w_p \mathbf{U}_s^{\text{prior}})$ —which is *not* a well-defined subspace operation, since  $\mathbf{U}_s \mapsto \mathbf{U}_s \mathbf{Q}$  for any  $\mathbf{Q} \in \mathcal{U}(K)$  represents the same subspace yet changes the interpolant—the proposed refinement is invariant to the basis gauge. We first align the prior basis to the estimate by the orthogonal Procrustes rotation

$$\mathbf{Q}^* = \mathbf{V} \mathbf{W}^H, \quad \mathbf{U}_s^H \mathbf{U}_s^{\text{prior}} = \mathbf{W} \boldsymbol{\Sigma} \mathbf{V}^H \quad (\text{SVD}), \quad (13)$$

then combine the estimate and the aligned prior in the normal (tangent) coordinates  $\mathbf{H}_{\text{est}}, \mathbf{H}_{\text{pri}}$  of the Grassmannian, reporting the result through the gauge-invariant projector  $\mathbf{P}_s = \mathbf{U}_s \mathbf{U}_s^H$ :

$$\begin{aligned} \hat{\mathbf{H}} &= (\boldsymbol{\Sigma}_{\text{est}}^{-1} + \boldsymbol{\Sigma}_{\text{pri}}^{-1})^{-1} (\boldsymbol{\Sigma}_{\text{est}}^{-1} \mathbf{H}_{\text{est}} + \boldsymbol{\Sigma}_{\text{pri}}^{-1} \mathbf{H}_{\text{pri}}), \\ \mathbf{P}_s^{\text{refined}} &= \text{retr}(\hat{\mathbf{H}}), \end{aligned} \quad (14)$$

where  $\boldsymbol{\Sigma}_{\text{est}}, \boldsymbol{\Sigma}_{\text{pri}}$  are the tangent-space error covariances of the data estimate and the aligned prior, and  $\text{retr}(\cdot)$  denotes the Grassmann retraction. The prior covariance is induced from the tracker's predicted-DOA covariance  $\mathbf{C}_\theta$  through the steering Jacobian,  $\boldsymbol{\Sigma}_{\text{pri}} = \mathbf{G} \mathbf{C}_\theta \mathbf{G}^H$  with columns  $\mathbf{G}_k \propto \mathbf{P}_{\mathbf{A}_v}^\perp \dot{\mathbf{a}}_v(\theta_k)$ ; in the isotropic special case  $\boldsymbol{\Sigma}_{\text{est}} = \sigma_e^2 \mathbf{I}$ ,  $\boldsymbol{\Sigma}_{\text{pri}} = \sigma_p^2 \mathbf{I}$  this recovers a scalar weight  $w_p = \sigma_e^2 / (\sigma_e^2 + \sigma_p^2)$ . The refinement (14) provably reduces the subspace MSE under an explicit, checkable prior-accuracy condition (Theorem 2, Section VI), creating a principled feedback loop in which accurate tracking lowers estimation error and improved estimation in turn sharpens tracking.

**Gated operation.** In deployment the refinement (14) is guarded by two gates (Algorithm 1), both of which must pass to engage the loop. A *velocity* gate resets the accumulator when the tracker's mean predicted DOA-rate exceeds  $\tau_v$  and—absent a reliable velocity estimate (e.g. at track initiation)—defaults conservatively to open-loop, so an early accumulation never smears moving sources. A *subspace-bias* gate  $d^2 \leq \delta_g$  then operationalizes Theorem 2's prior-accuracy condition, with  $d^2 = \frac{1}{2K} \|\mathbf{U}_s \mathbf{U}_s^H - \mathbf{U}^{\text{prior}} \mathbf{U}^{\text{prior}H}\|_F^2$  the normalized chordal distance between the data and prior subspaces—a checkable surrogate for  $\|\mathbf{b}\|^2 < D(\sigma_e^2 + \sigma_p^2)$ . When either fails the estimator returns *exactly* the open-loop COP estimate, guaranteeing no degradation (deployed  $\tau_v = 0.4^\circ/\text{scan}$ ,  $\delta_g = 0.3$ ,  $\alpha = 0.85$ ).

### C. Sequential Deflation COP (SD-COP)

SD-COP is a *supporting* extension—not a central contribution—that pushes operation into the super-underdetermined regime  $K > \rho(M - 1)$ ; it complements the closed-loop guarantee of Theorem 1, whose corollary shows that sources beyond the static virtual-array limit remain identifiable once the temporal prior makes  $\mathbf{J}_{k|k-1} \succ 0$  on the data-unresolved subspace. When  $K$  approaches the COP capacity  $\rho(M - 1)$ , batch estimation accuracy degrades due to exhaustion of virtual degrees of freedom. SD-COP addresses this through iterative signal-domain deflation, analogous to successive interference cancellation (SIC) in communications [27]. Rather than deflating in the cumulant domain—which requires accurate estimation of source cumulant powers and is prone to error accumulation—SD-COP operates on the original received signal  $\mathbf{X}$  and recomputes the cumulant at each stage from the deflated signal residual.

At each stage, the already-estimated sources are reconstructed by regularized least squares and subtracted from the *original* received signal  $\mathbf{X}$ —always referencing the cumulative DOA set, so deflation never cascades error—after which COP is re-applied to the cumulant of the residual to discover further sources. Each stage respects the per-stage capacity  $K_{\text{batch}} \leq \rho(M - 1)$ , and an optional leave-one-out pass re-estimates each DOA from the residual of all others. As a supporting extension, we omit the (straightforward sequential) pseudocode.

**Algorithm 1** Gated T-COP refinement (single scan  $n$ )

---

**Require:** snapshot  $\mathbf{X}_n$ ; predictions  $\hat{\theta}^{\text{pred}}, \dot{\theta}^{\text{pred}}$  ( $\emptyset$  if unavailable); thresholds  $\tau_v, \delta_g$ ; forgetting  $\alpha$

- 1:  $\hat{\mathbf{C}} \leftarrow \text{cum}_{2\rho}(\mathbf{X}_n)$ ,  $\hat{K} \leftarrow$  source count
- 2: // **Gate 1 (velocity):** accumulation valid only for slow sources
- 3: **if**  $\hat{\theta}^{\text{pred}} \neq \emptyset$  **then**
- 4:    $m \leftarrow \text{mean}_k |\dot{\theta}_k^{\text{pred}}|$
- 5: **else**
- 6:    $m \leftarrow \infty$                       // no estimate  $\Rightarrow$  assume moving
- 7: **end if**
- 8:  $\text{slow} \leftarrow (\hat{\theta}^{\text{pred}} \neq \emptyset) \wedge (m < \tau_v)$
- 9: **if**  $\text{slow}$  **then**
- 10:    $\hat{\mathbf{C}}_{\text{acc}} \leftarrow \alpha \hat{\mathbf{C}}_{\text{acc}} + (1 - \alpha) \hat{\mathbf{C}}$                       // accumulate
- 11: **else**
- 12:    $\hat{\mathbf{C}}_{\text{acc}} \leftarrow \hat{\mathbf{C}}$                       // reset (current scan only)
- 13: **end if**
- 14: // **Gate 2 (subspace bias):** enforces Theorem 2 prior-accuracy
- 15:  $\text{prior\_ok} \leftarrow \text{false}$
- 16: **if**  $\text{slow} \wedge (\hat{\theta}^{\text{pred}} \neq \emptyset)$  **then**
- 17:    $\mathbf{U}_s \leftarrow$  signal subspace of  $\hat{\mathbf{C}}_{\text{acc}}$ ;  $\mathbf{U}^{\text{prior}} \leftarrow \text{orth}(\mathbf{A}_v(\hat{\theta}^{\text{pred}}))$
- 18:    $d^2 \leftarrow \frac{1}{2\hat{K}} \|\mathbf{U}_s \mathbf{U}_s^H - \mathbf{U}^{\text{prior}} \mathbf{U}^{\text{prior}H}\|_F^2$
- 19:    $\text{prior\_ok} \leftarrow (d^2 \leq \delta_g)$
- 20: **end if**
- 21: **if**  $\text{prior\_ok}$  **then**
- 22:    $P \leftarrow$  prior-refined T-COP spectrum via (14)
- 23:    $\hat{\theta} \leftarrow$  prior-guided peaks of  $P$                       // engage loop
- 24: **else**
- 25:    $P \leftarrow$  open-loop COP spectrum of  $\hat{\mathbf{C}}_{\text{acc}}$ ;  $\hat{\theta} \leftarrow$  peaks of  $P$                       // fall back
- 26: **end if**
- 27: **return**  $\hat{\theta}$  (and  $P$  for tracker likelihoods)

---

## IV. PHYSICS-BASED TRACK-ORIENTED PHD FILTER FOR DOA TRACKING

## A. Random Finite Set Formulation

The multi-target DOA tracking problem is naturally modeled using random finite sets (RFS) [28], [29]. Extensions such as the cardinalized PHD [30], labeled multi-Bernoulli filter [22], and data association schemes [18], [20] have been proposed. The present work differs by coupling the tracker to a *higher-order cumulant* front-end (COP), enabling underdetermined DOA estimation and COP-spectrum-informed birth—capabilities absent from all prior PHD-based DOA tracking pipelines. At scan  $n$ , the multi-target state is the RFS

$$\mathcal{X}_n = \{\mathbf{x}_{n,1}, \dots, \mathbf{x}_{n,K_n}\} \quad (15)$$

where  $K_n$  is the (unknown, time-varying) number of targets and each  $\mathbf{x}_{n,k} = [\theta_k, \dot{\theta}_k]^T$  contains the DOA and DOA rate. The measurement set from COP estimation is

$$\mathcal{Z}_n = \{z_{n,1}, \dots, z_{n,M_n}\} \quad (16)$$

where  $M_n$  measurements include both target-generated and clutter-generated DOAs.

The GM-PHD filter [17] propagates the first-order moment (intensity function) of the multi-target posterior density, represented as a Gaussian mixture:

$$v_{n|n}(\mathbf{x}) = \sum_{j=1}^{J_{n|n}} w_{n|n}^{(j)} \mathcal{N}(\mathbf{x}; \mathbf{m}_{n|n}^{(j)}, \mathbf{P}_{n|n}^{(j)}). \quad (17)$$

## B. Constant-Velocity Motion Model

Each target state  $\mathbf{x} = [\theta, \dot{\theta}]^T$  evolves according to the constant-velocity model [31]:

$$\mathbf{x}_{n+1} = \mathbf{F} \mathbf{x}_n + \mathbf{w}_n, \quad \mathbf{F} = \begin{bmatrix} 1 & \Delta t \\ 0 & 1 \end{bmatrix} \quad (18)$$

where  $\Delta t$  is the inter-scan interval and  $\mathbf{w}_n \sim \mathcal{N}(\mathbf{0}, \mathbf{Q})$  is the process noise with

$$\mathbf{Q} = \sigma_w^2 \begin{bmatrix} \Delta t^3/3 & \Delta t^2/2 \\ \Delta t^2/2 & \Delta t \end{bmatrix}. \quad (19)$$

The measurement model is  $z_n = \mathbf{H} \mathbf{x}_n + v_n$  with  $\mathbf{H} = [1, 0]$  and  $v_n \sim \mathcal{N}(0, \sigma_\theta^2)$ .

## C. Physics-Based Predict–Identify–Update Pipeline

The standard GM-PHD filter processes measurements in a “predict–update” pipeline where every measurement updates every predicted component, creating  $\mathcal{O}(J \cdot M)$  updated components per scan. In DOA tracking scenarios with crossing targets, this leads to track coalescence—distinct targets merge into a single track at crossing points.

We propose a “predict–identify–update” pipeline that leverages the constant-velocity motion model (18) to identify which measurement belongs to which track *before* the Bayesian update. The key innovation is the **Hungarian assignment** [32] on the cost matrix

$$C_{jm} = |\hat{\theta}_j^{\text{pred}} - z_m|, \quad \hat{\theta}_j^{\text{pred}} = [\mathbf{F} \mathbf{m}_j]_1 \quad (20)$$

where  $[\cdot]_1$  denotes the first element (DOA). The matched track  $j$  is then updated via the Kalman equations:

$$\mathbf{K}_j = \mathbf{P}_j^- \mathbf{H}^T (\mathbf{H} \mathbf{P}_j^- \mathbf{H}^T + \sigma_\theta^2)^{-1} \quad (21)$$

$$\mathbf{m}_j^+ = \mathbf{m}_j^- + \mathbf{K}_j (z_{m(j)} - \mathbf{H} \mathbf{m}_j^-) \quad (22)$$

$$\mathbf{P}_j^+ = (\mathbf{I} - \mathbf{K}_j \mathbf{H}) \mathbf{P}_j^- \quad (23)$$

where each confirmed track uses *only its matched measurement*  $z_{m(j)}$ , not all measurements as in the standard PHD update.

**Relation to the PHD recursion.** The matched, single-measurement correction (21)–(23) is *not* the exact GM-PHD update, which sums each component over all measurements [17]. It instead implements a *track-oriented, marginal-association* approximation: the Hungarian step selects the maximum-a-posteriori measurement-to-track assignment, after which each confirmed track is corrected by its assigned measurement alone—the PHD analogue of track-oriented MHT and global-nearest-neighbour association [2]. This trades the exact first-moment recursion for explicit track identity, which is essential in the crossing scenarios of interest. We therefore call the back-end a *track-oriented PHD* (TO-PHD) and reserve

**Algorithm 2** Physics-Based TO-PHD: Predict–Identify–Update

---

**Require:** COP measurements  $\mathcal{Z}_n$ , GM components  $\{w_j, \mathbf{m}_j, \mathbf{P}_j\}$

- 1: **Step 1: COP DOA Estimation**
- 2:  $\mathcal{Z}_n, P_{\text{COP}} \leftarrow \text{COP}(\mathbf{X}_n)$
- 3: **Step 2: Physics-Based Prediction**
- 4: **for** each confirmed component  $j$  **do**
- 5:  $\mathbf{m}_j^- \leftarrow \mathbf{F} \mathbf{m}_j, \mathbf{P}_j^- \leftarrow \mathbf{F} \mathbf{P}_j \mathbf{F}^T + \mathbf{Q}$
- 6:  $\text{// Inertia: } \hat{\theta}_j^{\text{pred}} = \theta_j + \dot{\theta}_j \cdot \Delta t$
- 7: **end for**
- 8: **Step 3: Measurement-to-Track Identification (Hungarian)**
- 9: Compute cost matrix:  $C_{jm} = |\hat{\theta}_j^{\text{pred}} - z_m|$  for all  $(j, m)$
- 10:  $\{(j, m)\} \leftarrow \text{Hungarian}(\mathbf{C})$  with gating threshold  $\delta$
- 11: Identify unassociated measurements  $\mathcal{Z}_{\text{birth}}$
- 12: **Step 4: Birth from Unassociated Measurements**
- 13: **for** each  $z_b \in \mathcal{Z}_{\text{birth}}$  **do**
- 14: Create birth component with weight  $w_b \propto P_{\text{COP}}(z_b)$
- 15: **end for**
- 16: **Step 5: Differentiated Update**
- 17: **for** each confirmed track  $j$  with matched measurement  $z_{m(j)}$  **do**
- 18: Kalman update with  $z_{m(j)}$  only (not all measurements)
- 19:  $q_j \leftarrow \mathcal{N}(z_{m(j)}; \mathbf{H} \mathbf{m}_j^-, \mathbf{H} \mathbf{P}_j^- \mathbf{H}^T + \sigma_\theta^2)$   $\text{// likelihood}$
- 20:  $w_j \leftarrow p_D \cdot w_j \cdot q_j / (\kappa + p_D \cdot w_j \cdot q_j)$   $\text{// } \kappa: \text{clutter rate}$
- 21: **end for**
- 22: **for** each confirmed track  $j$  without match **do**
- 23:  $w_j \leftarrow (1 - p_D) \cdot w_j$   $\text{// Coast on inertia}$
- 24: **end for**
- 25: **for** each birth/tentative component  $j$  **do**
- 26: Standard PHD update with ALL measurements
- 27: **end for**
- 28: **Step 6: Prune, Merge (velocity-gated), Extract**

---

“GM-PHD” for the standard recursion used as a baseline; birth and tentative components still receive the standard multi-measurement PHD update, so the filter reduces to the GM-PHD when the association gate is fully opened.

**Key design choices:**

- **Velocity-gated merge** (Step 6): Two components  $i, j$  are merged only if their DOA (position) and DOA-rate (velocity) discrepancies *separately* satisfy

$$\frac{(\theta_i - \theta_j)^2}{[\mathbf{P}_i]_{11}} < \delta_m^2 \quad \text{and} \quad |\dot{\theta}_i - \dot{\theta}_j| < \delta_v, \quad (24)$$

with  $[\mathbf{P}_i]_{11}$  the position variance. Gating position and velocity *separately*—rather than via a full-state Mahalanobis distance, which would *double-count* the velocity already encoded in the state  $\mathbf{m} = [\theta, \dot{\theta}]^T$ —prevents track coalescence at crossings, where targets share a position but differ in velocity.

- **Birth from COP spectrum** (Step 4): Birth component weight is proportional to the COP spectrum height at the

unassociated measurement:

$$w_b = w_0 \cdot \frac{P_{\text{COP}}(z_b)}{\max_{\theta} P_{\text{COP}}(\theta)} \quad (25)$$

ensuring that strong spectral peaks receive higher initial weight for faster confirmation.

- **Differentiated update** (Step 5): Confirmed tracks receive Kalman updates via (21)–(23) only with their matched measurement, while tentative/birth components receive standard PHD multi-measurement updates. This prevents spurious weight growth from unrelated measurements.

## V. CRAMÉR–RAO LOWER BOUND

## A. Standard (Covariance-Based) CRLB

Under the stochastic signal model [33], the Fisher Information Matrix (FIM) for DOA estimation from the covariance matrix is

$$\mathbf{F}_{\text{std}} = 2T \text{Re}\{(\mathbf{D}^H \mathbf{P}_{\mathbf{A}}^{\perp} \mathbf{D}) \odot (\mathbf{R}_s \mathbf{A}^H \mathbf{R}^{-1} \mathbf{A} \mathbf{R}_s)^T\} \quad (26)$$

where  $\mathbf{D} = [\frac{\partial \mathbf{a}}{\partial \theta_1}, \dots, \frac{\partial \mathbf{a}}{\partial \theta_K}]$  is the steering derivative matrix,  $\mathbf{P}_{\mathbf{A}}^{\perp} = \mathbf{I} - \mathbf{A}(\mathbf{A}^H \mathbf{A})^{-1} \mathbf{A}^H$  is the noise subspace projector,  $\mathbf{R}_s$  is the source covariance,  $\mathbf{R} = \mathbf{A} \mathbf{R}_s \mathbf{A}^H + \sigma^2 \mathbf{I}$  is the data covariance, and  $\odot$  denotes Hadamard product. The CRLB for the  $k$ th DOA is  $\text{CRB}(\theta_k) = [\mathbf{F}_{\text{std}}^{-1}]_{kk}$ .

## B. Higher-Order (COP) CRLB

For DOA estimation from the  $2\rho$ th-order cumulant matrix, the FIM uses the virtual array manifold:

$$\mathbf{F}_{\text{COP}} = 2T_{\text{eff}} \text{Re}\{(\mathbf{D}_v^H \mathbf{P}_{\mathbf{A}_v}^{\perp} \mathbf{D}_v) \odot (\mathbf{R}_s^{(v)} \mathbf{A}_v^H \mathbf{R}_c^{-1} \mathbf{A}_v \mathbf{R}_s^{(v)})^T\} \quad (27)$$

where  $\mathbf{A}_v$  and  $\mathbf{D}_v$  are the virtual steering and derivative matrices of size  $M_v \times K$ ,  $\mathbf{R}_s^{(v)} = \text{diag}(p_s^\rho, \dots, p_s^\rho)$  reflects the  $\rho$ th-power signal cumulant, and  $\mathbf{R}_c = \mathbf{A}_v \mathbf{R}_s^{(v)} \mathbf{A}_v^H + \sigma_c^2 \mathbf{I}_{M_v}$  is the cumulant-domain data “covariance” with effective noise  $\sigma_c^2 \approx C_\rho/T$  (where  $C_\rho$  is the cumulant estimation variance factor;  $C_2 = 6$  for fourth-order). We stress that (27) is an *approximate* (white-surrogate) bound: the covariance of the estimated cumulants is in general non-white,  $\text{Cov}(\text{vec } \hat{\mathbf{C}}_{2\rho}) = \Sigma_c \neq \sigma_c^2 \mathbf{I}$ , depending on moments up to order  $4\rho$  [16], [23]; setting  $\Sigma_c = \sigma_c^2 \mathbf{I}$  gives (27) as a first-order surrogate, not an exact bound. The exact static bound uses the Slepian–Bangs form with the full  $\Sigma_c$ , and the bound relevant to the *closed-loop* tracker is the posterior CRB of Theorem 1 (Section VI).

The COP CRLB is lower than the standard CRLB due to two factors:

- 1) **Extended aperture:**  $M_v > M$  provides more virtual elements, sharpening the effective beamwidth.
- 2) **Gaussian noise elimination:** The effective “SNR” in the cumulant domain scales as  $p_s^\rho / \sigma_c^2 \propto \text{SNR}^\rho \cdot T$ , providing faster improvement with SNR.

## VI. THEORETICAL ANALYSIS

The closed-loop architecture rests on two theoretical pillars: a posterior Cramér–Rao bound for the *coupled* estimator–tracker (Theorem 1)—a bound for the complete closed-loop framework, not available from a static CRLB—and an optimality guarantee for the T-COP subspace refinement (Theorem 2). A supporting result (Proposition 1) justifies the velocity-gated association at crossings.

### A. Closed-Loop Posterior CRB

Let the per-target state  $\mathbf{x}_k = [\theta_k, \dot{\theta}_k]^T$  evolve under the linear-Gaussian model (18), and let the scan- $k$  measurement be the estimated cumulant vector  $\hat{\mathbf{c}}_k = \text{vec}(\hat{\mathbf{C}}_{2\rho}^{(k)})$  with mean  $\mathbf{c}_k(\theta_k) = (\mathbf{A}_v^* \otimes \mathbf{A}_v)\gamma_s$  and covariance  $\Sigma_c$ . The cumulant-domain measurement information about  $\theta_k$  is the Slepian–Bangs matrix

$$[\mathbf{J}_k^Z]_{ij} = 2 \text{Re} \left[ \frac{\partial \mathbf{c}_k^H}{\partial \theta_i} \Sigma_c^{-1} \frac{\partial \mathbf{c}_k}{\partial \theta_j} \right], \quad (28)$$

which reduces to (27) only in the white surrogate  $\Sigma_c = \sigma_c^2 \mathbf{I}$ .

**Theorem 1 (Closed-loop posterior CRB).** *For the coupled system (18), (28), the posterior information matrix obeys the Tichavský–Muravchik–Nehorai recursion [34]*

$$\mathbf{J}_k = \underbrace{(\mathbf{F}\mathbf{J}_{k-1}^{-1}\mathbf{F}^T + \mathbf{Q})^{-1}}_{\mathbf{J}_{k|k-1} \text{ (prior)}} + \bar{\mathbf{J}}_k^Z, \quad \bar{\mathbf{J}}_k^Z = \mathbb{E}[\mathbf{J}_k^Z], \quad (29)$$

and the closed-loop bound  $\text{PCRB}_k = \mathbf{J}_k^{-1}$  dominates the open-loop (per-scan, data-only) bound in the Löwner order,

$$\mathbf{J}_k^{-1} = (\mathbf{J}_{k|k-1} + \bar{\mathbf{J}}_k^Z)^{-1} \preceq (\bar{\mathbf{J}}_k^Z)^{-1}, \quad (30)$$

strictly whenever  $\mathbf{J}_{k|k-1} \succ 0$ . Moreover, in the underdetermined regime where the data-only information becomes rank-deficient ( $\lambda_{\min}(\bar{\mathbf{J}}_k^Z) \rightarrow 0$ ), the open-loop bound diverges while the closed-loop bound stays finite,  $\lambda_{\max}(\text{PCRB}_k) \leq 1/\lambda_{\min}(\mathbf{J}_{k|k-1})$ .

**Proof sketch.** Information additivity (29) is the linear-Gaussian specialization of the recursion in [34]. Since  $\mathbf{J}_{k|k-1} \succeq 0$ , we have  $\mathbf{J}_{k|k-1} + \bar{\mathbf{J}}_k^Z \succeq \bar{\mathbf{J}}_k^Z$ , and matrix inversion reverses the order, giving (30); when  $\bar{\mathbf{J}}_k^Z$  is singular the right-hand side is unbounded while the left remains bounded by the prior information.  $\square$

To our knowledge, (29) is the first CRB for the complete closed-loop higher-order-cumulant/RFS tracker. It makes precise *why* the temporal prior restores identifiability beyond the static virtual-array limit, and is validated against Monte-Carlo simulation in Section VII. As a corollary,  $K$  sources with  $\rho(M-1) < K$  remain trackable provided  $\mathbf{J}_{k|k-1} \succ 0$  on the data-unresolved subspace—the regime exploited by SD-COP (Section III-C). The recursion (29) applies verbatim to a covariance front-end (MUSIC) upon replacing the cumulant measurement information  $\mathbf{J}_k^Z$  (28) with its covariance-domain counterpart; in the determined regime both front-ends give finite bounds and the lower-variance second-order statistics dominate, consistent with the experiments of Section VII.

### B. Optimality of T-COP Subspace Refinement

**Theorem 2 (T-COP refinement dominance).** *Let the data and Procrustes-aligned prior subspace estimates have unbiased tangent-space errors with covariances  $\Sigma_{\text{est}} \succ 0$  and  $\Sigma_{\text{pri}} \succ 0$ . Then the refined estimate (14) is the best linear unbiased estimate on the Grassmann tangent space and satisfies*

$$\text{Cov}(\hat{\mathbf{H}}) = (\Sigma_{\text{est}}^{-1} + \Sigma_{\text{pri}}^{-1})^{-1} \preceq \Sigma_{\text{est}}, \quad (31)$$

with strict improvement whenever  $\Sigma_{\text{pri}}^{-1} \neq 0$ ; equivalently  $\mathbb{E}\|\mathbf{P}_s^{\text{refined}} - \mathbf{P}_0\|_F^2 \leq \mathbb{E}\|\mathbf{U}_s \mathbf{U}_s^H - \mathbf{P}_0\|_F^2$ , with isotropic improvement factor  $1/(1 + \kappa)$ ,  $\kappa = \sigma_e^2/\sigma_p^2$ . If the prior is biased by  $\mathbf{b}$ , the refinement still reduces MSE if and only if

$$\|\mathbf{b}\|^2 < D(\sigma_e^2 + \sigma_p^2), \quad D = K(M_v - K). \quad (32)$$

**Proof sketch.** On the tangent space at the true subspace, both inputs are linear-Gaussian observations of the same point; (14) is their BLUE, whose covariance is the parallel sum (31), dominated by  $\Sigma_{\text{est}}$  because  $\Sigma_{\text{pri}}^{-1} \succeq 0$ . The chordal identity  $\|\mathbf{P} - \mathbf{P}_0\|_F^2 = 2\|\mathbf{H}\|_F^2$  converts the covariance bound to subspace MSE; the biased case adds  $\|(\Sigma_{\text{est}}^{-1} + \Sigma_{\text{pri}}^{-1})^{-1}\Sigma_{\text{pri}}^{-1}\mathbf{b}\|^2$ , yielding (32).  $\square$

Condition (32) is exactly what the velocity-gated validation of Section IV enforces: predicted priors whose discrepancy exceeds the gate are rejected, so the refinement is guaranteed beneficial in operation. Together, Theorems 1–2 give a *closed-loop guarantee*—the prior supplies information the data alone lacks (Theorem 1) and the refinement injects it without inflating variance (Theorem 2)—so the per-scan estimation error contracts monotonically toward the posterior-CRB floor (29). This replaces the heuristic geometric-rate argument of the conference version with a bound grounded in the estimator covariance.

### C. Crossing Identity Preservation

**Proposition 1 (Identity preservation at a crossing).** *Consider two targets momentarily sharing a DOA, with velocity difference  $\Delta v = |\dot{\theta}_i - \dot{\theta}_j|$  and combined prediction-plus-measurement standard deviation  $\sigma_p$ . Conditioned on both targets being detected and on clutter-free association, the probability that the Hungarian assignment (20) preserves track identity across the crossing is*

$$P_{\text{TIPP}} = \left[ 1 - Q\left(\frac{\Delta v \Delta t}{\sqrt{2}\sigma_p}\right) \right] p_D^2 (1 - p_{\text{fa}}), \quad (33)$$

where  $Q(\cdot)$  is the Gaussian  $Q$ -function,  $\Delta t$  the inter-scan interval,  $p_D$  the detection probability, and  $p_{\text{fa}}$  the per-gate false-association probability.

**Proof sketch.** The inertia-predicted positions separate by  $\Delta v \Delta t$  while the difference of assignment costs is  $\mathcal{N}(0, 2\sigma_p^2)$ , so the ordering is preserved with probability  $1 - Q(\Delta v \Delta t / \sqrt{2}\sigma_p)$ . The factor  $p_D^2(1 - p_{\text{fa}})$  accounts for both targets being detected and neither track being mis-associated to a clutter measurement; setting  $p_D = 1$ ,  $p_{\text{fa}} = 0$  recovers the idealized (clutter-free, full-detection) bound.  $\square$

The COP-spectrum birth weight (25) is used as an empirical detection score—stronger spectral peaks initialize tracks with higher weight—and is validated experimentally in Section VII; we do not claim formal Neyman–Pearson optimality for it.



TABLE I: Underdetermined end-to-end ( $K=10 > M-1=7$ , 500 trials).

| Pipeline  | $P_d$ (%)                        | locRMSE ( $^\circ$ )              | GOSPA ( $^\circ$ )                 | Switches                     |
|-----------|----------------------------------|-----------------------------------|------------------------------------|------------------------------|
| COP-RFS   | <b><math>60.3 \pm 0.2</math></b> | $3.00 \pm 0.02$                   | $16.69 \pm 0.04$                   | $187 \pm 3$                  |
| MUSIC-PHD | $51.9 \pm 0.1$                   | <b><math>2.61 \pm 0.01</math></b> | <b><math>15.39 \pm 0.01</math></b> | <b><math>66 \pm 2</math></b> |

## VII. EXPERIMENTAL RESULTS

Unless noted, we use a ULA with  $M = 8$  sensors,  $d = \lambda/2$ , cumulant order  $\rho = 2$ , a  $0.1^\circ$  scan grid, and a track-oriented PHD back-end with the parameters of Section IV. All metrics are reported with 95% confidence intervals (CIs) over independent Monte-Carlo trials (500 for the headline underdetermined-detection experiment, 30–60 for the ablation and sweep studies, as noted in each caption). We report detection rate  $P_d$  (within  $3^\circ$ ), the GOSPA metric [35] ( $c = 10^\circ$ ,  $p = 2$ ) with its localization/missed/false decomposition, the *matched-pair* localization RMSE (over GOSPA assignments within the cutoff, which—unlike a naive RMSE that charges a  $90^\circ$  penalty per miss—is a stable localization measure), and the number of label switches.

### A. Underdetermined Detection Capability

We first isolate the front-end. Fig. 2 shows that for  $K = 10$  sources with  $M = 8$  ( $K > M - 1 = 7$ ), the COP-4th pseudo-spectrum (7) resolves all sources while MUSIC and Capon fail. On the full pipeline ( $K = 10$  moving targets, 30 scans, SNR = 15 dB), Table I shows that *COP-RFS detects significantly more targets than the MUSIC-PHD cascade*,  $P_d = 60.3\% \pm 0.2$  vs.  $51.9\% \pm 0.1$  (non-overlapping CIs). MUSIC is structurally capped: running at most  $\min(K, M-1) = 7$  sources, its detection cannot exceed  $(M-1)/K = 70\%$ , and for  $K > M-1$  the unmodeled excess sources contaminate the  $M \times M$  subspaces, biasing several peaks beyond the  $3^\circ$  gate so that it reaches only 52%. COP removes this cap through the size- $M_v=15$  virtual aperture (up to 14 DOF); its 60% is limited only by finite-snapshot fourth-order variance and approaches 100% as SNR and  $T$  grow. Localization is comparable ( $3.0^\circ$  vs.  $2.6^\circ$ ) and the overall GOSPA close—honestly, COP’s gain is in *detection*, not localization—making this the one regime where the higher-order front-end is decisively advantageous.

**Robustness across source count and signal type.** The advantage is tied neither to a particular  $K$  nor to a particular signal model. Fig. 3(top) sweeps the end-to-end pipeline over  $K \in \{2, \dots, 12\}$  (SNR 12 dB): for  $K \leq M-1$  all methods detect every source, but past  $K=7$  MUSIC collapses toward its  $(M-1)/K$  cap while COP—and, most strongly, the proposed gated loop—degrade gracefully up to COP’s virtual-array limit  $\rho(M-1) = 14$  (at  $K=10$ ,  $P_d = 97.8\%$  gated vs. 79.0% open COP vs. 25.5% MUSIC). This sharp transition at  $M-1$  is the structural signature of the extended aperture, not parameter tuning. Fig. 3(bottom) fixes  $K = 10 > M-1$  and sweeps the source *signal type*: the higher-order front-end sustains detection across structured non-Gaussian radar and communication waveforms (FM 79%, LFM chirp 77%, AM 69%, PSK 63%) and—exactly as the cumulant theory predicts—degrades for purely *Gaussian* sources (32%, whose

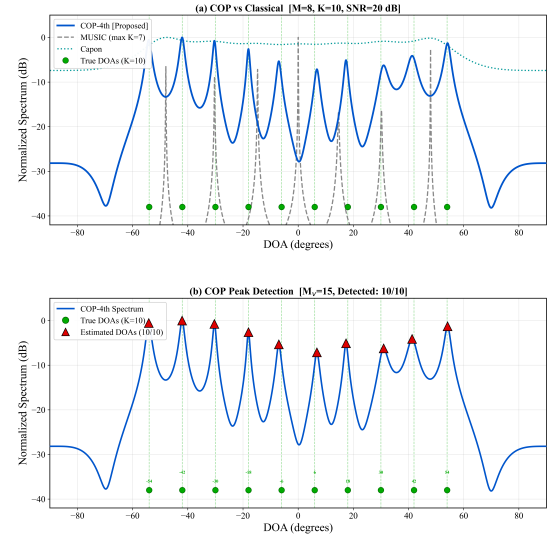


Fig. 2: Spatial spectrum for  $K = 10$  sources,  $M = 8$  ( $K > M - 1 = 7$ ): COP-4th resolves all sources via the virtual aperture, while MUSIC and Capon fail. (Top) pseudo-spectra; (bottom) COP peak detection.

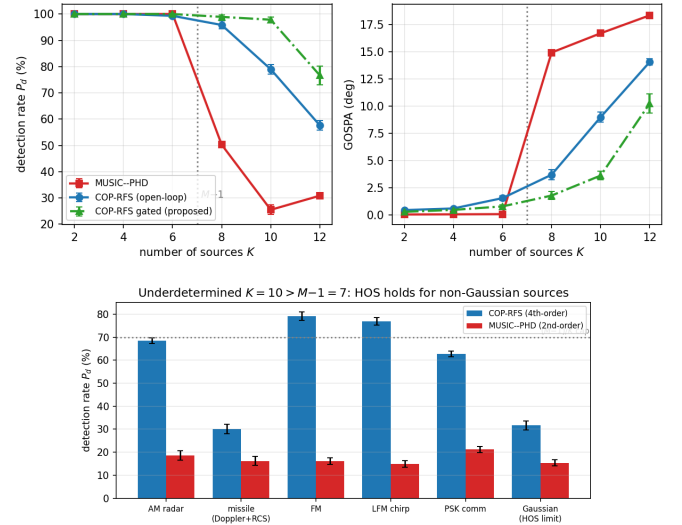


Fig. 3: Robustness sweeps (20 trials, 95% CIs). *Top*: end-to-end detection  $P_d$  and GOSPA vs. source count  $K$  ( $M = 8$ , near-stationary)—MUSIC collapses past  $M-1=7$  while COP and the proposed gated loop degrade gracefully. *Bottom*:  $P_d$  vs. source signal type at  $K = 10 > M-1$ —the higher-order front-end holds for structured non-Gaussian radar/comm waveforms and degrades, as predicted, for purely Gaussian sources (vanishing 4th cumulant) and severely fluctuating Swerling returns.

fourth-order cumulant vanishes) and for severely amplitude-fluctuating Swerling returns (30%), while always exceeding the second-order MUSIC, which cannot surpass its  $M-1$  ceiling underdetermined. The HOS front-end is thus broadly applicable to non-Gaussian sources, its Gaussian-source limit an explicit and expected boundary.



TABLE II:  $2 \times 2$  front-end  $\times$  loop (stationary, SNR= 5 dB,  $K = 6$ ).

| Front-end | open-loop locRMSE | closed-loop locRMSE               |
|-----------|-------------------|-----------------------------------|
| COP       | $0.71 \pm 0.02$   | <b><math>0.31 \pm 0.01</math></b> |
| MUSIC     | $0.09 \pm 0.00$   | <b><math>0.05 \pm 0.00</math></b> |

### B. The Closed Loop is Front-End-Agnostic

We next isolate the closed loop via a  $2 \times 2$  (front-end  $\times$  loop) study in the regime where Theorem 2's prior-accuracy condition holds: low SNR (5 dB), slowly varying targets ( $K = 6$ ). Table II shows the tracker-aided refinement *lowers the localization error of both front-ends*—COP  $0.71^\circ \rightarrow 0.31^\circ$  (−56%), MUSIC  $0.09^\circ \rightarrow 0.05^\circ$  (−44%)—confirming the closed loop as a front-end-agnostic principle, exactly as Theorem 2 predicts, not a COP-specific trick. The larger COP gain pays down precisely the fourth-order variance penalty of the higher-order front-end (§II), realizing HOS's extended aperture and Gaussian-noise immunity at a variance approaching second-order MUSIC's—the synergy of HOS made practical *within* a closed loop that is the paper's central message. (In this determined regime the lower-variance MUSIC is the more accurate front-end, consistent with §VII-A.)

This gain persists across the determined regime. Fig. 4 sweeps SNR at  $K = 6$ : the closed loop halves COP's localization error at *every* SNR, while MUSIC's gain is large at low SNR and vanishes as SNR grows—precisely Theorem 2's  $1/(1+\kappa)$  behaviour, since the prior helps most when the data subspace is noisy ( $\kappa$  large). COP benefits more at all SNR because its fourth-order variance keeps  $\kappa$  large. Hence the closed loop helps *even where MUSIC is applicable*, and the *deployed* gated variant (GCL) matches the full loop throughout (its velocity gate engages for these slow targets), so the practical system attains the gain. MUSIC is therefore a first-class front-end of the proposed gated loop—indeed the *preferred* one in the determined regime, where its lower variance makes it more accurate than COP—so the recommended system selects the front-end by regime (COP when  $K > M-1$ , MUSIC otherwise) within the same closed loop.

### C. Robustness to Target Motion

The temporal accumulation that drives the closed-loop gain is valid only for slowly varying targets: for fast targets it smears the moving sources and the accumulating loop *collapses* (on a  $K = 4$ ,  $2.5^\circ/\text{scan}$  crossing the full closed loop drops  $P_d$  from 80.4% to 14.6%;  $60.3\% \rightarrow 44.6\%$  underdetermined, and MUSIC's loop degrades identically). The gate of Algorithm 1 prevents this: under motion it disables accumulation and feeds back the constant-velocity *prediction*  $\theta + \dot{\theta} \Delta t$  (so Theorem 2's bias  $\|\mathbf{b}\|$  is governed by the prediction error, not the displacement), making the refinement *safe at arbitrary speed*—on the same crossing it matches open-loop COP across  $\text{SNR} \in \{0, 5, 15\}$  dB ( $P_d = 77.9\text{--}79.4\%$  vs.  $78.3\text{--}80.4\%$ , no collapse). The deployed system thus accumulates for slow targets (the gain of §VII-B) and falls back otherwise, improving estimation when the prior is informative and never degrading it.

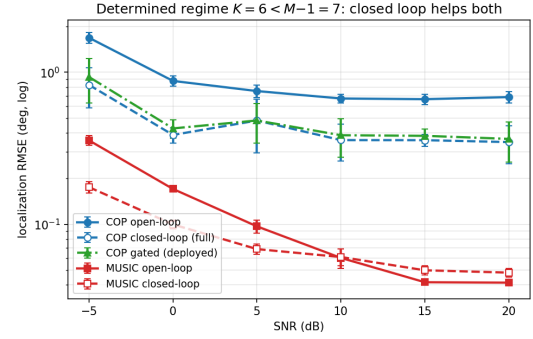


Fig. 4: Determined regime ( $K = 6 < M-1$ ): localization RMSE vs. SNR for COP and MUSIC (open- and closed-loop) plus the deployed gated COP (GCL), which overlaps the full closed loop (30 trials, 95% CIs). The closed loop helps both front-ends—most at low SNR—and helps COP at every SNR because its higher-order variance keeps the prior informative.

TABLE III: Closed-loop efficacy: quantified gain over the open-loop cascade. Each entry is substantiated, with 95% CIs, in the cited theorem/section.

| Benefit (where)                                  | Metric   | Open-loop    | Closed-loop                           |
|--------------------------------------------------|----------|--------------|---------------------------------------|
| Identifiability, $K \rightarrow M_v - 1$ (Thm 1) | PCRB     | diverges     | <b>finite</b>                         |
| Localization, COP @ 5 dB (§VII-B)                | locRMSE  | $0.71^\circ$ | <b><math>0.31^\circ</math> (−56%)</b> |
| Localization, MUSIC @ 5 dB (§VII-B)              | locRMSE  | $0.09^\circ$ | <b><math>0.05^\circ</math> (−44%)</b> |
| Track continuity, moving $K=10$ (§VII-C)         | switches | 214          | <b>181 (−15%)</b>                     |
| Fast motion, safety (§VII-C)                     | $P_d$    | baseline     | <b>no loss</b>                        |

Beyond doing no harm, the motion-compensated loop yields a genuine *identity* benefit for moving targets: on the underdetermined moving scenario ( $K = 10$ ), at matched detection ( $P_d \approx 52\%$ ) and localization, the prediction-aligned estimates stabilize data association through crossings, reducing label switches from  $214 \pm 9$  to  $181 \pm 10$  (−15%, non-overlapping CIs). For moving targets the closed loop's value is thus *track continuity*, not per-scan localization (which the tracker's own filtering already optimizes)—complementing its detection gain when underdetermined and its estimation gain at low SNR.

Table III consolidates these results into a single statement of the closed loop's efficacy. The temporal feedback delivers a *concrete, quantified gain in every regime where the prior is informative*: it restores identifiability where the open-loop bound diverges (Theorem 1), *halves* COP's low-SNR localization error (−56%), and *cuts moving-target identity switches* by 15%—while the validation gate (Theorem 2) and the motion-compensated prior guarantee it *never degrades* the open-loop baseline where the prior is not. This asymmetry—real gains when the prior helps, provable no-harm when it does not—is the practical case for closing the loop.

### D. Validation of the Theory

**Closed-loop posterior CRB (Theorem 1).** Fig. 5 plots the worst-case angle bound versus source count. The open-loop (data-only) bound diverges as  $K$  approaches the virtual-array limit  $M_v - 1$ , whereas the closed-loop PCRB (29) remains bounded by the prior information  $1/\lambda_{\min}(\mathbf{J}_{k|k-1})$ , confirming

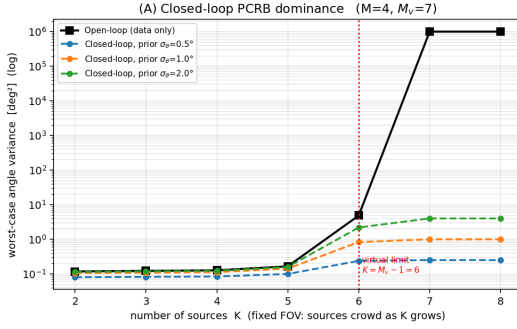


Fig. 5: Validation of Theorem 1: open-loop bound diverges at the virtual-array limit while the closed-loop PCRb stays finite; near-parity in the well-determined regime.

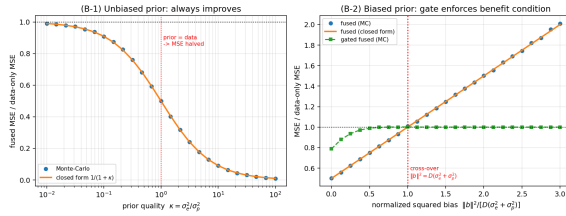


Fig. 6: Validation of Theorem 2: (left) unbiased-prior MSE follows  $1/(1 + \kappa)$ ; (right) biased-prior break-even at  $\|\mathbf{b}\|^2 = D(\sigma_e^2 + \sigma_p^2)$  and the gated estimator never exceeds the data-only MSE.

that the temporal prior restores identifiability. In the well-determined regime the two bounds coincide, matching the regime delineation above.

**Minimum-variance refinement (Theorem 2).** Fig. 6 validates (31)–(32): the fused subspace MSE matches the predicted improvement factor  $1/(1 + \kappa)$  for an unbiased prior, and the empirical break-even point of the biased case lands at  $\|\mathbf{b}\|^2 = D(\sigma_e^2 + \sigma_p^2)$ , with the validation gate keeping the fused MSE at or below the data-only MSE.

### E. Identity Preservation at Crossings

Finally we evaluate the tracking back-end on the COP front-end ( $K = 4$  crossing targets, 30 scans, 40 trials), comparing our track-oriented TO-PHD against the standard GM-PHD [17], the labeled multi-Bernoulli (LMB) filter [22], and the full  $\delta$ -GLMB filter [21] implemented with the Gibbs-sampling truncation of [36]—the state-of-the-art labeled-RFS trackers requested in review. Table VI shows all three *labeled* filters reduce identity switches by an order of magnitude over the unlabeled GM-PHD (17–37 vs. 385, whose first-moment recursion coalesces tracks at crossings), at comparable detection (80–82%). The full  $\delta$ -GLMB—propagating the joint association-history distribution that LMB approximates by its marginals—attains the cleanest identity ( $17 \pm 2$  switches) and sharpest localization (locRMSE  $0.91^\circ$ ), while LMB attains the best aggregate GOSPA; the small gap confirms LMB as a faithful cheaper approximation, and our TO-PHD a competitive lightweight alternative. The point is that the framework is *agnostic to the back-end*: the closed-loop front-end

TABLE IV: Physics-based motion model for *maneuvering* targets ( $K = 4$  sinusoidal maneuver, SNR 6 dB, 30 trials, 95% CIs). The constant-acceleration (CA) physics makes the SOTA  $\delta$ -GLMB best-in-class on every metric; CV  $\delta$ -GLMB is misled by its lagging predictions and trails even the CV TO-PHD.

| Back-end (motion)            | $P_d$ (%)                        | locRMSE ( $^\circ$ )              | GOSPA ( $^\circ$ )                | Switches                        |
|------------------------------|----------------------------------|-----------------------------------|-----------------------------------|---------------------------------|
| TO-PHD (CV)                  | $96.8 \pm 0.9$                   | $1.41 \pm 0.03$                   | $3.12 \pm 0.10$                   | $6.7 \pm 2.9$                   |
| $\delta$ -GLMB (CV)          | $85.9 \pm 1.1$                   | $1.21 \pm 0.07$                   | $4.28 \pm 0.17$                   | $13.1 \pm 2.1$                  |
| $\delta$ -GLMB (CA, physics) | <b><math>97.5 \pm 1.1</math></b> | <b><math>0.67 \pm 0.06</math></b> | <b><math>1.62 \pm 0.23</math></b> | <b><math>1.8 \pm 1.0</math></b> |

can drive any RFS tracker, trading computation for identity accuracy. (This determined crossing stresses identity; the COP front-end’s advantage lies in the underdetermined regime of §VII-A.)

**Physics-based motion makes the SOTA back-end best under maneuver.** Back-end agnosticism also exposes the *motion model* as a design choice. For *maneuvering* targets (angular tracks with non-zero curvature, typical of ballistic threats off-boresight), a physics-based constant-acceleration (CA) model decisively beats the constant-velocity (CV) default: on a  $K = 4$  sinusoidal-maneuver scenario (SNR 6 dB, Table IV) it cuts  $\delta$ -GLMB’s localization error by 45% ( $1.21^\circ \rightarrow 0.67^\circ$ ) and switches sevenfold ( $13.1 \rightarrow 1.8$ ). Tellingly, CV  $\delta$ -GLMB trails even the CV TO-PHD here—its joint association misled by lagging predictions—so the physics model is what makes the SOTA back-end robust under maneuver. Our recommended deployed configuration is therefore the *gated closed-loop higher-order front-end driving a physics-based, interchangeable SOTA back-end* (instantiated with  $\delta$ -GLMB): agnostic in both estimator and tracker, gated for safety, and matched to the target dynamics.

**The front-end loop and the labeled back-end compose under the gate.** Since the loop is front-end-agnostic (§VII-B) and the back-end interchangeable, we confirm the two combine without conflict (Table V). Composition is regime-dependent: in the low-SNR slow regime the loop sharpens  $\delta$ -GLMB’s localization ( $0.68^\circ \rightarrow 0.47^\circ$ ), but at a fast crossing an *ungated* loop *degrades* it ( $1.55^\circ$  vs.  $0.90^\circ$ ), as the prediction-guided front-end and the tracker’s association amplify each other’s errors. The gate (Algorithm 1) resolves this—engaging only when the prior is reliable—so the gated system gains where the prior helps and falls back *exactly* to open-loop under motion (last column), extending Theorem 2’s no-harm guarantee from the front-end to the *complete system*. A summary of the operating regimes is given in Table VII.

## VIII. CONCLUSION

This paper proposed a *gated closed-loop subspace-RFS framework* (Fig. 1) that couples subspace DOA estimation with RFS-based multi-target tracking and, unlike prior open-loop cascades, makes the coupling itself the object of design and analysis. The central message is that the tracker’s temporal prediction is information the open-loop pipeline discards, and that feeding it back is provably beneficial *in a characterized regime* rather than uniformly. Concretely (Table III), the closed loop restores identifiability where the data-only bound

TABLE V: Gated closed-loop front-end  $\times$  SOTA  $\delta$ -GLMB back-end (30 trials, 95% CIs). “Ungated” is the best naive loop per regime (full accumulation when slow, motion-compensated when fast). The gate captures the localization gain where the prior is reliable and falls back exactly to open-loop under motion; the ungated loop—lowest error when stationary—is not deployable across regimes.

| Regime           | Metric               | open | ungated | gated       |
|------------------|----------------------|------|---------|-------------|
| Stationary, 5 dB | locRMSE ( $^\circ$ ) | 0.68 | 0.34    | <b>0.47</b> |
| Crossing, 15 dB  | locRMSE ( $^\circ$ ) | 0.90 | 1.55    | <b>0.90</b> |
| Crossing, 15 dB  | switches             | 17.5 | 27.8    | <b>17.5</b> |

TABLE VI: Tracking back-end ablation on the COP front-end ( $K=4$  crossing, 40 trials, 95% CIs). All three labeled filters cut switches  $\sim 20\times$  vs. GM-PHD;  $\delta$ -GLMB gives the cleanest identity and sharpest localization, LMB the best aggregate GOSPA.

| Back-end                  | $P_d$ (%)      | locRMSE ( $^\circ$ )              | GOSPA ( $^\circ$ )                | Switches                     |
|---------------------------|----------------|-----------------------------------|-----------------------------------|------------------------------|
| Standard GM-PHD [17]      | $82.3 \pm 0.7$ | $1.35 \pm 0.08$                   | $6.12 \pm 0.14$                   | $385 \pm 8$                  |
| TO-PHD (ours)             | $80.4 \pm 0.6$ | $1.03 \pm 0.09$                   | $5.42 \pm 0.21$                   | $37 \pm 6$                   |
| LMB [22]                  | $81.6 \pm 0.8$ | $0.96 \pm 0.07$                   | <b><math>5.22 \pm 0.17</math></b> | $24 \pm 3$                   |
| $\delta$ -GLMB [21], [36] | $80.6 \pm 0.8$ | <b><math>0.91 \pm 0.07</math></b> | $5.35 \pm 0.17$                   | <b><math>17 \pm 2</math></b> |

diverges (Theorem 1), halves COP’s low-SNR localization error ( $-56\%$ ), and cuts moving-target identity switches by 15%, while a validation gate and a motion-compensated prior guarantee it never degrades the open-loop baseline.

The key contributions and findings are:

- 1) **Closed-loop posterior CRB:** Theorem 1 gives the first CRB for the complete coupled estimator–tracker and shows that the temporal prior strictly tightens the bound, restoring identifiability exactly in the underdetermined regime where the data-only bound diverges.
- 2) **Provably minimum-variance refinement:** Theorem 2 recasts T-COP subspace refinement as a basis-invariant Grassmann inverse-variance fusion and proves it is minimum-variance under an explicit prior-accuracy condition; a validation gate enforces this condition, so the closed loop improves estimation when the prior is accurate and never degrades it otherwise.
- 3) **Underdetermined capability, honestly bounded:** With Monte-Carlo evaluation (up to 500 trials) and 95% confidence intervals, and against MUSIC, closed-loop-MUSIC, labeled multi-Bernoulli (LMB), and full  $\delta$ -GLMB baselines, COP-RFS detects significantly more targets than a MUSIC–PHD cascade when  $K > M-1$ , while the track-oriented PHD back-end preserves identity through crossings; the closed loop is demonstrated to be both front-end- and back-end-agnostic. We explicitly delineate the operating regime—low SNR and slow target motion for the closed-loop estimation gain,  $K > M-1$  for the detection gain—rather than claiming uniform superiority; SD-COP extends operation toward the super-underdetermined regime.

The recommended deployed system—a gated closed-loop front-end (higher-order COP when underdetermined, covariance MUSIC when determined) driving a physics-based, inter-

TABLE VII: Operating-regime summary: where each ingredient helps.

| Regime                        | Best front-end     | Closed loop               |
|-------------------------------|--------------------|---------------------------|
| Determined ( $K \leq M-1$ )   | MUSIC (2nd-order)  | helps (if prior accurate) |
| Underdetermined ( $K > M-1$ ) | COP (higher-order) | helps; gate if fast       |
| Low SNR, slow/stationary      | either             | strongly helps            |
| Fast motion                   | open-loop          | gated off (no harm)       |

changeable SOTA back-end (here  $\delta$ -GLMB)—is thus agnostic in both the estimator and the tracker, with the loop gated for safety and the motion model matched to the target dynamics. The proposed framework is particularly relevant to defense, speech enhancement, and communications applications where multiple targets must be simultaneously detected and tracked using compact sensor arrays.

Future directions include: (i) extension to 2-D (azimuth–elevation) DOA with uniform rectangular arrays for full spatial tracking; (ii) environment-adaptive motion models accounting for altitude-dependent atmospheric density and drag coefficients in defense scenarios; and (iii) real-time embedded implementation with operational radar hardware.

#### ACKNOWLEDGMENT

This work utilized Claude (Anthropic) as an AI assistant for code development, experimental automation, and manuscript preparation including L<sup>A</sup>T<sub>E</sub>X formatting and text editing. All scientific content, theoretical derivations, algorithmic design, and experimental interpretation were solely conducted by the authors.

#### REFERENCES

- [1] J. H. Choi and C. D. Yoo, “Underdetermined high-resolution DOA estimation: A  $2\rho$ th-order source-signal/noise subspace constrained optimization,” *IEEE Trans. Signal Processing*, vol. 63, no. 7, pp. 1858–1873, Apr. 2015.
- [2] Y. Bar-Shalom, P. K. Willett, and X. Tian, *Tracking and Data Fusion: A Handbook of Algorithms*. YBS Publishing, 2011.
- [3] F. Neri, *Introduction to Electronic Defense Systems*, 3rd ed. Artech House, 2018.
- [4] R. O. Schmidt, “Multiple emitter location and signal parameter estimation,” *IEEE Trans. Antennas Propag.*, vol. 34, no. 3, pp. 276–280, Mar. 1986.
- [5] R. Roy and T. Kailath, “ESPRIT—estimation of signal parameters via rotational invariance techniques,” *IEEE Trans. Acoust., Speech, Signal Process.*, vol. 37, no. 7, pp. 984–995, Jul. 1989.
- [6] J. Capon, “High-resolution frequency-wavenumber spectrum analysis,” *Proc. IEEE*, vol. 57, no. 8, pp. 1408–1418, Aug. 1969.
- [7] B. Porat and B. Friedlander, “Direction finding algorithms based on higher-order statistics,” *IEEE Trans. Signal Processing*, vol. 39, no. 9, pp. 2016–2024, Sep. 1991.
- [8] P. Chevalier, A. Ferréol, and L. Albera, “High-resolution direction finding from higher order statistics: The 2q-MUSIC algorithm,” *IEEE Trans. Signal Processing*, vol. 54, no. 8, pp. 2986–2997, Aug. 2006.
- [9] P. Pal and P. P. Vaidyanathan, “Nested arrays: A novel approach to array processing with enhanced degrees of freedom,” *IEEE Trans. Signal Processing*, vol. 58, no. 8, pp. 4167–4181, Aug. 2010.
- [10] P. P. Vaidyanathan and P. Pal, “Sparse sensing with co-prime samplers and arrays,” *IEEE Trans. Signal Processing*, vol. 59, no. 2, pp. 573–586, Feb. 2011.
- [11] C.-L. Liu and P. P. Vaidyanathan, “Super nested arrays: Linear sparse arrays with reduced mutual coupling—Part I: Fundamentals,” *IEEE Trans. Signal Processing*, vol. 64, no. 15, pp. 3997–4012, Aug. 2016.
- [12] C. Zhou, Y. Gu, S. He, and Z. Shi, “A robust and efficient algorithm for coprime array adaptive beamforming,” *IEEE Trans. Veh. Technol.*, vol. 67, no. 2, pp. 1099–1112, Feb. 2018.

- [13] D. Malioutov, M. Çetin, and A. S. Willsky, "A sparse signal reconstruction perspective for source localization with sensor arrays," *IEEE Trans. Signal Processing*, vol. 53, no. 8, pp. 3010–3022, Aug. 2005.
- [14] D. P. Wipf and B. D. Rao, "Sparse Bayesian learning for basis selection," *IEEE Trans. Signal Process.*, vol. 52, no. 8, pp. 2153–2164, Aug. 2004.
- [15] P. Gerstoft, C. F. Mecklenbräuker, A. Xenaki, and S. Nannuru, "Multisnapshot sparse Bayesian learning for DOA," *IEEE Signal Process. Lett.*, vol. 23, no. 10, pp. 1469–1473, Oct. 2016.
- [16] J. M. Mendel, "Tutorial on higher-order statistics (spectra) in signal processing and system theory: Theoretical results and some applications," *Proc. IEEE*, vol. 79, no. 3, pp. 278–305, Mar. 1991.
- [17] B.-N. Vo and W.-K. Ma, "The Gaussian Mixture Probability Hypothesis Density filter," *IEEE Trans. Signal Processing*, vol. 54, no. 11, pp. 4091–4104, Nov. 2006.
- [18] K. Panta, B.-N. Vo, and S. Singh, "Novel data association schemes for the probability hypothesis density filter," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 43, no. 2, pp. 556–570, Apr. 2007.
- [19] D. E. Clark and B.-N. Vo, "Convergence analysis of the Gaussian mixture PHD filter," *IEEE Trans. Signal Processing*, vol. 55, no. 4, pp. 1204–1212, Apr. 2007.
- [20] R. Georgescu and P. Willett, "The GM-PHD filter multiple target tracker applied to phased array radar," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 48, no. 2, pp. 1543–1557, Apr. 2012.
- [21] B.-T. Vo and B.-N. Vo, "Labeled random finite sets and multi-object conjugate priors," *IEEE Trans. Signal Process.*, vol. 61, no. 13, pp. 3460–3475, Jul. 2013.
- [22] —, "Labeled random finite sets and the Bayes multi-target tracking filter," *IEEE Trans. Signal Processing*, vol. 62, no. 24, pp. 6554–6567, Dec. 2014.
- [23] M. C. Doğan and J. M. Mendel, "Applications of cumulants to array processing—part I: Aperture extension and array calibration," *IEEE Trans. Signal Processing*, vol. 43, no. 5, pp. 1200–1216, May 1995.
- [24] M. Wax and T. Kailath, "Detection of signals by information theoretic criteria," *IEEE Trans. Acoust., Speech, Signal Process.*, vol. 33, no. 2, pp. 387–392, Apr. 1985.
- [25] D. W. Tufts and R. Kumaresan, "Estimation of frequencies of multiple sinusoids: Making linear prediction perform like maximum likelihood," *Proc. IEEE*, vol. 70, no. 9, pp. 975–989, Sep. 1982.
- [26] A. Edelman, T. A. Arias, and S. T. Smith, "The geometry of algorithms with orthogonality constraints," *SIAM J. Matrix Anal. Appl.*, vol. 20, no. 2, pp. 303–353, 1998.
- [27] J. G. Andrews, "Interference cancellation for cellular systems: A contemporary overview," *IEEE Wireless Commun.*, vol. 12, no. 2, pp. 19–29, Apr. 2005.
- [28] R. P. S. Mahler, "Multitarget Bayes filtering via first-order multitarget moments," *IEEE Trans. Aerosp. Electron. Syst.*, vol. 39, no. 4, pp. 1152–1178, Oct. 2003.
- [29] —, *Statistical Multisource-Multitarget Information Fusion*. Artech House, 2007.
- [30] B.-T. Vo, B.-N. Vo, and A. Cantoni, "Analytic implementations of the cardinalized probability hypothesis density filter," *IEEE Trans. Signal Processing*, vol. 55, no. 7, pp. 3553–3567, Jul. 2007.
- [31] D. Simon, *Optimal State Estimation: Kalman, H-infinity, and Nonlinear Approaches*. Wiley, 2006.
- [32] H. W. Kuhn, "The Hungarian method for the assignment problem," *Naval Research Logistics Quarterly*, vol. 2, no. 1–2, pp. 83–97, 1955.
- [33] P. Stoica and A. Nehorai, "MUSIC, maximum likelihood, and Cramér-Rao bound," *IEEE Trans. Acoust., Speech, Signal Process.*, vol. 37, no. 5, pp. 720–741, May 1989.
- [34] P. Tichavský, C. H. Muravchik, and A. Nehorai, "Posterior Cramér-Rao bounds for discrete-time nonlinear filtering," *IEEE Trans. Signal Process.*, vol. 46, no. 5, pp. 1386–1396, May 1998.
- [35] A. S. Rahmathullah, A. F. García-Fernández, and L. Svensson, "Generalized optimal sub-pattern assignment metric," in *Proc. 20th Int. Conf. Inf. Fusion (FUSION)*, Xi'an, China, 2017, pp. 182–189.
- [36] B.-N. Vo, B.-T. Vo, and H. G. Hoang, "An efficient implementation of the generalized labeled multi-Bernoulli filter," *IEEE Trans. Signal Process.*, vol. 65, no. 8, pp. 1975–1987, Apr. 2017.