


USER MANUAL

MODEL NAME	CO SENSOR EXCO-1000-2E EVB
PART NUMBER	EVB_EXCO_1000-2E_V0
CUSTOMER NAME	-
CUSTOMER PART NUMBER	-
DATE	2026.03.26
REMARK	R00
SOFTWARE VERSION	V0
SOFTWARE CHECKSUM	NONE

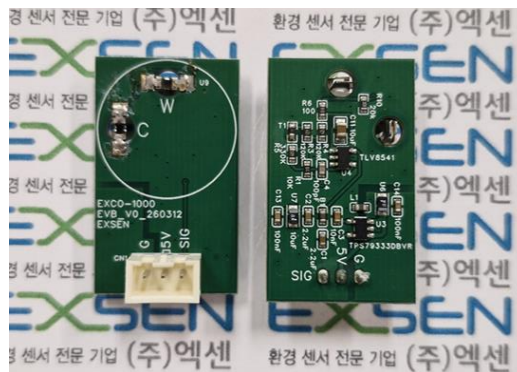

EXSEN Inc.

	Written	Reviewed	Approved
Signature			
Name			
Date			

Customer

	Written	Reviewed	Approved
Signature			
Name			
Date			

Contents

1. REVISION NOTE.....	3
2. DATA SHEET.....	4
(1) Dimension.....	4
(2) Schematic Diagram	5
(3) BOM	6
(4) Sensor & electrical performance specification ($T_a = 25^{\circ}\text{C}$, 50%RH)	7
(5) Pin Configuration	7
(6) CO concentration conversion equation	8
Notice	9


[illegible]

2. DATA SHEET

MODEL NAME	CO SENSOR EXCO-1000-2E EVB
PART NUMBER	EVB_EXCO_1000-2E_V0
DIMENSION	21 x 34
DETECTION RANGE	0~500 ppm
COMMUNICATION	On Board TIA and LDO
APPLICATION	Carbon monoxide concentration measuring General Purpose


(1) Dimension

- 21 x 34 (W x H, mm)

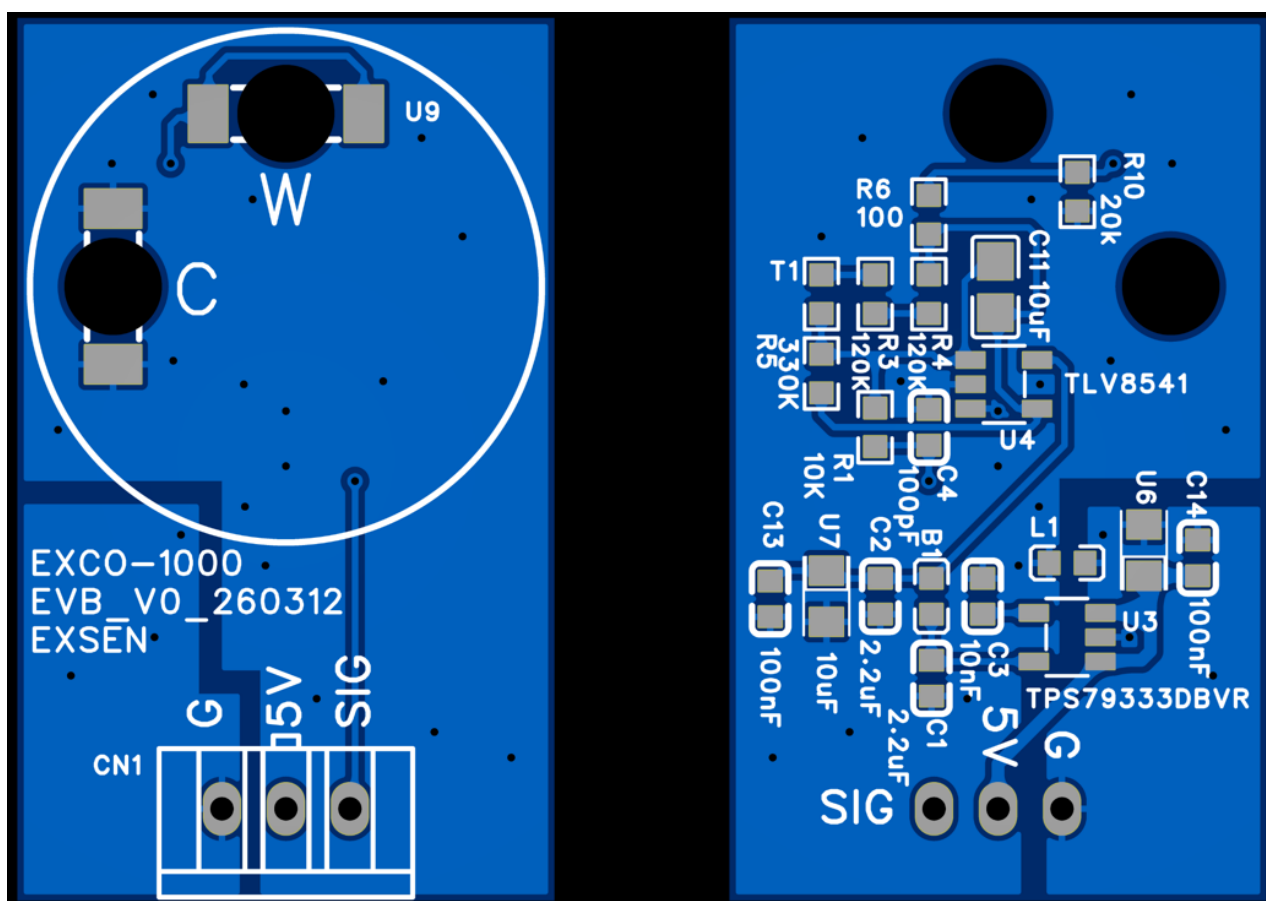**General Tolerance (mm)**

Linear	±0.3
Radius	±0.5

(2) Schematic Diagram

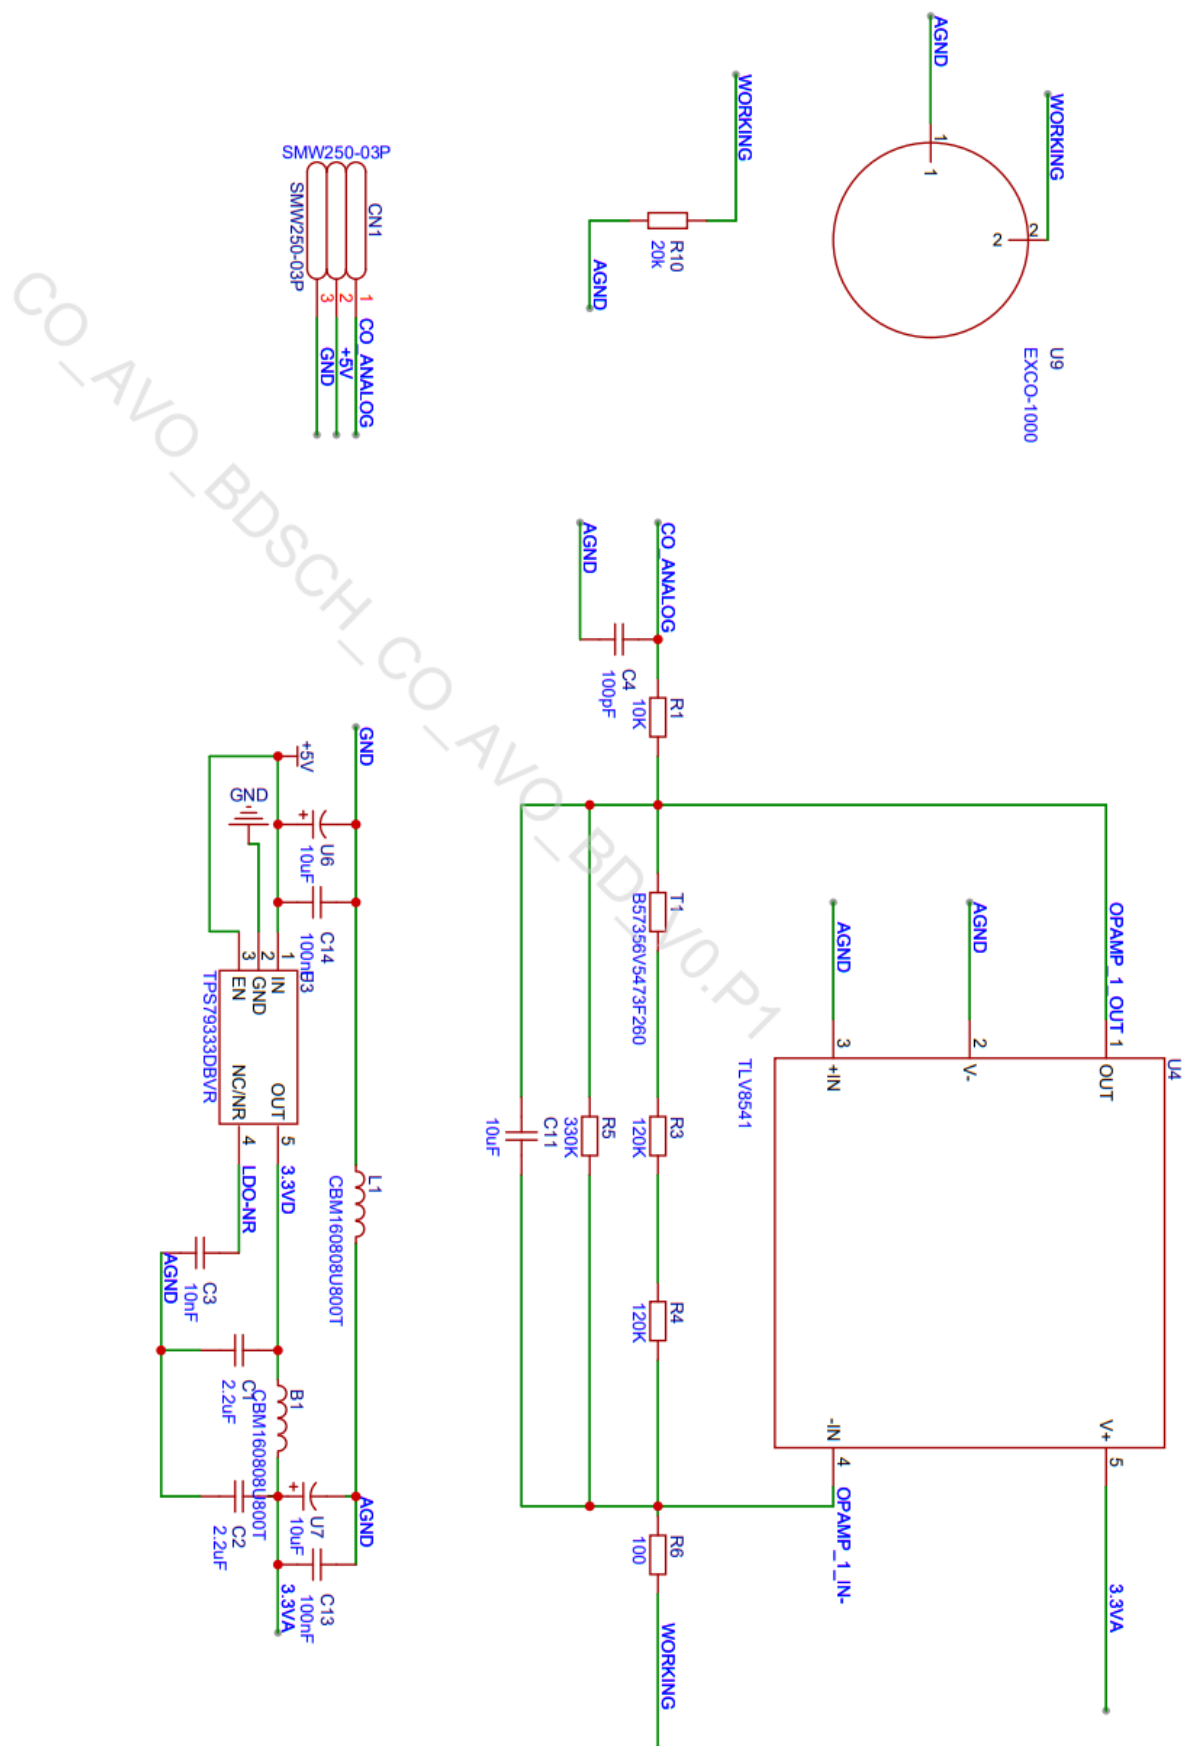

(3) BOM

No.	Quantity	Comment	Designator	Footprint	Value	Note
1	2	CBM160808U800T	B1,L1	L0603	80ohm	-
2	2	2.2uF	C1,C2	C0603	2.2uF	-
3	1	10nF	C3	C0603	10nF	-
4	1	100pF	C4	C0603	100nF	-
5	1	10uF	C11	C0805	10uF	-
6	2	100nF	C13,C14	C0603	100nF	-
7	1	SMW250-03P	CN1	SMW250-03P	3P	YEONHO
8	1	10K, 1%	R1	R0603	10K	F
9	2	120K, 1%	R3,R4	R0603	120K	F
10	1	330K, 1%	R5	R0603	330K	F
11	1	100, 1%	R6	R0603	100	F
12	1	20k	R10	R0603	20k	J or F
13	1	B57356V5473F260	T1	R0603	47k, 4050K	TDK
14	1	TPS79333DBVR	U3	SOT-23-5	3.3V	TI
15	1	TLV8541	U4	SOT-23-5		TI
16	2	10uF	U6, U7	CAP-SMD_L2.0-W1.3-FD	10uF	Tantal
17	1	EXCO-1000-2E	U9	CO_PCD13_5		EXSEN CO SENSOR
18	2	S9091-46R	U9	S9091-46R, EXCO-1000-2E footprint	-	HARWIN

(4) Sensor & electrical performance specification ($T_a = 25^\circ\text{C}$, 50%RH)

Parameters		Condition	Symbol	Min	Typ	Max	Unit
Power	Input	Bias is not required	V_{IN}	4.5	5	5.5	V
	Current Consumption	-	P_A	-	10	-	mA
Electrical	Interface connections	-	O_C	Voltage Output			V
	Sampling interval	-	T_{SPL}	-	Depends on receiver's system		Hz
	Connector	-	CNT	3pin, SMW-250-3P			-
Transimpedance Gain(Rf)				153.5			$k\Omega$
Temperature Compensation				Integrated NTC thermistor (T1)			

Note: The actual gain may vary by +3~5% depending on component tolerances and ambient temperature

(5) Pin Configuration

Pin No	Name	Description
1	SIG	CO Signal (Analog V)
2	5V	5V in
3	G	Ground
CNT	SMW-250-03P	

(6) CO concentration conversion equation

$$Sig(V) = I(sensor) \times Rf$$

$$R3 = 120k\Omega, R4 = 120k\Omega, R5 = 330k\Omega, T1 = 47k\Omega(@25^{\circ}C)$$

$$Rf = \frac{(R3 + R4 + T1) \times R5}{(R3 + R4 + T1) + R5}$$

$$\rightarrow Rf \approx 153.5k\Omega$$

$$I(sensor) = CO\ Conc(ppm) \times Sensitivity(\frac{nA}{ppm})^{note\ 1}$$

$$CO\ Conc(ppm) = \frac{Sig(V)}{sensitivity(\frac{nA}{ppm}) \times Rf(\Omega)}$$

Example)

$$if\ Sig(V) = 0.768\ V, sensitivity = 10\ nA/ppm$$

$$CO\ Conc(ppm) = \frac{0.768\ (V)}{10\ (\frac{nA}{ppm}) \times 153.5(k\Omega)}$$

$$V(V) = I\ (A) \times R(\Omega)$$

$$CO\ Conc(ppm) = \frac{0.768\ (V)}{1.535\ (\frac{mV}{ppm})}$$

$$\rightarrow CO\ Conc(ppm) \approx 500\ (ppm)$$

Note 1: The sensor sensitivity is indicated via a QR code and text printed on the side of the CO sensor body.

3. SAMPLE CODE

(1) Download site: <https://github.com/EXSEN/EXCO-1000-2E>

4. SALES & Technical Support

(1) Ordering Information

Part Number: EVB_EXCO_1000_2E

(2) Contact for Sales and Support

Point of Contact)

- Kyuhwan.noh@ygcompany.kr

(3) Contact for Technical Support

Point of Contact

- ykkim@exsen.co.kr

Notice

EXSEN Inc. (EXSEN) reserves the right to make changes to the products contained in this document to improve performance or for any other purpose, or to discontinue them without notice. Customers are advised to contact EXSEN to obtain the latest product information before placing orders or designing EXSEN products into systems.

EXSEN assumes no responsibility for the use of any products or circuits described in this document or customer product design, conveys no license, either expressed or implied, under any patent or other right, and makes no representation that the circuits are free of patent infringement. EXSEN further makes no claim as to the suitability of its products for any particular purpose, nor does EXSEN assume any liability arising out of the use of any product or circuit, and specifically disclaims all liability, including consequential or incidental damages without limitation.

EXSEN, the EXSEN logo is registered trademarks of EXSEN.