



J2
CSI
1 +3V3
2 CAM_SDA
3 CAM_SCL
4 GND
5 CAM_IO1
6 CAM_IO0
7 GND
8 MIPI_RX0_P
9 MIPI_RX0_N
10 GND
11 MIPI_RX1_P
12 MIPI_RX1_N
13 GND
14 MIPI_RX2_P
15 MIPI_RX2_N
16 GND
17 MIPI_RX3_P
18 MIPI_RX3_N
19 GND
20 MIPI_RX4_P
21 MIPI_RX4_N
22 GND
MP
GND
J5
DSI
1 +3V3
2 +3V3
3 +1V8
4 GND
5 LCD0_RESET
6 +1V8
7 GND
8
9
10 GND
11 PWM3 PWM[14]
12 PWM4 PWM[15]
13 GND
14 SPI0_SDO
15 SPI0_SDI
16
17 SPI0_SCK
18 SPI0_CS
19 GND
20
21
22 GND
23 GND
24 LCD0_BL−
25 LCD0_BL−
26 LCD0_BL−
27 LCD0_BL−
28
29 LCD0_BL+
30 LCD0_BL+
31 LCD0_BL+
MP
GND
Camera
LED−strobe
CAM_IO0 TRIG
CAM_IO1 PWDN
MIPI_RX0_N MCLK
CAM_SCL SCL
CAM_SDA SDA
MIPI_RDP0 MIPI_RX4_P
MIPI_RDN0 MIPI_RX4_N
MIPI_RDP1 MIPI_RX3_P
MIPI_RDN1 MIPI_RX3_N
MIPI_RCP MIPI_RX2_P
MIPI_RCN MIPI_RX2_N
文件: Camera.kicad_sch
IMU
IMU_SPI2−SCK SPI_CLK
CS1_Accel CS1_Accel
CS2_Gyro CS2_Gyro
IMU_SPI2−MOSI SPI_MOSI
INT1_Accel INT1_Accel
INT2_Accel INT2_Accel
INT3_Gyro INT3_Gyro
SPI_MISO IMU_SPI2−MISO
文件: IMU.kicad_sch
Power
文件: Power.kicad_sch
U4
LicheeRV_Nano
PWM1 1 GPIOA_17/UART0_RX/PWM_5
PWM2 2 GPIOA_16/UART0_TX/PWM_4
GND 3 GND
4 GPIOA_15
5 SPK+
6 SPK−
INT1_Accel 7 GPIOA_24/EMMC_D1/SPI1_CS
CS2_Gyro 8 GPIOA_23/EMMC_CMD/SPI1_MISO
SPI0_HANDSHAKE 9 GPIOA_27/EMMC_D3
INT2_Accel 10 GPIOA_25/EMMC_D0/SPI1_MOSI
CS1_Accel 11 GPIOA_22/EMMC_CLK/SPI1_SCK
INT3_Gyro 12 GPIOA_26/EMMC_D2
+5V 13 VSYS
+5V 14 VBUS
PWM_7/JTAG_TCK/UART1_CTS/UART1_RX/GPIOA_19 28 JTAG_TMS
PWM_6/JTAG_TMS/UART1_RTS/UART1_TX/GPIOA_18 27 JTAG_TCK
GND 26 GND
JTAG_TDO/UART1_RX/UART2_RX/GPIOA_29 25 JTAG_TDO
ADC/GPIOB_3 24
JTAG_TDI/UART1_TX/UART2_TX/GPIOA_28 23 JTAG_TDI
SDIO1_D3/SPI2_CS/PWM_4/I2C1_SCL/UART3_CTS/GPIOP_18 22 IMU_SPI2−CS
SDIO1_D2/PWM_5/UART3_TX/GPIOP_19 21
SDIO1_D0/SPI2_MISO/PWM_7/I2C1_SDA/UART3_RTS/GPIOP_21 20 IMU_SPI2−MISO
SDIO1_CMD/SPI2_MOSI/PWM_8/I2C3_SCL/GPIOP_22 19 IMU_SPI2−MOSI
SDIO1_CLK/SPI2_SCK/PWM_9/I2C3_SDA/GPIOP_23 18 IMU_SPI2−SCK
SDIO1_D1/PWM_6/UART3_RX/GPIOP_20 17
GPIOA_14 16
3V3 15 +3V3
Battery
文件: Battery.kicad_sch
U9
XIAO−ESP32−C5−DIP
SPI0_CS 1 GPIO1_A0_D0
2 GPIO0_D1
SPI0_HANDSHAKE 3 GPIO25_D2
4 GPIO7_D3
5 GPIO23_D4_SDA
6 GPIO24_D5_SCL
7 GPIO11_D6_TX
VBUS 14 +5V
GND 13 GND
3V3 12 +3V3
GPIO18_D10_MOSI 11 SPI0_SDI
GPIO9_D9_MISO 10 SPI0_SDO
GPIO8_D8_SCK 9 SPI0_SCK
GPIO12_D7_RX 8
+3V3
JTAG_TMS 2
JTAG_TCK 3
JTAG_TDO 4
JTAG_TDI 5
6
J6
JTAG
MP
GND
PWM1 1
+8V 2
GND 3
J7
PWM1
PWM2 1
+8V 2
GND 3
J8
PWM2
PWM3 1
+8V 2
GND 3
J9
PWM3
PWM4 1
+8V 2
GND 3
J10
PWM4
Sheet: /
File: RM_Guided_Dart_Base_HW.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.3
Id: 1/5

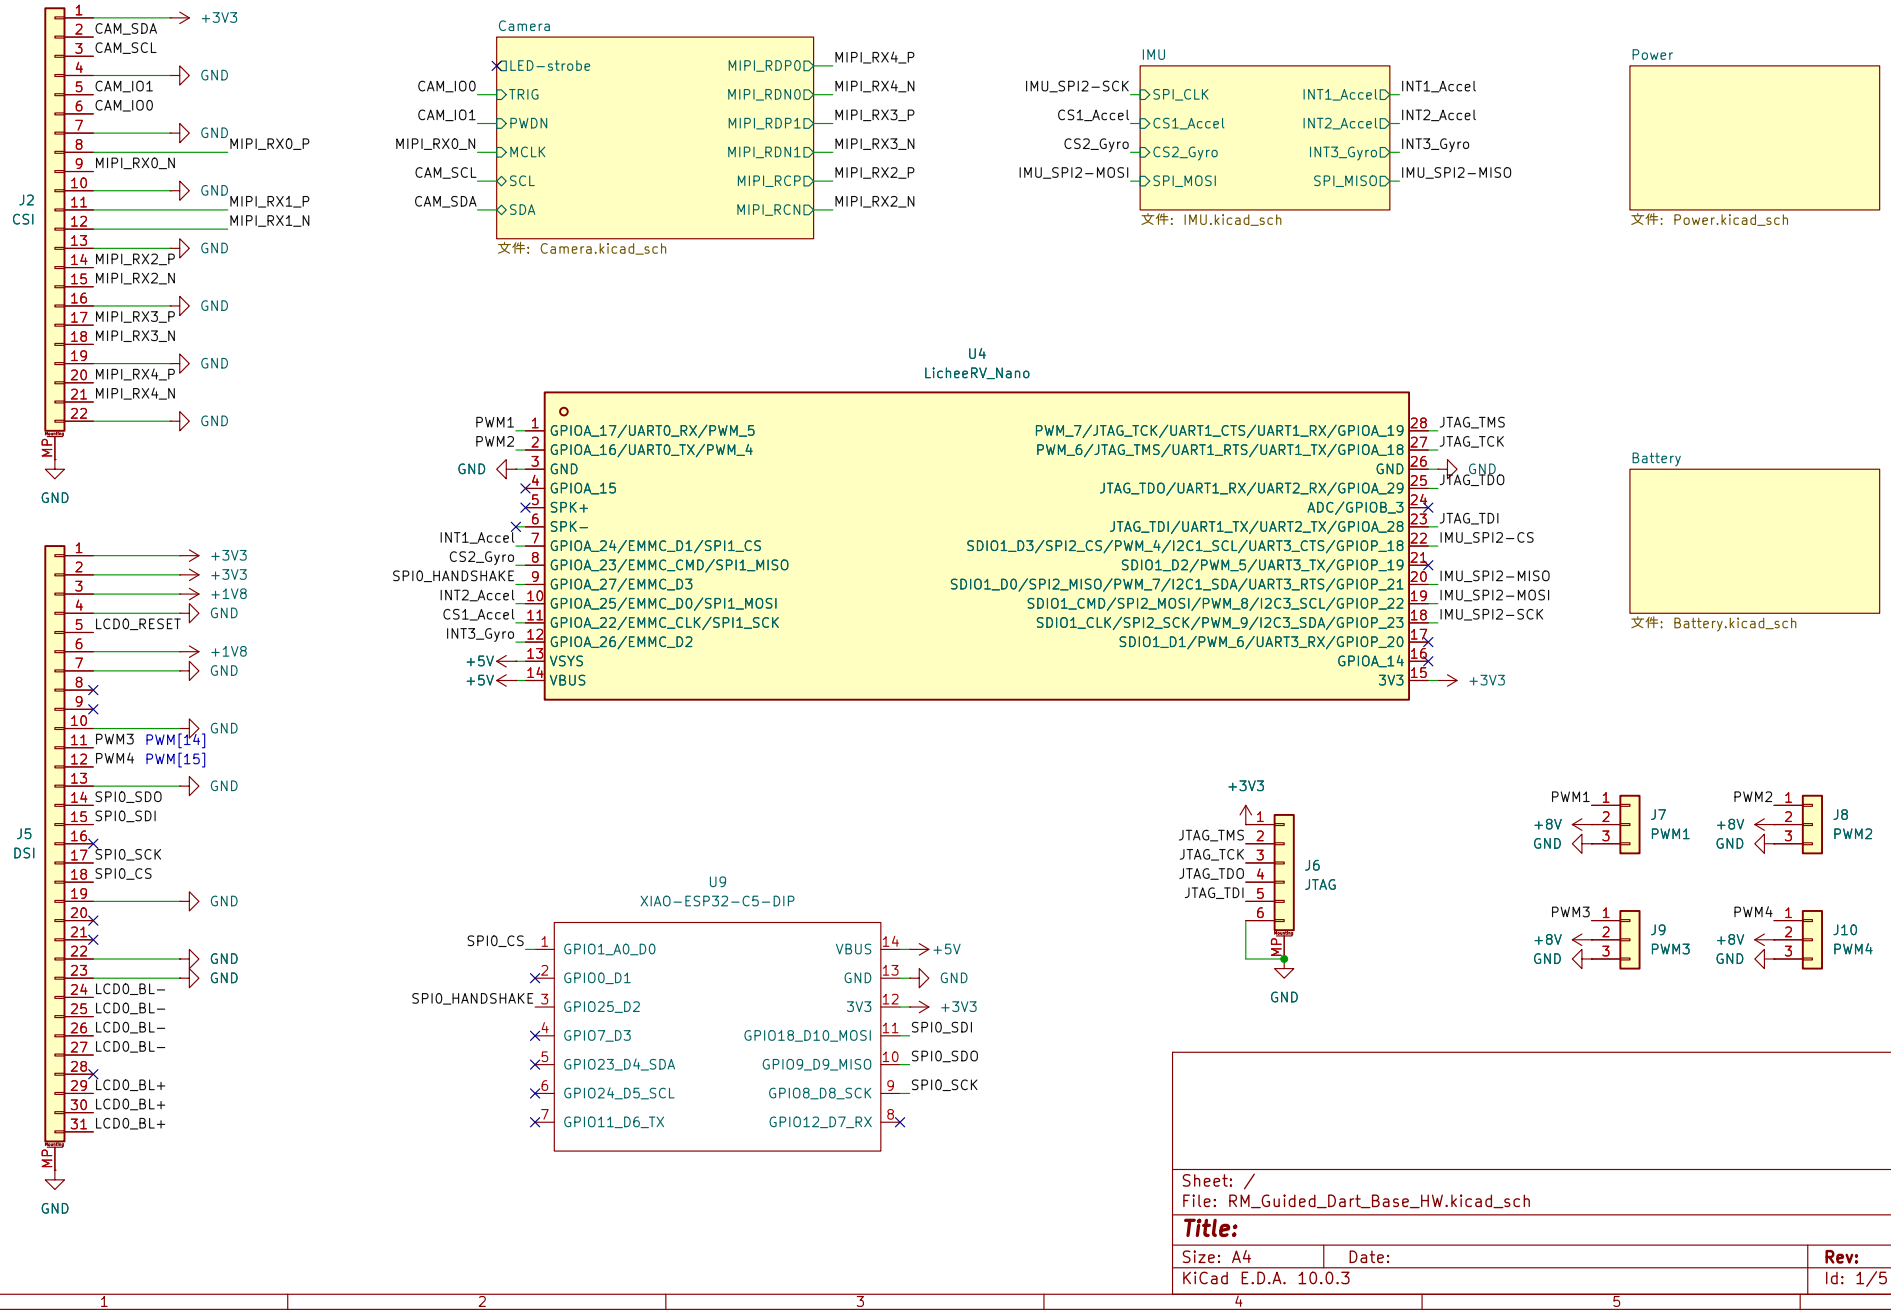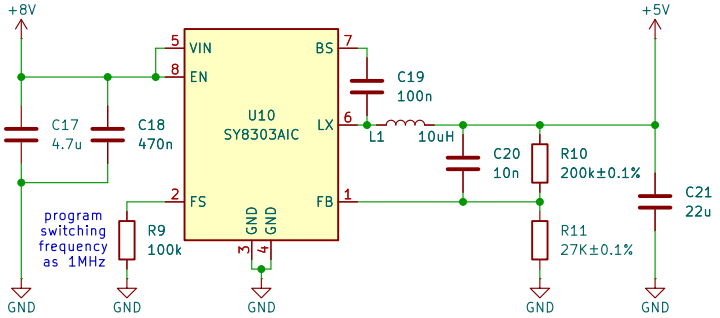


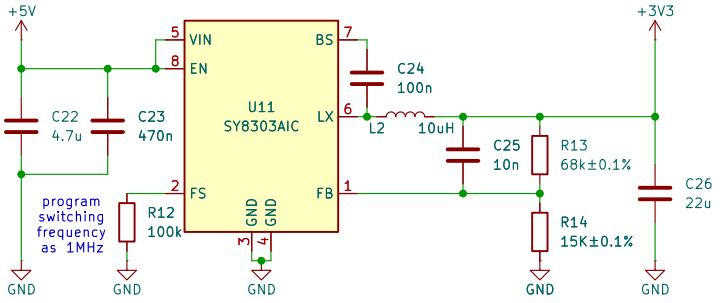

Feedback resistor dividers R1 and R2:

Choose R1 and R2 to program the proper output voltage. To minimize the power consumption under light loads, it is desirable to choose large resistance values for both R1 and R2. A value of between 10kΩ and 1MΩ is highly recommended for both resistors. If Vout is 3.3V, R1=100k is chosen, then using following equation, R2 can be calculated to be 22.1k:

$$R_2 = \frac{0.6V}{V_{OUT} - 0.6V} R_1 .$$



Sheet: /Power/ File: Power.kicad_sch		
Title:		
Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.3		Id: 2/5


5.2.1 单电阻配置

适用于同一 PCB 通过修改电阻阻值实现不同请求电压的应用场合。

CFG1 对 GND 连接电阻，不同阻值对应不同的电压请求档位。使用单电阻配置方式时，CFG2 和 CFG3 引脚可悬空。电阻与请求电压对照表如下：

表 5-1 电阻与请求电压对照说明

配置电阻阻值	请求电压
6.8K Ω	9V
24K Ω	12V
56K Ω	15V
120K Ω	20V
210K Ω	28V

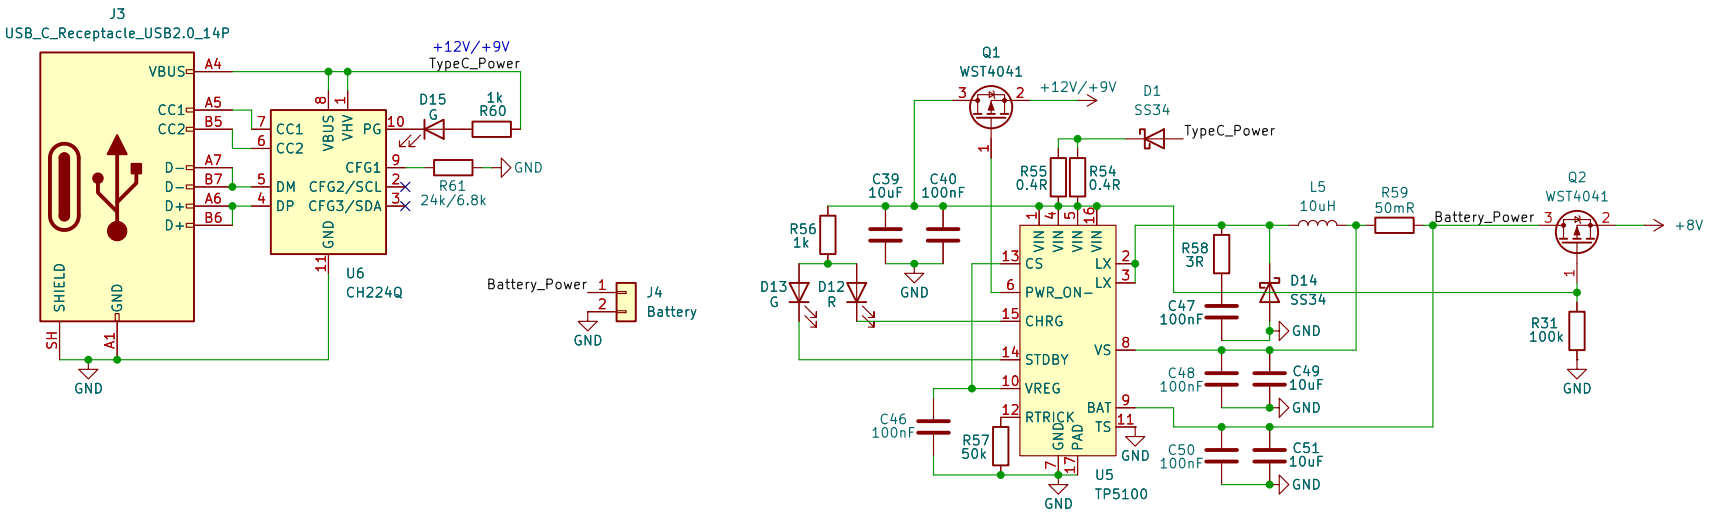


Sheet: /Battery/
File: Battery.kicad_sch

Title:

Size: A4 | Date: | **Rev:**


KiCad E.D.A. 10.0.3 | Id: 3/5

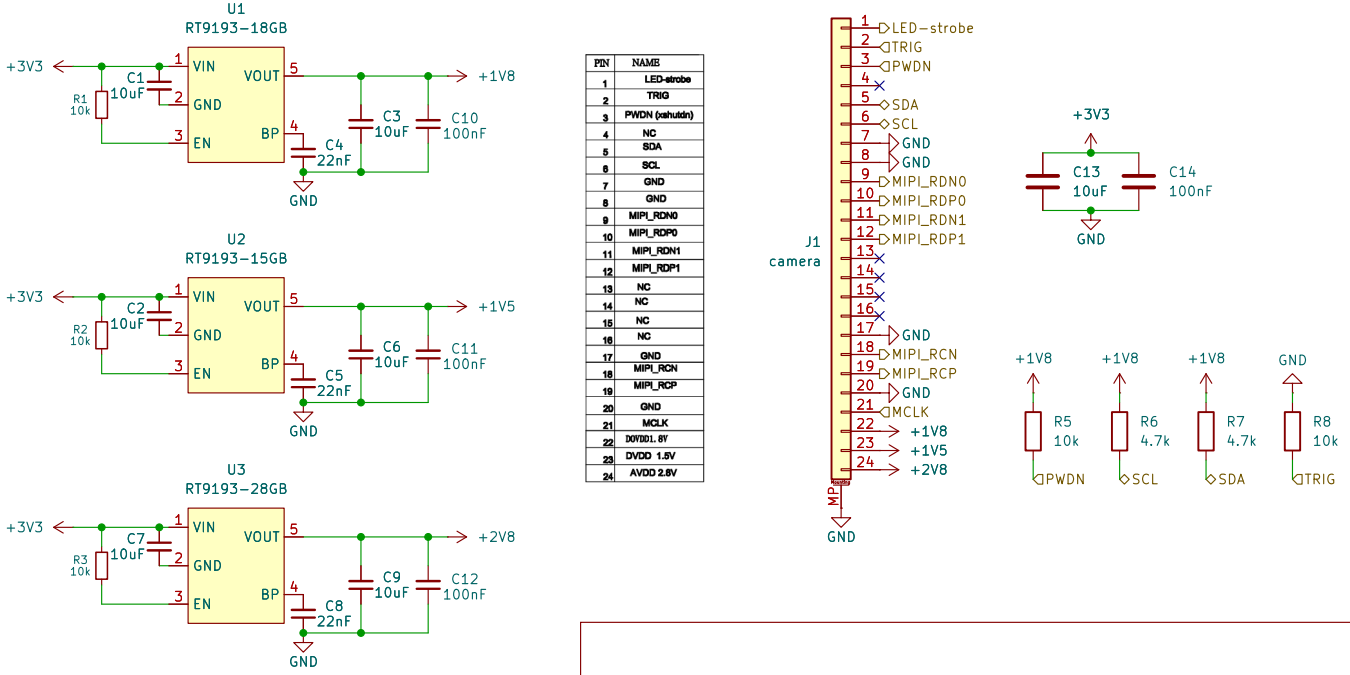

Sheet: /Camera/
File: Camera.kicad_sch

Title:

Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.3		Id: 4/5

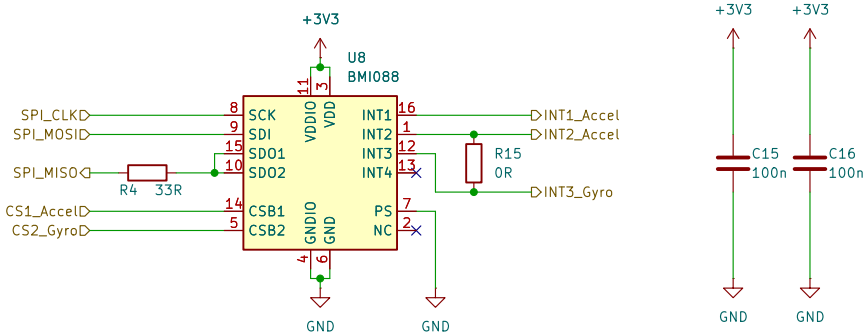

Sheet: /IMU/		
File: IMU.kicad_sch		
Title:		
Size: A5	Date:	**Rev:**
KiCad E.D.A. 10.0.3		Id: 5/5