


USB_INPUT

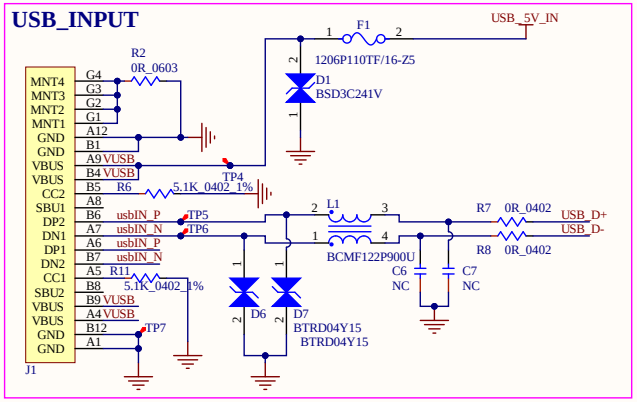


OVP/OCP

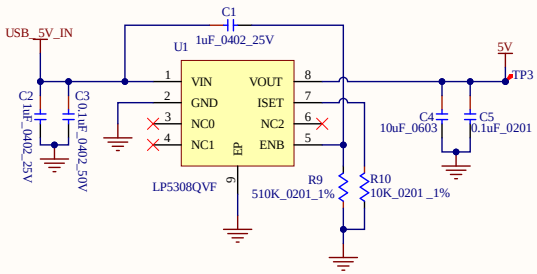

Power ON/OFF

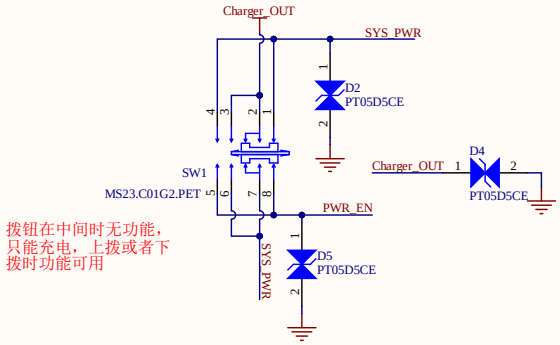


Charger

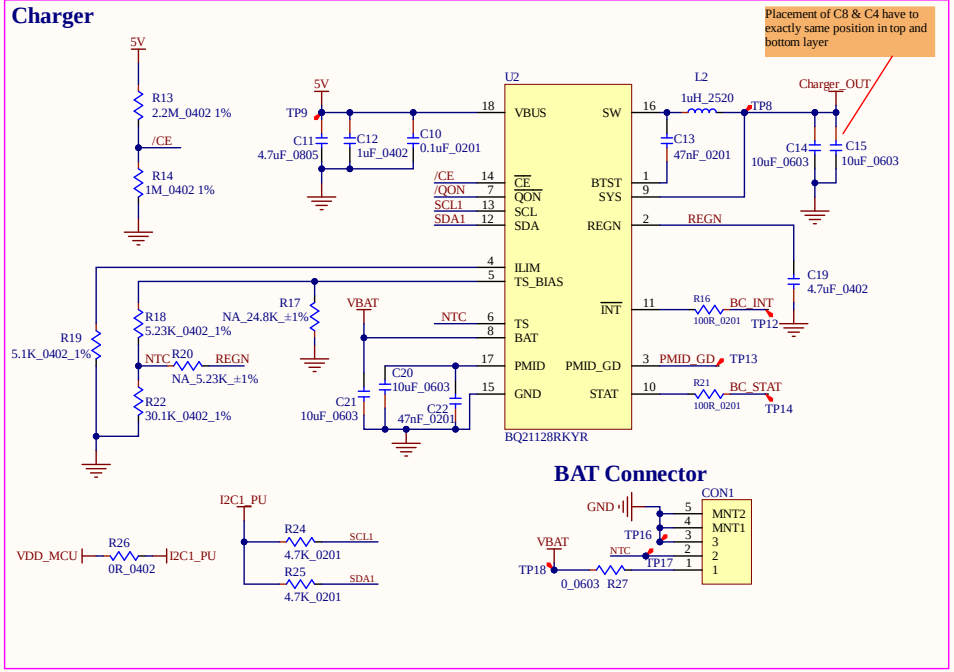


BAT Connector


DC-DC 1.9V

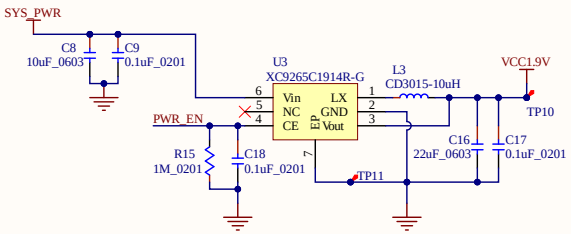


DC-DC 3.3V

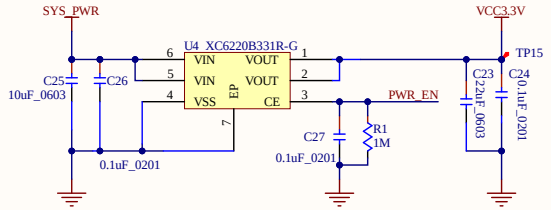

Haptic BOOST 7V

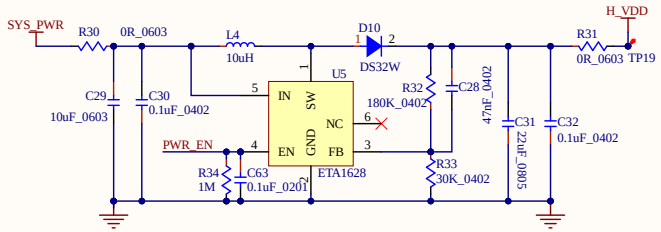


Optical Mark Point




Title: GT_Lina T1A hall haptic_V0.1.PrjPcb			G.TECH TECHNOLOGY LTD. No.8, Jinyuan 1st road, High-tech Zone, Zhuhai, Guangdong, China
Size: A3	Number: 2	Revision: V01	
Date: 2026/9/9	Time: 16:16:47	Sheet 2 of 3	
Drawn BY: Jinming.Luo	Checked BY: Henry.Chen	Approved BY: James.Tian	


Hall IC to LB&RB

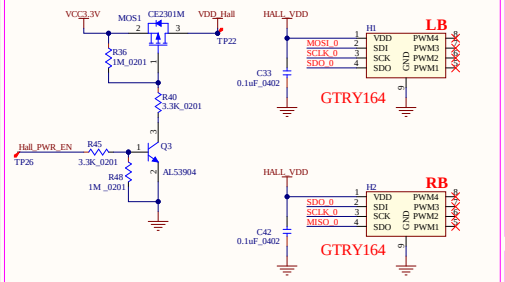


MB & SIDE KEY

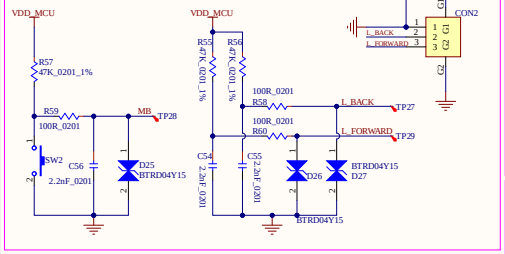

DPI SWITCH

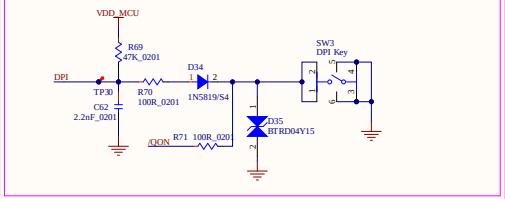


INDICATOR LED DRIVE

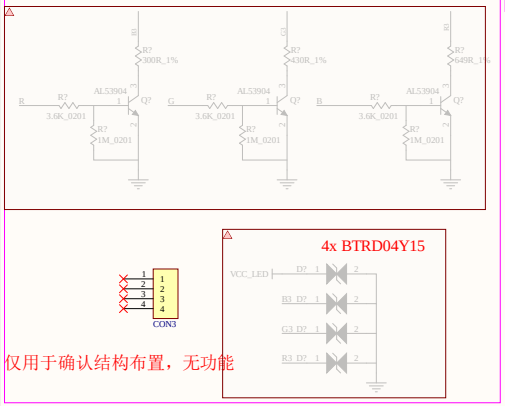


仅用于确认结构布置，无功能


Optical Encoder

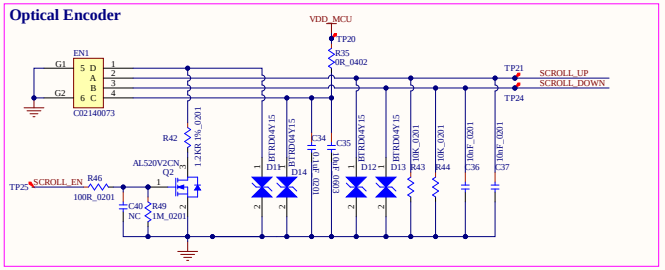

SENSOR

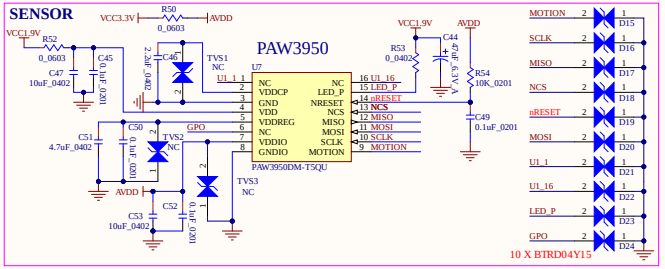


LB&RB Haptics Driver

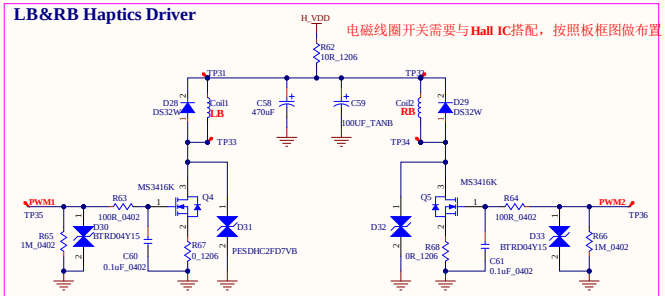


L/R Level SLIDE SW


仅用于确认结构布置，无功能



MCU

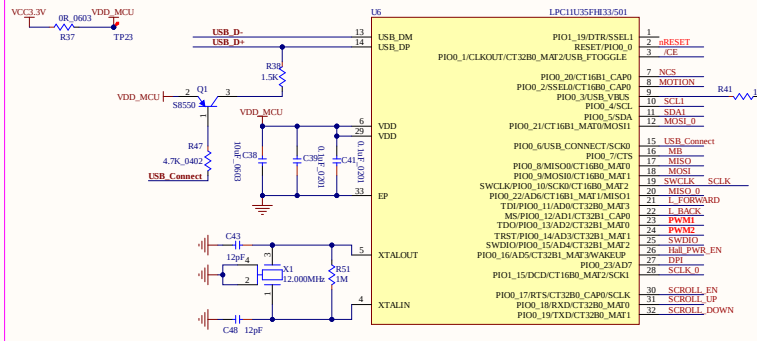

JTAG Program Interface



Title: GT_Lina T1A hall haptic_V0.1.PrjPcb			G.TECH TECHNOLOGY LTD. No.8, Jinyuan 1st road, High-tech Zone, Zhuhai, Guangdong, China
Size: A2	Number: XXXXXXXXX	Revision: V0.1	
Date: 2026/9/9	Time: 16:16:47	Sheet 1 of 1	
Drawn BY: Zero	Checked BY: Henry.chen	Approved BY: James.tian	