


roboy de10-nano-soc PINOUT

LEGEND

SCK[0-2]	SPI clock lines
MOSI[0-2]	SPI Master Out Slave In lines
MISO[0-2]	SPI Master In Slave Out
SS0[0-8]	SPI Slave Select lines of SPI bus 0 (the [] is the motor ID)
SS1[9-11]	SPI Slave Select lines of SPI bus 1 (the [] is the motor ID)
SS2[12-14]	SPI Slave Select lines of SPI bus 2 (the [] is the motor ID)
SCL[0-1]/SDA[0-1]	I2C clock/data lines for myoControl [1-2]
SCL/SDA[0-3]	I2C clock/data lines for 2 cores
SCK[ESP]	SPI clock line for ESP8266
MOSI[ESP]	SPI Master Out Slave In line for ESP8266
SS[ESP]	SPI Slave Select line for ESP8266
LS_D[0-15]	DarkRoom Lighthouse Sensor TS4231 data lines
LS_E[0-15]	DarkRoom Lighthouse Sensor TS4231 envelope lines
LS_TX	DarkRoomOOTXDecoder uart TX
PWR_S	Power Sense, active low
GPIO	gpio, controlled by myoControl[1]

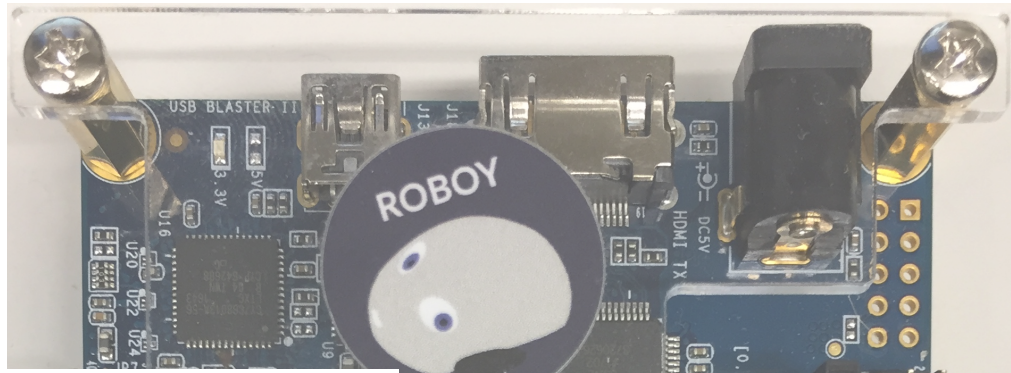

SCL[0]	GPIO_1[35]	40	39	GPIO_1[34]	SDA[0]	MOSI[ESP]	GPIO_0[0]	1	2	GPIO_0[1]	SCK[ESP]
SCL[1]	GPIO_1[33]	38	37	GPIO_1[32]	SDA[1]	SS[ESP]	GPIO_0[2]	3	4	GPIO_0[3]	LS_TX
SCL[2]	GPIO_1[31]	36	35	GPIO_1[30]	SDA[2]	LS_D[0]	GPIO_0[4]	5	6	GPIO_0[5]	LS_E[0]
SCL[2]	GPIO_1[29]	34	33	GPIO_1[28]	SDA[2]	LS_D[1]	GPIO_0[6]	7	8	GPIO_0[7]	LS_E[1]
SCL[1]	GPIO_1[27]	32	31	GPIO_1[26]	SDA[1]	LS_D[2]	GPIO_0[8]	9	10	GPIO_0[9]	LS_E[2]
GND		30	29	GPIO_1[24]	PWR_S	LS_D[3]	GPIO_0[10]	11	12	GND	
GPIO	GPIO_1[25]	28	27	GPIO_1[22]	SS2[13]	LS_D[4]	GPIO_0[12]	13	14	GPIO_0[11]	LS_E[3]
SS2[14]	GPIO_1[23]	26	25	GPIO_1[20]	SCK[2]	LS_D[5]	GPIO_0[14]	15	16	GPIO_0[13]	LS_E[4]
SS2[12]	GPIO_1[21]	24	23	GPIO_1[18]	MOSI[2]	LS_D[6]	GPIO_0[16]	17	18	GPIO_0[15]	LS_E[5]
MISO[2]	GPIO_1[19]	22	21	GPIO_1[16]	SS1[10]	LS_D[7]	GPIO_0[18]	19	20	GPIO_0[17]	LS_E[6]
SS1[11]	GPIO_1[17]	20	19	GPIO_1[14]	SCK[1]	LS_D[8]	GPIO_0[20]	21	22	GPIO_0[19]	LS_E[7]
SS1[9]	GPIO_1[15]	18	17	GPIO_1[12]	MOSI[1]	LS_D[9]	GPIO_0[22]	23	24	GPIO_0[21]	LS_E[8]
MISO[1]	GPIO_1[13]	16	15	GPIO_1[10]	SS1[7]	LS_D[10]	GPIO_0[24]	25	26	GPIO_0[23]	LS_E[9]
SS1[8]	GPIO_1[11]	14	13	GPIO_1[8]	SS0[5]	LS_D[11]	GPIO_0[26]	27	28	GPIO_0[25]	LS_E[10]
GND		12	11	GPIO_1[6]	SS0[3]	LS_D[12]	GPIO_0[28]	29	30	GND	
SS0[6]	GPIO_1[9]	10	9	GPIO_1[4]	SS0[1]	LS_D[13]	GPIO_0[30]	31	32	GPIO_0[27]	LS_E[11]
SS0[4]	GPIO_1[7]	8	7	GPIO_1[2]	SCK[0]	LS_D[14]	GPIO_0[32]	33	34	GPIO_0[29]	LS_E[12]
SS0[2]	GPIO_1[5]	6	5	GPIO_1[0]	MOSI[0]	LS_D[15]	GPIO_0[34]	35	36	GPIO_0[31]	LS_E[13]
SS0[0]	GPIO_1[3]	4	3					37	38	GPIO_0[33]	LS_E[14]
MISO[0]	GPIO_1[1]	2	1					39	40	GPIO_0[35]	LS_E[15]

