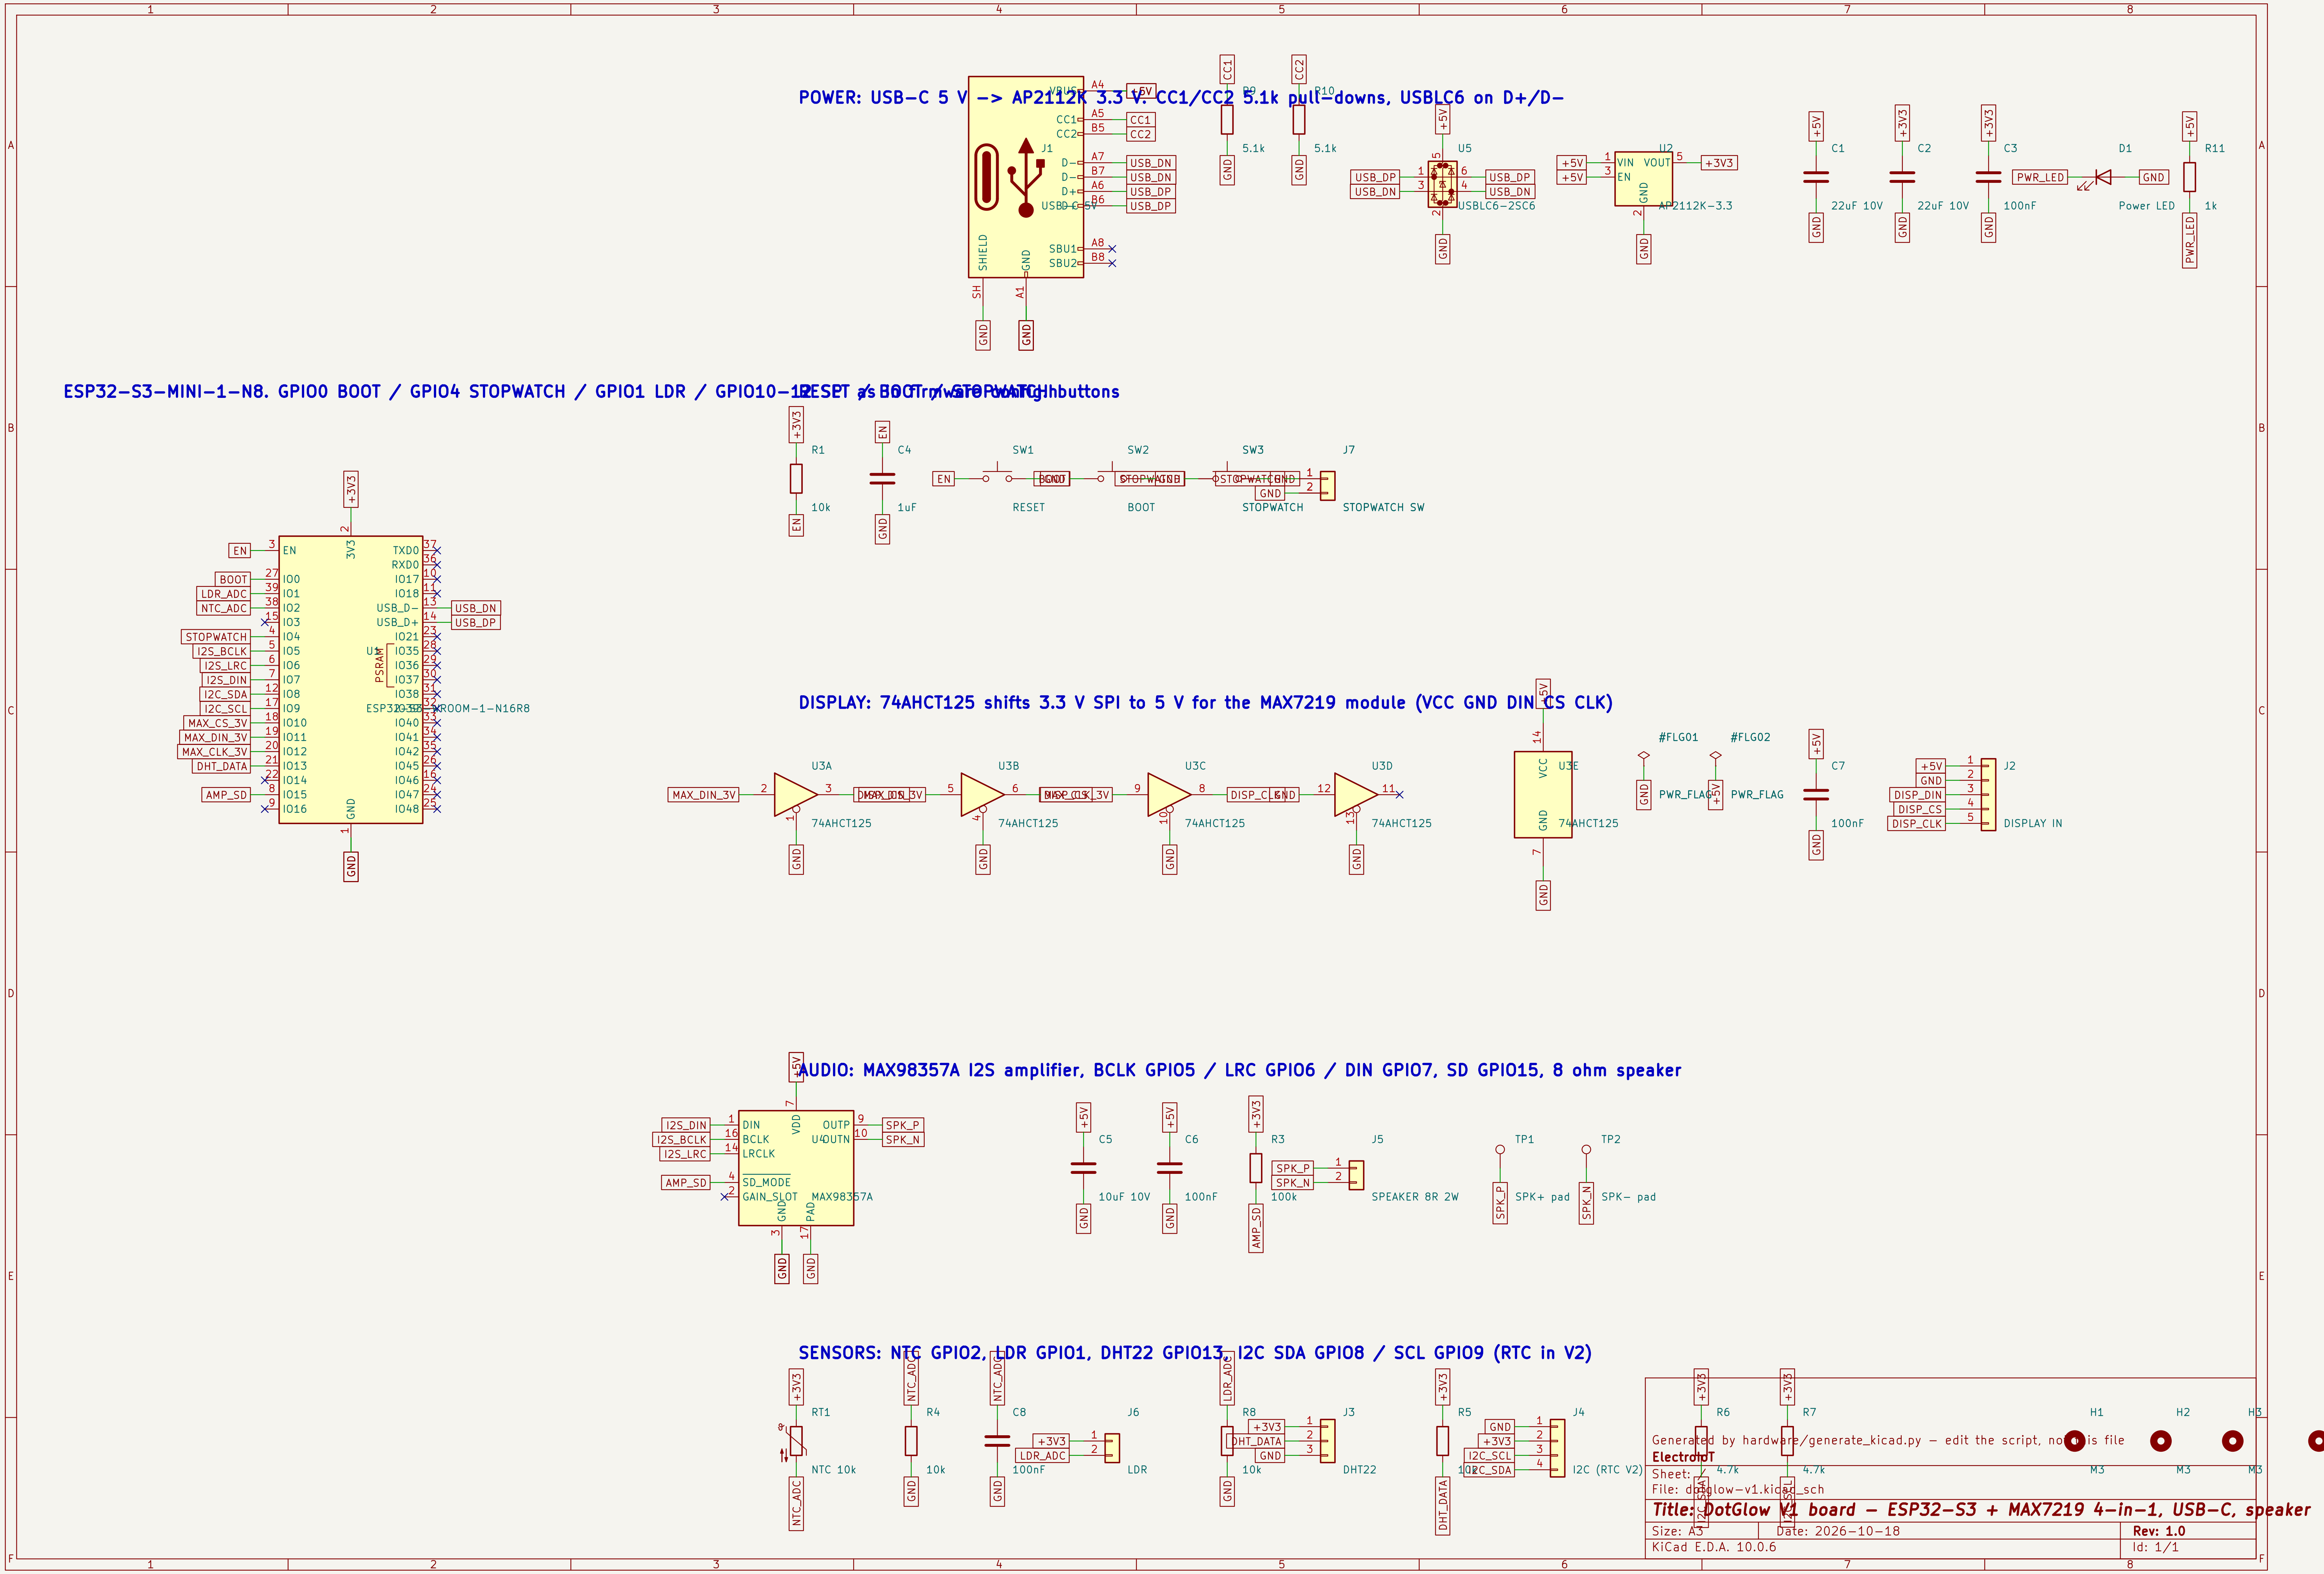

POWER: USB-C 5 V -> AP2112K 3.3 V. CC1/CC2 5.1k pull-downs, USBLC6 on D+/D-

ESP32-S3-MINI-1-N8. GPIO0 BOOT / GPIO4 STOPWATCH / GPIO1 LDR / GPIO10-12 as in firmware config.

RESET / BOOT / STOPWATCH buttons

DISPLAY: 74AHCT125 shifts 3.3 V SPI to 5 V for the MAX7219 module (VCC GND DIN CS CLK)

AUDIO: MAX98357A I2S amplifier, BCLK GPIO5 / LRC GPIO6 / DIN GPIO7, SD GPIO15, 8 ohm speaker

SENSORS: NTC GPIO2, LDR GPIO1, DHT22 GPIO13, I2C SDA GPIO8 / SCL GPIO9 (RTC in V2)

Generated by hardware/generate_kicad.py — edit the script, not this file
ElectroIoT
Sheet: /
File: dotglow-v1.kicad_sch
Title: DotGlow V1 board – ESP32-S3 + MAX7219 4-in-1, USB-C, speaker
Size: A3
Date: 2026-10-18
Rev: 1.0
KiCad E.D.A. 10.0.6
Id: 1/1