D21CC80UNVPW-C

2100mA Programmable LED Driver

- Universal (120-277V) Input Voltage
- Class 2, 80W Constant Current Output with 0-10V dimming
- Full featured programmability with Wireless Programming

Performance	
Input Voltage	120 ~ 277 Vac
Input Current Max	0.77 /120V 0.33 / 277V
Input Power Max	93W
Input Frequency	50 - 60 (Hz)
Power Factor	> 0.95 @ max load
THD max	< 20 % @ max load
Output Voltage (Refer to Power Curve Chart)	16V to 38V @ 2.10 Amps 16V to 56V @ 1.40 Amps
Max. Output Current	2100mA
Min. Dimming Current	5mA
Output Power	80W
Standby Power	< 2.8W @120Vac
	< 3.5W @ 277Vac
Line Regulation	±3 %
Load Regulation	±5 %
Output Current Ripple	<10% (Pk-Pk/avg)
Inrush Current* Peak / >10% Duration	120V: 21A / 455uS 277V: 52A / 358uS

*Source Impedance per NEMA 410

Physical	
Length	14.25 in (362 mm)
Width	1.18 in (30 mm)
Height	1.00 in (25.4 mm)
Mounting Length	13.75 in (349.3 mm)
Weight (lbs)	1.0
Wire Trap / Plug-in Connectors for 16-22 AWG Solid Wire Strip length 0.33in	

Environmental	
EMI and RFI	Meets FCC part 15 (Class A) Non-Consumer Limits
Operating Temperature	-40°C to 55°C
	(-40°F to 131°F)
Storage Temperature	-40°C to 85°C
	(-40°F to 185°F)
tc	85°C max for warranty
	85°C max for UL
Protection Rating	UL Dry & Damp
Transient Protection	IEEE C62.41 2.5kV

Protection

Over Voltage, Under Voltage, Short Circuit, Over Temp

Safety:

UL 8750 & CSA 250.13

UL Class P

c UL us LISTED LED DRIVER E339166

RoHS COMPLIANT

Wiring Diagram:

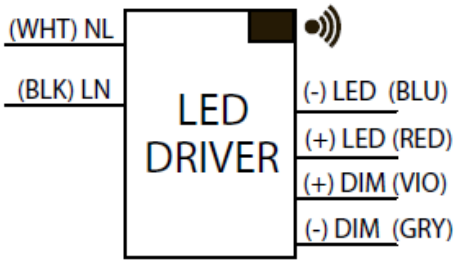

Ordering Information

Order Number	Description	Qty/Carton
D21CC80UNVPW-C010C	2100mA 80W	10

EVERLINE

Application and operation performance specification information subject to change without notification.

Programmable Features
Output Current
Minimum Dimming Level
Dim-to-Off
Dimming Curve (Linear, Linear Soft Start, Logarithimc)
Lumen Maintenance

*Refer to application notes EVD10 and EVD11 at www.noble-jase.com for additional information on programmable features.

Programming System	
Software	EVERset Programming Software
Hardware	LDPC000A Configuration Tool
Driver Interface	Wireless via RFID

Driver Operating Range:

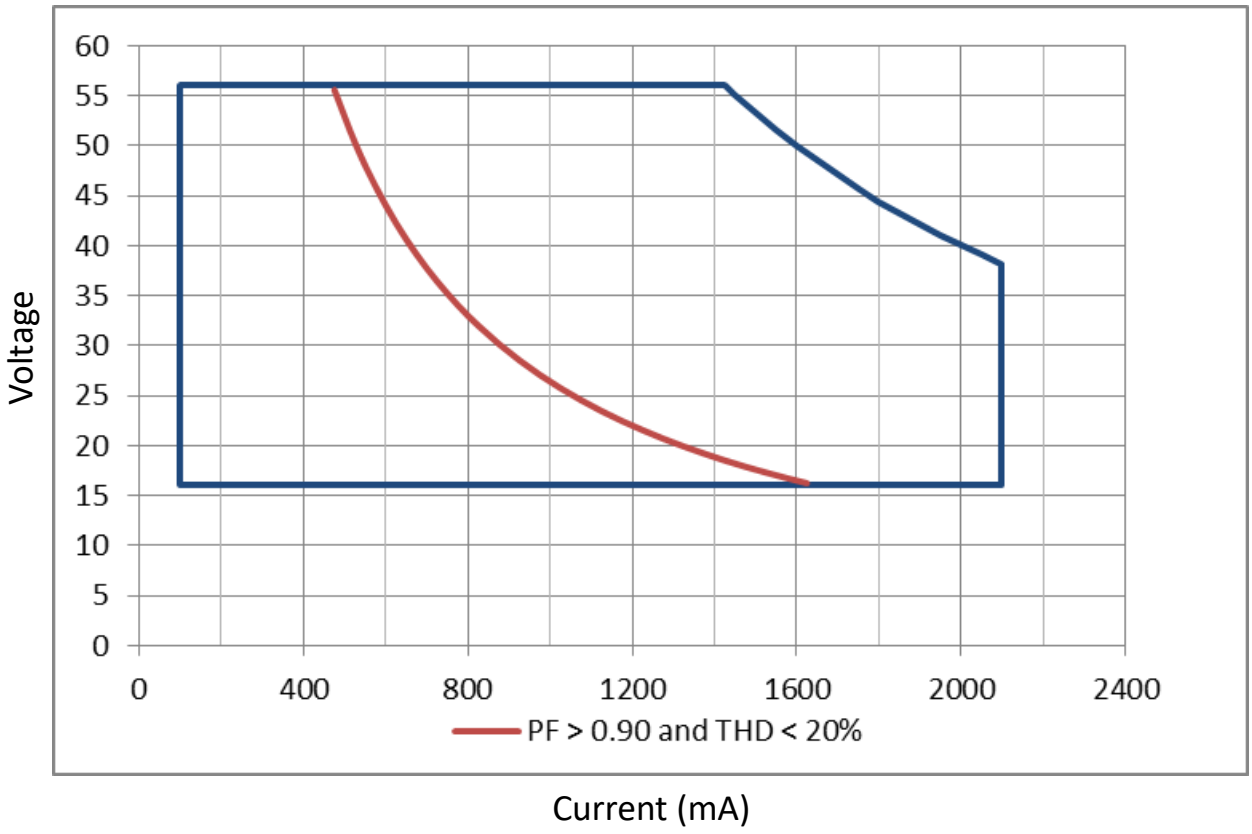

Application and operation performance specification information subject to change without notification.

0-10V Dimming

Linear Dimming to 1%

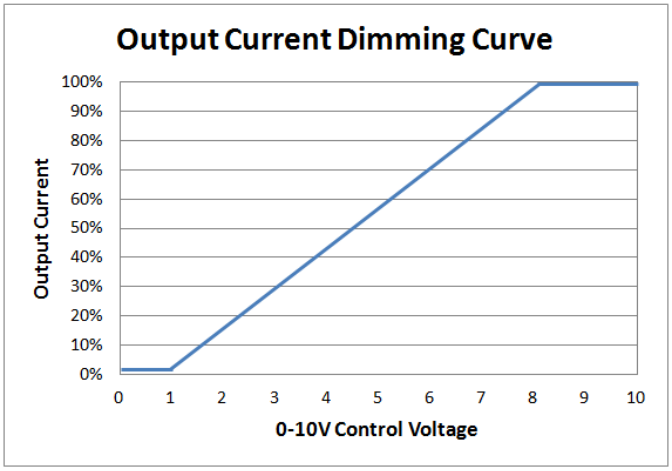

Linear Dimming w/ Dim-to-Off*

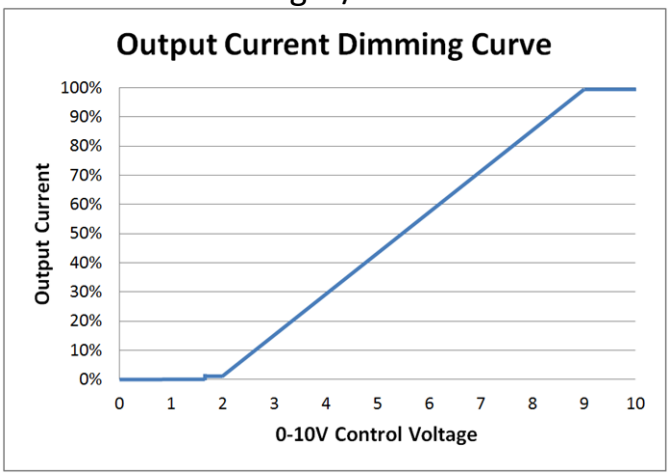

* Driver ships with Dim-to-Off disabled. Dim-to-Off must be enabled through the EVERset programming software.

0-10V Analog Dimming Interface

- Analog 0 to 10 vDC Voltage Control
- Use Violet (+) & Gray (-) for connection to 0-10vDC.
- 10v = maximum output, 0v = minimum output
- Wiring Violet & Gray together provides min. light output.
- Capping Violet & Gray separately provides 100% light output.
- 0-10V interface can be wired as Class 1 or Class 2 Circuit.
- Driver will source a maximum of 165uA for control needs.
- Controller must sink current from the 0-10V control leads.

Programmable Dimming Features		
Feature	**Range**	**Factory Default**
Maximum Output Current	100 - 2100mA	default = 2100mA
Minimum Dimming Level	5 - 525mA	default = 21mA
Dimming Curve	(Linear, Linear Soft Start, Logarithmic w/ factor 1 to 7)	default = Linear
Dimming Control Voltage Range		
Max Bright Control Voltage	7 - 9Vdc	default = 8Vdc
Min Dim Level Control Voltage	1 - 3Vdc	default = 1Vdc
Dim-to-Off	0.1 - 1.7Vdc	default = 0Vdc (disabled)

* Refer to application note EVD10 at www.noble-jase.com for additional information on programmable dimming features.

EVERLINE

Application and operation performance specification information subject to change without notification.

Performance: Efficiency

Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

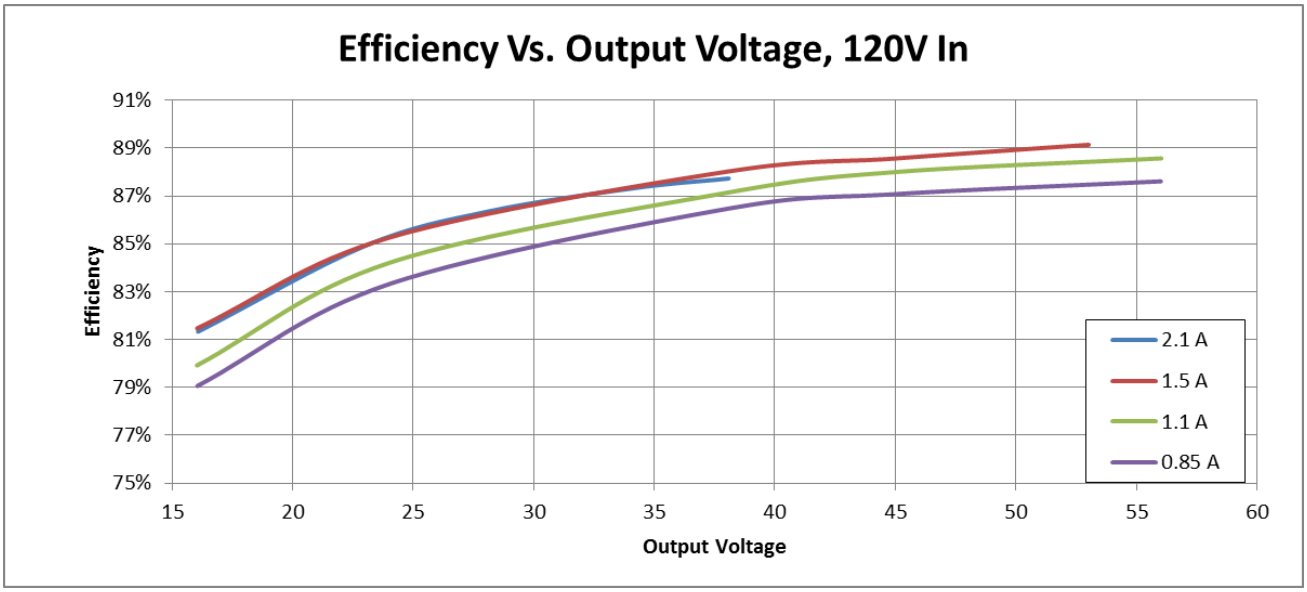

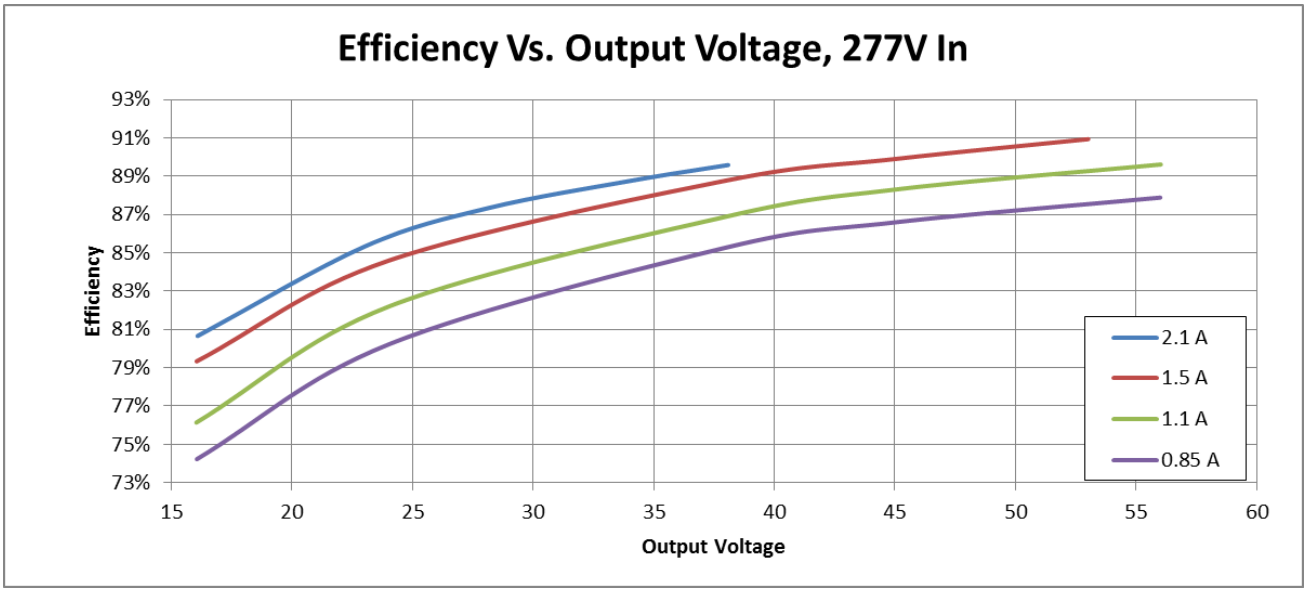

Performance: Total Harmonic Distortion, & Power Factor

Typical performance measurements are shown. The charts are to be used as a guideline and not for specification use.

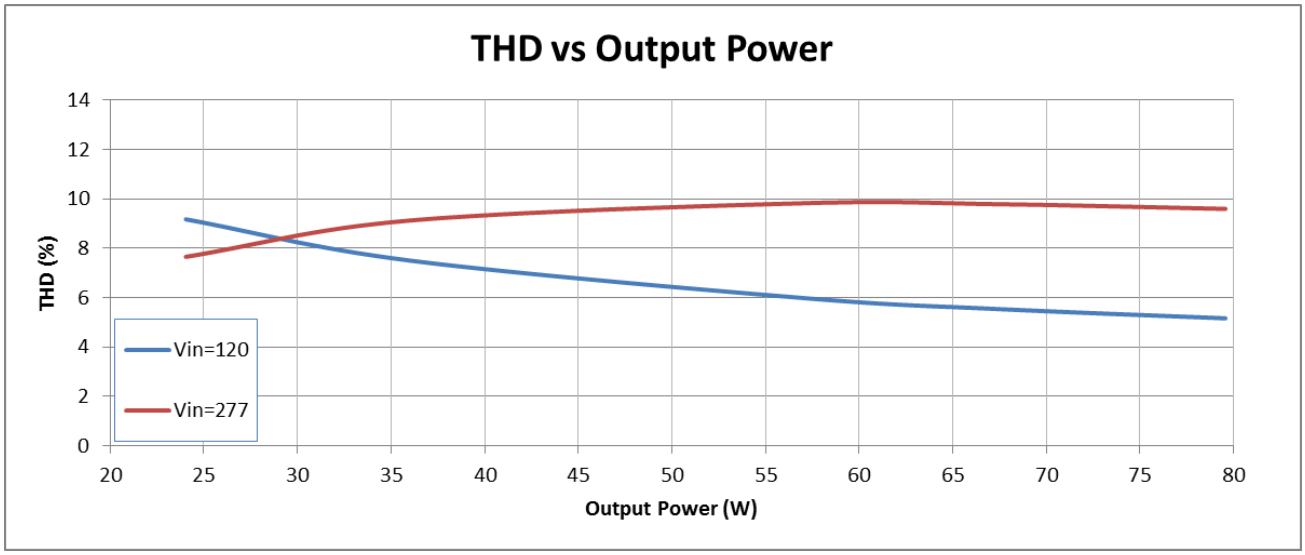

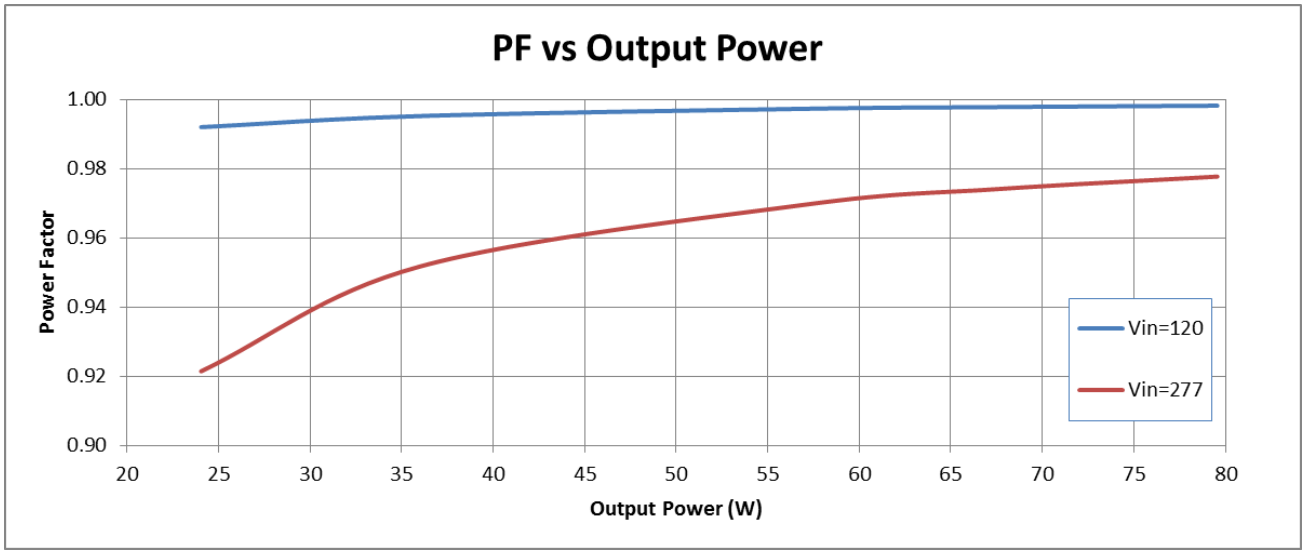

Output power based on maximum rated output current and varying load voltages.

Application and operation performance specification information subject to change without notification.

Transient Protection		
Transient	**Differential Mode (L-N)**	**Common Mode (L-G, N-G, L&N-G)**
IEEE C62.41 100kHz Ring Wave (200A maximum)	> 2.5kV	> 2.5kV

Isolation				
Isolation	**Input**	**Output**	**0-10V**	**Enclosure**
Input	-	2xU + 1kV	2xU + 1kV	2xU + 1kV
Output	2xU + 1kV	-	2xU + 1kV	700V
0-10V	2xU + 1kV	2xU + 1kV	-	2xU + 1kV
Enclosure	2xU + 1kV	700V	2xU + 1kV	-

U = Max Input Voltage

Driver Lifetime vs. Driver Case Temperature

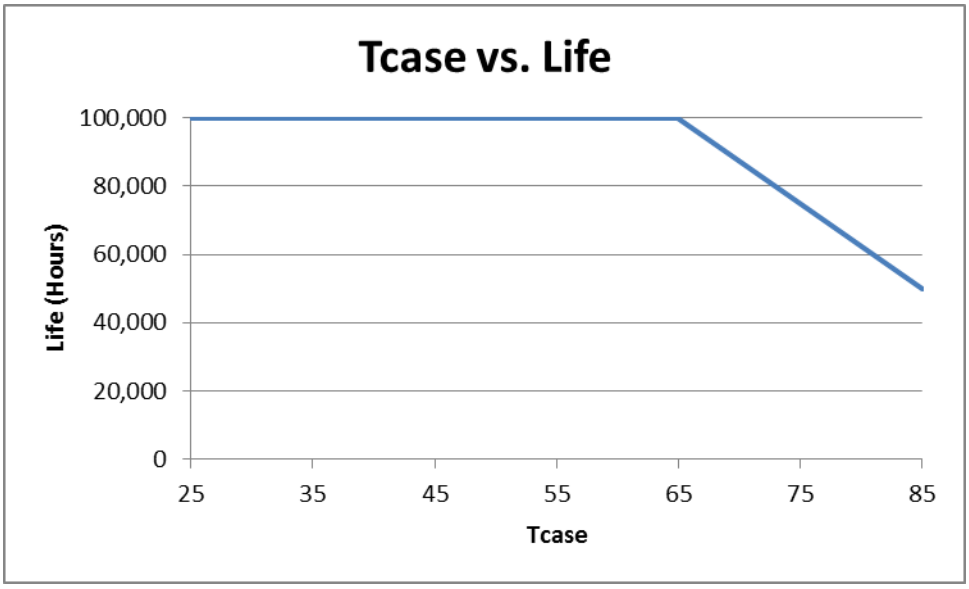

The Data curve provided predicts the LED Driver life based on the case temperature measured at the Tc location identified on the label or specification sheet. The Telecordia SR-332 standard is used to generate the prediction curves.

Dimensional Diagram:

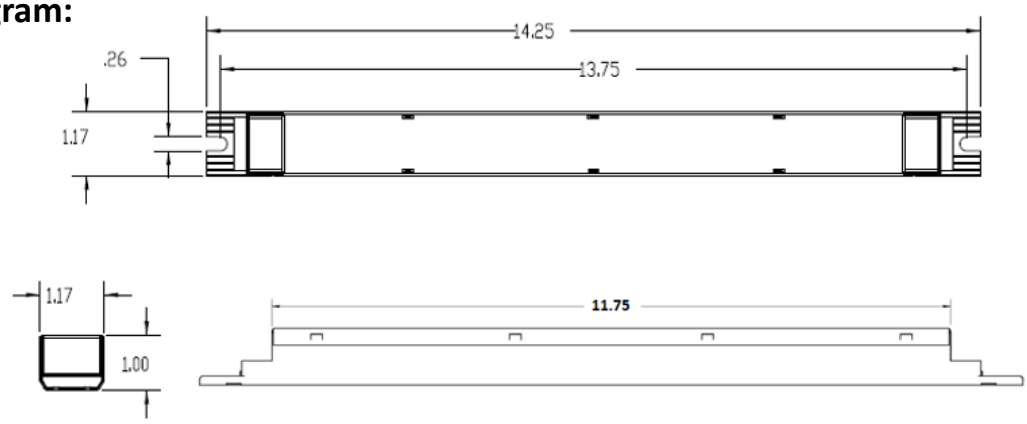

Tc Location:

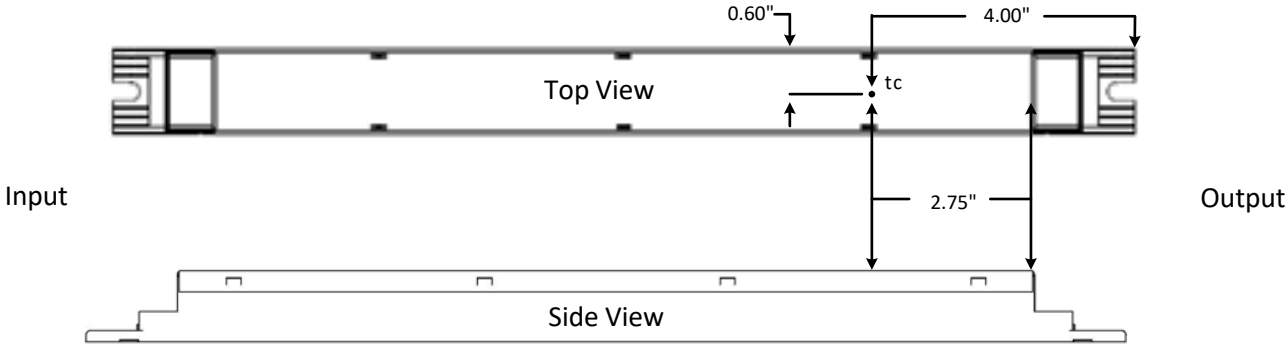

FCC Statement: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warranty:

Universal Lighting Technologies warrants to the purchaser that each power supply will be free from defects in material or workmanship for a period of 5 years from the date of manufacture when properly installed per instructions and under normal operating conditions of use. Call 1-800-225-5278 for technical assistance.

EVERLINE