

LAMBDA ANALOG



Target lambda indicated by triangle. point of triangle should always point to center of gauge.

BOOST ANALOG

Use Inches of Mercury for
vacuum side of gauge.
Major ticks every 10 In Hg,
minor ticks every 2 In Hg




'ghost needle' triangle to
Hold max achieved boost
for 3 sec if boost exceeds
7 PSI. point of triangle
should always point to
center of gauge.


Boost should have
maximum value of 25psi,
major ticks with a number
every 5 psi, minor ticks
every PSI

Image for reference. If text conflicts with
image, text overrides image.


BOOST/LAMBDA COMBO

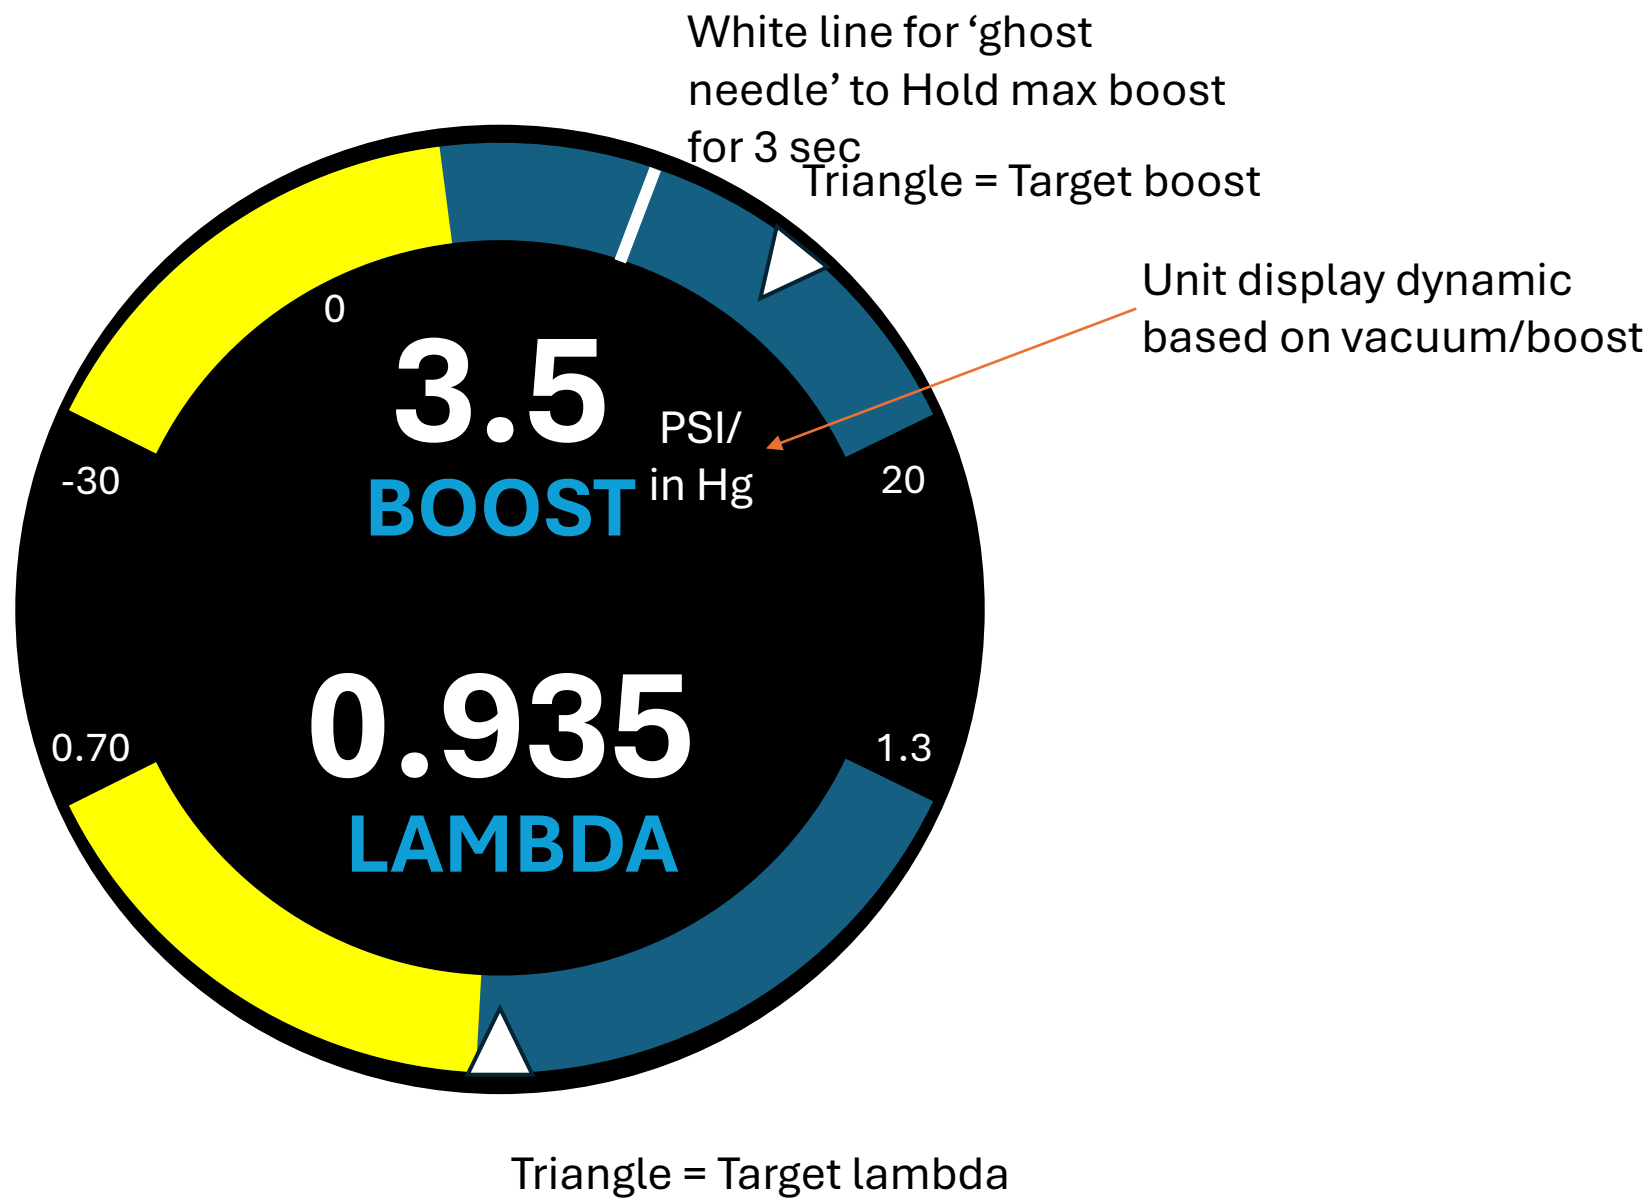

ENGINE DATA

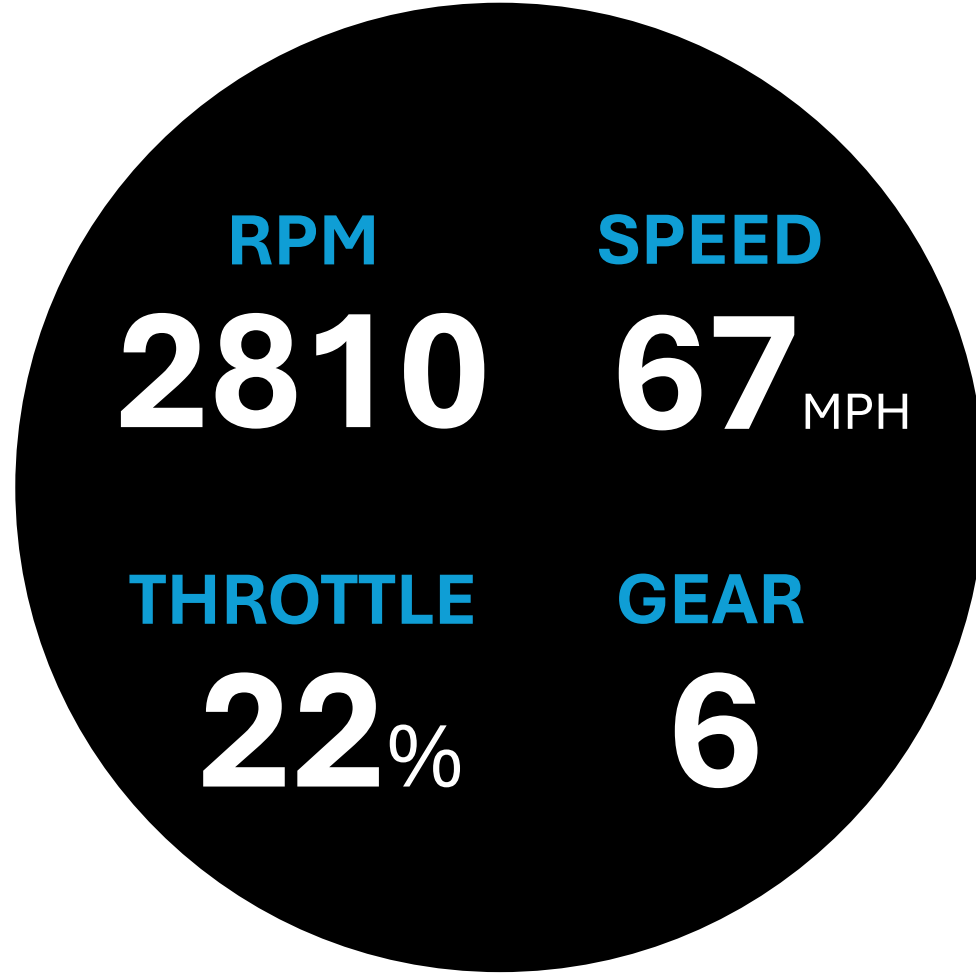

DRIVING DATA

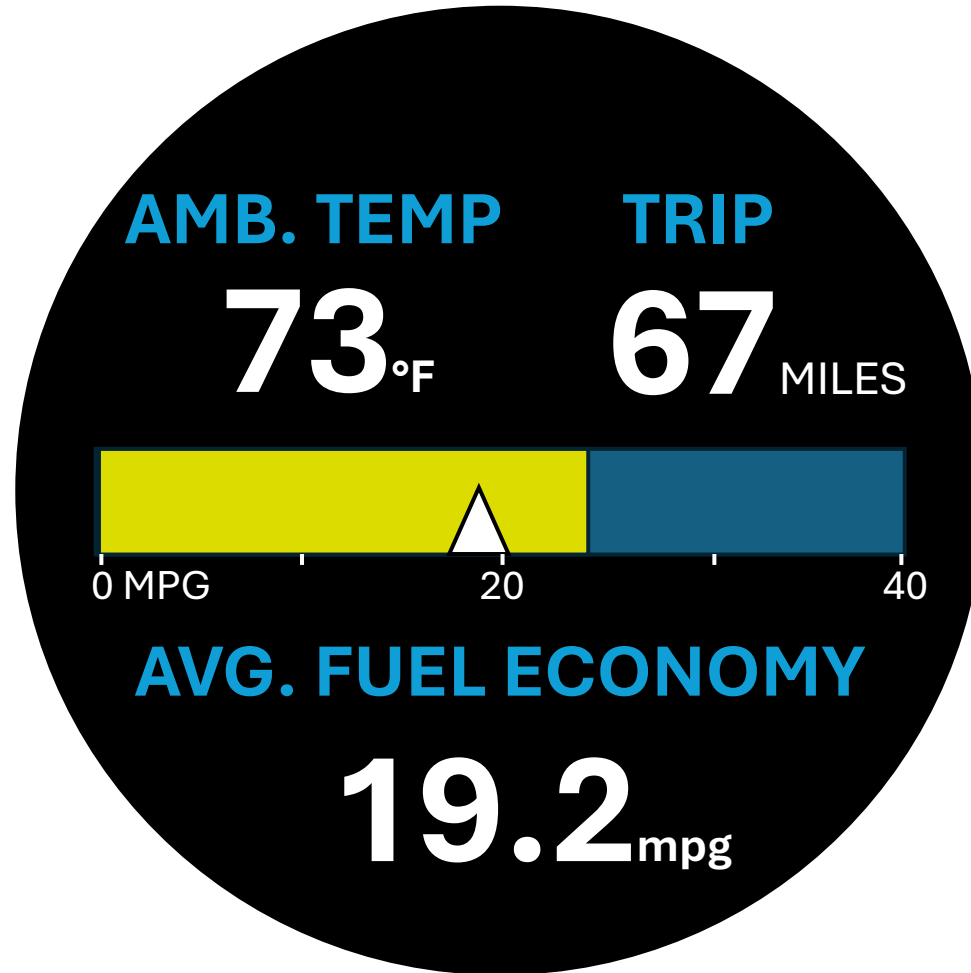

Instantaneous fuel
economy
with triangle = trip
(avg) fuel economy