

1. Description


1.1. Project

Project Name	F103ZET6_LCD_Pro
Board Name	custom
Generated with:	STM32CubeMX 5.6.0
Date	04/01/2020

1.2. MCU

MCU Series	STM32F1
MCU Line	STM32F103
MCU name	STM32F103ZETx
MCU Package	LQFP144
MCU Pin number	144

2. Pinout Configuration

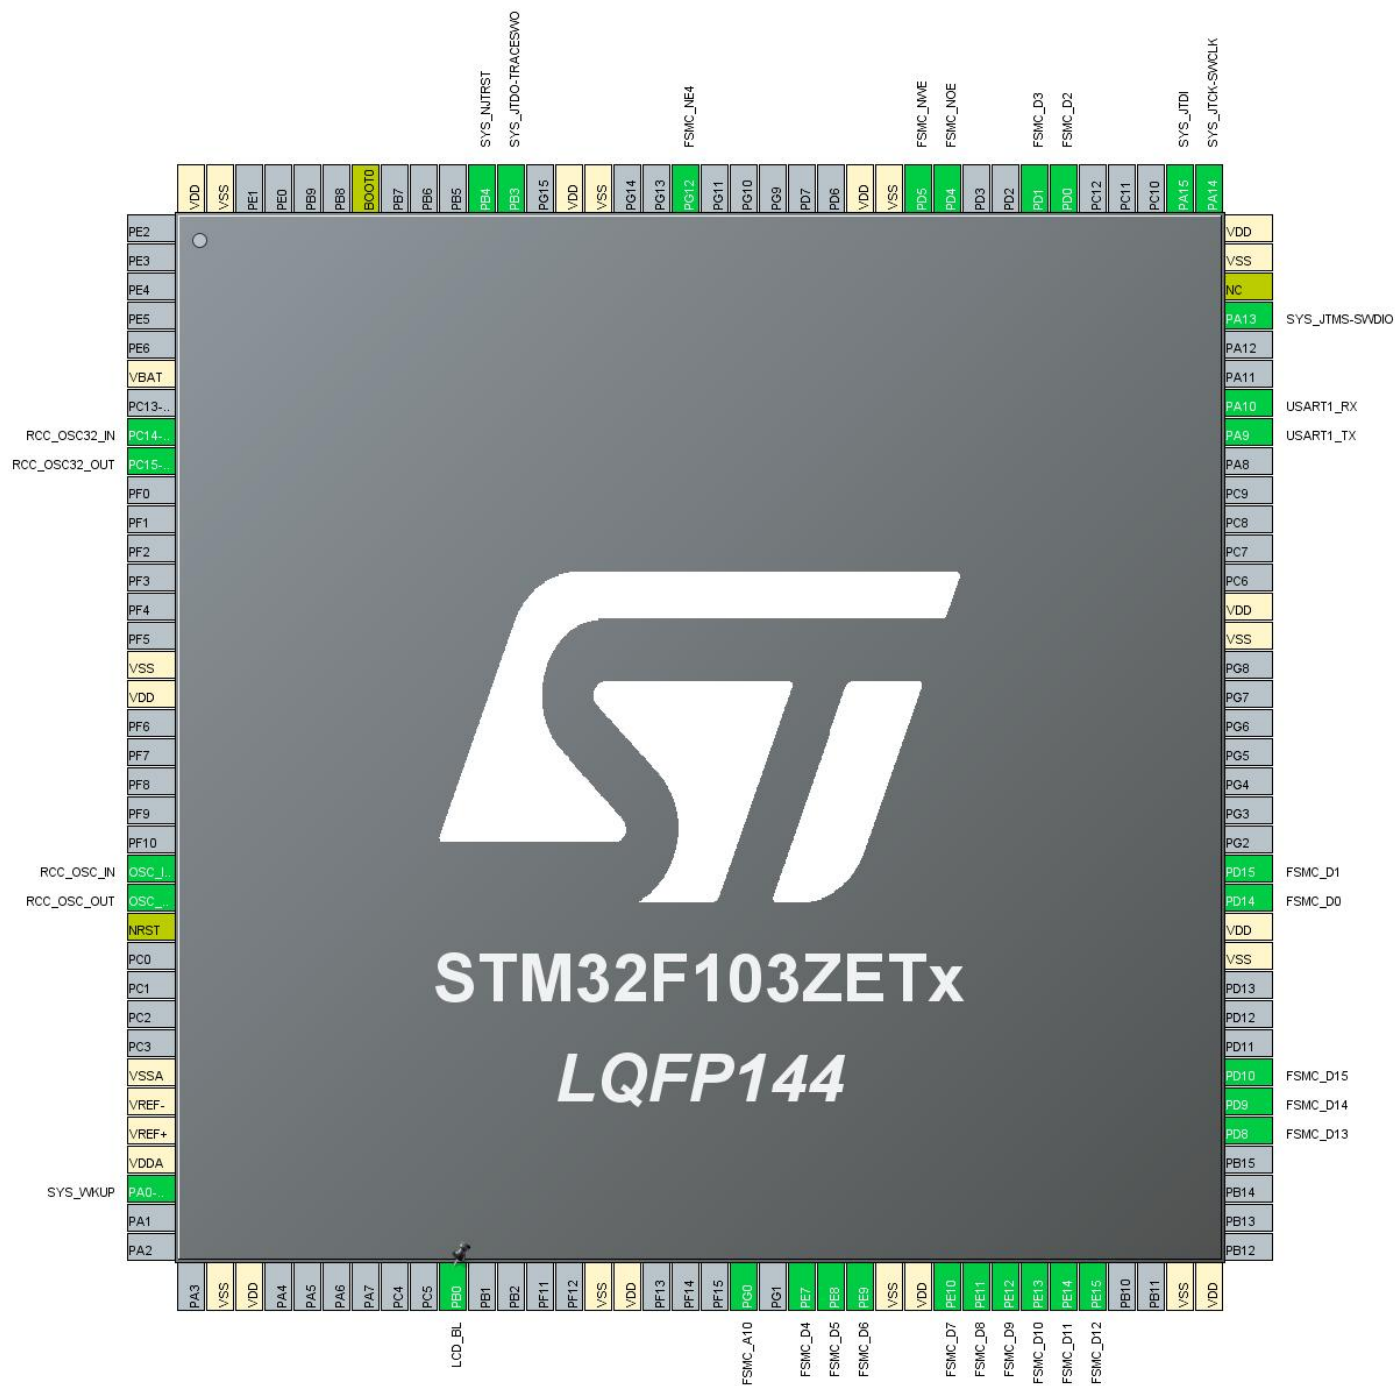


3. Pins Configuration

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
8	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
16	VSS	Power		
17	VDD	Power		
23	OSC_IN	I/O	RCC_OSC_IN	
24	OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
30	VSSA	Power		
31	VREF-	Power		
32	VREF+	Power		
33	VDDA	Power		
34	PA0-WKUP	I/O	SYS_WKUP	
38	VSS	Power		
39	VDD	Power		
46	PB0 *	I/O	GPIO_Output	LCD_BL
51	VSS	Power		
52	VDD	Power		
56	PG0	I/O	FSMC_A10	
58	PE7	I/O	FSMC_D4	
59	PE8	I/O	FSMC_D5	
60	PE9	I/O	FSMC_D6	
61	VSS	Power		
62	VDD	Power		
63	PE10	I/O	FSMC_D7	
64	PE11	I/O	FSMC_D8	
65	PE12	I/O	FSMC_D9	
66	PE13	I/O	FSMC_D10	
67	PE14	I/O	FSMC_D11	
68	PE15	I/O	FSMC_D12	
71	VSS	Power		
72	VDD	Power		
77	PD8	I/O	FSMC_D13	
78	PD9	I/O	FSMC_D14	
79	PD10	I/O	FSMC_D15	
83	VSS	Power		

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
84	VDD	Power		
85	PD14	I/O	FSMC_D0	
86	PD15	I/O	FSMC_D1	
94	VSS	Power		
95	VDD	Power		
101	PA9	I/O	USART1_TX	
102	PA10	I/O	USART1_RX	
105	PA13	I/O	SYS_JTMS-SWDIO	
106	NC	NC		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	
110	PA15	I/O	SYS_JTDI	
114	PD0	I/O	FSMC_D2	
115	PD1	I/O	FSMC_D3	
118	PD4	I/O	FSMC_NOE	
119	PD5	I/O	FSMC_NWE	
120	VSS	Power		
121	VDD	Power		
127	PG12	I/O	FSMC_NE4	
130	VSS	Power		
131	VDD	Power		
133	PB3	I/O	SYS_JTDO-TRACESWO	
134	PB4	I/O	SYS_NJTRST	
138	BOOT0	Boot		
143	VSS	Power		
144	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

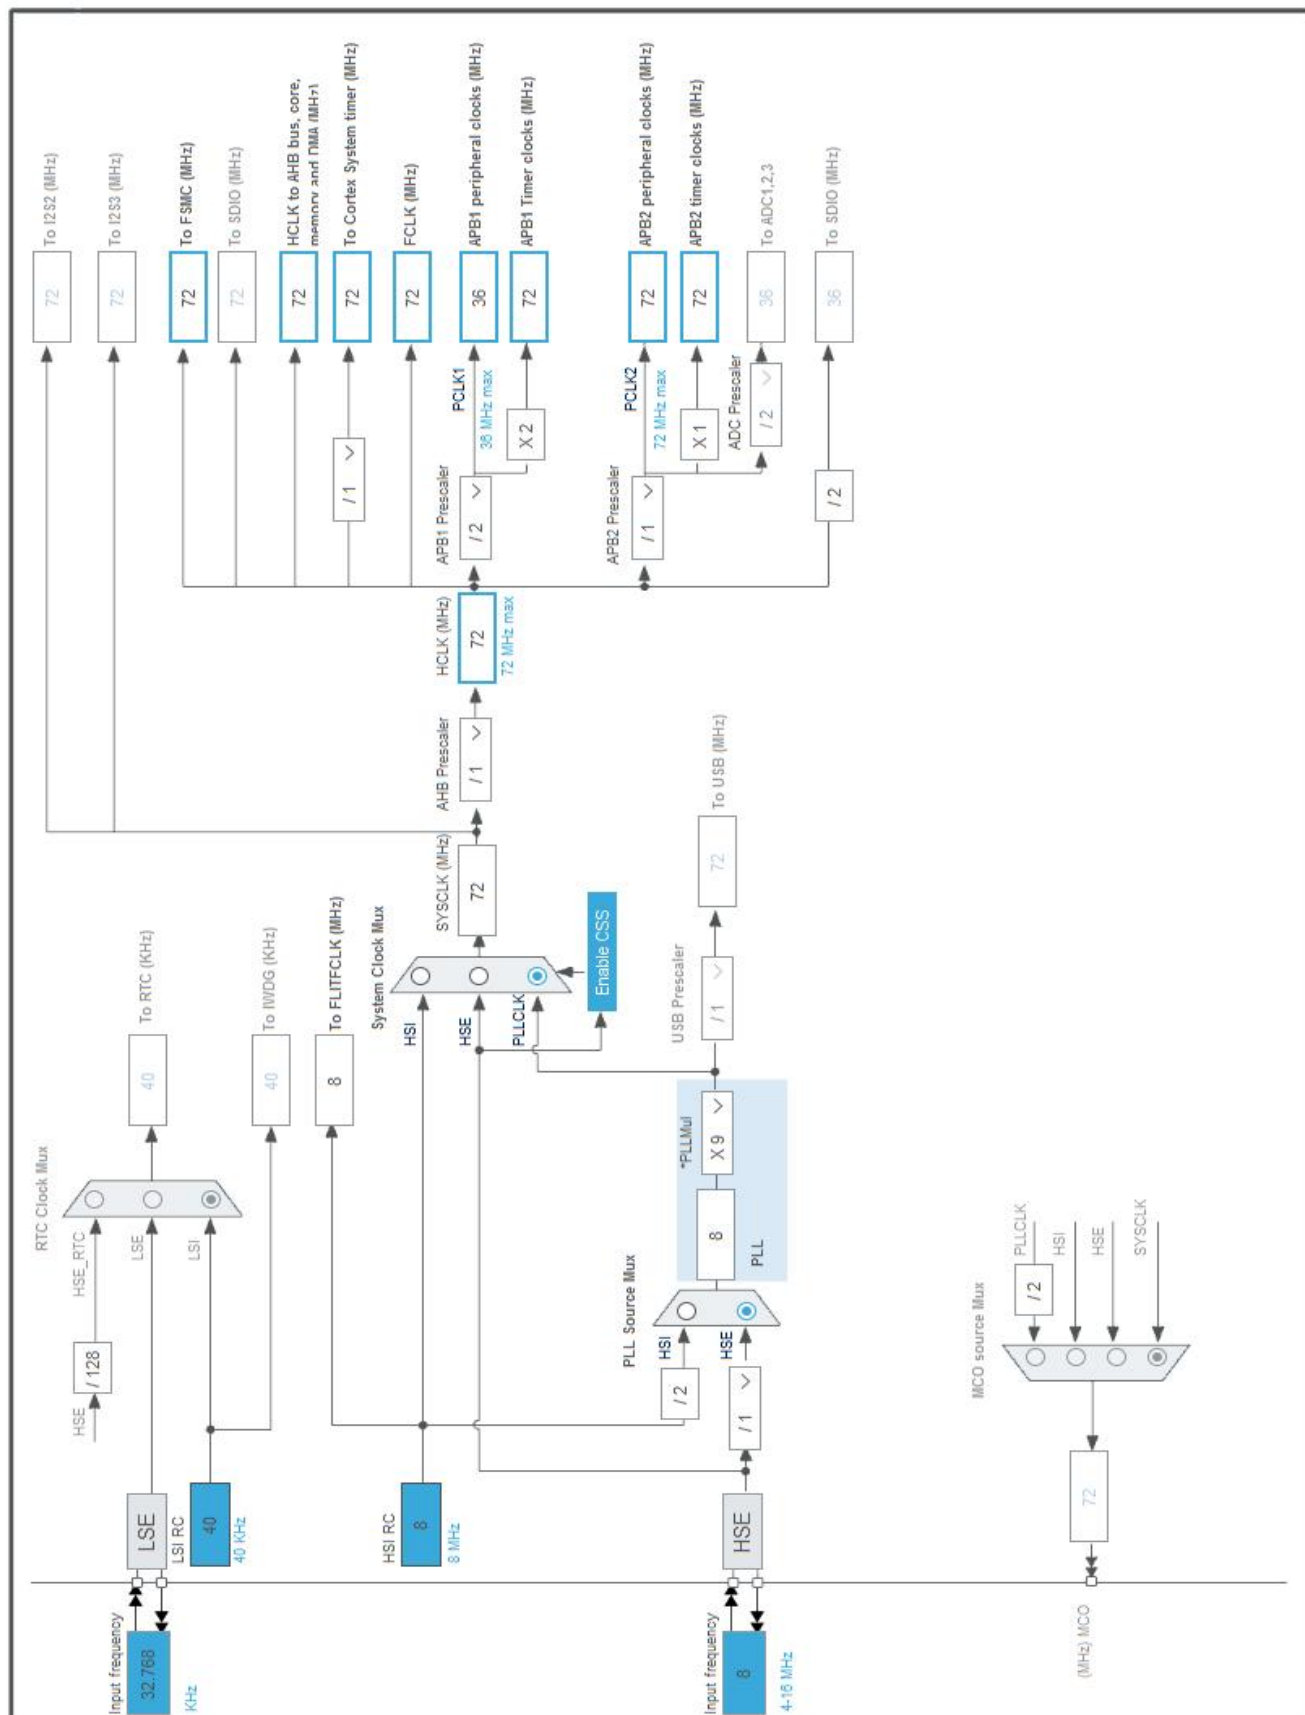

5. Software Project

5.1. Project Settings

Name	Value
Project Name	F103ZET6_LCD_Pro
Project Folder	C:\Users\Administrator\Desktop\F103ZET6_LCD_Pro
Toolchain / IDE	MDK-ARM V5.27
Firmware Package Name and Version	STM32Cube FW_F1 V1.8.0

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F1
Line	STM32F103
MCU	STM32F103ZETx
Datasheet	14611_Rev12

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	No Scale	No Scale
Fetch Type	FLASH	n/a
CPU Frequency	72 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP
Clock Source Frequency	8 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	30.5 mA	25 μ A
Duration	0.1 ms	0.9 ms
DMIPS	90.0	0.0
Ta Max	101.98	105
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	3.07 mA
Battery Life	1 month, 15 days, 15 hours	Average DMIPS	61.0 DMIPS

6.6. Chart

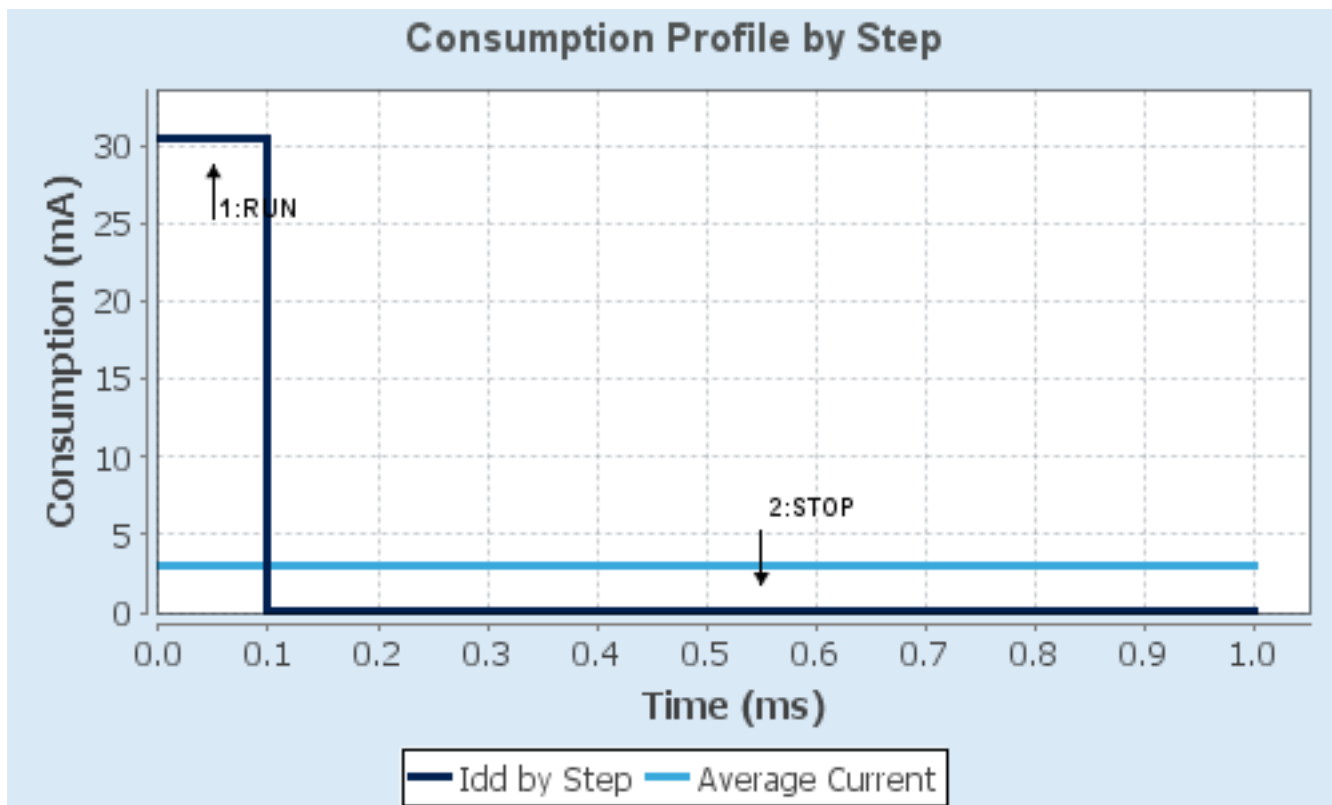

7. IPs and Middleware Configuration

7.1. FSMC

NOR Flash/PSRAM/SRAM/ROM/LCD 1

Chip Select: NE4

Memory type: LCD Interface

LCD Register Select: A10

Data: 16 bits

7.1.1. NOR/PSRAM 1:

NOR/PSRAM control:

Memory type	LCD Interface
Bank	Bank 1 NOR/PSRAM 4
Write operation	Enabled
Extended mode	Enabled *

NOR/PSRAM timing:

Address setup time in HCLK clock cycles	1 *
Data setup time in HCLK clock cycles	0xf *
Bus turn around time in HCLK clock cycles	0 *
Access mode	A

NOR/PSRAM timing for write accesses:

Extended address setup time	0 *
Extended data setup time	3 *
Extended bus turn around time	0 *
Extended access mode	A

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled

Flash Latency(WS) 2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

7.4. SYS

Debug: JTAG (5 pins)

mode: System Wake-Up

Timebase Source: SysTick

7.5. USART1

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FSMC	PG0	FSMC_A10	Alternate Function Push Pull	n/a	High	
	PE7	FSMC_D4	Alternate Function Push Pull	n/a	High	
	PE8	FSMC_D5	Alternate Function Push Pull	n/a	High	
	PE9	FSMC_D6	Alternate Function Push Pull	n/a	High	
	PE10	FSMC_D7	Alternate Function Push Pull	n/a	High	
	PE11	FSMC_D8	Alternate Function Push Pull	n/a	High	
	PE12	FSMC_D9	Alternate Function Push Pull	n/a	High	
	PE13	FSMC_D10	Alternate Function Push Pull	n/a	High	
	PE14	FSMC_D11	Alternate Function Push Pull	n/a	High	
	PE15	FSMC_D12	Alternate Function Push Pull	n/a	High	
	PD8	FSMC_D13	Alternate Function Push Pull	n/a	High	
	PD9	FSMC_D14	Alternate Function Push Pull	n/a	High	
	PD10	FSMC_D15	Alternate Function Push Pull	n/a	High	
	PD14	FSMC_D0	Alternate Function Push Pull	n/a	High	
	PD15	FSMC_D1	Alternate Function Push Pull	n/a	High	
	PD0	FSMC_D2	Alternate Function Push Pull	n/a	High	
	PD1	FSMC_D3	Alternate Function Push Pull	n/a	High	
	PD4	FSMC_NOE	Alternate Function Push Pull	n/a	High	
	PD5	FSMC_NWE	Alternate Function Push Pull	n/a	High	
	PG12	FSMC_NE4	Alternate Function Push Pull	n/a	High	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA0-WKUP	SYS_WKUP	n/a	n/a	n/a	
	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PA15	SYS_JTDI	n/a	n/a	n/a	
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	
	PB4	SYS_NJTRST	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	n/a	High *	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
	PA10	USART1_RX	Input mode	No pull-up and no pull-down	n/a	
GPIO	PB0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	High *	LCD_BL

8.2. DMA configuration

DMA request	Stream	Direction	Priority
USART1_RX	DMA1_Channel5	Peripheral To Memory	Low

USART1_RX: DMA1_Channel5 DMA request Settings:

Mode: Normal
Peripheral Increment: Disable
Memory Increment: **Enable ***
Peripheral Data Width: Byte
Memory Data Width: Byte

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA1 channel5 global interrupt	true	3	0
USART1 global interrupt	true	2	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		

* User modified value

9. Predefined Views - Category view : Current

10. Software Pack Report