Cellular Internet Access

mponents of cellular network architectu

MSC

- connects cells to wide area net
- manages call setup
- handles mobility

cell

- covers geographical region
- *base station* (BS) analogous to 802.11 AP
- *mobile users* attach to network through BS
- *air-interface:* physical and link layer protocol between mobile and BS

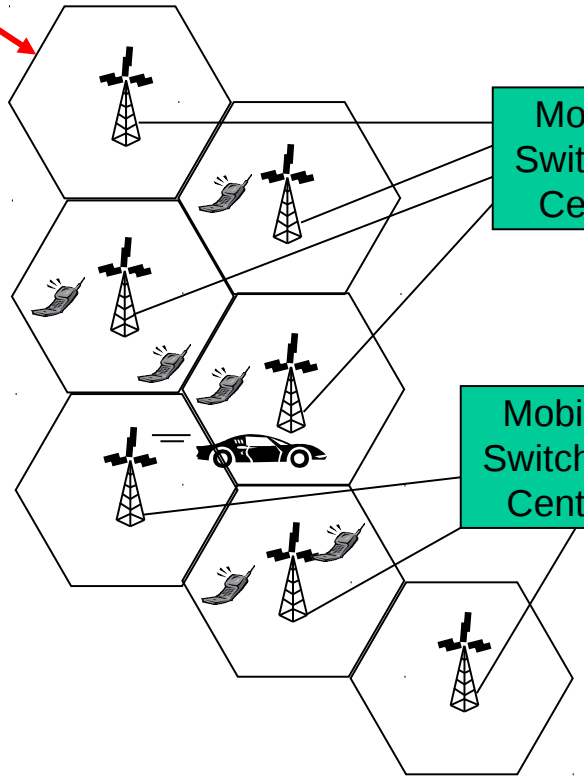

Mobile Switching Center

Mobile Switching Center

Public telephone network, and Internet

wired network

Cellular networks: the first hop

Two techniques for sharing mobile-to-BS radio spectrum

- combined FDMA/TDMA: divide spectrum in frequency channels, divide each channel into time slots
- CDMA: code division multiple access

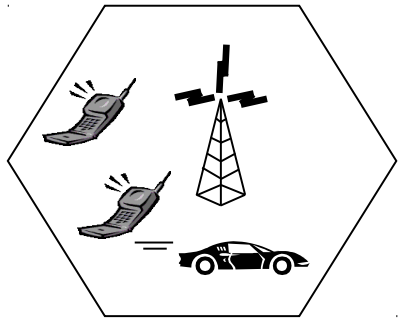

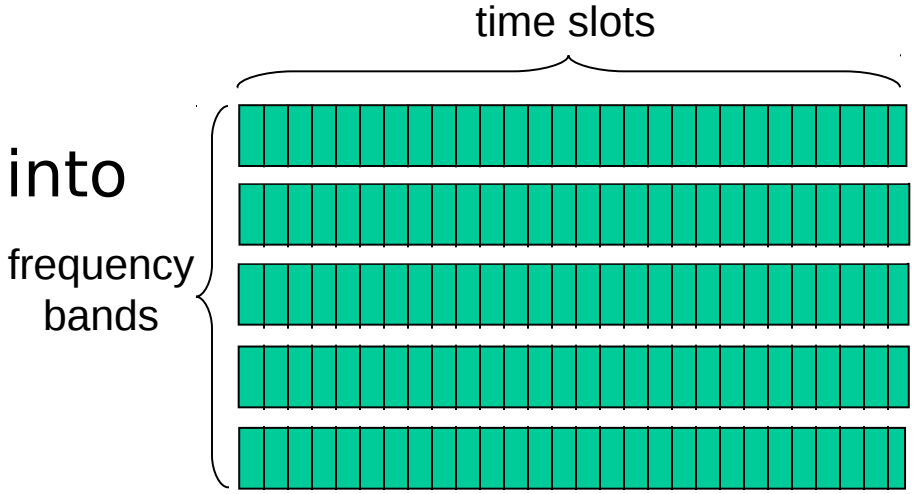

Cellular standards: brief survey

2G systems: voice channels

- IS-136 TDMA: combined FDMA/TDMA (north america)
- GSM (global system for mobile communications): combined FDMA/TDMA
  - most widely deployed
- IS-95 CDMA: code division multiple access

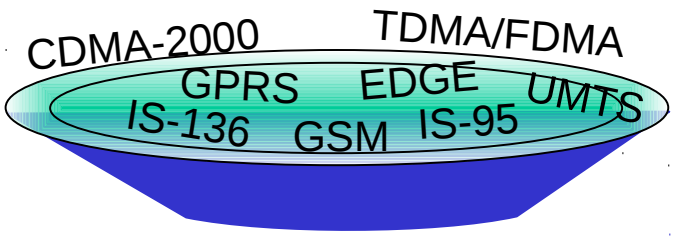

Cellular standards: brief survey

2.5 G systems: voice and data channels

- general packet radio service (GPRS)
  - evolved from GSM
  - data sent on multiple channels (if available)
- enhanced data rates for global evolution (EDGE)
  - also evolved from GSM, using enhanced modulation
  - Date rates up to 384K
- CDMA-2000 (phase 1)
  - data rates up to 144K
  - evolved from IS-95

Cellular standards: brief survey

3G systems: voice/data

- Universal Mobile Telecommunications Service (UMTS)
  - GSM next step, but using CDMA
- CDMA-2000

... and more

4G

5G

Addressing and routing to mobile users

What is mobility?

- spectrum of mobility, from the *network* perspective:

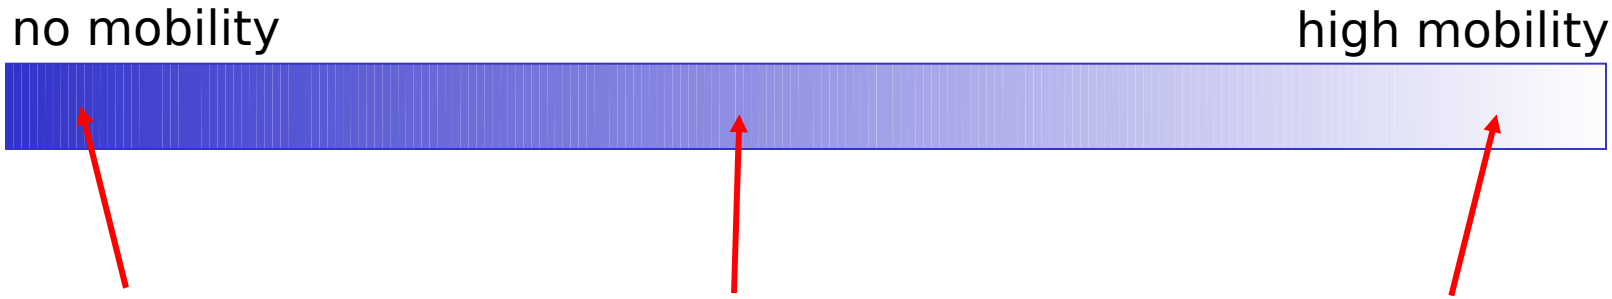

mobile wireless user, using same access point

mobile user, connecting/ disconnecting from network using DHCP.

mobile user, passing through multiple access point while maintaining ongoing connections (like cell phone)

Mobility: Vocabulary

home network:
permanent "home" of mobile
(e.g., 128.119.40/24)

home agent: *entity that will perform mobility functions on behalf of mobile, when mobile is remote*

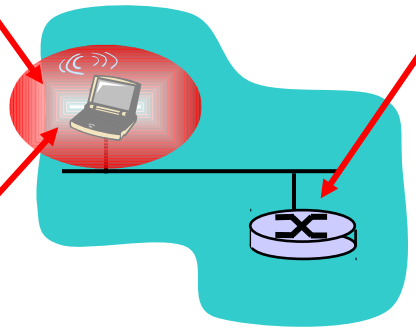

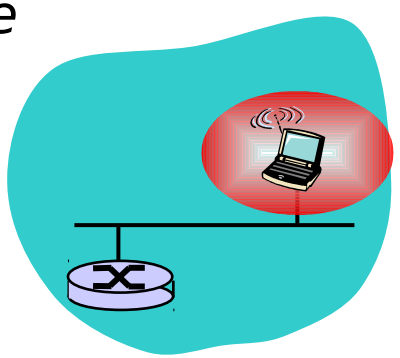

wide area network

Permanent address:
address in home network, *can always* be used to reach mobile
e.g., 128.119.40.186

Mobility: more vocabulary

Permanent address: remains constant (e.g., 128.119.40.186)

visited network: network in which mobile currently resides (e.g., 79.129.13/24)

Care-of-address: address in visited network. (e.g., 79,129 [illegible])

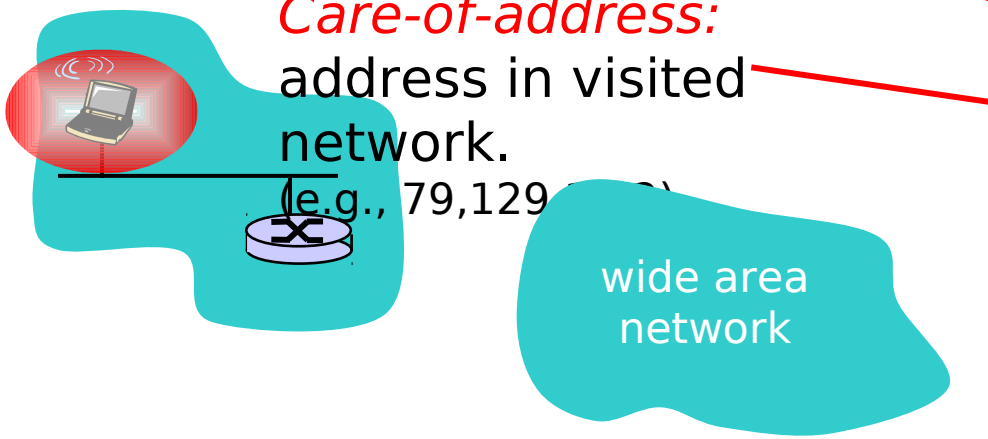

foreign agent: *entity in visited network that performs mobility functions on behalf of mobile.*

correspondent: *wants to communicate with mobile*

How do *you* contact a mobile friend:

Consider friend frequently changing addresses, how do you find her?

- search all phone books?
- call her parents?
- expect her to let you know where he/she is?

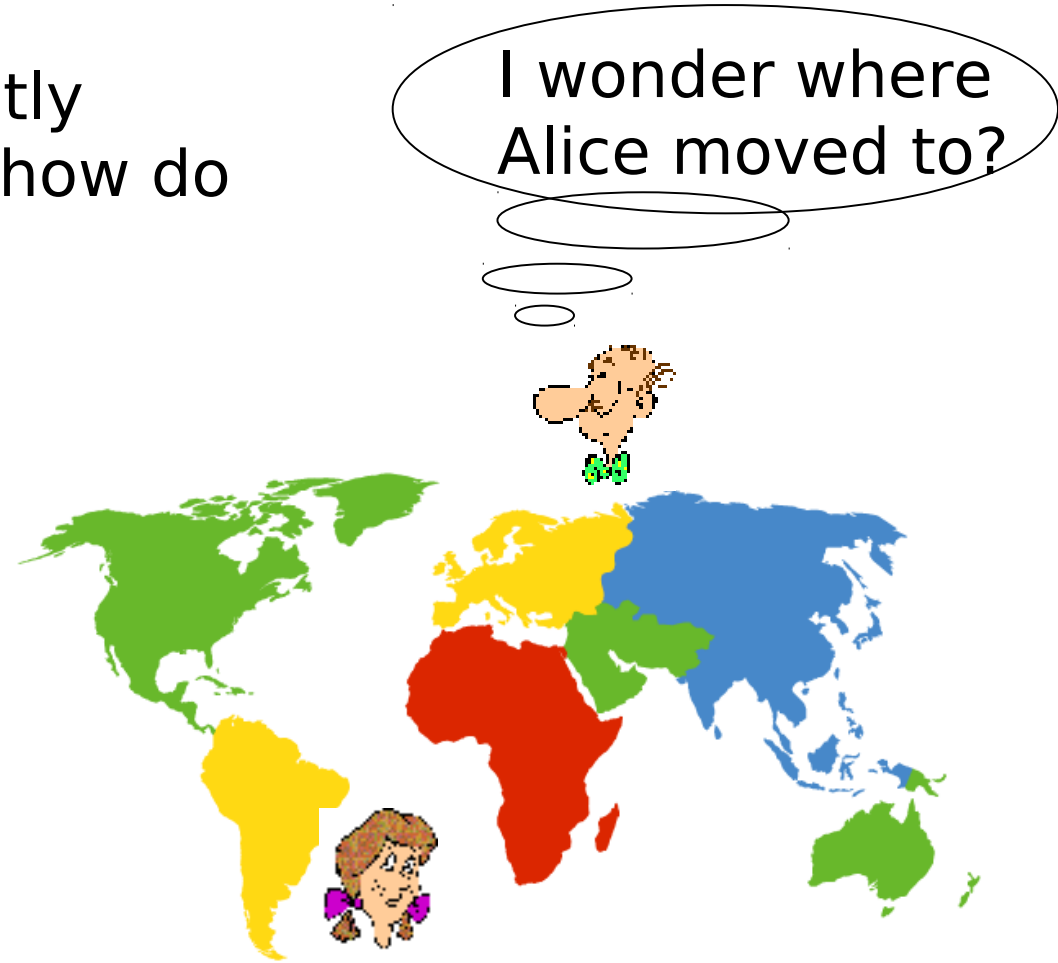

Mobility: approaches

- *Let routing handle it:* routers advertise permanent address of mobile-nodes-in-residence via usual routing table exchange.
  - routing tables indicate where each mobile located
  - no changes to end-systems
- *Let end-systems handle it:*
  - *indirect routing:* communication from correspondent to mobile goes through home agent, then forwarded to remote
  - *direct routing:* correspondent gets foreign address of mobile, sends directly to mobile

Mobility: approaches

- *Let routing handle it:* routers advertise permanent address of mobile-unit network residence via usual routing table exchange
  - routing tables indicate where each mobile located
  - no changes to end-systems
- *let end-systems handle it:*
  - *indirect routing:* communication from correspondent to mobile goes through home agent, then forwarded to remote
  - *direct routing:* correspondent gets foreign address of mobile, sends directly to mobile

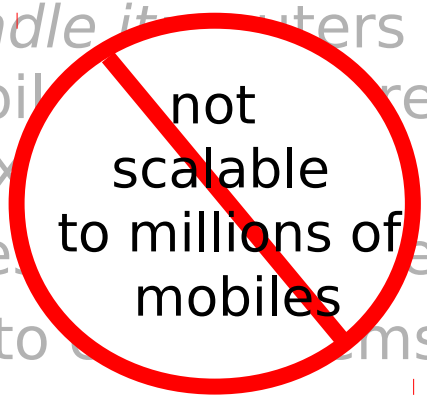

Mobility: registration

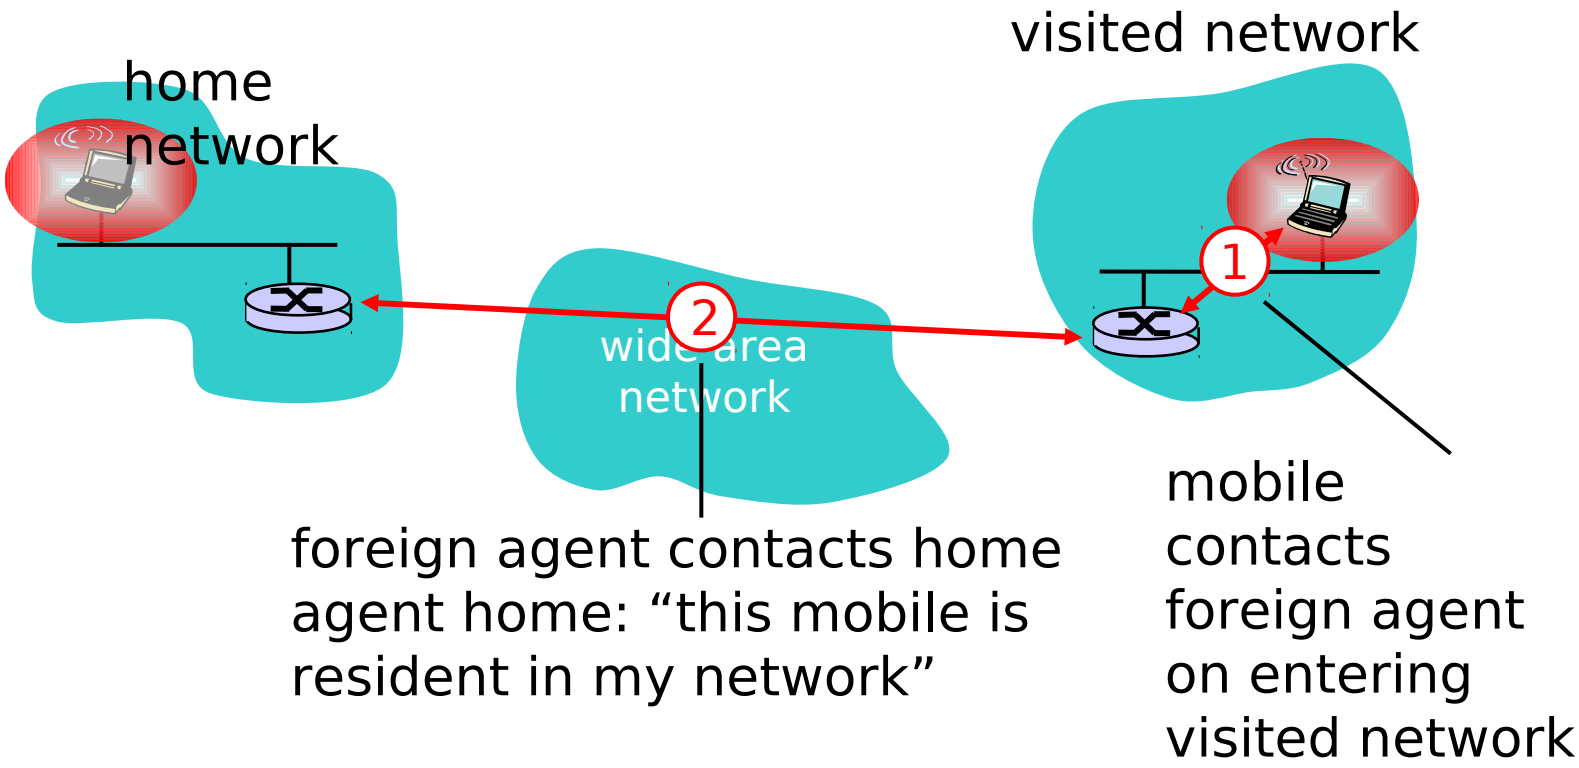

End result:

- Foreign agent knows about mobile
- Home agent knows location of mobile

Mobility via Indirect Routing

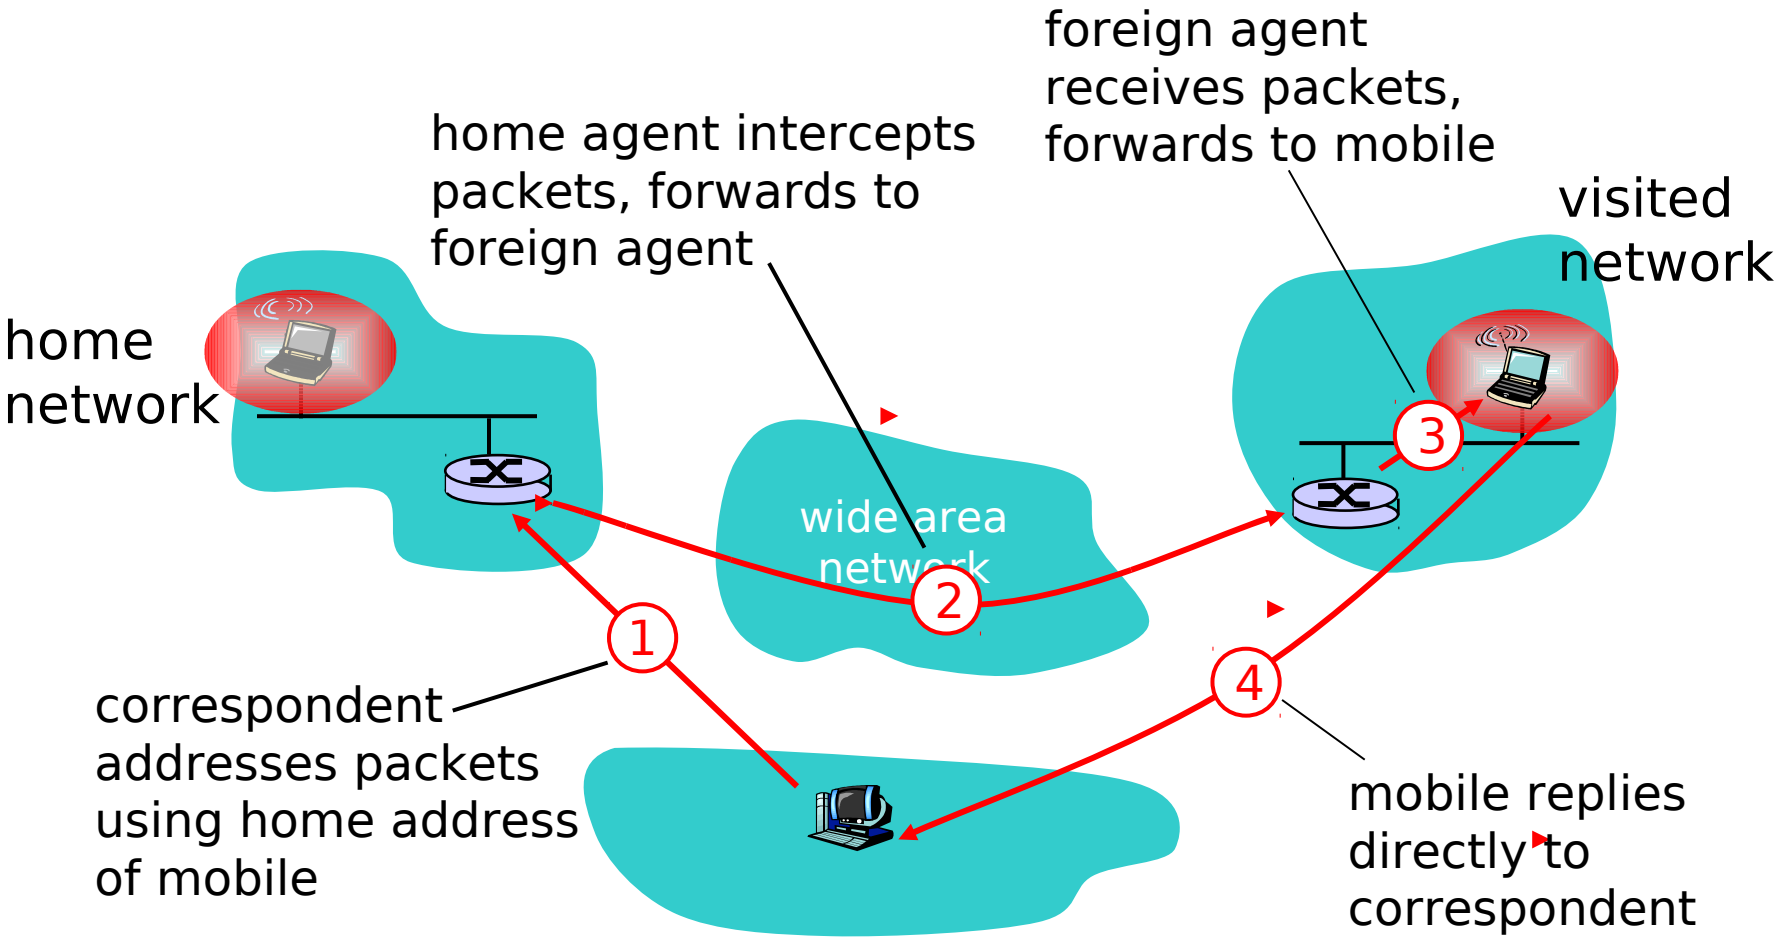

Indirect Routing: comments

- Mobile uses two addresses:
  - permanent address: used by correspondent (hence mobile location is *transparent* to correspondent)
  - care-of-address: used by home agent to forward datagrams to mobile
- foreign agent functions may be done by mobile itself
- triangle routing: correspondent-home-network-mobile
  - inefficient when correspondent, mobile are in same network

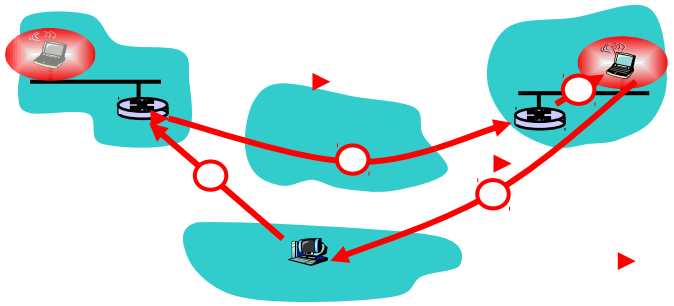

Indirect Routing: moving between networks

- suppose mobile user moves to another network
  - registers with new foreign agent
  - new foreign agent registers with home agent
  - home agent update care-of-address for mobile
  - packets continue to be forwarded to mobile (but with new care-of-address)
- mobility, changing foreign networks transparent: *on going connections can be maintained!*

Mobility via Direct Routing

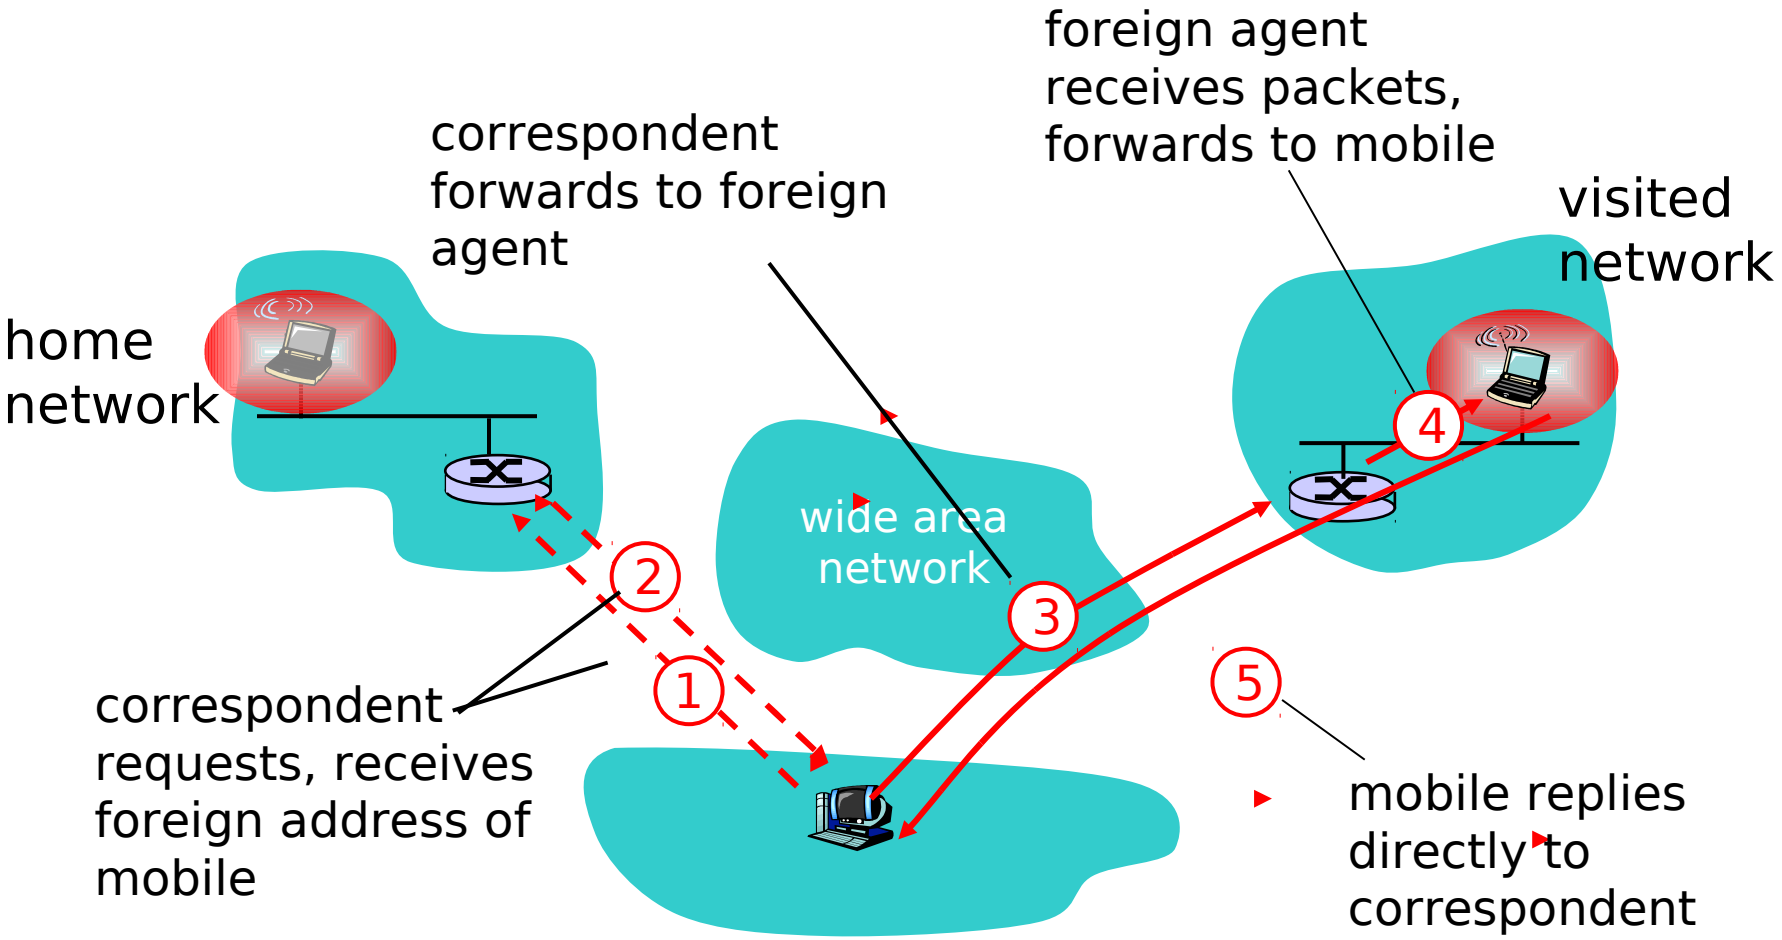

Mobility via Direct Routing: comments

- overcome triangle routing problem
- non-transparent to correspondent: correspondent must get care-of-address from home agent
  - what if mobile changes visited network?

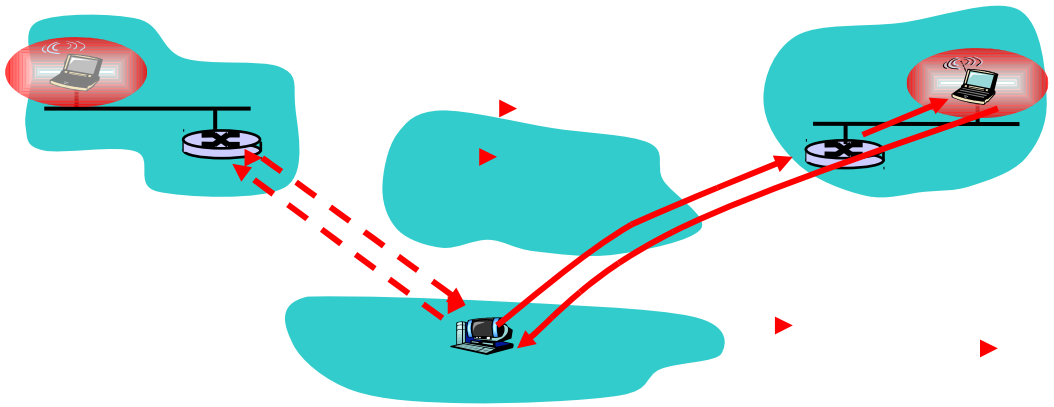

Accommodating mobility with direct routing

- anchor foreign agent: FA in first visited network
- data always routed first to anchor FA
- when mobile moves: new FA arranges to have data forwarded from old FA (chaining)

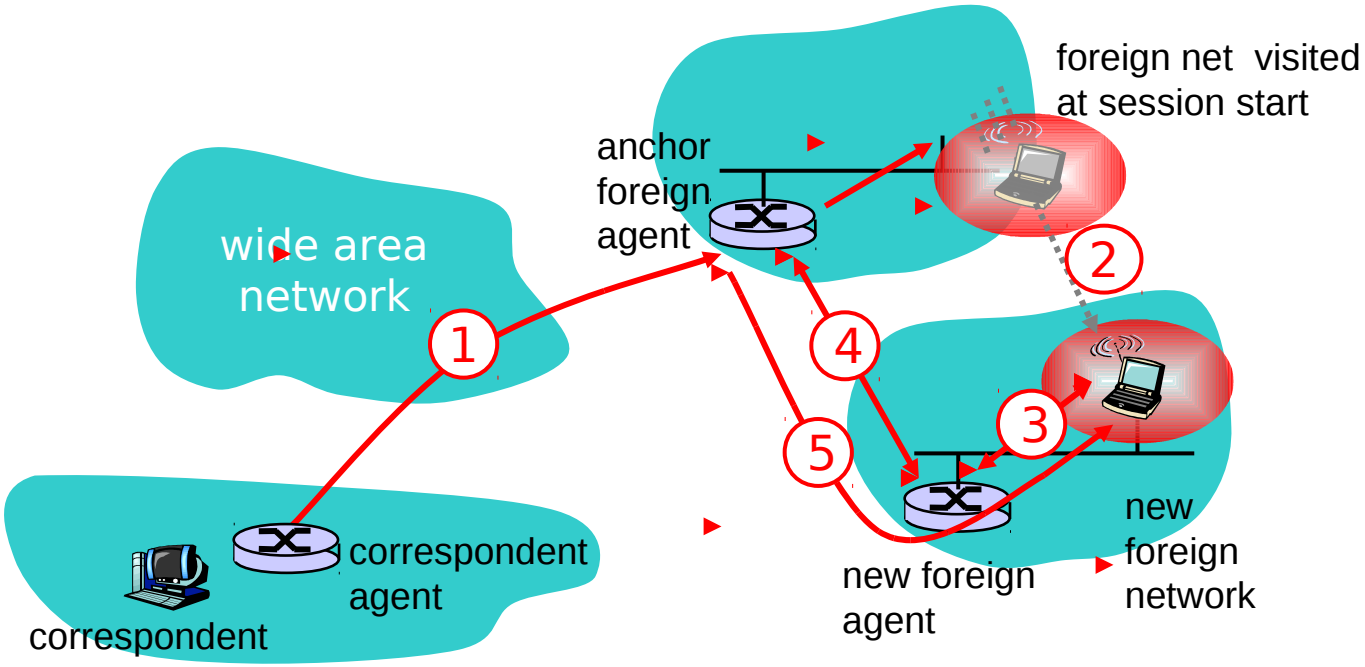

* Mobile IP
* Handling mobility in cellular networks