Power

File: power.kicad_sch

MCU

File: mcu.kicad_sch

Ethernet client port

File: eth_client.kicad_sch

Ethernet I/O port

File: eth_io.kicad_sch

Memories and display

File: periph.kicad_sch

Field digital I/O

File: io_dig.kicad_sch

Field power, pump, relays, USB

File: io_pwr.kicad_sch

Analog inputs and temperatures

File: io_ana.kicad_sch


CEMS core board, rev 0.1 schematic (draft for review)
Two separate Ethernet networks: client port = STM32H573 MAC + LAN8742A (J2); I/O port = W5500 (J3). I/O boards only.
24 VDC in; DIN-rail enclosure behind the RVT70 display (FFC J4).
Pin map and design notes: docs/CORE_PCB.md. Parts marked CHECK in the sheet notes need datasheet confirmation before layout.

Design spec: docs/CORE_PCB.md
Generated from hardware/core_pcb/tools/design.py; do not edit by hand
**EnviroDevelo**

Sheet: /
File: cems_core.kicad_sch

***Title: CEMS core board***


| | | |
|---|---|---|
| Size: A4 | Date: 2026-10-31 | **Rev: 0.2** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 1/9 |

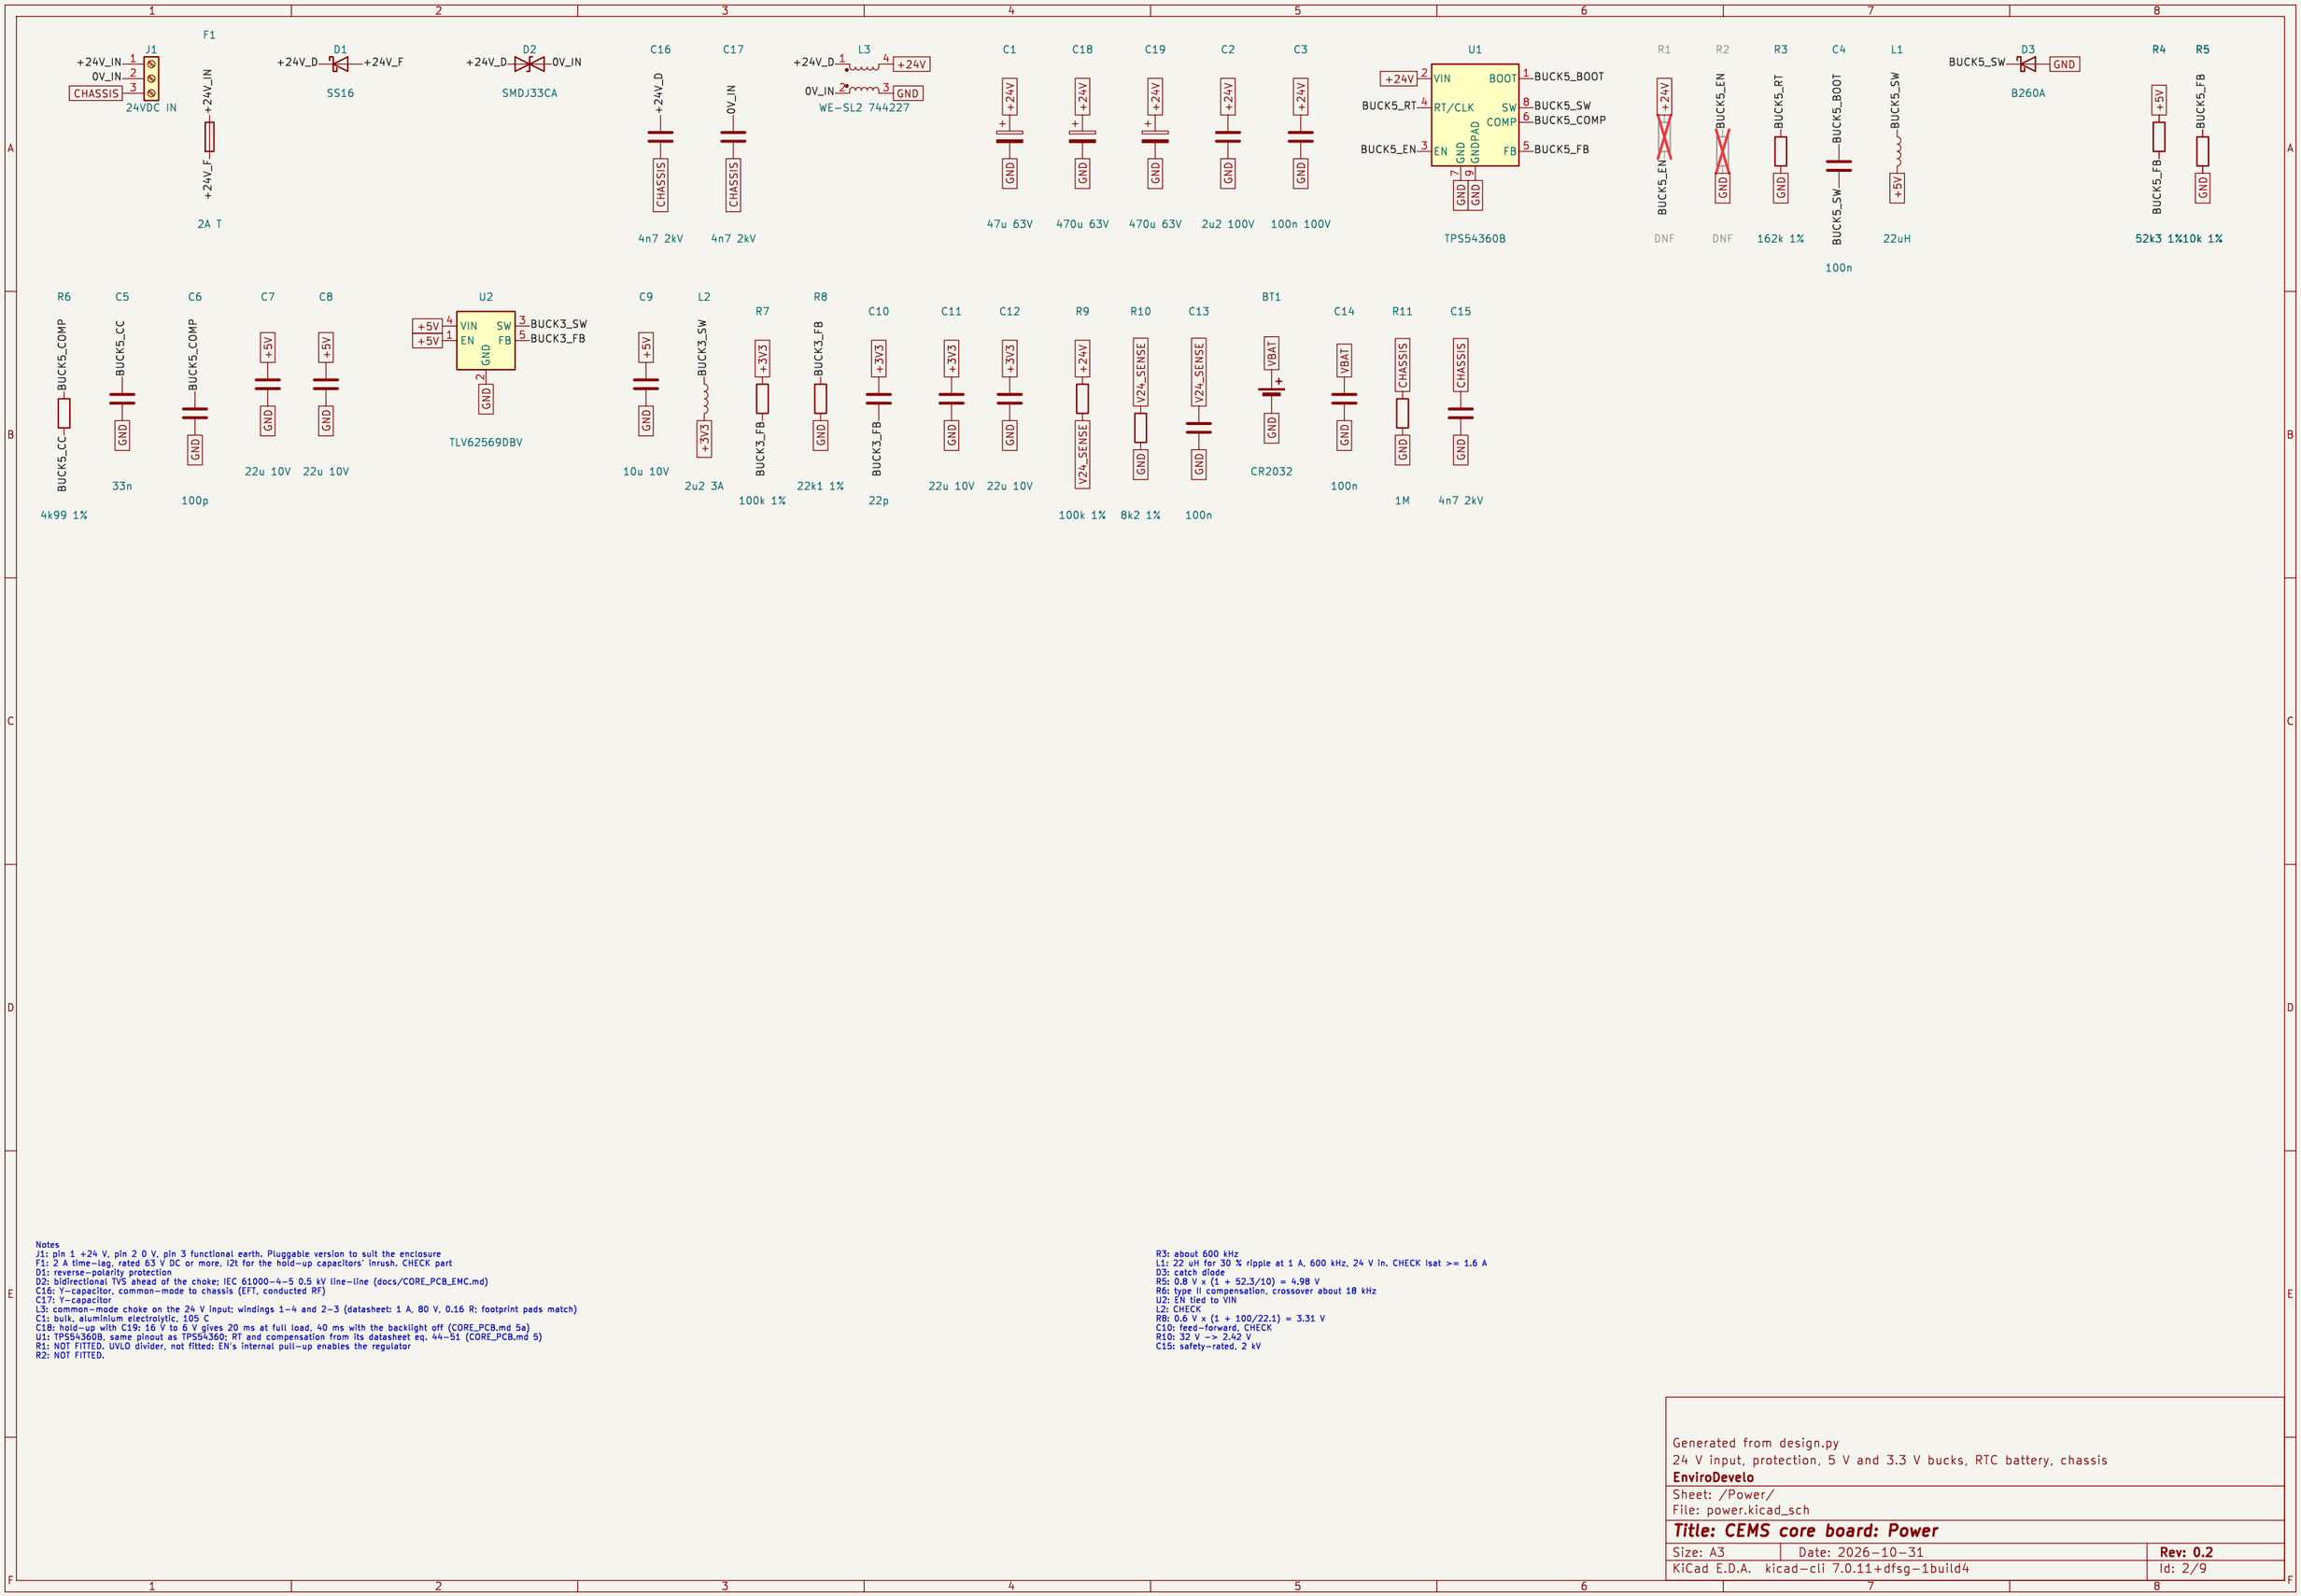


Notes
J1: pin 1 +24 V, pin 2 0 V, pin 3 functional earth. Pluggable version to suit the enclosure
F1: 2 A time-lag, rated 63 V DC or more, I2t for the hold-up capacitors' inrush. CHECK part
D1: reverse-polarity protection
D2: bidirectional TVS ahead of the choke; IEC 61000-4-5 0.5 kV line-line (docs/CORE_PCB_EMC.md)
C16: Y-capacitor, common-mode to chassis (EFT, conducted RF)
C17: Y-capacitor
L3: common-mode choke on the 24 V input; windings 1-4 and 2-3 (datasheet: 1 A, 80 V, 0.16 R; footprint pads match)
C1: bulk, aluminium electrolytic, 105 C
C18: hold-up with C19: 16 V to 6 V gives 20 ms at full load, 40 ms with the backlight off (CORE_PCB.md 5a)
U1: TPS54360B, same pinout as TPS54360; RT and compensation from its datasheet eq. 44-51 (CORE_PCB.md 5)
R1: NOT FITTED. UVLO divider, not fitted: EN's internal pull-up enables the regulator
R2: NOT FITTED.
R3: about 600 kHz
L1: 22 uH for 30 % ripple at 1 A, 600 kHz, 24 V in. CHECK Isat >= 1.6 A
D3: catch diode
R5: 0.8 V x (1 + 52.3/10) = 4.98 V
R6: type II compensation, crossover about 18 kHz
U2: EN tied to VIN
L2: CHECK
R8: 0.6 V x (1 + 100/22.1) = 3.31 V
C10: feed-forward, CHECK
R10: 32 V -> 2.42 V
C15: safety-rated, 2 kV

Generated from design.py
24 V input, protection, 5 V and 3.3 V bucks, RTC battery, chassis
**EnviroDevelo**

| | | |
|---|---|---|
| Sheet: /Power/ | | |
| File: power.kicad_sch | | |
| ***Title: CEMS core board: Power*** | | |
| Size: A3 | Date: 2026-10-31 | **Rev: 0.2** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 2/9 |

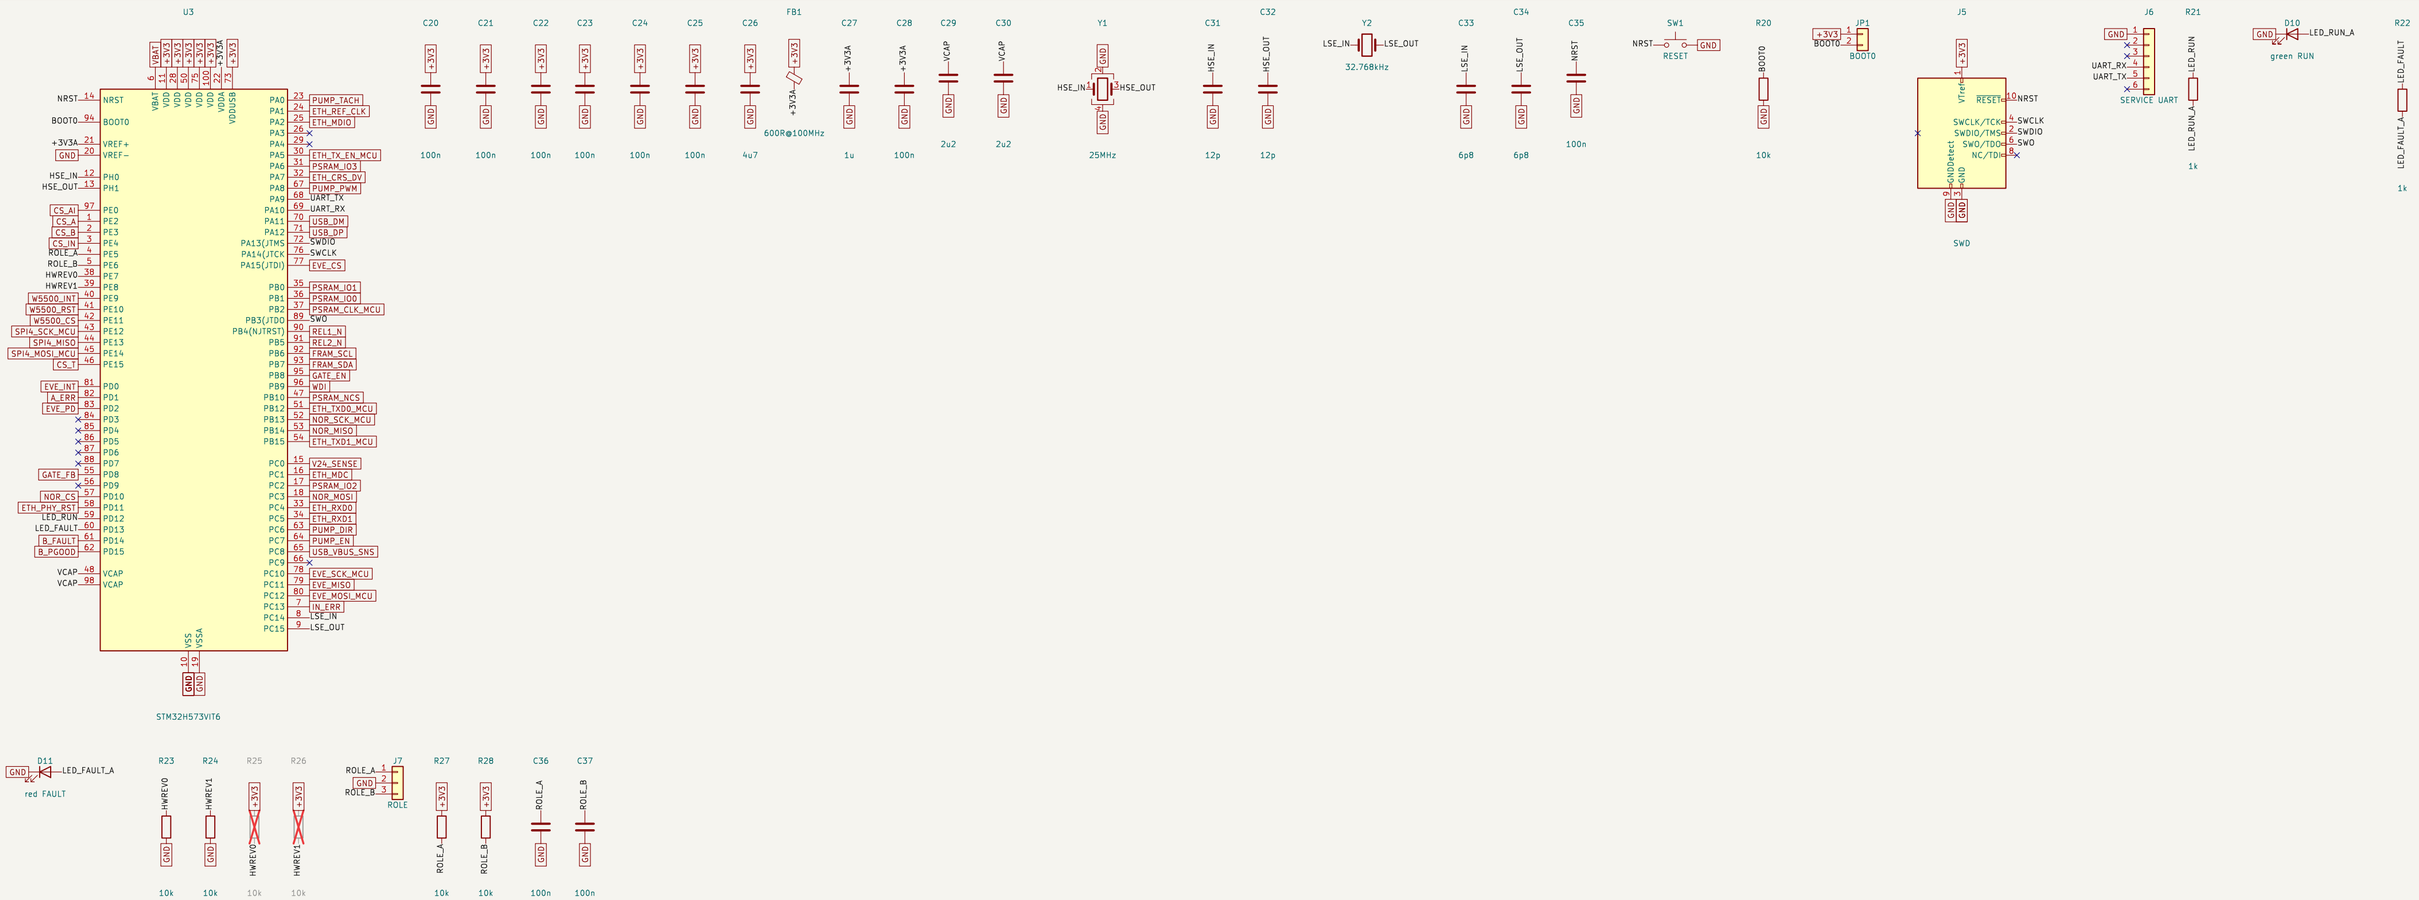


Notes
U3: STM32H563VIT6 is pin-compatible
C20: one per VDD pin, VDDUSB included
C21: one per VDD pin, VDDUSB included
C22: one per VDD pin, VDDUSB included
C23: one per VDD pin, VDDUSB included
C24: one per VDD pin, VDDUSB included
C25: one per VDD pin, VDDUSB included

FB1: VDDA / VREF+ filter
C29: VCAP, CHECK value and count against the H5 datasheet
Y1: HSE, CL 10 pF class, CHECK against the DK
C31: CHECK for the crystal's CL
Y2: CL 6 pF, ESR per AN2867
C33: AN2867, CHECK for the crystal
JP1: fit a jumper for the ST bootloader


J6: FTDI TTL-232R-3V3 order: 1 GND, 2 CTS, 3 VCC (not connected), 4 cable TXD, 5 cable RXD, 6 RTS
R23: hardware revision 0: both pulled down
R25: NOT FITTED.
R26: NOT FITTED.
J7: shunt with pull tab; silkscreen 1–2 CORE / 2–3 I/O NODE / none = OFF: reachable only with the housing open
C36: ESD, at J7

Generated from design.py
STM32H573VIT6, clocks, reset, boot, SWD, service UART, LEDs
**EnviroDevelo**

Sheet: /MCU/
File: mcu.kicad_sch

***Title: CEMS core board: MCU***

| Size: A2 | Date: 2026-10-31 | **Rev: 0.2** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 3/9 |

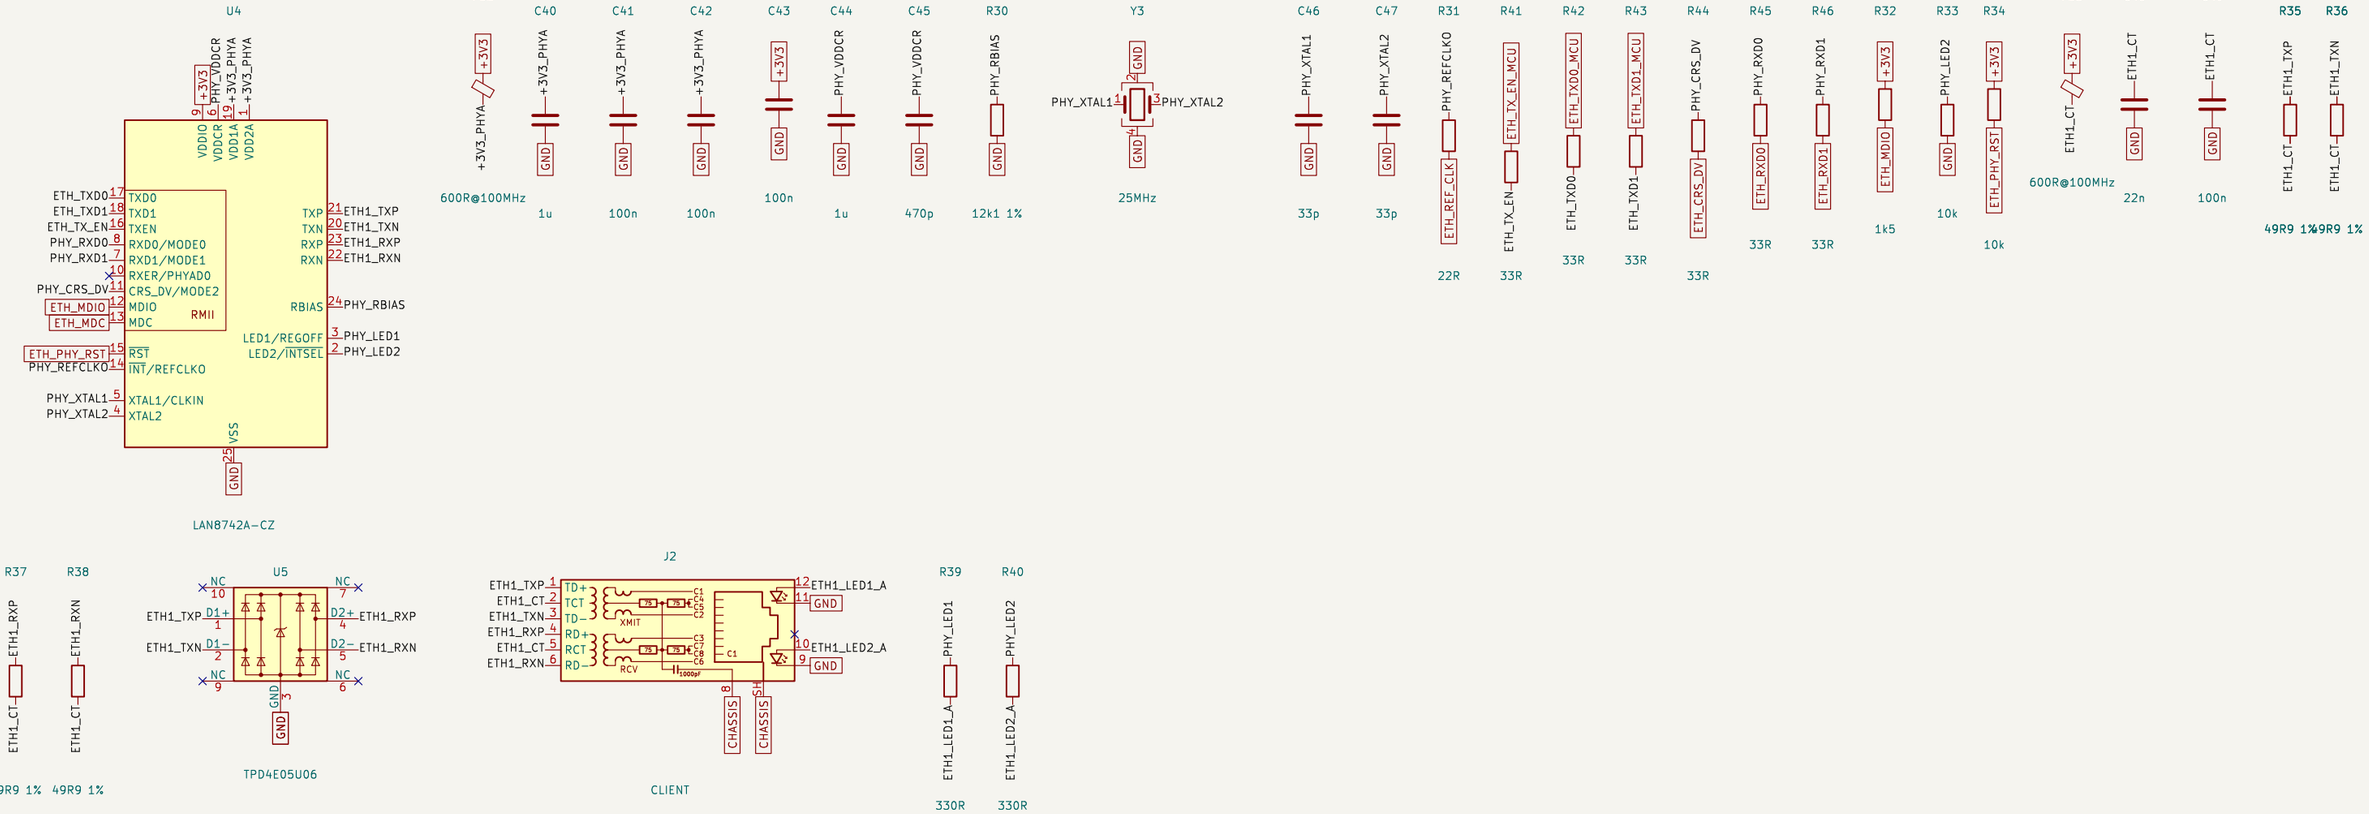



Notes
U4: straps: MODE[2:0] internal pull-ups = all capable; PHYAD0 internal pull-down = address 0; nINTSEL pulled low (R33) = pin 14 is REFCLKO, 50 MHz to the MCU; REGOFF internal pull-down = regulator on
C41: at pin 1
C42: at pin 19
C43: VDDIO
C44: VDDCR, with C45
Y3: CL 20 pF, +/-50 ppm total (LAN8742A datasheet)
C46: for CL 20 pF with about 4 pF stray
R31: series, at the PHY
R41: series, at the MCU
R42: series, at the MCU
R43: series, at the MCU
R44: series, at the PHY
R45: series, at the PHY
R46: series, at the PHY
R33: strap nINTSEL = 0 (REFCLKO mode)
R34: PHY runs if the firmware leaves PD11 as input
U5: flow-through: route each line across pins 1/10, 2/9, 4/7, 5/6
J2: client network
R39: LED1 = link/activity, active high (REGOFF strap low)
R40: LED2 = speed, active high (nINTSEL strap low)

Generated from design.py
LAN8742A on RMII, client RJ45 (J2)
**EnviroDevelo**

Sheet: /Ethernet client port/
File: eth_client.kicad_sch

***Title: CEMS core board: Ethernet client port***

| | | |
|---|---|---|
| Size: A3 | Date: 2026-10-31 | **Rev: 0.2** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 4/9 |

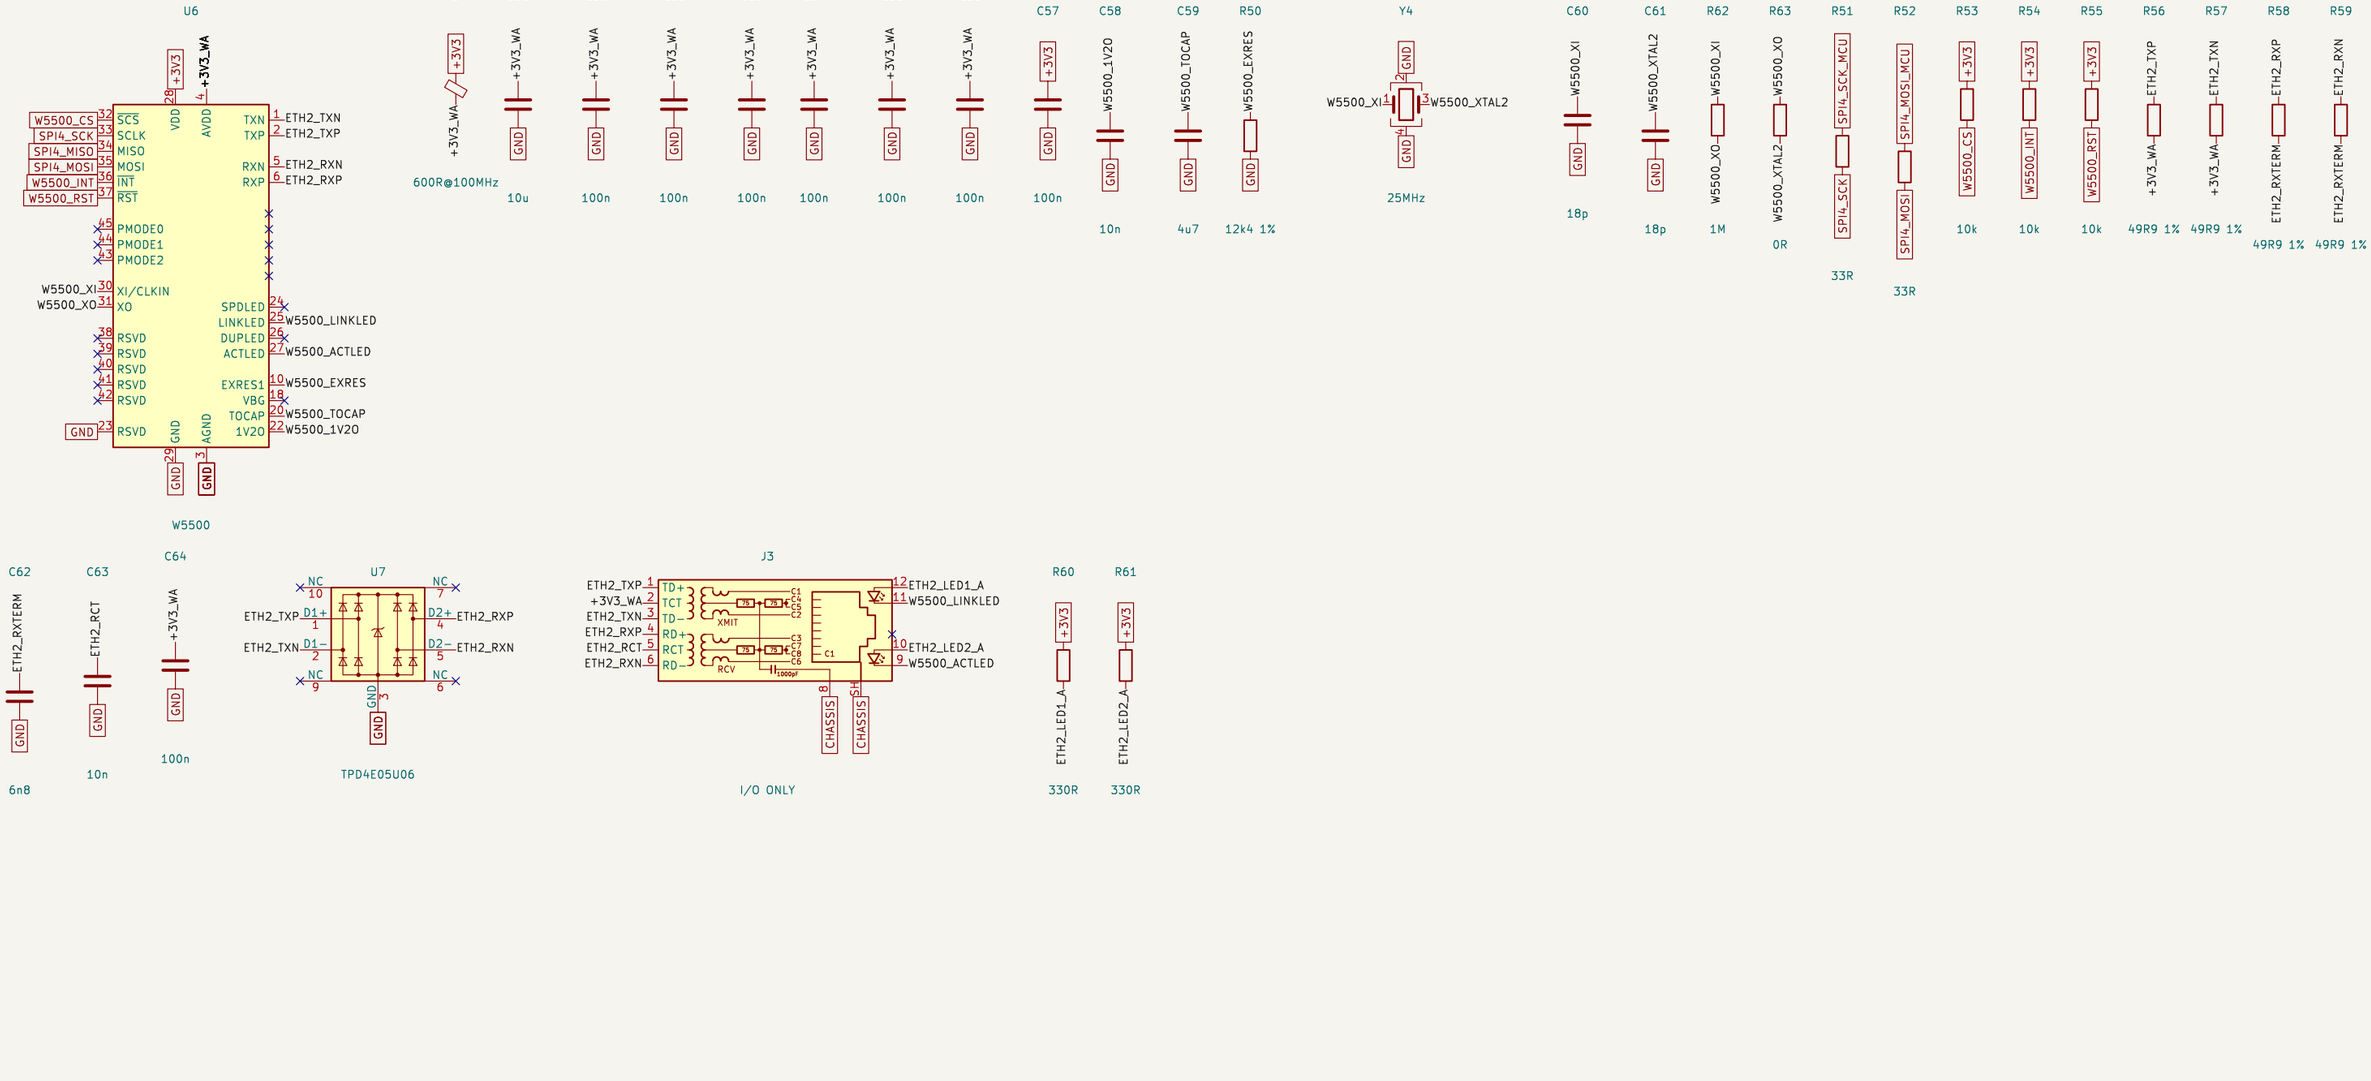



Notes
U6: PMODE[2:0] internal pull-ups = all capable, auto-negotiation; RSVD pin 23 to ground, RSVD 38–42 NC; VBG open. No auto-MDIX: the I/O board's LAN8742A does HP auto-MDIX, so a straight cable works
C51: one per AVDD pin
C52: one per AVDD pin
C53: one per AVDD pin
C54: one per AVDD pin
C55: one per AVDD pin
C56: one per AVDD pin
C57: VDD pin 28
Y4: own crystal, CL 18 pF, +/-30 ppm (W5500 datasheet); separate from the MCU's HSE

C60: W5500 reference circuit
R62: W5500 reference circuit
R63: drive-level option, W5500 reference circuit
R51: series, at the MCU
R52: series, at the MCU
C64: TX centre tap
J3: I/O boards only; silkscreen I/O ONLY
R60: link LED; W5500 LED outputs sink (active low)
R61: activity LED

Generated from design.py
W5500 on SPI4, I/O RJ45 (J3), I/O boards only
**EnviroDevelo**

| | | |
|---|---|---|
| Sheet: /Ethernet I/O port/ | | |
| File: eth_io.kicad_sch | | |
| ***Title: CEMS core board: Ethernet I/O port*** | | |
| Size: A3 | Date: 2026-10-31 | **Rev: 0.2** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 5/9 |

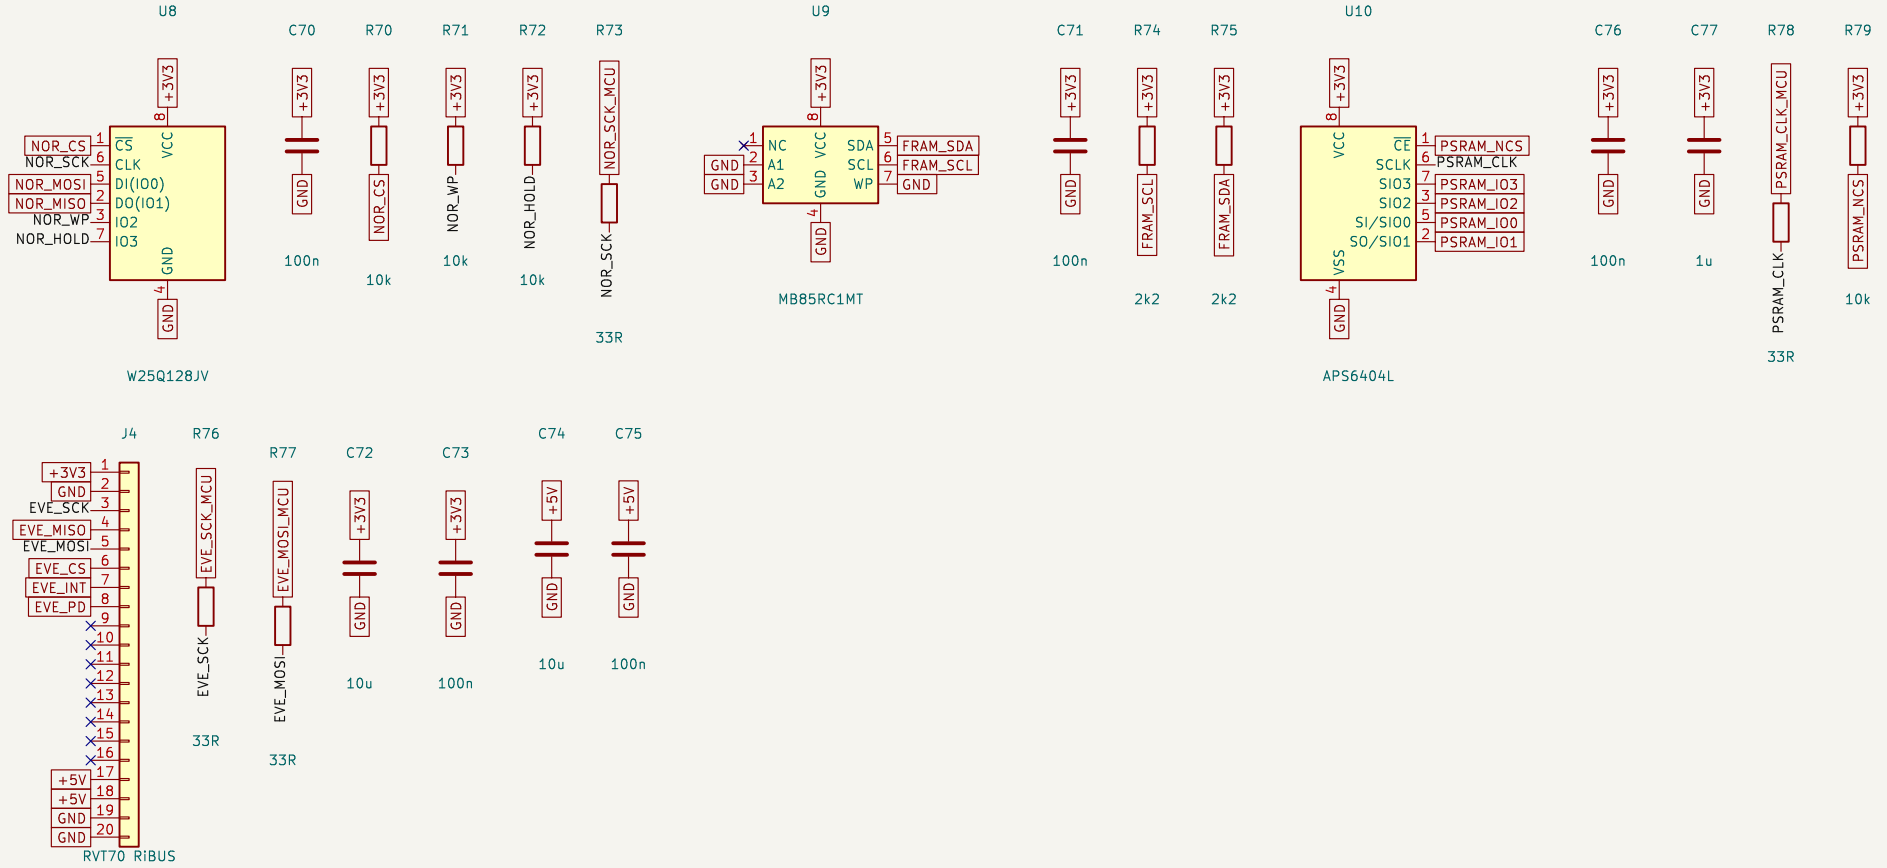


Notes
U8: event log and data logger (H3)
R73: series, at the MCU
U9: 128 KB FRAM (H2), I2C address 0x50. A1 = A2 = 0, WP low = writes enabled (pinout per datasheet)
U10: 8 MB QSPI PSRAM on OCTOSPI1, up to about 100 MHz: keep it next to the MCU, traces under 30 mm and roughly matched
C76: at U10 VDD
R78: series, at the MCU
R79: keeps the PSRAM deselected through reset
J4: RiBUS pinout from the RVT70HSBNWC00 V1.1A datasheet; 9–12 (GPIO, audio, QSPI) left open; 13–16 NC. CHECK contact side against the cable at

mechanical layout
R76: series, at the MCU
R77: series, at the MCU
C72: at J4
C73: at J4
C74: at J4, backlight
C75: at J4

Generated from design.py
NOR flash, FRAM, RVT70 display FFC (J4)
**EnviroDevelo**

Sheet: /Memories and display/
File: periph.kicad_sch

**Title: CEMS core board: Memories and display**

| Size: A4 | Date: 2026-10-31 | **Rev: 0.2** |
|---|---|---|
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 6/9 |

Notes
U11: SET2..0 = 010: 30 ms watchdog (outputs off within 50 ms). CHECK the SET table and startup delay
R102: gate shut while the MCU is in reset
U12: GATE = GATE_EN and watchdog OK
R103: firmware reads the gate back (PDB)
U13: ODIS of the ISO2H823V2.5. CHECK ODIS polarity: if it is active low, link GATE instead
U14: serial mode; SEL high, MSO/MS1 high, ALE/RST low. No LED matrix: X pins tied, Y pins tied. CHECK pinout, mode pins and OLADJ against the datasheet; footprint is a project footprint to draw
R104: CLKADJ. CHECK
R105: IADJ. CHECK
R106: NOT FITTED; open-load threshold option. CHECK
C110: per output, datasheet application circuit
J10: same pinout as the breakout J1, straight-through ribbon


F10: ribbon +24 V (breakout LEDs)
U15: tab = VCC (+24V_FB); copper pour on the field side only. CHECK pinout
C200: bank B bulk
J11: B A return over 2 contacts: CHECK the plug rating (8 A per contact)
D31: flyback at the terminal, as on the breakout
D41: NOT FITTED, fast-release option (remove the OR)
D42: NOT FITTED.
D43: NOT FITTED.
D44: NOT FITTED.
D45: NOT FITTED.
D46: NOT FITTED.

D47: NOT FITTED.
D48: NOT FITTED.
U16: serial mode; internal DC/DC off (DC_ENA low), field side from VBB. Values from Infineon's ISO1I813T evaluation board. CHECK pinout and SEL/MS levels
R118: 500 kHz
R119: type 1/3 (eval board RTS). CHECK
R120: wire-break threshold (eval board). CHECK
R122: RIN. eval board
R123: RLED (no LED here; the breakout has them)
J12: same pinout as the breakout J1
F11: sensor supply down the input ribbon

Generated from design.py
Output gate, bank A 8 x 0.6 A (ISO2H823V2.5), bank B 8 x 1 A (ISO808A-1), 8 inputs (ISO1I813T)
**EnviroDevelo**
Sheet: /Field digital I/O/
File: io_dig.kicad_sch

**Title: CEMS core board: Field digital I/O**

| Size: A2 | Date: 2026-10-31 | **Rev: 0.2** |
|---|---|---|
| KiCad E.D.A. | kicad-cli 7.0.11+dfsg-1build4 | Id: 7/9 |

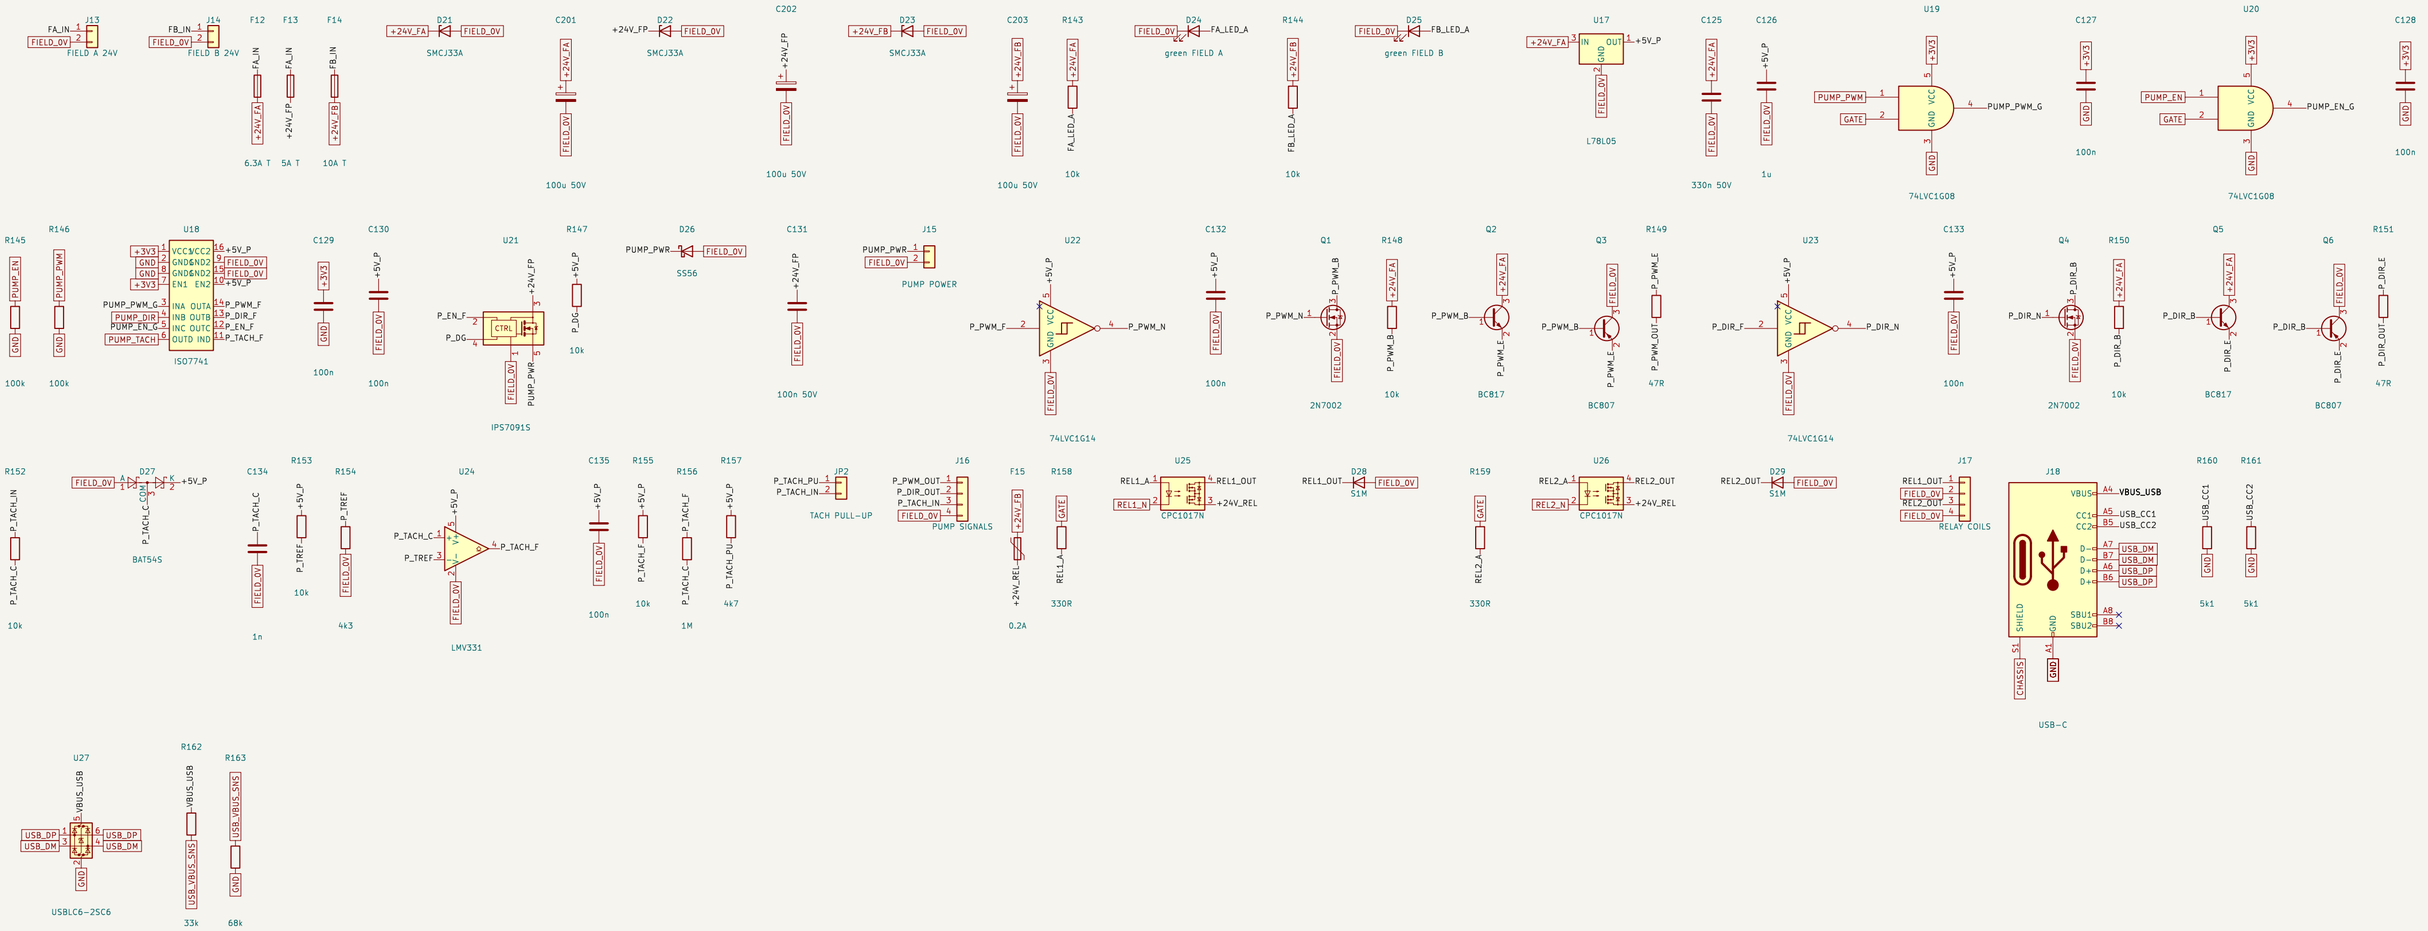



Notes
J13: bank A, inputs, pump: about 10 A
J14: bank B and relays: about 8 A
F12: bank A, inputs, ribbons
F13: pump
F14: bank B, relays
D21: unidirectional TVS; surge clamp, and blows the fuse on reverse polarity
U17: pump logic 5 V, field side

U18: CHECK pinout and the F suffix
U21: about 4 A pump supply with current limit; can PWM a brushed motor to 1 kHz. CHECK rating once the 107Z current is known
R147: diagnostic, test point only
D26: motor freewheel
R149: pump PWM: 24 V push-pull, 20 Hz–25 kHz
R151: pump DIR: 24 V push-pull, 20 Hz–25 kHz
D27: clamp to the 5 V rail

R154: 1.5 V threshold
U24: CHECK pin order for the SOT-23-5 variant
R156: hysteresis
JP2: fit for an open-collector tacho
J16: Thomas 107Z: signal ground must be field 0 V
U25: 60 V, 100 mA PhotoMOS
R163: 5 V -> 3.4 V

Generated from design.py
Field supplies A and B, pump switch / PWM / DIR / tacho, 2 relay coil outputs, USB-C
**EnviroDevelo**

| | | |
|---|---|---|
| Sheet: /Field power, pump, relays, USB/ | | |
| File: io_pwr.kicad_sch | | |
| ***Title: CEMS core board: Field power, pump, relays, USB*** | | |
| Size: A2 | Date: 2026-10-31 | **Rev: 0.2** |
| KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4 | | Id: 8/9 |

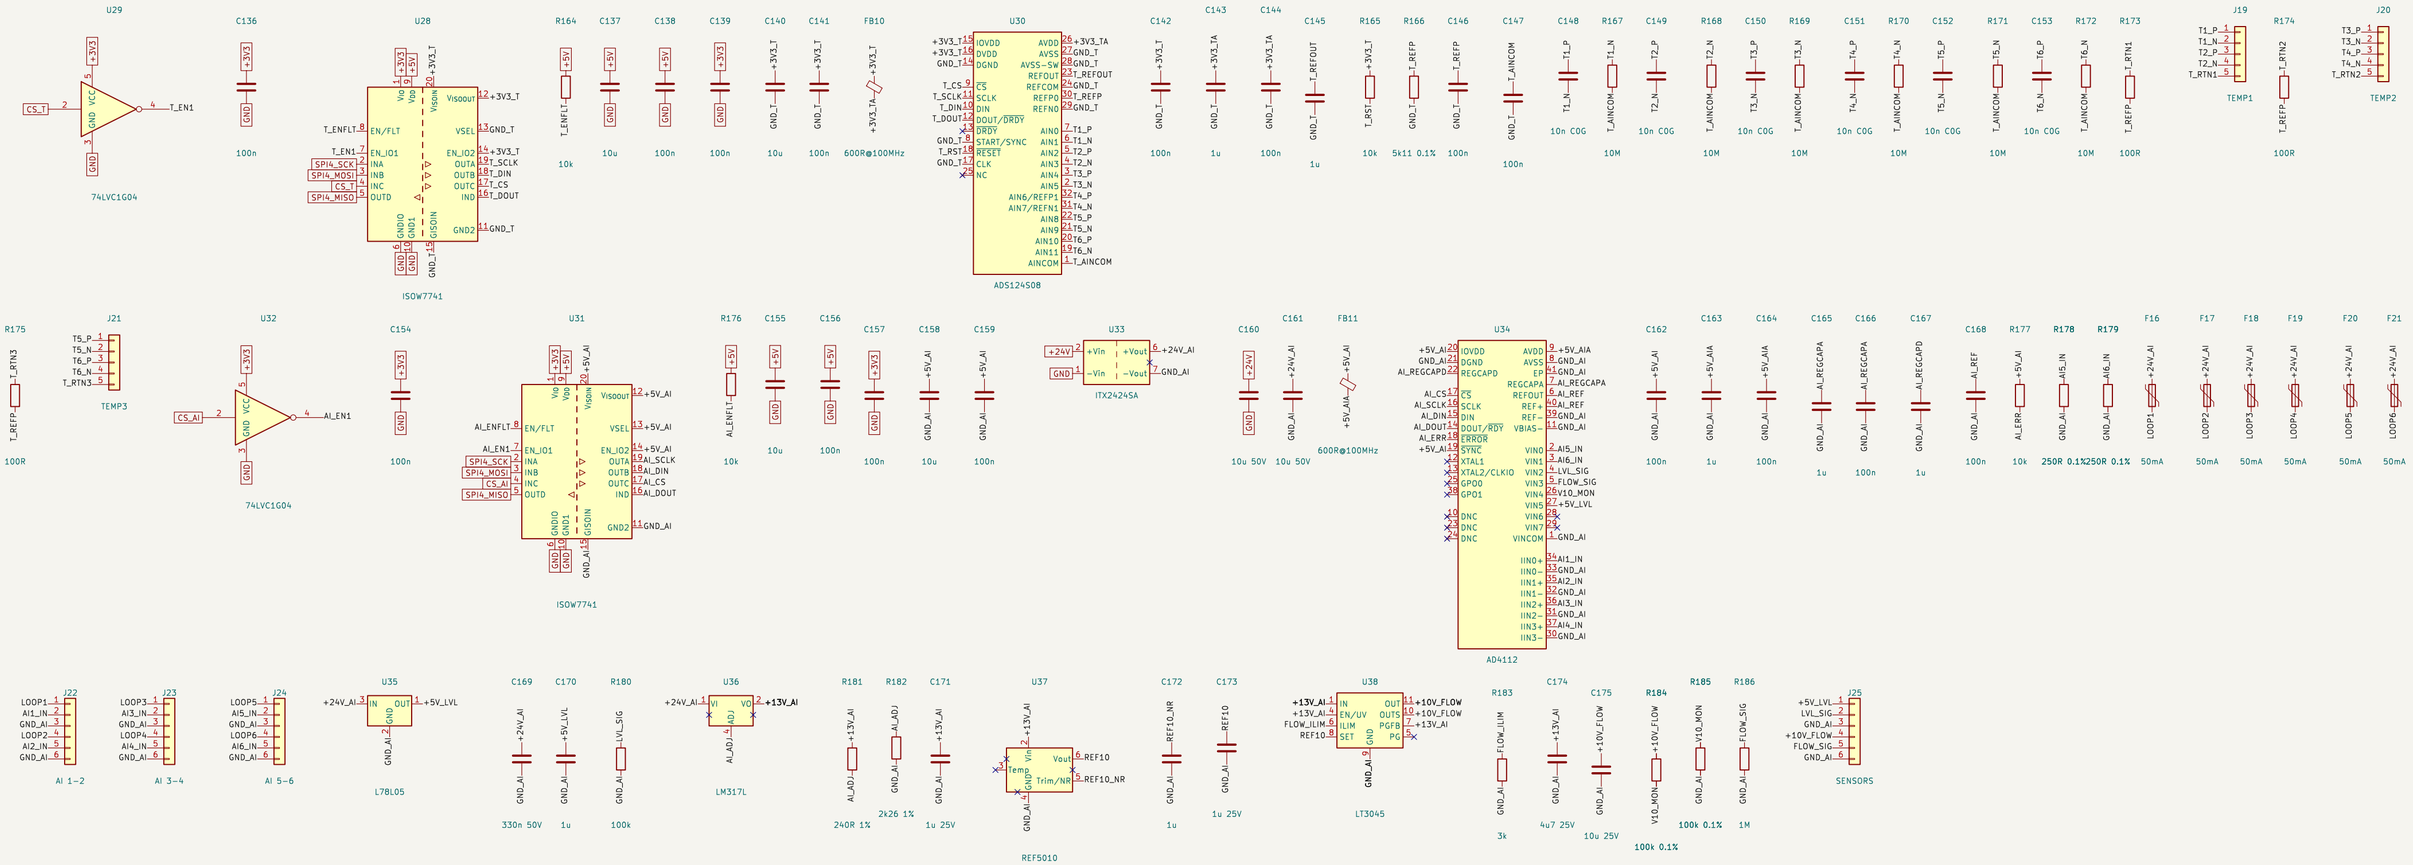


Notes
U28: VSEL low = 3.3 V out, CHECK
U30: internal clock (CLK low), START low (conversions by command), DOUT/DRDY on one pin, CHECK pinout
C145: REFOUT to REFCOM
R166: RTD reference resistor, 10 ppm/K
C147: CHECK AINCOM and the TC bias against the io-node schematic
C148: differential filter
R167: open—TC bias
R173: RTD return to the reference resistor
J19: T1 +/−, T2 +/−, RTD return
J20: T3 +/−, T4 +/−, RTD return

J21: T5 +/−, T6 +/−, RTD return
U31: VSEL high = 5 V out, CHECK
U33: loop power 6 x 22 mA + level + mass-flow supply, about 4 W
U34: internal oscillator and 2.5 V reference, VIN0/1: 4–20 mA ch 5/6 on shunts; VIN2 level; VIN3 mass flow; VIN4 10 V monitor; VIN5 5 V monitor, CHECK pinout and exposed pad size
R178: 4–20 mA shunt -> 1–5 V
R179: 4–20 mA shunt -> 1–5 V
F16: loop supply limit
J22: per channel: 24 V loop, IN, 0 V (2-wire or 4-wire transmitters)
J23: per channel: 24 V loop, IN, 0 V (2-wire or 4-wire transmitters)
J24: per channel: 24 V loop, IN, 0 V (2-wire or 4-wire transmitters)

U35: level sensor 5 V, internal current limit
R180: defined level when unplugged
U36: 13 V pre-regulator, about 0.5 W; copper on the VO pins
R182: 1.25 x (1 + 2260/240) = 13.0 V
U38: SET driven by the REF5010 (no RSET), CHECK PGFB tie when PG is unused
R183: about 50 mA current limit
R184: 10 V monitor for ratiometric correction
J25: level (DFRobot SEN0205): 5 V, SIG, 0 V: mass flow (AWM5104VN): +10 V, OUT, 0 V

Generated from design.py
Isolated: 6 x 4–20 mA, level and mass-flow ports (AD4112); 6 temperatures (ADS124S08)

**EnviroDevelo**

Sheet: /Analog inputs and temperatures/
File: io_ana.kicad_sch

**Title: CEMS core board: Analog inputs and temperatures**

| Size: A2 | Date: 2026-10-31 | **Rev: 0.2** |
|---|---|---|
| KiCad E.D.A. | kicad-cli 7.0.11+dfsg-1build4 | Id: 9/9 |