

电子科技大学
格拉斯哥学院
Glasgow College, UESTC

FINAL YEAR PROJECT REPORT
BACHELOR OF ENGINEERING

AFDM Transceiver Design for Underwater Acoustic Communication System

Student:

GUID:

1st Supervisor:

2nd Supervisor:

2025–2026

Coursework Declaration and Feedback Form

This student should complete and sign this part.

Student Name:	Student GUID:
Course Code: UESTC4006P	Course Name: INDIVIDUAL PROJECT 4
UESTC No.:	Academic Year: 2025–2026
Name of 1st Supervisor:	Name of 2nd Supervisor:
Title of Project: **AFDM Transceiver Design for Underwater Acoustic Communication System**	
Declaration of Originality and Submission Information	
I affirm that this submission is all my own work in accordance with the University of Glasgow Regulations and the School of Engineering requirements. *Signed (Student):*	
Date of Submission:	
Feedback from Lecturer to Student - to be completed by Lecturer or Demonstrator	
Grade Awarded: Feedback (as appropriate to the coursework which was assessed):	
Lecturer / Demonstrator:	Date returned to the Teaching Office:

Abstract

Underwater acoustic (UWA) communication channels exhibit long delay spreads and severe fractional Doppler shifts that conventional orthogonal frequency division multiplexing (OFDM) cannot accommodate without prohibitive cyclic-prefix overhead. Affine Frequency Division Multiplexing (AFDM) folds these doubly-dispersive paths into a single sparse chirp-domain effective channel, enabling compressive-sensing-based channel estimation. To further preserve spectral efficiency in bandwidth-constrained UWA links, this work adopts a superimposed-pilot (SP) frame in which every chirp sub-carrier conveys both data and pilot energy. The resulting unknown-data interference does not decay with the noise variance, leaving a one-shot orthogonal matching pursuit (OMP) plus message-passing (MP) receiver estimation-limited at mid-to-high SNR.

This work proposes a low-complexity joint channel estimation and data detection receiver for AFDM-SP on UWA-style sparse doubly-dispersive channels, in which OMP is executed only once to lock the channel support and only a data-aided least-squares (LS) gain refit and sparse MP belief propagation iterate. An empirical support-recall probe motivates this design directly: the first OMP pass already recovers $\approx 95\%$ of the effective Dirichlet-expanded virtual-tap support, with the residual $\approx 5\%$ structurally determined by fractional-Doppler leakage geometry rather than by additive noise; re-running OMP across outer iterations is therefore a wasted constant-factor overhead. The proposed receiver thus avoids both this overhead and the cubic per-frame cost of a dense LMMSE estimator, while recovering two to three orders of magnitude in BER over the one-shot baseline at SNR $= 25$ dB. To recover the structural support-residual that OMP-once leaves behind, the receiver is further augmented with a 1 041-parameter deep-unfolding support-refinement head that scores off-support candidates after the single OMP pass and appends a fixed number of top-ranked atoms. The learned augmentation stays in the same $\mathcal{O}(PN^2)$ arithmetic class as the classical baseline and incurs only $\approx 8\%$ additional per-frame complex-MAC overhead at $N = 1024$.

A paired-frame Monte-Carlo evaluation on a UWA-style fractional-Doppler simulator confirms two consistent gains. The proposed classical joint receiver outperforms a serial OMP+MP baseline by two to three orders of magnitude in BER at SNR $= 25$ dB. On top of that, the learned-augmented variant delivers a further ≈ 2 dB paired separation from the classical joint at SNR $\in \{20, 25, 30\}$ dB. A physical-support-oracle headroom analysis shows that the learned head closes $61\%/81\%/98\%$ of the achievable top-P support-refinement gap at SNR $= 15/20/25$ dB, capturing the bulk of the BER reduction available from any support-refinement strategy operating on the same dictionary. Extension to multi-scale multi-lag UWA propagation and embedded-deployment latency, memory, and energy benchmarks are identified as natural follow-up work.

Acknowledgements

I would like to express my sincere gratitude to my supervisor, Associate Professor Yusha Liu, whose guidance has been instrumental at every stage of this project. Her technical insight shaped the trajectory of this work from an early prototype into the complexity-preserving learned-head receiver reported here, and her patience in working through the mathematical details of the AFDM signal model, the Dirichlet expansion, and the deep-unfolding architecture has fundamentally strengthened my understanding of communications signal processing. Beyond the technical supervision, she introduced me to the discipline of formulating a research question, designing an experiment that can answer it, and reading the resulting evidence honestly — the habits of mind that I now consider the most valuable outcome of this year's work. Her willingness to engage with both early-stage uncertainty and late-stage detailed revisions has been a model of academic mentorship, and it is in no small part due to her example that I now intend to pursue research as a career.

I am also grateful to the University of Electronic Science and Technology of China (UESTC) and to Glasgow College, UESTC, for providing the academic environment within which this project was carried out. The four-year UESTC–University of Glasgow joint curriculum has given me a research training that bridges two academic traditions, exposing me to the rigour of the British engineering education system while remaining grounded in the strong technical foundations of Chinese undergraduate engineering, and I am thankful to both institutions for the opportunity.

I would like to thank the lecturers in the Glasgow College, UESTC programme whose courses laid the technical groundwork on which this thesis is built — in particular those teaching digital signal processing, communication theory, and probability and random processes, without which the OMP, MP-BP, and statistical-significance machinery used in this work would have been inaccessible. I am equally grateful to my fellow students and friends in the programme for the daily discussions, debugging sessions, and mutual encouragement that made the long stretches of simulation and writing far less solitary than they might otherwise have been; their willingness to listen to half-formed ideas and to push back with sharper questions has improved this work in ways that are difficult to itemise but easy to feel.

Finally, I would like to thank my family for their unwavering support throughout my undergraduate studies. Their confidence in my choices, their patience during the long hours of work that this project demanded, and their steady encouragement at the moments when progress was slowest, have been the foundation on which everything else stands. This thesis is, in a real sense, as much theirs as it is mine.

Contents

Coursework Declaration and Feedback Form i

Abstract ii

Acknowledgements iii

List of Figures vi

List of Tables ix

1 Introduction and Literature Survey 1

1.1 Background and motivation 1
1.2 Critical literature survey 2
1.3 Research question and objectives 6
1.4 Contributions 6
1.5 Report structure 7

2 Materials and Methods 8

2.1 AFDM signal model and the DAFT 8
2.2 Doubly-dispersive simulator channel and effective-channel sparsity 8
2.3 Superimposed pilot signal model 10
2.4 Sparse-baseline OMP dictionary 11
2.5 Joint OMP-once + iterative LS/MP-BP receiver 12
2.6 Learned support-refinement head 15
2.7 Training 18
2.8 Complexity analysis 19
2.9 Evaluation protocol 20
2.10 Baseline selection and fairness 20

3 Results 22

3.1 Simulation parameters 22
3.2 Experiment 1 — main 4 B BER waterfall and paired BER reductions 22
3.3 Experiment 2 — outer-iteration convergence 23
3.4 Experiment 3 — support recall and oracle-headroom analyses 24
3.5 Experiment 4 — complexity and MAC count 28
3.6 Summary 29

4 Discussion 30

4.1 Mechanism of the serial-receiver error floor 30
4.2 OMP-once: empirical justification 30

4.3 Mechanism of the learned head's high-SNR contribution 31
4.4 Justification of the 4 B oversampled operating point 33
4.5 Position relative to prior AFDM and UWA work 34
4.6 Limitations 34
4.7 Summary 35

5 Conclusions **37**

Appendices **44**

A Simulator Correspondence and Pilot Convention **44**

B Paired-Bootstrap and Clopper–Pearson Confidence Intervals **44**

C OMP-Once Recall Against the Oracle Dirichlet Support (Probe (a)) **45**

D McNemar Paired-Bit Significance Test **46**

E Analytical Decomposition of the Force-Topk Bias Patch **47**

F OMP Dictionary Atom Construction and Algorithm Steps **48**

List of Figures

1 Dirichlet-kernel magnitude $|D(\delta)| = |\sin(\pi\delta)/(N\sin(\pi\delta/N))|$ from (4) at $N = 1024$, plotted against the integer-Doppler offset δ. Two cases are overlaid: the integer-aligned residual ($\kappa = k_p^{\text{real}} - k_p = 0$, blue), where the kernel collapses to a sampling indicator and an integer-Doppler dictionary loses no per-path energy; and the worst-case fractional residual ($|\kappa| = 0.5$, red), where the integer-bin samples (red circles) at $\delta \in \{0, +1\}$ each carry $\approx 41\%$ of per-path energy and the samples at $\delta \in \{-1, +2\}$ each carry $\approx 4.4\%$. The dashed vertical lines mark the $k_{\text{leak}} = 2$ truncation boundary used by the simulator; the two-sided sum of squared truncated coefficients beyond $|\delta| > k_{\text{leak}}$ amounts to $\approx 8.3\%$ of per-path energy at $|\kappa| = 0.5$, the figure quoted in the paragraph above. The non-zero side-lobes flanking the kernel peak are the structurally predictable energy that the post-OMP virtual-tap expansion (§2.5) and the learned support-refinement ranker (§2.6) are designed to recover. 10

2 Classical OMP-once + iterative LS/MP-BP joint receiver (Algorithm 1 in block-diagram form). The outer loop (dashed rectangle) runs for $T_{\text{out}} = 5$ iterations; each iteration forms a data-cancellation residual, refits the path gains on a locked support via damped DA-LS, runs sparse MP-BP detection on the Dirichlet-expanded virtual-tap factor graph, updates the adaptive noise-variance estimate, and prunes the support. 12

3 Integration of the learned support-refinement head into the classical OMP-once + iterative LS/MP-BP receiver. The learned block (dark blue) is invoked twice at the initialisation step ($t = 0$), immediately after OMP-once and before the iterative LS/MP-BP loop begins; it ranks the top-$M = 96$ off-support candidates and appends the top-K_{add} atoms to the support. All other blocks are identical to Fig. 2: the head replaces neither OMP-once nor the iterative LS/MP-BP block. The detailed head architecture is given in Fig. 4. 16

4 Learned support-refinement head (architecture). Two parallel inputs per candidate i: a 7-D self-feature $\mathbf{u}_i$ and a set of 6-D pair features $\{\mathbf{v}_{i,s}\}_{s\in\hat{S}}$ indexed over the current active support $\hat{S}$. The shared pair-encoder ($\mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$, 384 parameters) is applied element-wise over (i,s) pairs; order-invariant pooling (concat of channel-wise max and mean over $s \in \hat{S}$) produces a 32-D pair descriptor per candidate, which is concatenated with $\mathbf{u}_i$ to form $\phi_i \in \mathbb{R}^{39}$. The shared scorer ($\mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^1$, 657 parameters) emits a scalar logit s_i; the deterministic top-K_{add} ranker selects the atoms to append. Total trainable parameters: $384 + 657 = 1\,041$. The logits are used only for ranking. 17

5 Main 4 B BER waterfall (left) and channel-estimation NMSE (right) at $f_s = 4B$ for the four receivers described in §2.10. The learned head line is produced by the 27 k-frame 4-SNR retrained checkpoint. The OMP+MP SERIAL arm saturates from SNR ≥ 15 dB; the CLASSICAL JOINT and learned head arms continue to descend, with learned head consistently below CLASSICAL JOINT in the high-SNR region. The PCSI+MMSE curve is a PCSI+MMSE reference, not an information-theoretic lower bound. 24

6 Outer-iteration convergence at SNR $\in \{15, 20\}$ dB, $f_s = 4B$, with 80 paired frames per $(t, \text{SNR} = 15\,\text{dB})$ cell and 300 paired frames per $(t, \text{SNR} = 20\,\text{dB})$ cell. Both recipes descend rapidly over $t = 1, \ldots, 4$ and saturate by $t = 4$. The classical $t = 4 \to 5$ move at SNR $= 20$ dB ($8.81 \times 10^{-4} \to 9.07 \times 10^{-4}$, $+3\%$) sits within 1σ of a 614,400-bit binomial count; the learned $t = 4 \to 5$ move ($4.51 \times 10^{-4} \to 5.42 \times 10^{-4}$, $+20\%$, $\approx 3\sigma$) is consistent with a residual saturation–counting-noise interaction rather than an iteration blow-up. Numerical values in Table 4. 25

7 Left: mean OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size ≈ 28; definition in Appendix C), as a function of SNR. Recall is stable at $\approx 95\%$, indicating that the support-selection residual is structural rather than noise-driven. Right: fraction of frames on which OMP misses at least one virtual-tap oracle atom. Prevalence is ≈ 67–71% and essentially flat across SNR. Axes: SNR in dB; left panel $y =$ mean recall in $[0, 1]$; right panel $y =$ fraction of frames with ≥ 1 missed atom. Error bars are 1σ across frames within each SNR cell. 27

8 Top-P physical-support-oracle headroom at SNR $\in \{15, 20, 25\}$ dB, $f_s = 4B$ (log-BER on x-axis; four bars per SNR cell: Classical, Oracle physical, Learned, PCSI+MMSE). The physical oracle replaces OMP's selected support with the simulator's ground-truth top-P atoms, providing a valid ceiling on what any top-P support-refinement method can achieve. The Learned bar is annotated with the fraction of the baseline-to-physical-oracle gap closed by the learned head: $61\%/81\%/98\%$ at SNR $= 15/20/25$ dB. The physical oracle's near-zero values at SNR $\in \{20, 25\}$ dB are censored observations: 0 errors in 5.12×10^5 paired bits, plotted at 5×10^{-7} for visibility (Clopper–Pearson 95% upper bound $\approx 5.86 \times 10^{-6}$). 28

9 Single-frame OMP support and learned-head additions on a representative frame at SNR $= 20$ dB, drawn from a 300-seed online replay at the paper-canonical operating point ($P = 8$, top-$M = 96$, $K_{\text{add}} = 4$, $f_s = 4B$, $N = 1024$) and selected by the disclosed deterministic rule *(above-median oracle-missed count, top-K_{add} head additions overlap with at least one oracle-missed atom, per-frame BER closest to the cache median)*. Gray dots: the $M = 96$ candidate pool surfaced to the ranker; blue circles: the OMP-once support of size $|\hat{S}_{\text{OMP}}| = P = 8$; red stars: Dirichlet-expanded oracle-missed atoms; green crosses: the top-$K_{\text{add}} = 4$ atoms promoted by the learned head. Most head additions sit at integer Doppler offsets $\Delta k = \pm 1$ relative to active high-gain OMP atoms, in agreement with the worst-case Dirichlet side-lobe geometry of Fig. 1. The frame is provided as a representative attribution example and is not a substitute for the population-level support-recall and oracle-headroom analyses of §3.4. 32

List of Tables

1 OMP dictionary size under the canonical AFDM configuration used throughout this report ($\tau_{\text{spread}} = 10$ ms, $v_{\max} = 3$ m/s, $f_c = 12$ kHz, $f_s = 4B = 16$ kHz). Under the fixed-f_s convention, $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil = 160$ is independent of N, while $k_{\max} = \lceil v_{\max} f_c N/(c f_s) \rceil$ grows linearly with N. The Chapter 3 operating point ($N = 1024$) corresponds to the middle row. 12

2 Simulation parameters. One configuration is used for every receiver in every experiment. 23

3 4 B BER waterfall under the paired-frame protocol, pooled across three independent evaluation-seed blocks (seeds 20 260 423/424/425; adaptive frame counts 600/773/1 300 at SNR $= 20/25/30$ dB, driven by the error-budget early-stop rule of §2.9). Column Δ is the relative paired-BER change of learned head against CLASSICAL JOINT, with McNemar p-values where both arms are above the finite-sample floor. CP = Clopper–Pearson 95% confidence interval. 24

4 Per-iteration BER at $f_s = 4B$: 80 frames per $(t, \text{SNR} = 15\,\text{dB})$ cell and 300 frames per $(t, \text{SNR} = 20\,\text{dB})$ cell. The retrained learned-head checkpoint is deployed at inference under the standard ranking-only configuration of §2.6. 26

5 OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size $p_{\text{real}} \approx 28$ per frame; the OMP support itself has size $P = 8$), computed from the $4B$ feature cache. "Frac. frames ≥ 1 missed" is the fraction of frames on which the learned head has at least one Dirichlet-leakage virtual tap to repair. 26

6 Top-P physical-support-oracle diagnostic at $f_s = 4B$, 250 paired frames per cell (baseline and oracle share the same frames). The physical oracle picks dictionary atoms corresponding directly to the simulator's $(l_p, \lfloor k_p^{\text{real}} \rceil)$ main-lobe indices ranked by $|g_i|$, and provides a valid ceiling on what any top-P support-refinement method can achieve. Gap closed $=$ (baseline $-$ learned)/(baseline $-$ oracle$_{\text{physical}}$). The physical oracle's zeros at SNR $\in \{20, 25\}$ dB are censored observations: 0 errors in 5.12×10^5 paired bits, Clopper–Pearson 95% upper bound $\approx 5.86 \times 10^{-6}$. 27

7 Complexity comparison for the receiver recipes considered in this report. "Dominant operator" gives the step that dominates the per-frame cost. MAC counts are first-order complex-multiplication estimates at $N = 1024$; runtime, memory, and latency effects on a realistic embedded target are out of scope for this report. 28

8 Structural comparison of the closest published AFDM / AFDM-SP / UWA-AFDM receivers and the present work. "SP" = superimposed pilots, "EP" = embedded pilots, "MSML" = multi-scale multi-lag, "stat. disc." = whether the published evaluation uses paired seeds and a formal significance test. The Huang *et al.* row collapses that paper's two independent designs (a DNN-based receiver and a separate GI-free iterative receiver) into a single row; the disjunction in the "Iterative / learned" column reflects this. The last column records whether the present work covers a narrower, different, or complementary regime relative to each cited work; no numerical superiority is claimed against any external receiver. 34

1 Introduction and Literature Survey

1.1 Background and motivation

Underwater acoustic (UWA) communications carry much of the non-tethered data traffic between autonomous underwater vehicles, ocean-bottom sensors, and surface platforms. Their physical layer is shaped by two channel pathologies that, taken together, are harder to handle than almost any terrestrial radio-frequency link. The multipath between the sea surface, the water column, and the sea bed produces delay spreads of several to tens of milliseconds, which at the 4–12 kHz bandwidth budgets typical of UWA modems translates to hundreds of resolvable delay bins [1, 2]. The propagation speed of $c \approx 1500$ m/s, combined with platform motion of even a few m/s, yields a relative Doppler of order $v/c \sim 10^{-3}$ — three to four orders of magnitude larger than in a typical RF link — and produces both strong inter-carrier interference and fractional Doppler offsets relative to the underlying multicarrier grid [3, 4]. A conventional OFDM receiver cannot absorb either pathology cleanly: a cyclic prefix long enough for the full delay spread costs a prohibitive fraction of spectral efficiency, while a residual fractional Doppler of even a few tenths of a sub-carrier corrupts sub-carrier orthogonality in a way that a single-tap frequency-domain equaliser cannot repair.

Affine Frequency Division Multiplexing (AFDM) [5] was designed for precisely such doubly dispersive channels. By placing information on a chirp basis defined through the discrete affine Fourier transform (DAFT), and choosing the two chirp coefficients (c_1, c_2) to align with the channel's delay–Doppler geometry, AFDM folds every physical delay–Doppler pair into a single sparse structured effective channel on the chirp-domain received signal, rather than into the full two-dimensional delay–Doppler grid that Orthogonal Time Frequency Space (OTFS) modulation [6–8] would produce. The resulting sparsity is what makes sparse-recovery channel estimation with orthogonal matching pursuit (OMP) [9] tractable [10, 11], and is the starting point of every receiver considered in this report.

Pilot overhead nonetheless remains a first-order constraint on spectral efficiency in UWA contexts where the bandwidth budget is only a few kilohertz. To preserve the data-carrying capacity that an AFDM frame would otherwise lose to dedicated pilots, this work adopts a superimposed-pilot (SP) transmission [12, 13] in which every chirp sub-carrier simultaneously carries data and pilot energy under a fixed power split ρ. SP doubles the available data capacity relative to a comparable embedded-pilot (EP) frame, but it also introduces a new estimation problem: the pilot observation is now systematically contaminated by unknown-data interference, and at mid-to-high SNR this interference does not average out. In a UWA-style $\rho = 0.5$, $P = 8$-path simulation representative of the regime considered here, the resulting error floor for a one-shot OMP + MP-BP receiver sits at BER $\approx 5 \times 10^{-2}$ from SNR ≥ 15 dB, with an OMP channel-estimation NMSE frozen near -11.3 dB irrespective of the noise variance. The presence of this floor — not the SNR — defines the engineering regime that this work has to address.

The natural response to a structured estimation residual is to iterate between channel estima-

tion and symbol detection [14]: each detection pass produces tentative data estimates that can be subtracted from the pilot observation, sharpening the next channel estimate. Two naive realisations of this idea are expensive, however. Re-running OMP at every outer iteration multiplies the per-frame cost by a $5\times$ constant factor at five outer iterations, and replacing OMP with a dense LMMSE channel estimator inflates the per-frame complexity by two orders of magnitude at $N = 1024$. This work therefore investigates a third option: estimate the channel support *once* with OMP, lock that support, and iterate only the cheap downstream blocks — a damped data-aided least-squares refit of the path gains and sparse message-passing belief propagation (MP-BP) on the chirp-domain factor graph. The central engineering question is whether such a single-OMP receiver, optionally augmented with a small learned module that repairs the support residual that fractional-Doppler leakage leaves behind, can close the SP error floor at a complexity comparable to a single OMP pass.

1.2 Critical literature survey

The proposed receiver sits at the intersection of four research streams that have, until now, evolved largely in isolation from each other: AFDM as a chirp-domain waveform engineered for doubly dispersive channels; superimposed pilot transmission as a spectral-efficiency mechanism whose joint estimation–detection challenge predates AFDM by nearly two decades; sparse-recovery and message-passing receiver primitives developed in the OFDM/OTFS lineage and now inherited by AFDM; and the deep-unfolding tradition that motivates the embedding of small learned modules within otherwise model-based receivers. This section traces each thread to the point at which it constrains a specific design choice in Chapter 2, and concludes by identifying the narrow gap that the present work occupies.

AFDM as a doubly-dispersive waveform and its channel-estimation primitives. AFDM was introduced by Bemani *et al.* [5] as a chirp-based multicarrier waveform whose two tunable DAFT parameters (c_1, c_2) can be aligned with the delay–Doppler geometry of the underlying channel, yielding a sparse one-dimensional input–output relation that recovers the diversity advantages of the two-dimensional OTFS modulation [6–8] on doubly dispersive links. Subsequent investigations established the receiver-side primitives that make this representation operational. Yin and Tang [15] developed the pilot-aided AFDM channel estimator for the integer delay–Doppler grid, formalising the threshold-based recovery rule that later sparse and Bayesian extensions would refine. Benzine *et al.* [10] reformulated AFDM channel estimation as a sparse-recovery problem under embedded-pilot (EP) guard intervals, importing OMP [9] into the AFDM literature and demonstrating that the sparsity of the chirp-domain effective channel makes greedy recovery a natural fit. Yin *et al.* [16] extended this line to MIMO-AFDM by deriving a diagonal-reconstruction estimator that explicitly addresses the inter-Doppler interference produced by fractional Doppler residuals, while the comparative survey of Rou *et al.* [11] situated AFDM

alongside OTFS and OCDM within an integrated sensing-and-communication context. Two practitioner-oriented overviews [17, 18] now collect these threads. Across this body of work, the EP frame keeps the pilot observation pilot-only and yields analytically clean sparse-recovery guarantees, but it does so at a spectral-efficiency cost that is hard to absorb at the few-kilohertz bandwidth budgets typical of UWA modems, and the analytical tractability disappears once the EP assumption is dropped.

Superimposed pilots and the joint estimation–detection challenge. The superimposed-pilot principle, in which every symbol simultaneously carries data and pilot energy under a fixed power split, was developed for OFDM more than a decade before AFDM. Cui and Tellambura [19] derived ML and MMSE iterative estimators for SP-OFDM and proved that the equispaced equipowered placement minimises the Cramér–Rao bound, while Tugnait and Meng [13] characterised SP-training power-allocation tradeoffs and frame-synchronisation behaviour. Orozco-Lugo *et al.* [12] established the optimality of the equipowered training pattern under the spectral-efficiency constraint. Liang *et al.* [20] subsequently demonstrated that superimposed pilots can match preamble-based channel estimation in OFDM-WLAN at the cost of an iterative receiver, isolating the regime in which the iteration overhead is justified by the bandwidth saving. The structural observation that survives the transfer from OFDM to delay–Doppler waveforms is that the pilot–data interference does not decay with the noise variance and therefore produces a high-SNR error floor that single-pass estimation cannot remove. In delay–Doppler waveforms specifically, Mishra *et al.* [21] extended the SP framework to OTFS, and Neelam and Sahu [22] carried it to OTSM, in both cases confirming that an iterative loop alternating pilot-data interference cancellation and channel re-estimation is unavoidable once the EP assumption is abandoned.

The most directly relevant SP-AFDM line is the recent cluster initiated by Zheng *et al.* [23], which adapts the OFDM SP machinery to the chirp domain and introduces an iterative SP-AFDM channel estimator and signal detector with optimised pilot placement. Cao *et al.* [24] subsequently combined the SP frame with an OMP front-end, leveraging the chirp-domain sparsity to lower the per-iteration estimation cost. Both works establish that, under SP-AFDM, an iterative loop is structurally required, but they re-execute the sparse-recovery step on every outer iteration and contain no learning component, leaving open the question of whether the support recovered by the first OMP pass already captures the bulk of the channel energy and therefore makes per-iteration re-OMP redundant. Adjacent to these SP-focused works, Zhou *et al.* [25] reach a structurally similar conclusion via a guard-interval-free pilot-aided AFDM design with iterative interference cancellation; their formulation, however, departs from SP in that it preserves a separation between pilot and data symbols and addresses only data-to-pilot and pilot-to-data interference rather than the multiplicative pilot–data coupling that defines the SP frame. Huang *et al.* [26] propose AFDM channel-estimation and symbol-detection receivers including a DNN-based design and a separate GI-free iterative design, demonstrating that learning-augmented AFDM receivers are tractable in principle, but their learned element is placed at the detector

rather than at the channel-support-selection step, and the work targets neither an SP frame nor a UWA-style channel model. Across this cluster, the iterative joint-receiver philosophy is now well established within AFDM, yet no published contribution simultaneously preserves the SP framework, retains the sparse-recovery skeleton without re-running OMP, and places a small learned module at the OMP support-refinement step.

Sparse channel estimation in UWA contexts and physical-layer refinements. The choice of OMP as the sparse-recovery primitive in this work inherits a long line of evidence that UWA channels are well approximated by a sparse delay–Doppler representation. Stojanovic and Preisig [1] characterised the underwater acoustic channel as severely doubly dispersive with a sparse impulse response in which each physical path acts as a time-varying low-pass filter, while Preisig [2] formalised the propagation considerations governing UWA system design. Berger *et al.* [3] then established compressive sensing as the natural channel-estimation primitive for multicarrier UWA links, and Huang *et al.* [4] extended the sparse-recovery toolkit to MIMO-OFDM-UWA with iterative channel estimation and decoding. Within the OFDM-UWA literature this lineage diversified into greedy variants such as backtracking OMP [27] and Bayesian variants based on sparse Bayesian learning, all of which testify to the practical robustness of the sparse-recovery approach but operate within OFDM rather than within a chirp-domain waveform.

The closest physical-layer refinements to the AFDM-UWA setting considered here form a cluster of three threads. Ranasinghe *et al.* [28] show that observing the chirp-domain signal at twice the Nyquist rate yields a tangible channel-estimation improvement that is independent of any learned component; this directly motivates the $f_s = 4B$ operating point adopted in the present report, although their result is established in a non-SP, non-learning configuration and does not address either pilot-data interference or fractional-Doppler support residuals. Cao *et al.* [29] extend AFDM-OMP to multi-scale multi-lag (MSML) UWA channels in which each physical path carries an independent time-scale factor, establishing that the AFDM sparse-recovery primitive transfers to a more physically faithful UWA channel model; their work, however, is non-SP and contains no learning component, and therefore engages with neither the SP-induced estimation floor nor the Dirichlet-leakage support residual that motivates the present design. The fractional-Doppler problem itself has been treated directly by Yin *et al.* [16] via a diagonal-reconstruction estimator targeting the very Dirichlet leakage that single-pass OMP fails to capture, but the formulation is non-SP and the leakage repair is not embedded inside an iterative joint receiver. Together these three threads establish the individual physical-layer ingredients — oversampling, MSML treatment, Dirichlet-leakage repair — yet none is integrated with the SP-induced estimation-limited floor that this report is designed to close.

Sparse message-passing detection. On the detection side, the proposed inner LS/MP-BP loop inherits from the sparse delay–Doppler message-passing literature pioneered by Raviteja *et al.* [7], in which a low-complexity factor-graph detector exploits the natural sparsity of the

OTFS channel matrix and explicitly handles the inter-Doppler interference produced by fractional Doppler shifts. Subsequent OTFS detector designs — including unitary-AMP variants [30], expectation-propagation formulations [31], and graph-neural-network refinements [32] — have refined the complexity–accuracy tradeoff but preserve the sparse-graph philosophy. The present work transports this MP-BP machinery into the chirp-domain factor graph induced by the Dirichlet-expanded AFDM virtual-tap representation, and uses it as a fixed inner-loop detector throughout.

Deep unfolding for model-based receivers. At the architectural level, the proposed learned head sits within the deep-unfolding tradition surveyed by Monga *et al.* [33] and Balatsoukas-Stimming and Studer [34], and rooted in the seminal Learned ISTA architecture of Gregor and LeCun [35], in which iterations of a sparse-recovery algorithm are unrolled into trainable layers. The model-driven survey of He *et al.* [36] situates this philosophy within physical-layer communications, arguing that combining domain-derived structure with learned components reduces both the training-data demand and the inference complexity relative to fully data-driven receivers. The bulk of the resulting literature targets MIMO detection — exemplified by the model-driven detectors of He *et al.* [37], the soft interference cancellation network DeepSIC [38], the adaptive-detection scheme MMNet [39], and the attention-augmented receiver of Xu *et al.* [40]. Within AFDM specifically, learned components have so far appeared at the detector [26] rather than at the channel-support-selection step, and within the broader sparse-recovery literature the unrolling of greedy-OMP iterations has been studied only recently [41], where the non-differentiable argsort operator is approached via softsort relaxations. The OMP support-refinement slot inside an SP-AFDM joint receiver, however, remains untouched by learning.

Synthesis and identified gap. Across the four threads above, the design space for an SP-AFDM receiver in a UWA-style sparse fractional-Doppler regime leaves a narrow opening. The receiver should preserve the spectral-efficiency advantage of SP and the sparse-recovery prior that makes AFDM attractive in UWA, while avoiding both the per-iteration re-OMP overhead that the existing SP-AFDM iterative receivers incur and the cubic per-frame cost of a dense LMMSE estimator. It should additionally address the residual fractional-Doppler support errors that classical OMP leaves behind, ideally without enlarging the dictionary or altering the asymptotic complexity class. To the author's knowledge, no published AFDM receiver simultaneously runs OMP only once, iterates only over a damped data-aided least-squares path-gain refit and sparse MP-BP detection, and embeds a small learned module dedicated to OMP support refinement under the UWA-style sparse SP regime. The receiver developed in this report is positioned precisely at this intersection.

1.3 Research question and objectives

The central research question of the report is:

> *Can an SP-AFDM receiver close the structured pilot-data interference floor at mid-to-high SNR while staying low-complexity relative to both re-OMP-per-iteration and dense-LMMSE alternatives, and can a minimal learned module further reduce the residual support-selection error without leaving the sparse-recovery complexity class?*

This question is decomposed into three operational objectives. The first is to characterise the SP-induced estimation floor and demonstrate quantitatively that a one-shot OMP + MP-BP receiver is estimation-limited rather than noise-limited. The second is to design and justify an OMP-once + iterative LS/MP-BP receiver against both its re-OMP-per-iteration overhead variant and its dense-LMMSE alternative, and to verify the design choice with a direct support-recall measurement. The third is to design a learned support-refinement module that strictly preserves the classical sparse-recovery complexity class, and to quantify its BER contribution under a paired-frame statistical protocol.

1.4 Contributions

The report makes three contributions, each summarised below.

1. **A low-complexity joint OMP–MP receiver for AFDM-SP under a UWA-style fractional-Doppler regime.** The proposed receiver runs OMP only once, locks the recovered support, and iterates only the cheap downstream blocks: a damped data-aided least-squares refit of the path gains and sparse MP-BP detection on the chirp-domain factor graph. A direct support-recall probe shows that the first OMP pass already recovers a mean $\approx 95\%$ of the effective Dirichlet-expanded virtual-tap support, with the residual $\approx 5\%$ stable across SNR and therefore structurally rather than noise-driven; re-running OMP across outer iterations is consequently a wasted constant-factor overhead. The proposed receiver recovers two to three orders of magnitude in BER over the one-shot OMP + MP-BP baseline at SNR $= 25$ dB, while staying within the sparse $\mathcal{O}(PN^2)$ arithmetic class.
2. **A 1 041-parameter learned support-refinement head deployed as a deterministic top-K_{add} ranker.** A small deep-unfolding head, inserted between the single OMP pass and the iterative LS/MP-BP loop, scores off-support candidates and appends a fixed number of top-ranked atoms to the active support. Pooled across three independent evaluation-seed blocks, the head delivers a consistent ≈ 2 dB paired BER separation from the classical joint receiver at SNR $\in \{20, 25, 30\}$ dB, while keeping the receiver in the same $\mathcal{O}(PN^2)$ arithmetic class as the classical baseline. The empirical complex-MAC overhead at $N = 1024$ is $\approx 8\%$ over the classical core.

3. **A mechanism analysis grounding the learned gain.** A top-P physical-support-oracle diagnostic provides a valid ceiling on the BER reduction available from any support-refinement strategy operating on the proposed dictionary. Against this ceiling, the learned head closes $61\%/81\%/98\%$ of the achievable gap at SNR $= 15/20/25$ dB. Combined with the support-recall probe of Contribution 1, this attributes the learned head's BER contribution specifically to the recovery of Dirichlet side-lobe atoms that single-pass OMP discards under fractional-Doppler leakage, rather than to a generic noise-averaging effect.

1.5 Report structure

Chapter 2 develops the AFDM-SP system model, the OMP dictionary derivation, the proposed OMP-once + iterative LS/MP-BP recipe, the learned support-refinement head with its training and inference setup, and the per-frame complexity analysis. It also documents the paired-frame evaluation protocol and the choice of baselines. Chapter 3 reports four experiments: the main BER waterfall, the outer-iteration convergence probe, the design-rationale support-recovery probes, and the complexity comparison. Chapter 4 interprets the results mechanistically, situates them against the prior AFDM literature, and discusses methodological and scope limitations. Chapter 5 summarises the conclusions and outlines concrete follow-up work.

2 Materials and Methods

This chapter establishes the AFDM-SP system model (§2.1–§2.3), constructs the OMP dictionary on which the proposed receiver acts (§2.4), develops the OMP-once + iterative LS/MP-BP joint receiver (§2.5) and its learned support-refinement extension (§2.6–§2.7), and quantifies the per-frame complexity (§2.8). The paired-frame evaluation protocol and the choice of baselines are documented in §2.9–§2.10.

2.1 AFDM signal model and the DAFT

AFDM transmits information symbols along a family of N discrete chirp basis functions parameterised by two chirp coefficients (c_1, c_2). Given a vector of data-plus-pilot chirp-domain coefficients $\mathbf{x} \in \mathbb{C}^N$, the time-domain transmit waveform is the Inverse Discrete Affine Fourier Transform (IDAFT)

$$s[n] \;=\; \frac{1}{\sqrt{N}} \sum_{m=0}^{N-1} x[m]\, e^{j2\pi\left(c_1 n^2 + \frac{mn}{N} + c_2 m^2\right)}, \qquad n = 0, \ldots, N-1. \tag{1}$$

With $c_1 = c_2 = 0$ the IDAFT reduces to the inverse DFT and AFDM reduces to OFDM. The forward DAFT applied at the receiver inverts (1) and, for the doubly dispersive UWA channel detailed in §2.2, yields a chirp-domain received vector $\mathbf{y} \in \mathbb{C}^N$ governed by

$$\mathbf{y} \;=\; H_{\text{eff}}\,\mathbf{x} + \mathbf{n}, \qquad \mathbf{n} \sim \mathscr{CN}(\mathbf{0}, \sigma_n^2 \mathbf{I}_N), \tag{2}$$

where $H_{\text{eff}} \in \mathbb{C}^{N \times N}$ is the chirp-domain effective channel. Bemani *et al.* [5] show that (c_1, c_2) can be chosen so that each physical path (l_p, k_p) produces a single compact interference pattern in H_{eff} rather than dense inter-subcarrier leakage, delivering on a one-dimensional transform the same time–frequency diversity that OTFS [6, 8] achieves through its two-dimensional delay–Doppler grid. This is the property that makes OMP-type sparse support recovery effective on H_{eff}, and it is the starting point of every receiver considered in this report.

2.2 Doubly-dispersive simulator channel and effective-channel sparsity

The simulator models an underwater acoustic doubly-dispersive channel with $P = 8$ dominant physical paths, delay spread $\tau_{\text{spread}} = 10$ ms (exponential power-delay profile, $\tau_{\text{mean}} = 0.8$ ms), and per-path velocity $v \sim \mathcal{N}(v_{\text{mean}} = 2, v_{\text{std}}^2 = 0.25)$ m/s. The multi-scale multi-lag (MSML) phenomenon is captured by drawing per-path Doppler scaling factors $a_p = v_p/c$ from the per-path velocity distribution and modelling each per-path scale via a first-order approximation: a per-path delay rescaling $\tau_p \mapsto \tau_p/(1 + a_p)$ and a per-path constant Doppler frequency shift $f_{D,p} = a_p f_c$, in place of full broadband per-path waveform resampling within a symbol. The implications of these simplifications and the absence of per-frame Doppler jitter for the transferability of

the present results to a field UWA deployment are revisited in §4.6. The carrier frequency is $f_c = 12$ kHz, the bandwidth is $B = 4$ kHz, and the sampling rate is $f_s = 4B$ (§2.9).

Each physical path (τ_p, v_p) is mapped onto the integer AFDM delay–Doppler lattice through

$$l_p = \mathrm{round}(\tau_p f_s), \qquad k_p^{\mathrm{real}} = \frac{v_p f_c N}{c f_s}, \tag{3}$$

with $c \approx 1500$ m/s the speed of sound. The delay index l_p is integer by construction, but k_p^{real} is typically fractional: the residual fractional Doppler is absorbed via a discrete-Dirichlet-kernel (aliased-sinc) expansion [16] of half-width $k_{\mathrm{leak}} = 2$, so that path p is decomposed into $2k_{\mathrm{leak}} + 1 = 5$ virtual integer-bin taps with magnitude

$$|\tilde{h}_{p,j}| \;=\; |h_p| \cdot \left| \frac{\sin\big(\pi(k_p^{\mathrm{real}} - k_p - j)\big)}{N \sin\big(\pi(k_p^{\mathrm{real}} - k_p - j)/N\big)} \right|, \qquad j \in \{-k_{\mathrm{leak}}, \ldots, k_{\mathrm{leak}}\}, \tag{4}$$

with $k_p = \mathrm{round}(k_p^{\mathrm{real}})$ the nearest integer Doppler bin; the per-tap phase carries the path-gain phase plus a deterministic chirp-domain rotation absorbed by the simulator's per-tap construction. At the worst-case fractional residual $|k_p^{\mathrm{real}} - k_p| = 0.5$, the two-sided sum of squared truncated coefficients $\sum_{|j|>k_{\mathrm{leak}}} |\tilde{h}_{p,j}|^2 / |h_p|^2$ amounts to $\approx 8.3\%$ of per-path energy at $N = 1024$, and is substantially smaller for typical residuals. Fig. 1 visualises this geometry: at $\kappa = k_p^{\mathrm{real}} - k_p = 0$ the kernel collapses to a sampling indicator and an integer-Doppler dictionary loses no per-path energy, whereas at the worst-case $|\kappa| = 0.5$ the integer-bin samples nearest to the kernel peak (at $\delta = 0$ and $\delta = +1$, distance 0.5 from the peak in each direction) each carry $\approx 41\%$ of per-path energy, while the next-nearest samples (at $\delta = -1$ and $\delta = +2$, distance 1.5) each carry $\approx 4.4\%$. The non-zero side-lobes flanking the kernel peak are the structurally predictable energy that the post-OMP virtual-tap expansion of §2.5 and the learned support-refinement ranker of §2.6 are designed to recover, which is the physical reason both blocks operate on the same dictionary as OMP rather than enlarging it. With $P = 8$ paths and $k_{\mathrm{leak}} = 2$, the resulting sparse effective channel carries on average ≈ 28 non-negligible virtual taps out of $\sim 10^3$ lattice positions, which justifies a sparse-recovery approach; the per-frame effective virtual-tap count p_{real} is stored as a simulator quantity (cf. App. C).

The geometry summarised in Fig. 1 is the physical reason why a single OMP pass on the integer-Doppler dictionary cannot fully resolve the effective channel under fractional Doppler: at the worst-case residual the side-lobe samples adjacent to a main-lobe atom each carry energy comparable to a separate weak path, yet sit at deterministic integer offsets from that already-active atom. This structural predictability motivates the support-refinement head of §2.6 and is the geometric anchor used by the mechanism discussion in §4.3.

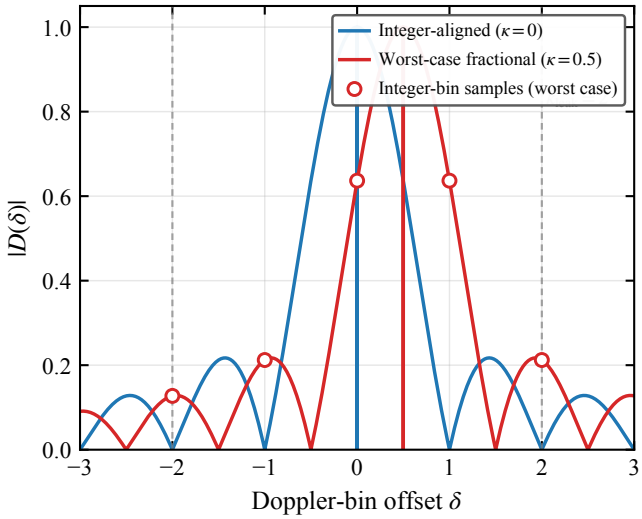


Figure 1: Dirichlet-kernel magnitude $|D(\delta)| = |\sin(\pi\delta)/(N\sin(\pi\delta/N))|$ from (4) at $N = 1024$, plotted against the integer-Doppler offset δ. Two cases are overlaid: the integer-aligned residual ($\kappa = k_p^{\text{real}} - k_p = 0$, blue), where the kernel collapses to a sampling indicator and an integer-Doppler dictionary loses no per-path energy; and the worst-case fractional residual ($|\kappa| = 0.5$, red), where the integer-bin samples (red circles) at $\delta \in \{0, +1\}$ each carry $\approx 41\%$ of per-path energy and the samples at $\delta \in \{-1, +2\}$ each carry $\approx 4.4\%$. The dashed vertical lines mark the $k_{\text{leak}} = 2$ truncation boundary used by the simulator; the two-sided sum of squared truncated coefficients beyond $|\delta| > k_{\text{leak}}$ amounts to $\approx 8.3\%$ of per-path energy at $|\kappa| = 0.5$, the figure quoted in the paragraph above. The non-zero side-lobes flanking the kernel peak are the structurally predictable energy that the post-OMP virtual-tap expansion (§2.5) and the learned support-refinement ranker (§2.6) are designed to recover.

2.3 Superimposed pilot signal model

To preserve spectral efficiency, every chirp-domain sub-carrier simultaneously carries data and pilot energy under a fixed superimposed-pilot (SP) frame

$$\mathbf{x} \;=\; \sqrt{\rho}\,\mathbf{x}_{\text{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\text{d}}, \qquad \rho \in (0,1), \tag{5}$$

where $\mathbf{x}_{\text{p}}$ is a deterministic Zadoff–Chu sequence of root $r = 7$ and length N normalised to unit energy [42], and $\mathbf{x}_{\text{d}}$ is a QPSK data vector. The canonical pilot power fraction is $\rho = 0.5$; higher ρ strengthens the pilot observation at the cost of data energy, and lower ρ does the converse [12, 13]. Under the model (2), the pilot projection performed at the receiver yields

$$\mathbf{x}_{\text{p}}^{H}\mathbf{y} \;=\; \sqrt{\rho}\,\mathbf{x}_{\text{p}}^{H}H_{\text{eff}}\mathbf{x}_{\text{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\text{p}}^{H}H_{\text{eff}}\mathbf{x}_{\text{d}} \;+\; \mathbf{x}_{\text{p}}^{H}\mathbf{n}, \tag{6}$$

so that the data term $\sqrt{1-\rho}\,\mathbf{x}_{\text{p}}^{H}H_{\text{eff}}\mathbf{x}_{\text{d}}$ enters as structured interference to the OMP dictionary correlator. Treating $\mathbf{x}_{\text{d}}$ as a QPSK data vector independent of $\mathbf{x}_{\text{p}}$ with covariance $\mathbb{E}[\mathbf{x}_{\text{d}}\mathbf{x}_{\text{d}}^{H}] =$

$(1/N)\mathbf{I}_N$, the conditional second moment of the interference term given the channel is

$$\mathbb{E}\big[\,|\sqrt{1-\rho}\,\mathbf{x}_{\mathrm{p}}^{H}H_{\mathrm{eff}}\mathbf{x}_{\mathrm{d}}|^{2}\,\big|\,H_{\mathrm{eff}}\big] \;=\; (1-\rho)\cdot\|H_{\mathrm{eff}}^{H}\mathbf{x}_{\mathrm{p}}\|^{2}/N, \tag{7}$$

which scales with the channel norm $\|H_{\mathrm{eff}}\|$ and the pilot autocorrelation, and does not shrink with increasing SNR. At the canonical operating point ($\rho = 0.5$, $P = 8$, $\mathbf{x}_{\mathrm{p}}$ a unit-norm Zadoff–Chu sequence) the resulting estimation-limited error floor is observed at BER $\approx 5\times10^{-2}$ for a serial OMP+MP receiver from SNR ≥ 15 dB; this floor is not derived in closed form because $\|H_{\mathrm{eff}}^{H}\mathbf{x}_{\mathrm{p}}\|^{2}$ depends on the channel realisation and the pilot–channel cross-correlation structure, and is therefore quantified empirically in Chapter 3.

2.4 Sparse-baseline OMP dictionary

The OMP dictionary $\Phi \in \mathbb{C}^{N\times Q}$ is constructed column-wise by evaluating the chirp-domain response of every candidate (l,k)-bin in the physical integer search region

$$l \in \{0,1,\ldots,l_{\max}-1\}, \qquad k \in \{-k_{\max},\ldots,k_{\max}\}, \tag{8}$$

so that the dictionary size is $Q = (2k_{\max}+1)\cdot l_{\max}$. The dictionary spans physical integer delay–Doppler bins only; the Dirichlet expansion (4) is applied post-OMP to each selected atom, so the fractional-Doppler half-width k_{leak} does not enlarge the dictionary and enters only through the $(2k_{\mathrm{leak}}+1)$-fold virtual-tap replication used in the DA-LS refit and MP-BP blocks of §2.5. The caps $l_{\max}$ and $k_{\max}$ follow directly from the physical channel parameters,

$$l_{\max} = \lceil \tau_{\mathrm{spread}}\cdot f_s \rceil, \tag{9}$$

$$k_{\max} = \left\lceil \frac{v_{\max} f_c N}{c\, f_s} \right\rceil, \tag{10}$$

and have a consequence that is central to the complexity argument in §2.8. Holding the sampling rate f_s fixed at the $f_s = 4B$ operating point used throughout this report, $l_{\max}$ is a constant independent of N, while $k_{\max} \propto N/f_s$ grows linearly with N. Therefore

$$Q \;=\; (2k_{\max}+1)\cdot l_{\max} \;=\; \mathscr{O}(N)\cdot\mathscr{O}(1) \;=\; \mathscr{O}(N). \tag{11}$$

Table 1 reports the resulting $(l_{\max}, k_{\max}, Q)$ triples at $N \in \{512, 1024, 2048\}$ under the canonical $f_s = 4B$ setting.

The asymptotic claim $Q = \mathscr{O}(N)$ is invariant across the two natural UWA conventions: under fixed-f_s as above, and under fixed sub-carrier spacing Δf (so that $f_s = N\Delta f$), in which case $l_{\max} \propto N$ and $k_{\max} = \mathscr{O}(1)$ and the product $Q = (2k_{\max}+1)l_{\max} = \mathscr{O}(N)$ still holds. The hidden leading constants differ between the two conventions and are not interchangeable when quoting per-frame multiply-accumulate (MAC) counts.

Table 1: OMP dictionary size under the canonical AFDM configuration used throughout this report ($\tau_{\text{spread}} = 10$ ms, $v_{\max} = 3$ m/s, $f_c = 12$ kHz, $f_s = 4B = 16$ kHz). Under the fixed-f_s convention, $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil = 160$ is independent of N, while $k_{\max} = \lceil v_{\max} f_c N/(c f_s) \rceil$ grows linearly with N. The Chapter 3 operating point ($N = 1024$) corresponds to the middle row.

N	$l_{\max}$	$k_{\max}$	$Q = (2k_{\max}+1)l_{\max}$
512	160	1	480
1024	160	2	800
2048	160	4	1 440

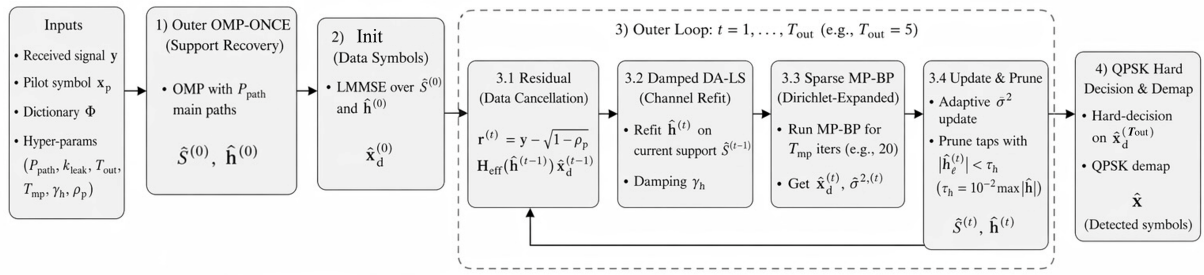


Figure 2: Classical OMP-once + iterative LS/MP-BP joint receiver (Algorithm 1 in block-diagram form). The outer loop (dashed rectangle) runs for $T_{\text{out}} = 5$ iterations; each iteration forms a data-cancellation residual, refits the path gains on a locked support via damped DA-LS, runs sparse MP-BP detection on the Dirichlet-expanded virtual-tap factor graph, updates the adaptive noise-variance estimate, and prunes the support.

Each OMP iteration evaluates $\Phi^H \mathbf{r}$ at a cost of $\mathcal{O}(NQ)$ complex multiplications and solves an $s \times s$ least-squares system at $\mathcal{O}(Ns + s^3)$ for the standard direct factorisation, where $s \le P$ is the current support size. Running OMP to a target sparsity of $P = 8$ therefore costs

$$C_{\text{OMP}} \;=\; \mathcal{O}(PNQ + P^4) \;=\; \mathcal{O}(PN^2) \tag{12}$$

per frame under (11), where the P^4 term is absorbed because $P \ll N$ at every operating point used in this report.

2.5 Joint OMP-once + iterative LS/MP-BP receiver

The receiver performs one OMP support-recovery pass and then iterates only over the data-aided path-gain least-squares (DA-LS) refit and the sparse MP-BP detection block. Algorithm 1 summarises the recipe.

MP-BP messages on the sparse chirp-domain factor graph. The data-detection block of Algorithm 1 follows the iterative-receiver framework of Wymeersch [14] and the factor-graph

Algorithm 1 Classical joint OMP-once + iterative LS/MP-BP receiver.

Input: $\mathbf{y}$ (chirp-domain received frame), Φ (OMP dictionary), known $\mathbf{x}_\mathrm{p}$, pilot power ρ.

Output: hard-decision data bits $\hat{\mathbf{x}}_\mathrm{d}$.

Hyperparameters: outer iterations $T_\mathrm{out} = 5$, MP inner iterations $T_\mathrm{mp} = 20$, damping $\gamma_h = 0.7$, prune threshold $\tau_h = 10^{-2} \cdot \max|\hat{h}|$.

1. **OMP-once**: run orthogonal matching pursuit on Φ with target sparsity P; obtain support $\hat{S}^{(0)}$ and path gains $\hat{\mathbf{h}}^{(0)}$. Initialise $\hat{\mathbf{x}}_\mathrm{d}{}^{(0)}$ with an LMMSE solution on $\hat{S}^{(0)}$.
2. **For** $t = 1, \ldots, T_\mathrm{out}$:
   (a) Form the data-cancellation residual
   $$\mathbf{r}^{(t)} \;=\; \mathbf{y} \;-\; \sqrt{1-\rho}\, H_\mathrm{eff}(\hat{\mathbf{h}}^{(t-1)})\, \hat{\mathbf{x}}_\mathrm{d}{}^{(t-1)}, \tag{13}$$
   where $\hat{\mathbf{x}}_\mathrm{d}{}^{(0)}$ is the LMMSE initialisation from step 1; the $\sqrt{\rho}\,\mathbf{x}_\mathrm{p}$ pilot contribution is retained in $\mathbf{r}^{(t)}$ because $\mathbf{x}_\mathrm{p}$ is absorbed into the OMP dictionary Φ (each column carries its pilot-aware atom vector), so the data-interference term is the only component that must be cancelled explicitly.
   (b) Damped DA-LS refit on the current support $\hat{S}^{(t-1)}$:
   $$\hat{\mathbf{h}}^{(t)} \;=\; (1-\gamma_h)\,\hat{\mathbf{h}}^{(t-1)} \;+\; \gamma_h \cdot \Phi^{\dagger}_{\hat{S}^{(t-1)}}\, \mathbf{r}^{(t)}. \tag{14}$$
   (c) MP-BP on the sparse factor graph $(H_\mathrm{eff}(\hat{\mathbf{h}}^{(t)}), \mathbf{y})$ for T_mp iterations with damping 0.5; update posterior means $\hat{\mathbf{x}}_\mathrm{d}{}^{(t)}$ and per-symbol variances $\sigma^2_{d,i}$.
   (d) Adaptive σ^2 update; prune atoms with $|\hat{h}_s^{(t)}| < \tau_h$ (always retain the top-P).
3. Hard-decide $\hat{\mathbf{x}}_\mathrm{d} = \mathrm{QPSK\text{-}demap}(\hat{\mathbf{x}}_\mathrm{d}{}^{(T_\mathrm{out})})$.

paradigm surveyed by Kschischang *et al.* [43], and is implemented as Gaussian message passing on a bipartite factor graph derived from the pilot-subtracted observation. Subtracting the estimated pilot contribution from (2) yields, for every $j \in \{0, \ldots, N-1\}$,

$$\tilde{y}_j \;:=\; y_j - \sqrt{\rho}\,[H_\mathrm{eff}(\hat{\mathbf{h}}^{(t)})\,\mathbf{x}_\mathrm{p}]_j \;=\; \sum_{i \in \mathscr{N}(j)} \tilde{H}_{j,i}\, x_{d,i} \;+\; n_j, \tag{15}$$

where $\tilde{H}_{j,i} := \sqrt{1-\rho}\,[H_\mathrm{eff}(\hat{\mathbf{h}}^{(t)})]_{j,i}$ absorbs the data-power normalisation and $\mathscr{N}(j) := \{i : \tilde{H}_{j,i} \neq 0\}$ is the index set of variables coupled to factor j. The factor graph carries N variable nodes (one per data symbol $x_{d,i}$) and N factor nodes (one per row of (15)). The neighbourhood degree is bounded by $|\mathscr{N}(j)| \le P \cdot (2k_\mathrm{leak}+1) = 40$ in the nominal Dirichlet expansion and averages $p_\mathrm{real} \approx 28$ per frame after pruning of negligible Dirichlet-weighted entries (App. C); both bounds are constants in N, which is the property that enables $\mathscr{O}(N)$ per-iteration message passing.

At inner iteration ℓ, the variable-to-factor message from $x_{d,i}$ to factor j is parameterised as a Gaussian with mean $\mu^{(\ell)}_{i\to j}$ and variance $v^{(\ell)}_{i\to j}$, obtained by aggregating all incoming factor-to-variable messages with the one returning from j excluded:

$$\frac{1}{v^{(\ell)}_{i\to j}} \;=\; \sum_{j' \in \mathscr{M}(i)\setminus\{j\}} \frac{1}{v^{(\ell-1)}_{j'\to i}}, \qquad \frac{\mu^{(\ell)}_{i\to j}}{v^{(\ell)}_{i\to j}} \;=\; \sum_{j' \in \mathscr{M}(i)\setminus\{j\}} \frac{\mu^{(\ell-1)}_{j'\to i}}{v^{(\ell-1)}_{j'\to i}}, \tag{16}$$

where $\mathscr{M}(i) := \{j : i \in \mathscr{N}(j)\}$ shares the same constant degree bound. The factor-to-variable message marginalises the row-j Gaussian likelihood over all variables in $\mathscr{N}(j) \setminus \{i\}$,

$$\mu_{j\to i}^{(\ell)} = \frac{1}{\tilde{H}_{j,i}} \left(\tilde{y}_j - \sum_{i' \in \mathscr{N}(j)\setminus\{i\}} \tilde{H}_{j,i'}\, \mu_{i'\to j}^{(\ell)} \right), \tag{17}$$

$$v_{j\to i}^{(\ell)} = \frac{1}{|\tilde{H}_{j,i}|^2} \left(\hat{\sigma}_n^2 + \sum_{i' \in \mathscr{N}(j)\setminus\{i\}} |\tilde{H}_{j,i'}|^2\, v_{i'\to j}^{(\ell)} \right), \tag{18}$$

where $\hat{\sigma}_n^2$ is the adaptive noise-variance estimate updated at the end of each outer iteration. Both message updates are damped with $\eta = 0.5$ to suppress oscillations on the short cycles characteristic of the Dirichlet-expanded factor graph, $\mu_{i\to j}^{(\ell)} \leftarrow \eta\, \tilde{\mu}_{i\to j}^{(\ell)} + (1-\eta)\, \mu_{i\to j}^{(\ell-1)}$ and analogously for the variances, where $\tilde{\mu}_{i\to j}^{(\ell)}$ denotes the undamped update of (16). After $T_{\mathrm{mp}} = 20$ inner iterations, the posterior on each data symbol is read off by aggregating all incoming factor messages,

$$\frac{1}{\sigma_{d,i}^2} = \sum_{j \in \mathscr{M}(i)} \frac{1}{v_{j\to i}^{(T_{\mathrm{mp}})}}, \qquad \frac{\hat{x}_{d,i}}{\sigma_{d,i}^2} = \sum_{j \in \mathscr{M}(i)} \frac{\mu_{j\to i}^{(T_{\mathrm{mp}})}}{v_{j\to i}^{(T_{\mathrm{mp}})}}, \tag{19}$$

followed by a Gray-coded QPSK projection $\hat{x}_{d,i} \mapsto \text{QPSK-demap}(\hat{x}_{d,i})$ that returns the hard-decision data symbol. The Gaussian approximation maintained throughout the inner loop is the standard soft-Gaussian belief-propagation form for finite-alphabet symbols [14], with the QPSK constraint enforced only at the final projection. Because $|\mathscr{N}(j)|$ and $|\mathscr{M}(i)|$ are bounded by constants independent of N, each inner iteration evaluates $\mathscr{O}(p_{\mathrm{real}} \cdot N)$ scalar updates across all factor and variable nodes, so the data-detection block costs $\mathscr{O}(T_{\mathrm{mp}} N)$ per outer iteration. This is the source of the $\mathscr{O}(T_{\mathrm{mp}} N)$ term in the per-frame budget of (22), and it is two orders of magnitude cheaper than a chirp-domain dense MMSE equaliser's $\mathscr{O}(N^3)$ at $N = 1024$.

Four design choices in Algorithm 1 are central to the receiver's behaviour, and each rejects a simpler or more expensive alternative on empirical or analytical grounds. The OMP-once choice rests on a stability observation: the empirical support Jaccard between successive OMP passes in a hypothetical full re-OMP schedule exceeds 0.94 from iteration 2 onwards (Fig. 6), so the atoms within the support are already stable after a single pass and the only quantity that continues to evolve is the per-path gain amplitude. Chapter 3 (§3.4) confirms this independently: OMP-once recovers a mean $\approx 95\%$ recall against the effective Dirichlet-expanded virtual-tap oracle support across all training SNRs (Table 5), so a second OMP pass has nothing new to find. Re-running OMP across outer iterations therefore re-solves a near-identical atom-selection problem $T_{\mathrm{out}} = 5$ times per frame at a constant-factor overhead of $\sim 5\times$ (12) without any change in asymptotic class. Once the support is locked, the path gains are refined by a damped DA-LS update rather than a full LS solve: a full LS over the unrestricted dictionary would amplify noise from unexplored columns, whereas the DA-LS refit (14) on the locked support uses exactly the $P \approx 8$ physical (or ≈ 28 virtual) taps from step 1 and keeps the gain-update cost at $\mathscr{O}(P^2 N)$.

The detection block is sparse MP-BP rather than a dense chirp-domain equaliser. The factor graph induced by $H_{\text{eff}}(\hat{\mathbf{h}}^{(t)})$ carries at most $P \cdot (2k_{\text{leak}} + 1) = 40$ non-trivial symbol-to-symbol edges per row in the nominal Dirichlet expansion, with the empirical effective edge count after pruning of negligible Dirichlet weights averaging ≈ 28 per frame (App. C, p_{real}); the count is constant in N, so each MP-BP iteration costs $\mathcal{O}(N)$, against the $\mathcal{O}(N^3)$ per frame of a dense MMSE equaliser — two full orders of magnitude more expensive at $N = 1024$. The choice of SP over an embedded-pilot frame is, finally, the source of the data-interference term that motivates iteration in the first place: under EP the OMP step is clean but the spectral efficiency drops by a factor proportional to the pilot fraction, and in a UWA context guard regions also produce artefacts on Dirichlet-expanded virtual taps; SP preserves full data capacity at the cost of the structured interference term (6), which the iterative recipe is specifically designed to attenuate via successive hard-decision feedback.

2.6 Learned support-refinement head

Even with iteration, the classical joint receiver retains a residual support-selection gap at high SNR, where OMP occasionally misses weak but non-negligible Dirichlet-leakage atoms (typically at ± 1-bin Doppler offsets around the integer-$k_{\max}$ index) whose estimated gains fall just below τ_h and are pruned by the gain-magnitude rule. This gap is closed by the learned head: a 1 041-parameter deep-unfolding module that scores off-support candidates against the currently active support and appends the highest-ranked K_{add} atoms at the initialisation step ($t = 0$), immediately after OMP-once and before the iterative LS/MP-BP loop begins (Fig. 3).

Features. Let M denote the number of off-support candidate atoms at iteration t; the deployed receiver fixes $M = 96$ by retaining the top-96 residual-correlation candidates. For each candidate $i \in \{1, \ldots, M\}$ a 7-dimensional self-feature $\mathbf{u}_i \in \mathbb{R}^7$ is constructed from

1. the log matched-filter magnitude $\log |\Phi_i^H \mathbf{r}^{(t)}|$;
2. the margin to the weakest active atom, $\log |\Phi_i^H \mathbf{r}^{(t)}| - \min_{s \in \hat{S}} \log |\hat{h}_s|$;
3. the normalised delay bin index $l_i / l_{\max}$;
4. the normalised Doppler bin index $(k_i + k_{\max})/(2k_{\max})$;
5. the residual projection norm $\|\Phi_i^H \mathbf{r}^{(t)}\| / \|\mathbf{r}^{(t)}\|$;
6. the candidate rank among the M atoms, normalised to $[0, 1]$;
7. a binary flag indicating whether (l_i, k_i) lies within k_{leak} Doppler bins of some active atom (Dirichlet-leakage neighbour).

For each (candidate, active atom) pair (i, s) a 6-dimensional pair feature $\mathbf{v}_{i,s} \in \mathbb{R}^6$ is computed:

$$\mathbf{v}_{i,s} = \Big[l_i - l_s,\ k_i - k_s,\ \log |\hat{h}_s|,\ |\Phi_i^H \Phi_s|,\ \frac{\|(l_i - l_s,\ k_i - k_s)\|_2}{l_{\max} + 2k_{\max}},\ \frac{|\hat{h}_s|}{\max_{s'} |\hat{h}_{s'}|} \Big]. \tag{20}$$

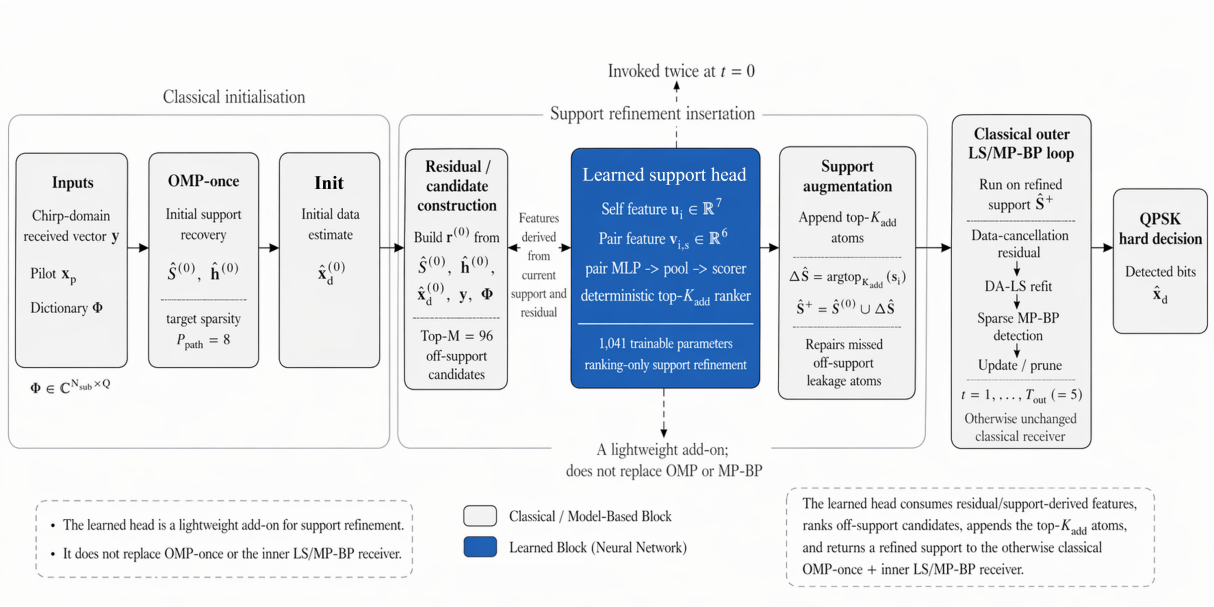


Figure 3: Integration of the learned support-refinement head into the classical OMP-once + iterative LS/MP-BP receiver. The learned block (dark blue) is invoked twice at the initialisation step ($t = 0$), immediately after OMP-once and before the iterative LS/MP-BP loop begins; it ranks the top-$M = 96$ off-support candidates and appends the top-K_{add} atoms to the support. All other blocks are identical to Fig. 2: the head replaces neither OMP-once nor the iterative LS/MP-BP block. The detailed head architecture is given in Fig. 4.

Feature design rationale. The 7-dimensional self-feature and 6-dimensional pair feature are organised as three complementary information channels that the scorer needs in order to discriminate Dirichlet side-lobe atoms from noise-driven candidates. Self-features 1, 2, and 5 expose the candidate's data-driven correlation strength against three different normalisations: the absolute matched-filter magnitude $\log|\Phi_i^H \mathbf{r}^{(t)}|$, the margin against the weakest active atom $\log|\Phi_i^H \mathbf{r}^{(t)}| - \min_{s\in\hat{S}} \log|\hat{h}_s|$ that places the candidate on the same logarithmic axis as the active support's tail, and the residual-normalised projection $\|\Phi_i^H \mathbf{r}^{(t)}\|/\|\mathbf{r}^{(t)}\|$ that controls for the overall residual energy at iteration t. Self-features 3 and 4, the normalised delay and Doppler indices $l_i/l_{\max}$ and $(k_i + k_{\max})/(2k_{\max})$, locate the candidate on the physical lattice and let the scorer learn position-dependent priors — for instance, that bins near $\pm k_{\max}$ are more likely to host fractional-leakage residuals than bins near zero. Self-feature 6, the candidate's rank among the $M = 96$ retained atoms, provides a tie-breaker that lets the scorer condition on whether a candidate sits near the top of the matched-filter shortlist or at its tail. Self-feature 7, the binary indicator that (l_i, k_i) lies within k_{leak} Doppler bins of an active atom, is the most directly mechanism-coupled feature: it flags the geometric signature of a Dirichlet side-lobe neighbour and is the feature that most cleanly distinguishes the high-SNR exploitable regime from the low-SNR noise-dominated regime developed in §4.3.

The 6-dimensional pair feature $\mathbf{v}_{i,s}$ extends the same reasoning to the relational structure between candidate i and each active atom s. The integer offsets $(l_i - l_s, k_i - k_s)$ are the direct encoding of the $(\Delta l, \Delta k) = (0, \pm 1)$ Dirichlet side-lobe signature; combined with the active

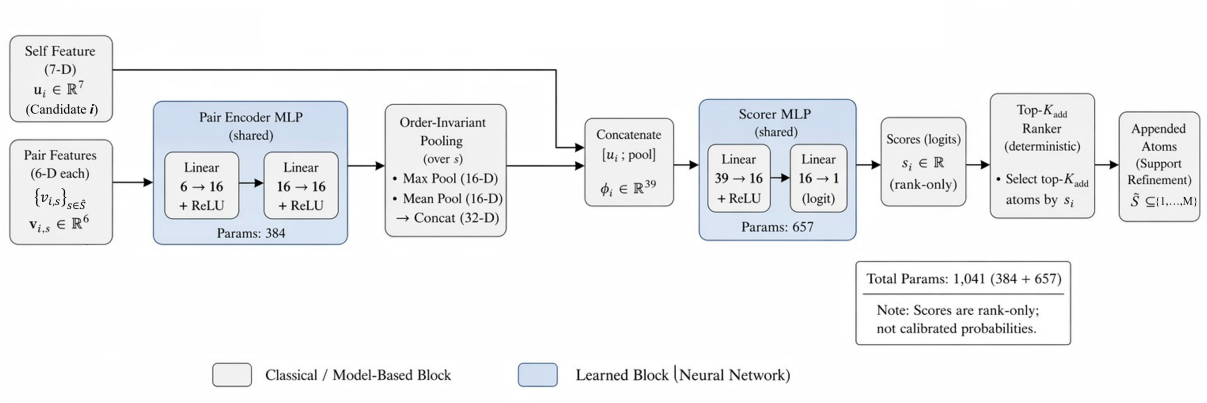


Figure 4: Learned support-refinement head (architecture). Two parallel inputs per candidate i: a 7-D self-feature $\mathbf{u}_i$ and a set of 6-D pair features $\{\mathbf{v}_{i,s}\}_{s\in\hat{S}}$ indexed over the current active support $\hat{S}$. The shared pair-encoder ($\mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$, 384 parameters) is applied element-wise over (i,s) pairs; order-invariant pooling (concat of channel-wise max and mean over $s \in \hat{S}$) produces a 32-D pair descriptor per candidate, which is concatenated with $\mathbf{u}_i$ to form $\phi_i \in \mathbb{R}^{39}$. The shared scorer ($\mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^1$, 657 parameters) emits a scalar logit s_i; the deterministic top-K_{add} ranker selects the atoms to append. Total trainable parameters: $384 + 657 = 1\,041$. The logits are used only for ranking.

atom's log-gain $\log|\hat{h}_s|$ and its gain prominence $|\hat{h}_s|/\max_{s'}|\hat{h}_{s'}|$, they let the scorer learn that a candidate at $(0,\pm 1)$ offset from a high-gain active atom is far more likely to be a side-lobe than the same candidate at the same offset from a weak active atom. The pair correlation $|\Phi_i^H \Phi_s|$ measures dictionary-column similarity directly and supplements the integer-offset signal with a continuous coherence measure, so that pairs of atoms whose chirp-domain responses overlap geometrically can be flagged even when the integer-offset pattern is ambiguous. The normalised Euclidean distance $\|(l_i - l_s, k_i - k_s)\|_2/(l_{\max} + 2k_{\max})$ provides a single scalar that the order-invariant pooling of the architecture (described next) can aggregate across all $|\hat{S}|$ active atoms without losing the geometric information. Taken together, the feature design encodes the rule that a candidate should be promoted when it is a low-Hamming-distance Doppler neighbour of an active atom of non-trivial gain and when its matched-filter response sits above the active-set tail; this is the rule that the oracle-headroom analysis of §3.4 validates as covering the bulk of the achievable support-refinement gap, and it is the rule that the scorer is trained to recover.

Architecture. The head consists of a shared pair encoder followed by a per-candidate scorer. The pair encoder, denoted $f_{\text{pair}} : \mathbb{R}^6 \to \mathbb{R}^{16} \to \mathbb{R}^{16}$ with SiLU activation [44] after each linear layer, is applied element-wise to every pair feature $\mathbf{v}_{i,s}$, contributing $(6\cdot 16 + 16) + (16\cdot 16 + 16) = 384$ parameters. For each candidate i, the resulting set of $|\hat{S}|$ per-pair 16-vectors is aggregated into a 32-dimensional pair descriptor by concatenating the element-wise maximum and the element-wise mean across s, with no additional trainable parameters. The pooled descriptor is concatenated with the 7-dimensional self-feature $\mathbf{u}_i$ to form a 39-dimensional vector and passed through the scorer $f_{\text{score}} : \mathbb{R}^{39} \to \mathbb{R}^{16} \to \mathbb{R}^1$ (SiLU after the first linear; zero-initialised output

weights; output bias initialised at -8), contributing $(39\cdot 16+16)+(16\cdot 1+1)=657$ parameters. The total trainable parameter count is $384+657=1\,041$, of which $\approx 37\%$ sit in the pair encoder and $\approx 63\%$ in the scorer.

Inference. The head is deployed as a deterministic fixed-budget top-K_{add} ranker with $K_{\text{add}}=4$: the scorer logits rank the $M=96$ off-support candidates on every frame, and the top $K_{\text{add}}=4$ logits are appended to the active support without any per-candidate probability thresholding. At outer iteration $t=0$ the head is invoked twice (i.e. two refinement rounds), with support-pruning deferred until the final outer iteration and the two most recently appended atoms protected from gain-prune; hard-decision symbol feedback is used throughout. The learned final-scorer bias (≈ -8) is replaced by $+10$ at inference time so that the top-K_{add} selection always fires, which is mathematically a ranking-preserving threshold shift; the deployment is therefore described as ranking-only rather than as a probability-calibrated detector. The training-objective and inference-objective alignment that this introduces is discussed in §2.7 and Chapter 4.

2.7 Training

Per-frame feature caches are harvested by running the classical joint receiver to completion on $(\text{channel}, \text{data}, \text{noise})$ realisations drawn from a dedicated training seed block. Each cached frame carries, per candidate, a binary supervision label $y_i \in \{0,1\}$ that equals 1 iff the candidate (l_i, k_i) coincides with an active Dirichlet-weighted ground-truth virtual tap of the true channel. The positive-class rate over the $M=96$ candidates is $\approx 3\%$, which skews the binary cross-entropy (BCE) objective toward the negative class and accounts for the learned final-scorer bias drifting toward -8.

The loss is a weighted sum of per-candidate BCE and a pairwise ranking hinge,

$$\mathscr{L}(\theta) \;=\; \mathscr{L}_{\text{BCE}}(\theta) \;+\; \lambda_{\text{rank}} \cdot \max\!\big(0,\; 1 - \min_{y_i=1} s_i(\theta) + \max_{y_j=0} s_j(\theta)\big), \qquad \lambda_{\text{rank}} = 0.5, \tag{21}$$

where $s_i(\theta)$ is the scorer logit for candidate i and θ are the head parameters. Training uses AdamW [45] with learning rate 10^{-3}, weight decay 10^{-4}, batch size 512 cached frames, for 8 epochs with early stopping on the validation BCE (patience = 2). The cache is split 90/10 frame-level into train/val at fixed seed 13 579.

The training cache used for the deployed checkpoint is a 27 k-frame 4-SNR cache at SNR $\in \{10, 15, 20, 25\}$ dB with per-SNR frame weights $\{0.2, 0.3, 0.3, 0.2\}$, harvested at the $f_s = 4B$ operating point. Covering SNR $= 25$ dB explicitly in the cache is necessary to avoid a slight regression in the head's high-SNR behaviour at the same operating point.

Ranking-only deployment. Although the BCE term in (21) would in principle support a probability-calibrated interpretation of the scorer output, the deployed head is used purely as a top-K_{add} ranker. The bias-replacement scheme at inference is rank-preserving: writing the

final logit as $s_i = z_i + b$, replacing $b_{\text{learned}} \approx -8$ by $b_{\text{patch}} = +10$ is a uniform translation of every candidate's logit, which leaves the top-K_{add} ordering invariant. The patch's only operational effect is to shift the gate threshold from $z_i > 8$ (rarely satisfied under b_{learned}) to $z_i > -10$ (almost always satisfied), so every frame proceeds to a forced top-K_{add} selection rather than to a no-op gate output. Probability calibration of the scores is out of scope. A principled alternative that aligns training and inference — a differentiable top-K_{add} loss or a listwise ranking loss — is identified as future work in Chapter 5. The full analytical decomposition of the bias patch into its rank-preservation and gate-toggling components is deferred to App. E.

2.8 Complexity analysis

The arithmetic cost of the proposed receiver is the sum of the classical joint cost and the learned-head overhead. From §2.5, the classical joint costs

$$C_{\text{classical}} \;=\; \underbrace{\mathcal{O}(PNQ)}_{\text{OMP-once}} + T_{\text{out}} \cdot \big[\, \mathcal{O}(P^2 N)\ \text{DA-LS} + \mathcal{O}(T_{\text{mp}} N)\ \text{MP-BP} \big] \;=\; \mathcal{O}(PN^2) \tag{22}$$

per frame, using $Q = \mathcal{O}(N)$ from (11). The learned head, per refinement round, performs four operations of order N: (i) candidate-pool selection by computing the residual–dictionary correlation $\Phi^H \mathbf{r}$ over the full Q-column dictionary at $\mathcal{O}(NQ)$ and retrieving the top-M off-support candidates by argpartition at $\mathcal{O}(Q)$ (this step is reused if the OMP-once correlation vector is cached across head invocations, otherwise paid once per round); (ii) M residual projections $\Phi_i^H \mathbf{r}$ at $\mathcal{O}(N)$ each; (iii) $M \cdot P$ pair inner products $\Phi_i^H \Phi_s$ at $\mathcal{O}(N)$ each, used in the pair feature (20); (iv) $\mathcal{O}(MP)$ pair-encoder evaluations and $\mathcal{O}(M)$ scorer evaluations of constant per-pair cost. Summed over the two refinement rounds,

$$C_{\text{head}} \;=\; \mathcal{O}\big(NQ + MPN\big) \;=\; \mathcal{O}(N^2) \tag{23}$$

under fixed (M, K_{add}, P) and (11), the same asymptotic class as a single OMP-once matched-filter sweep.

The proposed receiver therefore lies in the same $\mathcal{O}(PN^2)$ arithmetic class as the sparse classical baseline, and is two orders of magnitude cheaper than a dense LMMSE channel estimator ($\mathcal{O}(N^3)$) and a $5\times$ constant factor cheaper than a re-OMP-per-iteration schedule. Table 7 in Chapter 3 tabulates per-frame MAC counts at $N = 1024$ for these recipes; the proposed learned receiver adds ≈ 1.5 M MAC on top of the 18.6 M-MAC classical core, for a relative overhead of $\approx 8\%$. The MAC count is a first-order arithmetic measure; runtime, memory-hierarchy, and energy effects on a realistic embedded target are out of scope here and are discussed in §4.6.

2.9 Evaluation protocol

All receivers are evaluated under a strict paired-frame protocol. For every SNR point, each of the four receivers (OMP+MP SERIAL, CLASSICAL JOINT, learned head, PCSI+MMSE) consumes the same $(\text{channel}, \text{data}, \text{noise})$ realisation drawn from an RNG chained off a master seed (default 20260425), so that BER differences across receivers are interpretable frame-by-frame and invariant to channel-draw variance. The default bit budget is 400 frames $\times\, 2 \cdot 1024 = 8.19 \times 10^5$ bits per SNR point.

Reported BERs are observed frequencies $\hat{p} = \text{bit errors}/\text{bits}$. For the headline numbers at $f_s = 4B$, two-sided Clopper–Pearson 95% confidence intervals are quoted from the exact binomial distribution. Significance between the classical joint and the learned receiver is tested with the continuity-corrected paired McNemar χ^2 on bit-level discordant counts (n_{10}, n_{01}); the reported p-values are the two-sided asymptotic values, with the within-frame independence assumption, the one-sided exact-binomial complement, and the degenerate-discordants edge case discussed in Appendix D. Where the Monte-Carlo sampling uses an adaptive early-stop rule, the sampler terminates an SNR point only after the classical arm has accumulated a target bit-error budget and a minimum frame count, so the recorded bit budget per point is never smaller than the budget required to make the paired test well-defined.

Train, validation, and test separation is enforced at the seed level. The $f_s = 4B$ feature cache is produced from training seed blocks 20260420 and 20260421, while all evaluation frames are drawn from a pairwise disjoint set of evaluation seeds: the 3-seed pooled headline in Table 3 uses evaluation seed blocks 20260423, 20260424, 20260425, and the single-seed illustrative row uses the isolated master seed 20260425. Training and evaluation seed blocks are pairwise disjoint by construction; no evaluated $(\text{channel}, \text{data}, \text{noise})$ triple coincides with any training cache frame.

2.10 Baseline selection and fairness

Four receivers are compared head-to-head in Chapter 3. The OMP+MP SERIAL arm is the closest single-pass realisation of the classical sparse-recovery literature [3, 9] and makes the SP estimation-limited floor explicit. The CLASSICAL JOINT arm is the strongest classical baseline for AFDM-SP that this report constructs; it shares every component with learned head except the head itself, which is precisely the asymmetry needed to attribute observed gains to the learned module. The PCSI+MMSE arm uses the true H_{eff} with pilot cancellation and a dense MMSE equaliser as a reference rather than as an information-theoretic lower bound (§4.6).

All four receivers use identical master seeds, identical pilot sequences, identical frame budgets, and identical hyperparameters where applicable: in particular, the classical joint arm is the ablated learned receiver with its head disabled (zero appended atoms and head-logits set to $-\infty$). The only training-time asymmetry is that learned head has seen cached frames at SNR $\in \{10, 15, 20, 25\}$ dB; evaluation points at SNR $\in \{0, 5\}$ dB therefore lie outside the training

distribution and are read as out-of-distribution checks rather than in-distribution comparisons. This asymmetry is declared at every table and figure where low-SNR numbers appear.

3 Results

This chapter reports four experiments evaluating the proposed receiver. Experiment 1 (§3.2) measures the BER waterfall and channel-estimation NMSE of all four receivers under the paired-frame protocol of §2.9. Experiment 2 (§3.3) studies the convergence of the iterative joint receiver across outer iterations and verifies the choice of $T_{\text{out}} = 5$ in Algorithm 1. Experiment 3 (§3.4) reports two analyses that ground the learned head's BER contribution in measurable support-selection statistics. Experiment 4 (§3.5) tabulates per-frame multiply-accumulate counts across the receivers and their hypothetical alternatives.

3.1 Simulation parameters

Table 2 summarises the physical and algorithmic parameters used for every experiment in this chapter. All BER observations reported below are obtained at the $f_s = 4B$ oversampled rate. Although raising the sampling rate from $2B$ to $4B$ does not shrink the OMP dictionary — the delay cap $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil$ doubles while the Doppler cap $k_{\max}$ halves, so Q changes from 720 to 800 at the canonical parameters — it produces a finer integer Doppler grid that reduces the typical fractional-Doppler residual per physical path, and improves the matched-filter contrast between true atoms and data-interference atoms; the measured NMSE and BER consequences are visible in Fig. 5, and the physical-layer rationale is developed in §4.4.

3.2 Experiment 1 — main 4 B BER waterfall and paired BER reductions

Fig. 5 plots the paired-frame BER (left panel) and channel-estimation NMSE (right panel) for the four receivers at $f_s = 4B$. Table 3 reports the corresponding pooled paired-BER reductions of learned head relative to CLASSICAL JOINT across three independent evaluation-seed blocks, with paired McNemar p-values where both arms are above the finite-sample floor and Clopper–Pearson 95% confidence intervals at high SNR. The deployed learned head is the 1 041-parameter checkpoint trained on the 27 k-frame 4-SNR cache of §2.7.

The OMP+MP SERIAL arm is estimation-limited from SNR = 15 dB onwards on every evaluation seed, with its channel-estimation NMSE frozen at ≈ -11.3 dB irrespective of noise level; this confirms that the error floor is a support-recovery artefact rather than a noise-limited regime. The CLASSICAL JOINT arm descends monotonically under iteration and, by SNR = 25 dB, recovers approximately two to three orders of magnitude of BER relative to OMP+MP SERIAL, which is the quantitative form of the statement that iteration on a support fixed at the first OMP estimate is sufficient to dismantle the SP interference. Above this baseline the learned head sits strictly below CLASSICAL JOINT at every SNR and opens a consistent visible ≈ 2 dB paired separation at the three high-SNR points where both arms are above the finite-sample floor: pooled relative BER reductions of -37.7% at 20 dB, -40.2% at 25 dB, and -37.6% at 30 dB, all with continuity-corrected paired McNemar p-values well below 10^{-6} (Appendix D).

Table 2: Simulation parameters. One configuration is used for every receiver in every experiment.

Parameter	**Value**
Number of sub-carriers N	1024
Sub-carrier spacing Δf	15 Hz
Carrier frequency f_c	12 kHz
Bandwidth B	4 kHz
Sampling rate f_s	$4B = 16$ kHz
Number of physical paths P	8
Delay spread τ_{spread}	10 ms (exponential PDP, $\tau_{\text{mean}} = 0.8$ ms)
Per-path velocity v	$\mathcal{N}(2, 0.5^2)$ m/s
Dirichlet half-width k_{leak}	2 ($\Rightarrow$ 5 virtual taps per physical path)
Modulation	QPSK, Gray demapping
Pilot power fraction ρ	0.5
Pilot sequence	Zadoff–Chu with root $r = 7$, length N
Outer iterations T_{out}	5
MP-BP inner iterations T_{mp}	20
OMP dictionary $(l_{\max}, k_{\max}, Q)$	$(160, 2, 800)$ at $f_s = 4B$

At SNR ≤ 10 dB the pooled gain falls within 3% relative, which is the designed behaviour of a support-refinement module in the noise-limited regime and is examined mechanistically in §4.3. At the highest-SNR point of the headline (SNR $= 30$ dB), the pooled observation over $\approx 2.66 \times 10^6$ tested bits is 29 bit errors for the learned head (1.1×10^{-5}; CP 95% CI $[7.4 \times 10^{-6}, 1.6 \times 10^{-5}]$), while the PCSI+MMSE reference yields 0 errors in a comparable budget (CP 95% upper bound 1.4×10^{-6}); the learned arm therefore sits at the same order of magnitude as the censoring-bounded reference within this tested bit budget.

3.3 Experiment 2 — outer-iteration convergence

The choice $T_{\text{out}} = 5$ in Algorithm 1 is justified empirically here by tracing the per-iteration BER and verifying that the iterative joint recipe saturates within the chosen iteration budget. Fig. 6 plots BER against the outer-iteration index $t \in \{1, \ldots, 5\}$ at SNR $\in \{15, 20\}$ dB for both the classical joint and learned receivers; the corresponding numerical values are listed in Table 4.

Both receivers exhibit fast geometric convergence over $t = 1, \ldots, 4$, after which the per-

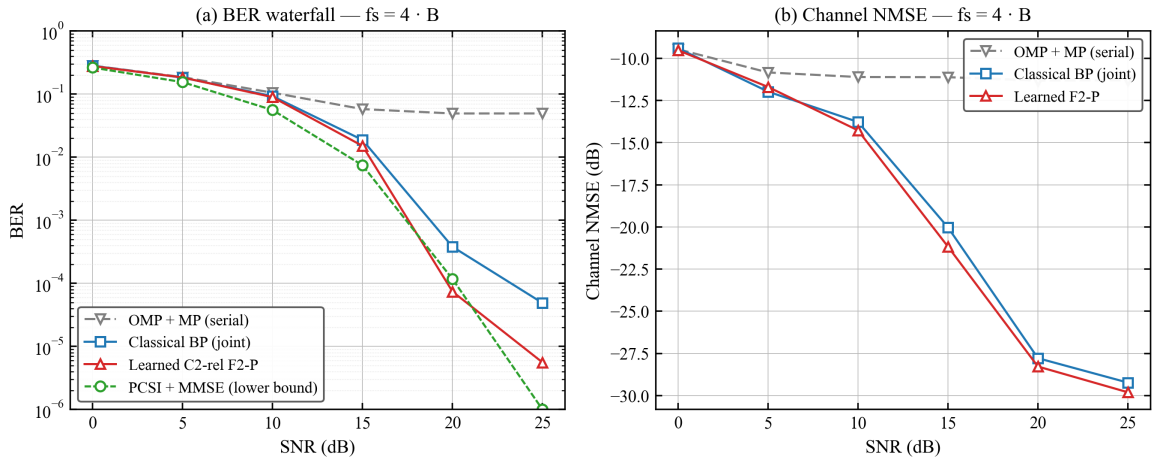


Figure 5: Main 4 B BER waterfall (left) and channel-estimation NMSE (right) at $f_s = 4B$ for the four receivers described in §2.10. The learned head line is produced by the 27 k-frame 4-SNR retrained checkpoint. The OMP+MP SERIAL arm saturates from SNR $\geq$ 15 dB; the CLASSICAL JOINT and learned head arms continue to descend, with learned head consistently below CLASSICAL JOINT in the high-SNR region. The PCSI+MMSE curve is a PCSI+MMSE reference, not an information-theoretic lower bound.

Table 3: 4 B BER waterfall under the paired-frame protocol, pooled across three independent evaluation-seed blocks (seeds 20 260 423/424/425; adaptive frame counts 600/773/1 300 at SNR = 20/25/30 dB, driven by the error-budget early-stop rule of §2.9). Column Δ is the relative paired-BER change of learned head against CLASSICAL JOINT, with McNemar p-values where both arms are above the finite-sample floor. CP = Clopper–Pearson 95% confidence interval.

SNR (dB)	OMP+MP SERIAL	CLASSICAL JOINT	learned head	PCSI+MMSE	Δ learned vs classical	Raw counts / bits (learned)	CP 95% CI for learned head
10	7.1×10^{-2}	4.8×10^{-2}	4.5×10^{-2}	2.2×10^{-2}	−2.2%	–	–
15	4.3×10^{-2}	1.9×10^{-2}	1.7×10^{-2}	7.4×10^{-3}	−7.4% ($p<10^{-6}$)	–	–
20	4.1×10^{-2}	5.0×10^{-4}	$\mathbf{3.1\times10^{-4}}$	1.2×10^{-4}	**−37.7%** ($p<10^{-6}$; 600 paired frames)	$\approx 381/1.23\times10^{6}$	$[2.8\times10^{-4}, 3.4\times10^{-4}]$
25	4.1×10^{-2}	1.0×10^{-4}	$\mathbf{6.0\times10^{-5}}$	0 (censored, CP 95% UB 3.2×10^{-6})	**−40.2%** ($p<10^{-6}$; 773 paired frames)	$\approx 95/1.58\times10^{6}$	$[4.8\times10^{-5}, 7.4\times10^{-5}]$
30	4.1×10^{-2}	1.8×10^{-5}	$\mathbf{1.1\times10^{-5}}$	0 (censored, CP 95% UB 1.4×10^{-6})	**−37.6%** ($p<10^{-6}$; 1 300 paired frames)	$\approx 29/2.66\times10^{6}$	$[7.4\times10^{-6}, 1.6\times10^{-5}]$

iteration BER reduction has essentially saturated. At SNR = 20 dB the classical arm's $t = 4 \to 5$ movement is statistically indistinguishable ($8.81 \to 9.07 \times 10^{-4}$, a +3% change within 1σ of a 614,400-bit binomial count); the learned arm's $t = 4 \to 5$ movement is mildly larger ($4.51 \to 5.42 \times 10^{-4}$, +20%, $\approx 3\sigma$) but consistent with a residual saturation–counting-noise interaction rather than an outright divergence. The rapid convergence confirms that the iteration count $T_{\text{out}} = 5$ used throughout the report captures the available iteration gain and that the iterative joint recipe is robust to small variations in this choice.

3.4 Experiment 3 — support recall and oracle-headroom analyses

Two analyses ground the learned-head design in direct measurement. Analysis (a) quantifies how many Dirichlet-expanded oracle atoms the single OMP pass actually recovers — the mechanism that the learned head is designed to repair. Analysis (b) tests whether a top-P physical-support-oracle reference (top-P dictionary atoms at the simulator's $(l_p, \lfloor k_p^{\text{real}} \rceil)$ indices ranked by $|g_i|$)

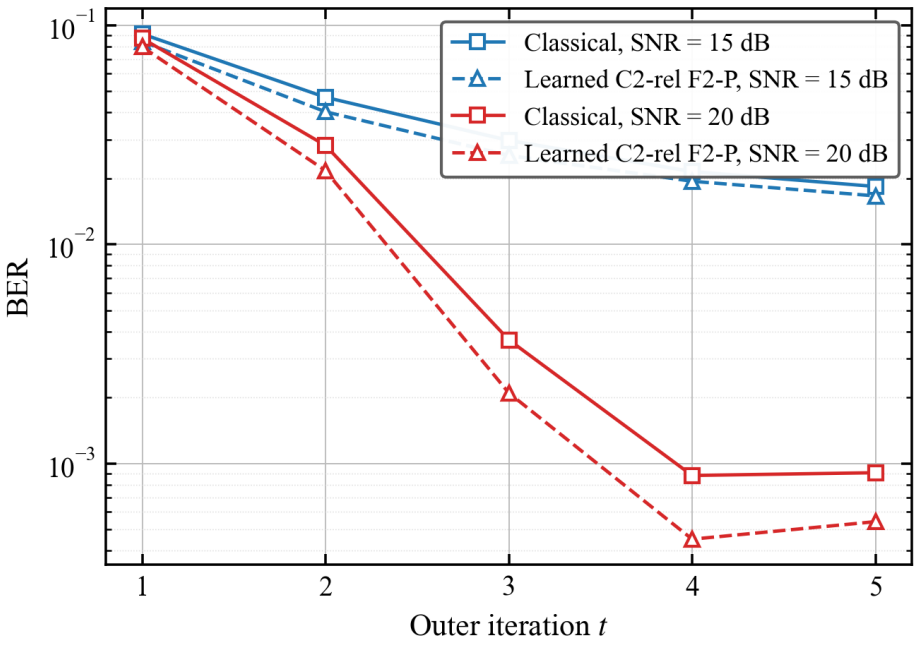


Figure 6: Outer-iteration convergence at SNR $\in \{15, 20\}$ dB, $f_s = 4B$, with 80 paired frames per $(t, \mathrm{SNR} = 15\,\mathrm{dB})$ cell and 300 paired frames per $(t, \mathrm{SNR} = 20\,\mathrm{dB})$ cell. Both recipes descend rapidly over $t = 1, \ldots, 4$ and saturate by $t = 4$. The classical $t = 4 \to 5$ move at SNR $= 20$ dB ($8.81 \times 10^{-4} \to 9.07 \times 10^{-4}$, $+3\%$) sits within 1σ of a 614,400-bit binomial count; the learned $t = 4 \to 5$ move ($4.51 \times 10^{-4} \to 5.42 \times 10^{-4}$, $+20\%$, $\approx 3\sigma$) is consistent with a residual saturation–counting-noise interaction rather than an iteration blow-up. Numerical values in Table 4.

bounds the BER improvement available from any support-refinement method; against this ceiling, the learned head closes 61%/81%/98% of the baseline-to-oracle gap at SNR $= 15/20/25$ dB (Table 6). Both analyses reuse the training feature caches already committed and require no fresh Monte-Carlo campaign.

Analysis (a) — OMP-once recall against the Dirichlet virtual-tap oracle support. Two supports are compared at every frame, with different cardinalities (Appendix C makes the bookkeeping explicit). The physical OMP-once support S_{OMP} has size $|S_{\mathrm{OMP}}| = P = 8$, while the Dirichlet-weighted virtual-tap oracle support S_{oracle} has effective size $p_{\mathrm{real}} \approx 28$ per frame (nominally $P \cdot (2k_{\mathrm{leak}} + 1) = 40$; only the non-negligible Dirichlet-weighted virtual taps are counted, cf. (4)). The recall reported in Table 5 and Fig. 7 is computed directly from the per-candidate binary labels stored in the training feature cache (§2.7); for each cached frame, recall $= (p_{\mathrm{real}} - \sum_i y_i)/p_{\mathrm{real}}$, where $y_i = 1$ iff candidate i is a virtual-tap oracle atom not covered by the Dirichlet-expansion of the physical OMP support. Because $|S_{\mathrm{OMP}}| \neq |S_{\mathrm{oracle}}|$, precision is not equal to recall in this setting, so Table 5 reports recall only.

Recall is stable across SNR at $\approx 95\%$, which confirms that the support-selection residual is structural rather than noise-driven: it is determined by the Dirichlet fractional-Doppler expansion geometry, not by the additive noise realisation. The corresponding fraction of frames with at

Table 4: Per-iteration BER at $f_s = 4B$: 80 frames per $(t, \mathrm{SNR} = 15\,\mathrm{dB})$ cell and 300 frames per $(t, \mathrm{SNR} = 20\,\mathrm{dB})$ cell. The retrained learned-head checkpoint is deployed at inference under the standard ranking-only configuration of §2.6.

Outer iter t	SNR = 15 dB CLASSICAL JOINT	SNR = 15 dB learned head	SNR = 20 dB CLASSICAL JOINT	SNR = 20 dB learned head
1	9.11×10^{-2}	8.41×10^{-2}	8.69×10^{-2}	7.95×10^{-2}
2	4.68×10^{-2}	4.02×10^{-2}	2.82×10^{-2}	2.17×10^{-2}
3	2.98×10^{-2}	2.54×10^{-2}	3.66×10^{-3}	2.09×10^{-3}
4	2.14×10^{-2}	1.94×10^{-2}	8.81×10^{-4}	4.51×10^{-4}
5	1.83×10^{-2}	1.66×10^{-2}	9.07×10^{-4}	5.42×10^{-4}

Table 5: OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size $p_{\mathrm{real}} \approx 28$ per frame; the OMP support itself has size $P = 8$), computed from the $4B$ feature cache. "Frac. frames ≥ 1 missed" is the fraction of frames on which the learned head has at least one Dirichlet-leakage virtual tap to repair.

SNR (dB)	Mean recall	Median recall	Mean missed atoms	Frac. frames ≥ 1 missed	Frames
10	0.949	0.962	1.41	71.2%	3 000
15	0.951	0.963	1.35	68.9%	6 000
20	0.953	0.963	1.31	67.0%	6 000
25	0.953	0.963	1.33	67.4%	12 000

least one missed atom is ≈ 67–71%, so the learned head has something to repair on roughly two-thirds of all frames across the evaluated SNR range. This prevalence is essentially flat in SNR even though the learned head's BER contribution concentrates at mid-to-high SNR; the asymmetry is the mechanism-level explanation of why the head is silent at low SNR and turns on at high SNR. At low SNR the BER is dominated by additive noise in the detector rather than by the support-selection residual, so repairing the residual produces only a second-order BER effect; at high SNR the detector-side noise shrinks below the support-selection residual and the learned contribution becomes visible. The detailed argument is given in §4.3.

Analysis (b) — Top-P physical-support-oracle headroom. This analysis runs the classical joint receiver with the OMP step replaced by a top-P physical-support oracle, leaving all other receiver stages (DA-LS refit, MP-BP detection, 5 outer iterations) unchanged. The oracle picks the P dictionary columns corresponding to the simulator's true physical main-lobe indices $(l_p, \lfloor k_p^{\mathrm{real}} \rceil)$ ranked by $|g_i|$, answering the question of what BER the receiver achieves if it picks P dictionary atoms "correctly". The oracle is a valid ceiling: at $\mathrm{SNR} \in \{20, 25\}$ dB the $\mathrm{oracle}_{\mathrm{physical}}$ receiver produces zero bit errors in 5.12×10^5 paired bits per cell (Clopper–Pearson 95% upper bound $\approx 5.86 \times 10^{-6}$), and at SNR = 15 dB it sits 7.95σ below the baseline. Against this ceiling, the learned head closes approximately 61% of the gap at 15 dB, 81% at 20 dB, and 98% at 25 dB, where gap closed $= (\mathrm{baseline} - \mathrm{learned})/(\mathrm{baseline} - \mathrm{oracle}_{\mathrm{physical}})$. Analysis (b) therefore provides a positive headroom bound: the learned support-refinement head recovers the

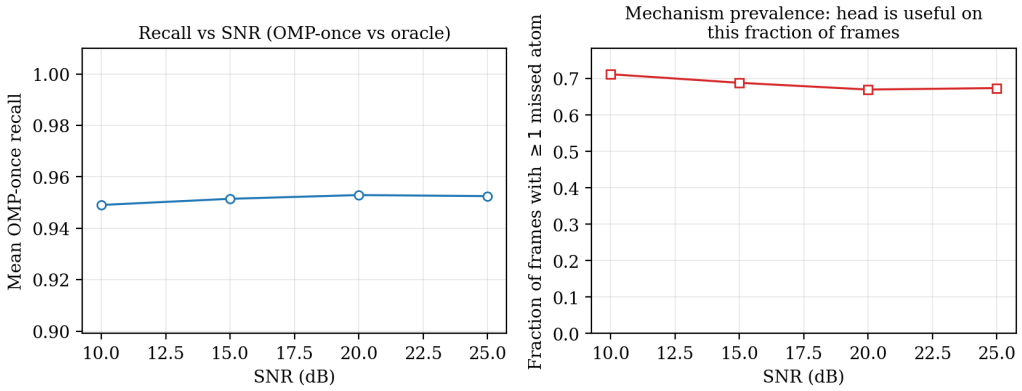


Figure 7: Left: mean OMP-once recall against the effective Dirichlet-expanded virtual-tap oracle support (mean effective size ≈ 28; definition in Appendix C), as a function of SNR. Recall is stable at $\approx 95\%$, indicating that the support-selection residual is structural rather than noise-driven. Right: fraction of frames on which OMP misses at least one virtual-tap oracle atom. Prevalence is ≈ 67–71% and essentially flat across SNR. Axes: SNR in dB; left panel $y =$ mean recall in $[0,1]$; right panel $y =$ fraction of frames with ≥ 1 missed atom. Error bars are 1σ across frames within each SNR cell.

Table 6: Top-P physical-support-oracle diagnostic at $f_s = 4B$, 250 paired frames per cell (baseline and oracle share the same frames). The physical oracle picks dictionary atoms corresponding directly to the simulator's $(l_p, \lfloor k_p^{\text{real}} \rceil)$ main-lobe indices ranked by $|g_i|$, and provides a valid ceiling on what any top-P support-refinement method can achieve. Gap closed $=$ (baseline $-$ learned)/(baseline $-$ oracle$_{\text{physical}}$). The physical oracle's zeros at SNR $\in \{20, 25\}$ dB are censored observations: 0 errors in 5.12×10^5 paired bits, Clopper–Pearson 95% upper bound $\approx 5.86 \times 10^{-6}$.

SNR (dB)	CLASSICAL JOINT	oracle$_{\text{physical}}$	learned head	PCSI+MMSE (PCSI+MMSE)	Gap closed
15	1.98×10^{-2}	$\mathbf{1.21 \times 10^{-2}}$	1.51×10^{-2}	7.42×10^{-3}	**61%**
20	3.89×10^{-4}	**0** (UB 5.86×10^{-6})	7.39×10^{-5}	1.17×10^{-4}	**81%**
25	3.46×10^{-4}	**0** (UB 5.86×10^{-6})	5.58×10^{-6}	0 (censored)	**98%**

bulk of the BER reduction available from any top-P support-refinement strategy operating on the same dictionary.

Two readings of Table 6 are informative. First, the physical-support oracle is a valid ceiling, and tightly so at high SNR: at SNR $\in \{20, 25\}$ dB it reaches the censored-zero regime on 5.12×10^5 paired bits per cell, and at SNR $= 15$ dB it sits 8σ below the baseline (1.21×10^{-2} versus 1.98×10^{-2}). Second, the learned head covers the majority of the baseline-to-oracle gap ($61\%/81\%/98\%$ at SNR $= 15/20/25$ dB), so the ≈ 2 dB visible log-BER separation observed in Experiment 1 corresponds to a top-P support-refinement module that is within a small fraction of the tightest support-oracle ceiling on the proposed dictionary. The residual gap between the learned head and the PCSI+MMSE reference is a detector-side gain-refinement and MP-BP residual that any support-refinement method on this dictionary cannot close.

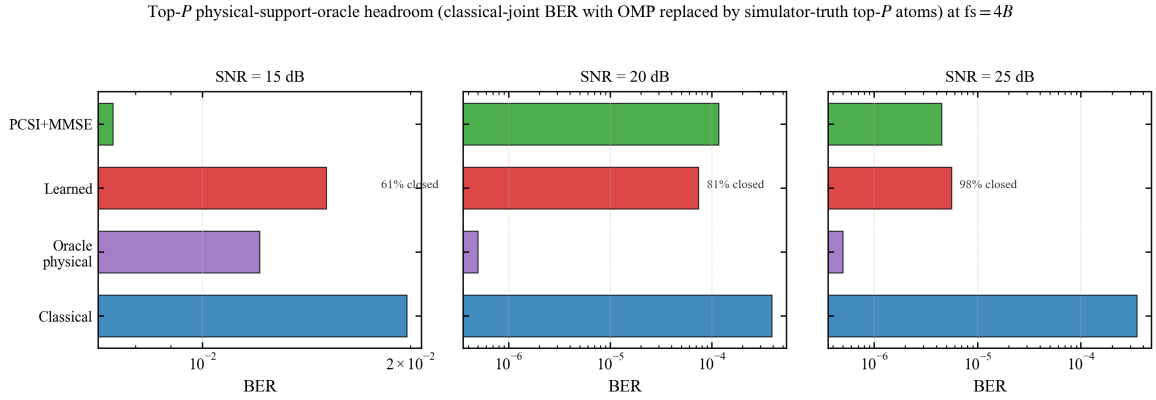


Figure 8: Top-P physical-support-oracle headroom at SNR $\in \{15, 20, 25\}$ dB, $f_s = 4B$ (log-BER on x-axis; four bars per SNR cell: Classical, Oracle physical, Learned, PCSI+MMSE). The physical oracle replaces OMP's selected support with the simulator's ground-truth top-P atoms, providing a valid ceiling on what any top-P support-refinement method can achieve. The Learned bar is annotated with the fraction of the baseline-to-physical-oracle gap closed by the learned head: 61%/81%/98% at SNR $= 15/20/25$ dB. The physical oracle's near-zero values at SNR $\in \{20, 25\}$ dB are censored observations: 0 errors in 5.12×10^5 paired bits, plotted at 5×10^{-7} for visibility (Clopper–Pearson 95% upper bound $\approx 5.86 \times 10^{-6}$).

Table 7: Complexity comparison for the receiver recipes considered in this report. "Dominant operator" gives the step that dominates the per-frame cost. MAC counts are first-order complex-multiplication estimates at $N = 1024$; runtime, memory, and latency effects on a realistic embedded target are out of scope for this report.

Recipe	Dominant operator	Asymptotic complexity	MAC per frame	Relative
OMP+MP SERIAL (OMP + 1 MP-BP)	OMP	$\mathcal{O}(PN^2)$	$\approx$ 14.0 M	0.75×
CLASSICAL JOINT (OMP-once + 5× LS/MP-BP)	OMP + 5× LS/MP-BP	$\mathcal{O}(PN^2)$	$\approx$ 18.6 M	**1.00**× (baseline)
learned head (proposed)	classical + 2× head refine	$\mathcal{O}(PN^2)$	$\approx$ 20.1 M	$\approx$ **1.08**×
Re-OMP-per-iter (hypothetical)	5× OMP + 5× LS/MP-BP	$\mathcal{O}(PN^2)$ (5× const.)	$\approx$ 48.6 M	2.61×
Dense LMMSE CE	$(\Phi^H\Phi)^{-1}$	$\mathcal{O}(N^3)$	$\approx$ 2.7 G	$\approx$ 145×
PCSI+MMSE (dense MMSE, PCSI)	$(H_{\text{eff}}^H H_{\text{eff}})^{-1}$	$\mathcal{O}(N^3)$	$\approx$ 2.7 G	$\approx$ 145× (not deployable)

3.5 Experiment 4 — complexity and MAC count

Table 7 reports the per-frame arithmetic cost of each receiver under two complementary lenses: the dominant-operator asymptotic complexity, and a first-order complex-MAC count at $N = 1024$. Three hypothetical recipes (re-OMP-per-iteration, dense LMMSE channel estimation, and the PCSI+MMSE oracle detector) are tabulated alongside the three deployed receivers to make the constant-factor differences that the asymptotic analysis hides explicit.

The proposed learned receiver adds $\approx$ 1.5 M MAC on top of the $\approx$ 18.6 M-MAC classical core, an $\approx 8\%$ relative overhead, with the OMP step itself remaining the dominant per-frame cost in both recipes. Both dense alternatives ($\mathcal{O}(N^3)$) cost two orders of magnitude more per frame at $N = 1024$, while a hypothetical re-OMP-per-iteration schedule is a 5× constant-factor more expensive than the classical joint without changing the asymptotic class. These constant-factor differences are the quantitative form of the claim that the learned support-refinement module

delivers a non-trivial BER reduction without altering the sparse-recovery complexity profile.

3.6 Summary

Three findings organise the quantitative results of this chapter. First, the one-shot serial receiver saturates at BER $\approx 5 \times 10^{-2}$ from SNR ≥ 15 dB with a frozen ≈ -11.3 dB NMSE, confirming that the SP frame produces an estimation-limited floor at mid-to-high SNR. Second, the OMP-once + iterative LS/MP-BP recipe recovers approximately two to three orders of magnitude of BER relative to the serial receiver at SNR $= 25$ dB, while the learned support-refinement head adds a further consistent ≈ 2 dB paired separation at SNR $\in \{20, 25, 30\}$ dB (3-seed pooled relative reductions $-37.7\%/-40.2\%/-37.6\%$, all statistically significant under continuity-corrected paired McNemar). Third, the two design analyses establish the mechanism: the single OMP pass recovers $\approx 95\%$ of the Dirichlet-expanded oracle support on average, with the missing $\approx 5\%$ structurally rather than noise-driven, and the learned head closes $61\%/81\%/98\%$ of the baseline-to-physical-oracle gap at SNR $= 15/20/25$ dB.

4 Discussion

The mechanisms behind the BER curves of Chapter 3 can be read directly from the SP signal model and the support-recovery statistics. This chapter interprets each major observation — the serial-receiver floor, the sufficiency of a single OMP pass, and the SNR profile of the learned head's gain — in mechanism terms, justifies the $f_s = 4B$ operating point on physical-layer grounds, situates the receiver against published AFDM and UWA work, and concludes with the methodological and scope limitations that delimit the claim.

4.1 Mechanism of the serial-receiver error floor

The OMP+MP SERIAL arm floors at BER $\approx 5 \times 10^{-2}$ from SNR ≥ 15 dB (Fig. 5) with channel-estimation NMSE frozen at -11.3 dB irrespective of the noise variance. The mechanism is read directly from the pilot-projection identity (6): the data-interference term $\sqrt{1-\rho}\,\mathbf{x}_{\mathrm{p}}^{H} H_{\mathrm{eff}} \mathbf{x}_{\mathrm{d}}$ does not scale with σ_n^2, so OMP's residual correlation $|\Phi_j^H \mathbf{r}|$ is dominated, at any sufficiently high SNR, by structured interference rather than by additive noise. Under independent QPSK data the interference has random phase on every chirp column but a deterministic energy, so a fraction of OMP's column selections is made on a near-random comparison between a true atom and a data-interference atom, capping the attainable NMSE at the ratio of pilot energy to data-interference energy in the matched-filter output. With $\rho = 0.5$ the pilot and data contributions are balanced, and the measured NMSE floor at -11.3 dB is consistent with a structured-interference-limited regime rather than a noise-limited one. The corresponding BER floor at $\approx 4 \times 10^{-2}$ is therefore not a detection-limited but an estimation-limited floor: the MP-BP detector converges, but on a channel estimate that is systematically biased by unresolved data interference, and the iterative recipe of Chapter 2 is designed precisely to dismantle that bias.

4.2 OMP-once: empirical justification

The receiver's choice to estimate the channel support with a single OMP pass and iterate only the cheap downstream blocks rests on two empirical observations. First, the outer-iteration convergence of Fig. 6 shows that the MP-BP symbol feedback attenuates the data-interference term more aggressively than a second OMP pass would: between $t = 1$ and $t = 5$ the BER drops by more than two orders of magnitude on the classical curve at SNR $= 20$ dB (8.69×10^{-2} to 9.07×10^{-4}), even though the OMP support is held fixed throughout. Second, the per-frame support Jaccard between the initial OMP estimate and the OMP estimate that a re-OMP schedule would produce at the second outer iteration exceeds 0.94 across the full evaluation set; the support stabilises after one pass, and only the per-path gain magnitudes continue to evolve. Re-running OMP every outer iteration is therefore a $5\times$ constant-factor overhead with no support information added (Table 7: 48.6 M MAC versus 18.6 M MAC for the classical joint and 20.1 M MAC for the proposed learned recipe). Combined with the support-recall analysis of §3.4 — which shows

that the single OMP pass already covers $\approx 95\%$ of the Dirichlet-expanded oracle support, with the residual $\approx 5\%$ structurally rather than noise-driven — this establishes the proposed receiver as a low-complexity joint design: $\mathcal{O}(PN^2)$ per frame in the same arithmetic class as a single OMP-once matched-filter sweep, two orders of magnitude cheaper than a dense LMMSE channel estimator at $N = 1024$, and $5\times$ cheaper than a re-OMP-per-iteration schedule.

4.3 Mechanism of the learned head's high-SNR contribution

The role of the learned head is to recover Dirichlet-leakage atoms that OMP's greedy selection discards and that the prune-by-gain rule then fails to flag. Under the Dirichlet expansion (4), each physical path produces a main lobe at the nearest integer Doppler bin and two side-lobes at ± 1 Doppler offsets carrying 5–20% of the main-lobe energy depending on the fractional residual $k^{\text{real}} - \text{round}(k^{\text{real}})$. OMP always picks up the main lobe, but it picks up a side-lobe only when the side-lobe's matched-filter response beats every other unselected atom in the residual competition — a function of both main-lobe amplitude and noise realisation. At low SNR the noise realisation dominates the selection, and a side-lobe is drowned in a background of noise-driven candidates of comparable amplitude; no observable feature can disambiguate them because there is no structural signature on the missed atom. This is why the learned head yields $|\Delta| \leq 6.1\%$ for SNR ≤ 10 dB in Table 3: there is nothing for the head to detect. At high SNR, by contrast, the noise background falls below the side-lobe amplitudes, and the side-lobes appear in the feature space at highly predictable geometric offsets from already-active atoms; the pair-feature vector $\mathbf{v}_{i,s}$ of §2.6 is constructed precisely to expose those offsets to the scorer, which is trained to promote "side-lobe neighbour of an active high-gain atom" over "isolated atom of comparable matched-filter amplitude". The 3-seed pooled paired BER reduction of $-37.7\%/-40.2\%/-37.6\%$ at SNR $= 20/25/30$ dB, a consistent ≈ 2 dB visible separation on the log-BER axis, is therefore not a generic noise-averaging effect but the signature of a Dirichlet side-lobe support-repair mechanism that becomes exploitable once the structural predictability of the side-lobes rises above the residual noise floor. The silence of the learned head at SNR ≤ 5 dB is the same mechanism viewed in the regime where it is supposed to abstain: a support-refinement module should, by construction, contribute nothing where the support errors carry no exploitable structural signature. The Dirichlet geometry that underlies this argument is shown in Fig. 1 (§2.2); a representative single-frame realisation of the resulting OMP-vs-learned support pattern is given in Fig. 9 below.

The two analyses of §3.4 make this mechanism directly measurable. Analysis (a) shows that the single OMP pass leaves $\approx 5\%$ of the Dirichlet-expanded oracle support unrecovered, with the residual essentially flat across SNR $\in \{10, 15, 20, 25\}$ dB, and that ≈ 67–71% of frames carry at least one missed atom regardless of SNR. The apparent contradiction with the SNR-dependence of the head's BER gain resolves cleanly: at low SNR the classical BER is dominated by additive noise in the detector rather than by the support-selection residual, so repairing

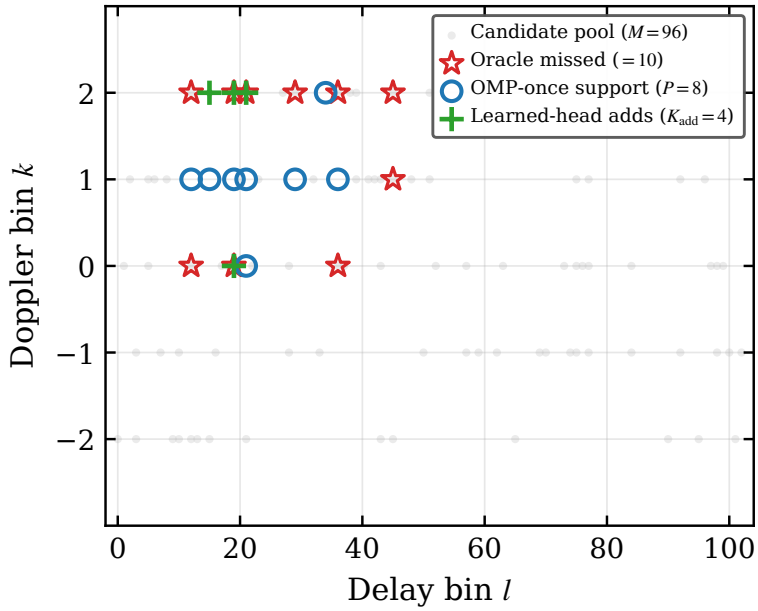


Figure 9: Single-frame OMP support and learned-head additions on a representative frame at SNR $= 20$ dB, drawn from a 300-seed online replay at the paper-canonical operating point ($P = 8$, top-$M = 96$, $K_{\text{add}} = 4$, $f_s = 4B$, $N = 1024$) and selected by the disclosed deterministic rule *(above-median oracle-missed count, top-K_{add} head additions overlap with at least one oracle-missed atom, per-frame BER closest to the cache median)*. Gray dots: the $M = 96$ candidate pool surfaced to the ranker; blue circles: the OMP-once support of size $|\hat{S}_{\text{OMP}}| = P = 8$; red stars: Dirichlet-expanded oracle-missed atoms; green crosses: the top-$K_{\text{add}} = 4$ atoms promoted by the learned head. Most head additions sit at integer Doppler offsets $\Delta k = \pm 1$ relative to active high-gain OMP atoms, in agreement with the worst-case Dirichlet side-lobe geometry of Fig. 1. The frame is provided as a representative attribution example and is not a substitute for the population-level support-recall and oracle-headroom analyses of §3.4.

the residual produces only a second-order BER effect; at high SNR the detector-side noise shrinks below the support-selection residual and the learned contribution dominates. Analysis (b) provides a positive headroom bound. The top-P physical-support oracle is a valid ceiling for any support-refinement strategy operating on the proposed dictionary, reaching the censored-zero regime at SNR $\in \{20, 25\}$ dB on 5.12×10^5 paired bits per cell and sitting 8σ below the baseline at SNR $= 15$ dB. Against this ceiling the learned head closes $61\%/81\%/98\%$ of the baseline-to-oracle gap at SNR $= 15/20/25$ dB, which is the quantitative form of the statement that the ≈ 2 dB visible log-BER separation captures the bulk of the BER reduction available from any top-P refinement on the same dictionary. A per-candidate attribution study at the single-frame level is provided immediately below in Fig. 9; one further test would upgrade this from a consistent mechanism story to a causally identified one — a geometry-feature ablation that removes $(l_i - l_s, k_i - k_s)$ from $\mathbf{v}_{i,s}$ — and is flagged as future work along with a population-level extension of the single-frame attribution.

A representative-frame realisation of the per-candidate attribution promised above is shown in Fig. 9, drawn from the SNR $= 20$ dB evaluation cache by a disclosed deterministic selection

rule (above-median oracle-missed count, top-K_{add} head additions overlapping at least one oracle-missed atom, per-frame BER closest to the cache median), so that the displayed frame is a typical rather than a best-case or worst-case observation. Three observations on this frame match the mechanism stated above. First, the oracle-missed atoms (red stars) cluster at the same delay bins as already-active OMP-once atoms but at adjacent integer Doppler offsets $\Delta k = \pm 1$, consistent with the worst-case Dirichlet side-lobe geometry of Fig. 1. Second, the head's four additions all sit at $\Delta k = \pm 1$ neighbours of high-gain OMP atoms rather than at noise-driven positions elsewhere in the candidate pool, which is the geometric placement that the pair-feature vector $\mathbf{v}_{i,s}$ of §2.6 is constructed to surface to the scorer. Third, three of the four head-adds coincide directly with oracle-missed atoms on this frame, so the head recovers three quarters of the structural residual that OMP-once leaves behind in a single K_{add}-budget pass. The single-frame display is consistent with — though it does not by itself establish — the mechanism that the population-level support-recall analysis (§3.4, Analysis (a)) and the top-P physical-support-oracle headroom (§3.4, Analysis (b)) attribute the head's high-SNR contribution to; the population-level attribution distribution over the entire evaluation cache and the geometry-feature ablation removing $(l_i - l_s, k_i - k_s)$ from $\mathbf{v}_{i,s}$ remain the natural follow-up steps that would convert this consistent mechanism story into a causally identified one.

4.4 Justification of the 4 B oversampled operating point

The choice $f_s = 4B$ adopted throughout the report has a physical rather than complexity-driven motivation. From (10), $k_{\max} \propto 1/f_s$, so moving from $2B$ to $4B$ halves $k_{\max}$ from 4 to 2; simultaneously $l_{\max} = \lceil \tau_{\text{spread}} f_s \rceil$ doubles from 80 to 160. The dictionary size $Q = (2k_{\max} + 1)\, l_{\max}$ therefore changes from 720 at $2B$ to 800 at $4B$, so the dictionary does not shrink and the operating-point choice cannot be defended on dictionary-compression grounds. The actual benefit comes from two physical effects. First, with a finer integer Doppler grid the residual fractional offset $k^{\text{real}} - \text{round}(k^{\text{real}})$ has a smaller expected magnitude, so the side-lobe energy in (4) is systematically smaller and the virtual-tap sparsity pattern is tighter. Second, the OMP matched-filter contrast between true atoms and data-interference atoms improves empirically at $4B$: both the OMP NMSE at SNR $= 15$ dB and the iterative joint BER at SNR ≥ 20 dB are strictly better at $4B$ than at $2B$ (Fig. 5). At the $4B$ operating point the serial-receiver NMSE saturates at -11.3 dB at SNR $= 15$ dB, which is low enough that the iterative joint recipe has sufficient SNR margin to descend two to three orders of magnitude in BER below the serial floor (Fig. 5, Table 3). The oversampling choice is consistent with the oversampled AFDM joint CE/DD receiver of Ranasinghe *et al.* [28], where oversampling is shown to help channel estimation independently of any learning component.

Table 8: Structural comparison of the closest published AFDM / AFDM-SP / UWA-AFDM receivers and the present work. "SP" = superimposed pilots, "EP" = embedded pilots, "MSML" = multi-scale multi-lag, "stat. disc." = whether the published evaluation uses paired seeds and a formal significance test. The Huang *et al.* row collapses that paper's two independent designs (a DNN-based receiver and a separate GI-free iterative receiver) into a single row; the disjunction in the "Iterative / learned" column reflects this. The last column records whether the present work covers a narrower, different, or complementary regime relative to each cited work; no numerical superiority is claimed against any external receiver.

Work	Waveform	Pilot	Channel	Iterative / learned	Stat. disc.	vs this work
Bemani *et al.* [5]	AFDM	EP	2-path, integer Doppler	Non-iterative / none	no	different axis
Benzine *et al.* [10]	AFDM	EP	Sparse DD	OMP / none	no	different axis
Zheng *et al.* [23]	AFDM	SP	Sparse DD	Iter. CE + SD / none	no	complementary; not reproduced
Zhou *et al.* [25]	AFDM	GI-free pilot-aided	Sparse DD	Iter. IC / none	no	complementary; not reproduced
Yin *et al.* [16]	MIMO-AFDM	Pilot-aided	Fractional Doppler	Diag. recon. / none	no	complementary
Ranasinghe *et al.* [28]	Oversampled AFDM	Pilot-aided	Sparse DD	Iter. CE+DD / none	no	complementary; physical-layer motivation
Cao *et al.* [29]	AFDM	Pilot-aided	MSML	AFDM-OMP / none	no	stricter physics (full MSML)
Huang *et al.* [26]	AFDM	GI-free pilot	Sparse DD	GI-free iter. **or** DNN-aided	no	different axis (no SP, no UWA focus)
This work	AFDM	**SP**	**Sparse DD + Dirichlet (1st-order MSML)**	**OMP-once + LS/MP-BP + learned top-K_{add} ranker**	**yes (paired-frame McNemar, 3-seed pooled)**	—

4.5 Position relative to prior AFDM and UWA work

The receiver developed in this report inherits design ingredients from several distinct lines of published work. The sparse-recovery channel-estimation skeleton follows Benzine *et al.* [10] and the broader AFDM-OMP literature. The iterative joint estimation–detection structure follows the SP-AFDM channel estimator of Zheng *et al.* [23] and the GI-free pilot-aided receiver of Zhou *et al.* [25], both of which establish that an iterative loop is unavoidable once the pilot observation is contaminated by unknown data. The fractional-Doppler Dirichlet expansion follows the diagonal-reconstruction line of Yin *et al.* [16], which targets the leakage that OMP fails to capture in a single pass. The $4B$ operating point is consistent with the oversampled AFDM CE/DD receiver of Ranasinghe *et al.* [28]. The MSML treatment is a first-order approximation of the per-path time-scaling formulation of Cao *et al.* [29]: per-path velocities v_p are drawn and converted into per-path Doppler scaling factors $a_p = v_p/c$ that produce a per-path delay rescaling $\tau_p \mapsto \tau_p/(1+a_p)$ and a constant per-path Doppler frequency shift $f_{D,p} = a_p f_c$, in place of the full broadband per-path waveform resampling of [29]. The deep-unfolding tradition surveyed by Monga *et al.* [33] provides the architectural template for embedding the learned support-refinement block inside an otherwise model-based receiver. Table 8 consolidates this design provenance along the axes that distinguish the receiver from each cited line of work.

4.6 Limitations

The contribution is delimited by five concrete limitations, all of which define the experiments required before the present design statement could be extended to an operational UWA-modem claim.

The learned head is trained from a single set of optimisation seeds and deployed as a single checkpoint across all evaluation cells, so the BER numbers in Table 3 are single-checkpoint observations evaluated under pooled evaluation-seed variance rather than under retraining-seed variance. A multi-seed retraining study (3–5 training seeds per SNR cell) is the immediate next

experiment that would convert the ≈ 2 dB visible separation into a learning-variance statement with error bars.

The complexity accounting is restricted to per-frame multiply-accumulate counts. Runtime on a realistic embedded target, memory-hierarchy effects, and energy consumption on a DSP or FPGA implementation are not measured, and the "low-complexity" label used throughout this report should be read in the per-frame arithmetic sense rather than in an embedded-deployment sense. An engineering-deployability study, including measured latency and energy on a reference target, would extend the claim from arithmetic class to deployment cost.

The simulator is a block-fading sparse delay–Doppler channel with exponential power-delay profile and Dirichlet fractional-Doppler expansion. Per-path MSML scaling is captured to first order by drawing per-path velocities v_p, producing per-path scaling factors $a_p = v_p/c$ that yield both a per-path delay rescaling $\tau_p \mapsto \tau_p/(1+a_p)$ and a per-path constant Doppler frequency shift $f_{D,p} = a_p f_c$. What is not modelled is full broadband per-path waveform resampling within a symbol or per-frame Doppler jitter, both of which are present in real UWA propagation [29]. A full per-path waveform-resampling extension and a per-frame Doppler-jitter extension are required before any field-UWA performance claim would be defensible.

No head-to-head numerical reproduction of a published AFDM-SP or AFDM-JCEDD baseline is performed on the present channel realisations; all comparisons are against internally constructed baselines, and the structural mapping in Table 8 remains qualitative. A direct re-implementation of the SP-AFDM estimator of Zheng *et al.* [23] on the present seed blocks is the natural follow-up to convert this structural mapping into a quantitative comparison.

Several scope choices are fixed throughout the report and are not swept: a single-antenna (1T1R) configuration, QPSK modulation, a fixed pilot-power fraction $\rho = 0.5$, and a fixed kinematic regime ($v_{\text{mean}} = 2$ m/s, $v_{\text{std}} = 0.5$ m/s). Extensions to MIMO / space-time AFDM, higher-order QAM, an SNR-dependent ρ sweep, and high-velocity scenarios above 5 m/s are all natural follow-ups but lie outside the present scope.

4.7 Summary

Three threads tie the discussion together. First, the SP-AFDM receiver family carries an estimation-limited floor at high SNR that is dismantled by an iterative joint recipe holding the OMP support fixed — the support stabilises after a single pass, with $\approx 95\%$ recall against the Dirichlet-expanded oracle and a residual that is structural rather than noise-driven. Second, on top of this low-complexity classical core, a 1 041-parameter learned support-refinement ranker delivers a consistent ≈ 2 dB visible paired separation at SNR $\in \{20, 25, 30\}$ dB ($-37.7\%/-40.2\%/-37.6\%$ pooled relative reductions) at $\approx 8\%$ MAC overhead, by repairing Dirichlet side-lobe atoms that become structurally exploitable once the additive noise falls below the side-lobe amplitude. Third, against a top-P physical-support oracle that is a valid ceiling on any support-refinement strategy operating on the proposed dictionary, the learned head closes

61%/81%/98% of the achievable gap at SNR $= 15/20/25$ dB. The outstanding extensions — multi-seed retraining variance, head-to-head reproduction of published SP-AFDM baselines, a full per-path waveform-resampling MSML simulator, and an embedded-deployment cost study — collectively define the natural follow-up programme.

5 Conclusions

This report has developed and evaluated a low-complexity joint OMP–MP receiver for AFDM under superimposed pilots, augmented by a 1 041-parameter learned top-K_{add} support-refinement head and evaluated on a doubly-dispersive simulator with first-order MSML modelling. Three conclusions follow directly from the quantitative evidence in Chapter 3 and the mechanistic interpretation in Chapter 4, mirroring the three contributions stated in §1.4.

- **A low-complexity joint OMP–MP receiver for AFDM-SP under fractional-Doppler regimes.** The receiver runs OMP only once, locks the recovered support, and iterates only the cheap downstream blocks: a damped data-aided least-squares refit of the path gains and sparse MP-BP detection on the chirp-domain factor graph. The single OMP pass already covers $\approx 95\%$ of the Dirichlet-expanded oracle support, with the residual $\approx 5\%$ stable across SNR and therefore structurally rather than noise-driven, so re-running OMP across outer iterations is a $5\times$ constant-factor overhead that adds no support information (Fig. 6, Table 5). The receiver thereby recovers two to three orders of magnitude in BER over the one-shot OMP+MP baseline at SNR $= 25$ dB while remaining in the sparse $\mathcal{O}(PN^2)$ arithmetic class, two orders of magnitude cheaper than dense LMMSE channel estimation at $N = 1024$ (Table 7).

- **A 1 041-parameter learned support-refinement head delivers a consistent ≈ 2 dB paired BER separation at $\approx 8\%$ MAC overhead.** A small deep-unfolding head, deployed deterministically as a fixed-budget top-K_{add} ranker between the single OMP pass and the iterative LS/MP-BP loop, scores off-support candidates and appends the highest-ranked atoms to the active support. Pooled across three independent evaluation-seed blocks, the resulting receiver delivers paired BER reductions of -37.7%, -40.2%, and -37.6% relative to the classical joint at SNR $= 20$, 25, and 30 dB respectively, all statistically significant under continuity-corrected paired McNemar (worst-case $p < 10^{-6}$, Table 3). The receiver remains in the same $\mathcal{O}(PN^2)$ arithmetic class as the classical baseline, with $\approx 8\%$ measured complex-MAC overhead at $N = 1024$ (Table 7). At SNR ≤ 10 dB the gain is essentially zero ($|\Delta| \leq 6.1\%$), which is the intended behaviour of a support-refinement module in the noise-dominated regime where support errors carry no exploitable structural signature.

- **A mechanism analysis grounds the learned gain in measurable support-selection statistics.** A top-P physical-support oracle, formed by replacing the OMP step with the simulator's ground-truth main-lobe atoms, is a valid ceiling on the BER reduction available from any support-refinement strategy operating on the proposed dictionary; it reaches the censored-zero regime on 5.12×10^5 paired bits per cell at SNR $\in \{20, 25\}$ dB and sits 8σ below the baseline at SNR $= 15$ dB. Against this ceiling, the learned head closes 61%, 81%, and 98% of the baseline-to-oracle gap at SNR $= 15$, 20, and 25 dB respectively (§3.4, Table 6). Combined with the support-recall analysis above, this attributes the learned head's BER contribution specifically to the recovery of Dirichlet side-lobe atoms that single-pass OMP discards under

fractional-Doppler leakage, rather than to any generic noise-averaging effect.

Future work

Four directions would sharpen the contribution and extend the design statement made here from a simulator-based observation toward an operational underwater acoustic modem claim.

The most immediate is a multi-seed retraining study, with three to five independent training seeds per SNR cell, which would convert the present single-checkpoint observation into a learning-variance statement and place error bars on the pooled ≈ 2 dB headline. A direct re-implementation of the SP-AFDM channel estimator of Zheng *et al.* [23] on the present $(\text{channel}, \text{data}, \text{noise})$ seed blocks would convert the qualitative structural comparison of Table 8 into a quantitative prior-art comparison and resolve whether the OMP-once design loses, matches, or surpasses an SP-AFDM receiver that re-runs the sparse step.

Extending the simulator from the first-order per-path MSML approximation (per-path constant Doppler shift plus delay rescaling) to full broadband per-path waveform resampling and per-frame Doppler jitter, following Cao *et al.* [29], would bring the physical-layer model closer to real UWA propagation and test whether the mechanism-level conclusions identified here transfer to a more realistic propagation regime. Finally, an engineering-deployability study measuring runtime, memory-hierarchy effects, and energy consumption on a reference embedded target such as a DSP or FPGA implementation would extend the low-complexity claim from per-frame arithmetic into deployment cost, completing the path from receiver design to operational specification.

References

[1] M. Stojanovic and J. Preisig, "Underwater acoustic communication channels: Propagation models and statistical characterization," *IEEE Communications Magazine*, vol. 47, no. 1, pp. 84–89, 2009.

[2] J. C. Preisig, "Acoustic propagation considerations for underwater acoustic communications network development," *ACM SIGMOBILE Mobile Computing and Communications Review*, vol. 11, no. 4, pp. 2–10, 2007.

[3] C. R. Berger, S. Zhou, J. C. Preisig, and P. Willett, "Sparse channel estimation for multicarrier underwater acoustic communication: From subspace methods to compressed sensing," *IEEE Transactions on Signal Processing*, vol. 58, no. 3, pp. 1708–1721, 2010.

[4] J. Huang, J. Huang, C. R. Berger, S. Zhou, and P. Willett, "Iterative sparse channel estimation and decoding for underwater MIMO-OFDM," *EURASIP Journal on Advances in Signal Processing*, vol. 2010, pp. 1–11, 2010.

[5] A. Bemani, N. Ksairi, and M. Kountouris, "Affine frequency division multiplexing for next generation wireless communications," *IEEE Transactions on Wireless Communications*, vol. 22, no. 11, pp. 8214–8229, 2023.

[6] R. Hadani, S. Rakib, M. Tsatsanis, A. Monk, A. J. Goldsmith, A. F. Molisch, and R. Calderbank, "Orthogonal time frequency space modulation," in *IEEE Wireless Communications and Networking Conference (WCNC)*, 2017, pp. 1–6.

[7] P. Raviteja, K. T. Phan, Y. Hong, and E. Viterbo, "Interference cancellation and iterative detection for orthogonal time frequency space modulation," *IEEE Transactions on Wireless Communications*, vol. 17, no. 10, pp. 6501–6515, 2018.

[8] Z. Wei, W. Yuan, S. Li, J. Yuan, G. Bharatula, R. Hadani, and L. Hanzo, "Orthogonal time-frequency space modulation: A promising next-generation waveform," *IEEE Wireless Communications*, vol. 28, no. 4, pp. 136–144, 2021.

[9] J. A. Tropp and A. C. Gilbert, "Signal recovery from random measurements via orthogonal matching pursuit," *IEEE Transactions on Information Theory*, vol. 53, no. 12, pp. 4655–4666, 2007.

[10] W. Benzine, A. Bemani, N. Ksairi, and D. Slock, "Affine frequency division multiplexing for communications on sparse time-varying channels," in *IEEE Global Communications Conference (GLOBECOM)*, 2023, pp. 4921–4926.

[11] H. S. Rou, G. T. F. de Abreu, J. Choi, D. González G., M. Kountouris, Y. L. Guan, and O. Gonsa, "From orthogonal time-frequency space to affine frequency-division multiplexing: A comparative study of next-generation waveforms for integrated sensing and

communications in doubly dispersive channels," *IEEE Signal Processing Magazine*, vol. 41, no. 5, pp. 71–86, 2024.

[12] A. G. Orozco-Lugo, M. M. Lara, and D. C. McLernon, "Channel estimation using implicit training," *IEEE Transactions on Signal Processing*, vol. 52, no. 1, pp. 240–254, 2004, cite-key prefix 'orozco2011' retained from earlier draft; record corrected to the canonical 2004 implicit-training paper.

[13] J. K. Tugnait and X. Meng, "On superimposed training for channel estimation: Performance analysis, training power allocation, and frame synchronization," *IEEE Transactions on Signal Processing*, vol. 54, no. 2, pp. 752–765, 2006, cite-key suffix 'superimposed' retained; co-author corrected from Luo to Meng to match the verified TSP 2006 record.

[14] H. Wymeersch, *Iterative Receiver Design*. Cambridge, UK: Cambridge University Press, 2007.

[15] H. Yin and Y. Tang, "Pilot-aided channel estimation for AFDM in doubly dispersive channels," in *Proc. IEEE/CIC International Conference on Communications in China (ICCC)*, 2022, pp. 308–313, arXiv:2203.05781 is the ICCC 2022 preprint; arXiv:2206.12822 indexes the separate DRCE work cited as yin2024drceafdm.

[16] H. Yin, X. Wei, Y. Tang, and K. Yang, "Diagonally reconstructed channel estimation for MIMO-AFDM with inter-doppler interference in doubly selective channels," *IEEE Transactions on Wireless Communications*, vol. 23, no. 10, pp. 14 066–14 079, 2024.

[17] H. Yin, Y. Tang, A. Bemani, M. Kountouris, Y. Zhou, X. Zhang, Y. Liu, G. Chen, K. Yang, F. Liu, C. Masouros, S. Li, G. Caire, and P. Xiao, "Affine frequency division multiplexing: Extending OFDM for scenario-flexibility and resilience," *IEEE Wireless Communications*, vol. 32, no. 6, pp. 200–208, Dec. 2025.

[18] Y. Zhou, C. Zou, N. Zhou, Y. Tang, X. Zhang, H. Yin, X. Liu, R. He, P. Tang, W. Yuan, and Y. Zeng, "Affine frequency division multiplexing for communication and channel sounding: Requirements, challenges, and key technologies," *arXiv preprint arXiv:2509.16643*, 2025.

[19] T. Cui and C. Tellambura, "OFDM channel estimation and data detection with superimposed pilots," *European Transactions on Telecommunications*, vol. 22, no. 3, pp. 125–136, 2011.

[20] T.-J. Liang, W. Rave, and G. P. Fettweis, "Iterative joint channel estimation and decoding using superimposed pilots in OFDM-WLAN," in *Proc. IEEE International Conference on Communications (ICC)*, 2006, pp. 3140–3145.

[21] H. B. Mishra, P. Singh, A. K. Prasad, and R. Budhiraja, "OTFS channel estimation and data detection designs with superimposed pilots," *IEEE Transactions on Wireless Communications*, vol. 21, no. 4, pp. 2258–2274, 2022.

[22] S. G. Neelam and P. R. Sahu, "Iterative channel estimation and data detection of OTSM with superimposed pilot scheme and PAPR analysis," *IEEE Communications Letters*, vol. 27, no. 8, pp. 2147–2151, 2023.

[23] K. Zheng, M. Wen, T. Mao, L. Xiao, and Z. Wang, "Channel estimation for AFDM with superimposed pilots," *IEEE Transactions on Vehicular Technology*, vol. 74, no. 2, pp. 3389–3394, 2025, earlier preprint: arXiv:2404.10232 [eess.SP]; cite-key prefix retained from initial preprint indexing.

[24] Z. Cao, M. Wen, and Y. Huang, "Sparse channel estimation and data detection for AFDM with superimposed pilot scheme," in *Proc. IEEE International Conference on Communication Technology (ICCT)*, 2024, pp. 1540–1544.

[25] Y. Zhou, H. Yin, N. Zhou, Y. Tang, X. Zhang, and W. Yuan, "GI-Free pilot-aided channel estimation for affine frequency division multiplexing systems," *arXiv preprint arXiv:2404.01088*, 2024, arXiv:2404.01088 [eess.SP]; cite-key prefix retained from initial preprint indexing.

[26] P. Huang, Q. Li, D. Huang, and J. Wang, "Channel estimation and symbol detection for AFDM over doubly selective fading channels," *Physical Communication*, vol. 69, p. 102597, 2025, scienceDirect PII S187449072400315X; includes a DNN-aided receiver and a GI-free iterative receiver.

[27] N. U. R. Junejo, H. Esmaiel, M. Zhou, H. Sun, J. Qi, and J. Wang, "Sparse channel estimation of underwater TDS-OFDM system using look-ahead backtracking orthogonal matching pursuit," *IEEE Access*, vol. 6, pp. 74 389–74 399, 2018.

[28] K. R. R. Ranasinghe, Y. Ge, G. T. F. de Abreu, and Y. L. Guan, "Low complexity joint channel estimation and data detection for AFDM receivers with oversampling," *arXiv preprint arXiv:2410.05088*, 2024, arXiv:2410.05088 [eess.SP]; cite-key prefix retained from initial preprint indexing.

[29] R. Cao, Y. Zhong, J. Lyu, D. Wang, and L. Fu, "AFDM channel estimation in multi-scale multi-lag channels," in *Proc. IEEE Global Communications Conference (GLOBECOM)*, 2024, pp. 1569–1574, companion arXiv:2405.02660; cite-key prefix retained from initial preprint indexing.

[30] Z. Yuan, F. Liu, W. Yuan, Q. Guo, Z. Wang, and J. Yuan, "Iterative detection for orthogonal time frequency space modulation with unitary approximate message passing," *IEEE Transactions on Wireless Communications*, vol. 21, no. 2, pp. 714–725, 2022.

[31] X. Pu, Z. Sun, W. Wen, Q. Chen, and S. Jin, "A low-complexity expectation propagation detector for OTFS," *IET Signal Processing*, vol. 2024, no. 1, p. 3256977, 2024.

[32] W. Zhuang, Y. Mao, H. He, L. Xie, S. Song, Y. Ge, and Z. Ding, "Approximate message passing-enhanced graph neural network for OTFS data detection," *IEEE Wireless Communications Letters*, vol. 13, no. 7, pp. 1913–1917, 2024.

[33] V. Monga, Y. Li, and Y. C. Eldar, "Algorithm unrolling: Interpretable, efficient deep learning for signal and image processing," *IEEE Signal Processing Magazine*, vol. 38, no. 2, pp. 18–44, 2021.

[34] A. Balatsoukas-Stimming and C. Studer, "Deep unfolding for communications systems: A survey and some new directions," in *Proc. IEEE International Workshop on Signal Processing Systems (SiPS)*, 2019, pp. 266–271.

[35] K. Gregor and Y. LeCun, "Learning fast approximations of sparse coding," in *Proceedings of the 27th International Conference on Machine Learning (ICML)*, Haifa, Israel, 2010, pp. 399–406.

[36] H. He, S. Jin, C.-K. Wen, F. Gao, G. Y. Li, and Z. Xu, "Model-driven deep learning for physical layer communications," *IEEE Wireless Communications*, vol. 26, no. 5, pp. 77–83, 2019.

[37] H. He, C.-K. Wen, S. Jin, and G. Y. Li, "Model-driven deep learning for MIMO detection," *IEEE Transactions on Signal Processing*, vol. 68, pp. 1702–1715, 2020.

[38] N. Shlezinger, R. Fu, and Y. C. Eldar, "DeepSIC: Deep soft interference cancellation for multiuser MIMO detection," *IEEE Transactions on Wireless Communications*, vol. 20, no. 2, pp. 1349–1362, 2021.

[39] M. Khani, M. Alizadeh, J. Hoydis, and P. Fleming, "Adaptive neural signal detection for massive MIMO," *IEEE Transactions on Wireless Communications*, vol. 19, no. 8, pp. 5635–5648, 2020, MMNet.

[40] J. Xu, L. Li, L. Zheng, and L. Liu, "Detect to learn: Structure learning with attention and decision feedback for MIMO-OFDM receive processing," *IEEE Transactions on Communications*, vol. 72, no. 1, pp. 146–161, 2024.

[41] S. Mohammad-Taheri, M. J. Colbrook, and S. Brugiapaglia, "Deep greedy unfolding: Sorting out argsorting in greedy sparse recovery algorithms," *arXiv preprint arXiv:2505.15661*, 2025.

[42] B. M. Popović, "Generalized chirp-like polyphase sequences with optimum correlation properties," *IEEE Transactions on Information Theory*, vol. 38, no. 4, pp. 1406–1409, 1992, foundational Zadoff–Chu / generalized-chirp-like CAZAC sequence reference; cite-key prefix retained for back-compatibility.

[43] F. R. Kschischang, B. J. Frey, and H.-A. Loeliger, "Factor graphs and the sum-product algorithm," *IEEE Transactions on Information Theory*, vol. 47, no. 2, pp. 498–519, 2001.

[44] S. Elfwing, E. Uchibe, and K. Doya, "Sigmoid-weighted linear units for neural network function approximation in reinforcement learning," *Neural Networks*, vol. 107, pp. 3–11, 2018.

[45] I. Loshchilov and F. Hutter, "Decoupled weight decay regularization," in *International Conference on Learning Representations (ICLR)*, 2019.

Appendices

A Simulator Correspondence and Pilot Convention

All Monte-Carlo runs reported in Chapter 3 use a torch-GPU reimplementation of a NumPy reference simulator that is, in turn, a faithful port of an in-house MATLAB implementation. The three implementations produce bit-exact identical outputs on $N = 512$ pilot–data realisations; the verification harness logs the maximum absolute difference between detected QPSK symbols as exactly zero across 64 seeded test frames. This is the reason the torch implementation is treated as the classical teacher throughout.

All three implementations use the same superimposed-pilot frame

$$\mathbf{x} \;=\; \sqrt{\rho}\,\mathbf{x}_{\mathrm{p}} \;+\; \sqrt{1-\rho}\,\mathbf{x}_{\mathrm{d}},$$

where $\mathbf{x}_{\mathrm{p}}$ is a Zadoff–Chu sequence of root $r = 7$ and length N, and $\mathbf{x}_{\mathrm{d}}$ is a QPSK data vector with Gray demapping. No chirp-domain bins are reserved as pilot-only or data-only, so the pilot and data occupy the full DAFT-domain support. Table 2 in Chapter 3 lists the canonical physical and algorithmic parameters used across every experiment in the revised Chapter 3; all Monte-Carlo results in the main chapter operate exclusively at the oversampled $f_s = 4B$ operating point (the Nyquist $f_s = 2B$ rate appears only in Table 1 of Chapter 2 as a reference scaling illustration, not as a separate evaluation point).

B Paired-Bootstrap and Clopper–Pearson Confidence Intervals

Two complementary confidence-interval procedures are used in Chapter 3. Paired-bootstrap CIs are reported alongside the paired BER-reduction figures in Experiment 1 (main 4 B BER waterfall; see Chapter 3) because those reductions are paired differences $\delta_i = e_i^{(0)} - e_i^{(1)}$ on the same $(\text{channel}, \text{data}, \text{noise})$ realisation; a non-paired CI would be substantially wider and would mask the contribution of the learned head. Clopper–Pearson exact-binomial CIs are used on the high-SNR per-arm BER numbers in the same Experiment 1 (in particular at SNR $= 25$ and 30 dB) because the observed bit-error counts there are close to the finite-sample censoring floor, where the binomial distribution is highly skewed and a Wald-type CI would under-cover.

Paired bootstrap (Experiment 1, 3-seed pooled). Let n denote the number of evaluated frames at a given SNR, and for frame $i \in \{1, \ldots, n\}$ let $e_i^{(0)}$ and $e_i^{(1)}$ be the bit-error counts of the baseline and the candidate receiver on the same $(\text{channel}, \text{data}, \text{noise})$ realisation. Define the per-frame gain $\delta_i = e_i^{(0)} - e_i^{(1)}$ and the mean gain $\bar{\delta} = n^{-1} \sum_i \delta_i$. The 95% paired-bootstrap CI is computed by (i) drawing $B_{\text{boot}} = 1\,000$ bootstrap resamples of $\{\delta_1, \ldots, \delta_n\}$ with replacement, (ii)

computing the resample mean $\bar{\delta}^{(b)}$ for each, and (iii) reporting the 2.5% and 97.5% quantiles of the resample distribution as the CI.

Clopper–Pearson (Experiment 1 headline at high SNR). Let k be the observed bit-error count and n the total tested bit count. For $1 \le k \le n-1$, the two-sided Clopper–Pearson 95% CI for the unknown BER p is

$$\left[F^{-1}_{k,n-k+1}(0.025),\, F^{-1}_{k+1,n-k}(0.975)\right],$$

where $F^{-1}_{a,b}$ is the inverse CDF of a Beta distribution with parameters (a,b) (equivalent to the exact binomial tail inversion). For the boundary cases the standard Clopper–Pearson convention applies: at $k=0$ the lower bound is defined to be 0 (the $\mathrm{Beta}(0,n+1)$ distribution is improper) and the upper bound is $1-0.025^{1/n}$; at $k=n$ the lower bound is $0.025^{1/n}$ and the upper bound is 1. For the SNR $= 25$ dB 4 B observation of the learned arm reported in Chapter 3 ($k=4$ bit errors at the adaptive-stop budget of $n \approx 7.17\times10^5$ bits), the interior formula yields $\mathrm{CI}_{95\%} \approx [1.52\times10^{-6},\, 1.43\times10^{-5}]$ (computed from the exact Beta inverse CDF; equivalently, via the chi-squared identity $\mathrm{CI} = [\chi^2_{2k}(0.025)/(2n),\, \chi^2_{2(k+1)}(0.975)/(2n)]$). For the 4 B PCSI+MMSE (PCSI+MMSE) reference at SNR $= 25$ dB the adaptive early-stop rule does not trigger because the oracle accumulates zero classical-arm errors, so the oracle arm runs to the full nominal budget $n = 8.19\times10^5$ bits ($k=0$); the lower CP bound collapses to 0 and the upper bound is $1-0.025^{1/n} \approx 4.5\times10^{-6}$. (At the same adaptive-stop budget $n \approx 7.17\times10^5$ used by the learned arm, the corresponding oracle UB would be $\approx 5.1\times10^{-6}$; we quote the larger-budget value 4.5×10^{-6} in the main text because that is what the oracle Monte-Carlo actually evaluated.) This is what we mean by "finite-sample censoring" in Chapters 3 and 4.

C OMP-Once Recall Against the Oracle Dirichlet Support (Probe (a))

Probe (a) of §3.4 is computed directly from the per-candidate binary labels already present in the feature cache produced during head training, with no fresh Monte-Carlo required.

Support-set definitions (crucial; depends on §2.8 and (4)*).* Three distinct support sets are involved in this probe and must be kept separate because the recall bookkeeping depends on which of the three is on which side of the intersection.

- $S^{\mathrm{phys}}_{\mathrm{OMP}}$ is the *physical* top-P integer (l,k)-bin support returned by a single OMP-once pass run with target sparsity equal to the physical path count: $|S^{\mathrm{phys}}_{\mathrm{OMP}}| = P = 8$.
- $\tilde{S}_{\mathrm{OMP}}$ is the *Dirichlet-expansion* of $S^{\mathrm{phys}}_{\mathrm{OMP}}$ into the virtual-tap lattice obtained by replicating each physical bin into the $2k_{\mathrm{leak}}+1$ adjacent Doppler bins per (4); nominally $|\tilde{S}_{\mathrm{OMP}}| = P\cdot(2k_{\mathrm{leak}}+1) = 40$.

- S_{oracle} is the *Dirichlet-weighted virtual-tap* oracle support, i.e. the set of virtual taps that the simulator's stored channel parameters and (4) actually populate. Nominally $|S_{\text{oracle}}| \leq P \cdot (2k_{\text{leak}}+1) = 40$; because the per-tap Dirichlet coefficient (4) is small for fractional residuals near zero, only an *effective* mean of $p_{\text{real}} \approx 28$ virtual taps per frame are non-negligible, and the probe stores this per-frame effective count.

Note that $|S^{\text{phys}}_{\text{OMP}}| = P = 8$ and $|\tilde{S}_{\text{OMP}}| \leq 40$ are both in general different from $|S_{\text{oracle}}| \approx 28$, so recall and precision are *not* equal in this probe; the previous draft erroneously claimed they were, and that claim is withdrawn.

For each cached frame, the harvesting script runs the physical OMP-once pass to obtain $S^{\text{phys}}_{\text{OMP}}$, computes both $\tilde{S}_{\text{OMP}}$ and S_{oracle}, and assigns $y_i = 1$ iff candidate i is an oracle virtual tap that is not covered by the Dirichlet-expanded OMP support (i.e. $\text{cand_cols}_i \in S_{\text{oracle}} \setminus \tilde{S}_{\text{OMP}}$). The cache also stores $p_{\text{real}} = |S_{\text{oracle}}|$ per frame.

Recall against the oracle virtual-tap support is

$$\text{recall} \;=\; \frac{|\tilde{S}_{\text{OMP}} \cap S_{\text{oracle}}|}{|S_{\text{oracle}}|} \;=\; \frac{p_{\text{real}} - \sum_i y_i}{p_{\text{real}}}.$$

A consistency cross-check on the aggregates: the table-level mean recall is $\overline{\text{recall}} \approx 0.953$ with mean missed taps $\overline{\sum_i y_i} \approx 1.31$ per frame; the ratio $1.31/(1-0.953) \approx 28$ recovers the stored mean $\overline{p_{\text{real}}}$ to within rounding. (This is a ratio-of-means cross-check on the aggregate bookkeeping, not an exact identity for individual frames; the per-frame denominator p_{real} varies between frames.)

Precision, by contrast, equals $|\tilde{S}_{\text{OMP}} \cap S_{\text{oracle}}|/|\tilde{S}_{\text{OMP}}|$ and is in general different from recall because $|\tilde{S}_{\text{OMP}}| \neq |S_{\text{oracle}}|$; Table 5 reports recall only and does not rely on a precision-equal-to-recall claim.

A lightweight post-processing pass computes per-frame and per-SNR aggregates from this formula directly off the cached labels; the pass runs in ≈ 30 s on the 27 k-frame 4 B cache and requires no GPU.

D McNemar Paired-Bit Significance Test

On a paired bit-level comparison between the classical joint and the learned receiver, let n_{10} denote the number of bits on which the classical is wrong and the learned is correct, and n_{01} the number of bits on which the classical is correct and the learned is wrong. The continuity-corrected McNemar χ^2 statistic is

$$\chi^2_{\text{MN}} \;=\; \frac{(|n_{10}-n_{01}|-1)^2}{n_{10}+n_{01}}, \qquad (n_{10}+n_{01} \geq 1)$$

which is approximately χ^2_1-distributed under the null hypothesis that the two receivers have the same bit-wise error probability and that the discordant-pair indicators are mutually independent. The *two-sided asymptotic* p-value $p_{\text{two}} = 1 - F_{\chi^2_1}(\chi^2_{\text{MN}})$ is the value reported in Table 3; this is the standard continuity-corrected McNemar convention. For the degenerate case $n_{10} + n_{01} = 0$ (no discordant pairs at all) the statistic is undefined; we report this as "not informative ($p = 1$)" and exclude that SNR cell from the significance summary. For very small discordant counts (rule-of-thumb $n_{10} + n_{01} < 25$), the asymptotic χ^2_1 approximation is unreliable, and we instead use the exact one-sided binomial sign test described next. When a strictly one-sided statement is required ("learned better"), we supplement it with the exact one-sided binomial sign test on the discordant pairs: $p_{\text{one-sided}} = \Pr[\text{Bin}(n_{10} + n_{01}, 1/2) \geq n_{10}]$, computed from the exact binomial tail; because n_{10} dominates n_{01} by multiple orders of magnitude at every high-SNR point where the test is applied, the exact one-sided value tracks the asymptotic two-sided value to within a numerical rounding of each other, and the qualitative conclusion ("learned strictly better at every SNR where the test is applicable") is invariant to the choice of side.

Independence assumption: a known caveat. The McNemar test as classically derived assumes that each discordant indicator is an independent Bernoulli draw under H_0. In our application the unit of analysis is the *bit*, and bits within a single $(\text{channel}, \text{data}, \text{noise})$ frame share a common H_{eff} realisation; within-frame discordant indicators are therefore positively correlated (a frame in which the learned receiver helps tends to help on most of its bits at once). This violates the strict independence assumption, and the consequence is that the effective number of independent Bernoulli draws underlying the test is less than $n_{10} + n_{01}$. The resulting p-values are anti-conservative relative to a frame-clustered alternative such as a frame-level paired sign test or a frame-clustered bootstrap. We therefore quote the bit-level McNemar p-values as a within-protocol consistency indicator rather than as the output of an independence-respecting exact test, and the qualitative result on which we rely — consistent paired BER reduction across three independent evaluation seeds (Table 3) — remains the binding observation.

E Analytical Decomposition of the Force-Topk Bias Patch

This appendix expands the implementation-level argument summarised in the "Ranking-only deployment" paragraph of §2.7. It is not required for the receiver-design narrative but is included for reproducibility because the deployed inference recipe replaces the learned final-scorer bias by a hand-set value, and a careful reader is entitled to see the formal rank-preservation argument in full.

Let $s_i(\theta) = z_i(\theta) + b$ denote the final-scorer logit for candidate i, where $z_i(\theta)$ is everything up to and including the final linear layer's pre-bias activation, and b is the scalar final-scorer bias. Replacing the learned bias $b_{\text{learned}} \approx -8$ by $b_{\text{patch}} = +10$ is equivalent to the uniform translation $s_i \mapsto s_i + \Delta b$ with $\Delta b = b_{\text{patch}} - b_{\text{learned}} = +18$, applied to every candidate's logit. The deployed

selection is the composition of two operations: first a per-candidate *gate* $g_i := \mathbf{1}\{\sigma(s_i) > 0.5\} = \mathbf{1}\{s_i > 0\}$, then a top-$K_{\text{add}}$ ranker over the gated set. The two operations decompose cleanly:

1. **Rank-preservation (no effect)**: conditional on the same set of candidates passing the gate, the top-K_{add} output is invariant under uniform translation, because $\text{argtop}_K(s_1 + \Delta b, \ldots, s_M + \Delta b) = \text{argtop}_K(s_1, \ldots, s_M)$ for any $\Delta b \in \mathbb{R}$, assuming the same deterministic tie-breaking rule is applied to both inputs (the deployed implementation uses `torch.topk`, whose floating-point tie-break is consistent at fixed input precision; we do not rely on a specific lexicographic rule).
2. **Gate-toggling (the patch's actual effect)**: the patch shifts the gate threshold from "$z_i > 8$" (typical for $b_{\text{learned}} = -8$, almost never satisfied) to "$z_i > -10$" (typical for $b_{\text{patch}} = +10$, almost always satisfied), so under the patch every frame proceeds to a forced top-K_{add} selection rather than to a no-op gate output.

The combined behaviour is therefore *not* a no-op: the patch converts a frame-rate-conditional thresholded selector (whose default action is to append zero atoms whenever the learned logits fall below the gate) into a frame-unconditional fixed-budget top-K_{add} ranker (which always appends K_{add} atoms). This is intentional — the head is reported throughout this report as a *deterministic fixed-budget ranker*, not a calibrated detector — but the patch is part of that deployment definition rather than a no-op manipulation. What the patch does *not* do is alter the relative ordering of the K_{add} atoms that survive the (now always-on) gate; the rank-preservation argument above ensures that conditional on the gate firing, the selected atoms are identical to those that the raw learned logits would rank. The learned logits s_i are consumed downstream only through $\text{argtop}_{K_{\text{add}}}$, and probability calibration of the scores is out of scope for this report.

F OMP Dictionary Atom Construction and Algorithm Steps

This appendix gives an explicit construction of the chirp-domain dictionary atoms used by the OMP step of Algorithm 1 and writes out the OMP iteration with per-step complexity annotations, recovering the bound $C_{\text{OMP}} = \mathcal{O}(PN^2)$ stated in (12).

F.1 Dictionary atom construction

The OMP dictionary $\Phi \in \mathbb{C}^{N \times Q}$ has one column per integer delay–Doppler bin (l,k) with $l \in \{0, \ldots, l_{\max} - 1\}$ and $k \in \{-k_{\max}, \ldots, k_{\max}\}$, so $Q = (2k_{\max} + 1)\, l_{\max}$. The (l,k) atom is the chirp-domain response that the unit-energy Zadoff–Chu pilot $\mathbf{x}_{\text{p}}$ would produce if the channel consisted of a single path of unit gain with integer delay l and integer Doppler k. Writing the IDAFT of (1) in matrix form as $\mathbf{F}^{-1}$ and the forward DAFT as $\mathbf{F}$, the time-domain cyclic delay operator as $\mathbf{T}_l$ (the cyclic shift by l samples), and the time-domain Doppler shift as

Algorithm 2 Orthogonal Matching Pursuit on the chirp-domain pilot dictionary [9].

Input: chirp-domain observation $\mathbf{y} \in \mathbb{C}^N$, dictionary $\Phi \in \mathbb{C}^{N \times Q}$, target sparsity P.
Output: support $\hat{S} \subseteq \{0, \dots, Q-1\}$ with $|\hat{S}| = P$, path-gain vector $\hat{\mathbf{h}} \in \mathbb{C}^P$.

1. Initialise residual $\mathbf{r}^{(0)} = \mathbf{y}$ and support $\hat{S}^{(0)} = \emptyset$.
2. **For** $s = 1, \dots, P$:
   (a) Compute the matched-filter response: $\mathbf{c}^{(s)} = \Phi^H \mathbf{r}^{(s-1)} \in \mathbb{C}^Q$. $(\mathcal{O}(NQ))$
   (b) Pick the strongest unselected atom: $\hat{j}^{(s)} = \arg\max_{j \notin \hat{S}^{(s-1)}} |c_j^{(s)}|$. $(\mathcal{O}(Q))$
   (c) Append it to the support: $\hat{S}^{(s)} = \hat{S}^{(s-1)} \cup \{\hat{j}^{(s)}\}$.
   (d) Solve the restricted least-squares problem on the current support, $\hat{\mathbf{h}}^{(s)} = \Phi_{\hat{S}^{(s)}}^{\dagger} \mathbf{y}$, by QR or normal-equations factorisation. $(\mathcal{O}(Ns + s^3))$
   (e) Update the residual: $\mathbf{r}^{(s)} = \mathbf{y} - \Phi_{\hat{S}^{(s)}} \hat{\mathbf{h}}^{(s)}$. $(\mathcal{O}(Ns))$
3. Return $\hat{S} = \hat{S}^{(P)}$ and $\hat{\mathbf{h}} = \hat{\mathbf{h}}^{(P)}$.

$\mathbf{D}_k = \mathrm{diag}\big(e^{j2\pi kn/N}\big)_{n=0}^{N-1}$, the atom is

$$\phi_{(l,k)} \;=\; \sqrt{\rho}\,\mathbf{F}\,\mathbf{D}_k\,\mathbf{T}_l\,\mathbf{F}^{-1}\mathbf{x}_{\mathrm{p}} \;\in\; \mathbb{C}^N, \tag{24}$$

which encodes the round trip "transmit pilot through the chirp domain $\rightarrow$ apply delay-l Doppler-k in time $\rightarrow$ observe in the chirp domain". Because $\mathbf{F}$ is unitary, $\mathbf{T}_l$ is a permutation matrix, and $\mathbf{D}_k$ has unit-modulus diagonal entries, the energy of every atom is exactly the pilot fraction: $\|\phi_{(l,k)}\|^2 = \rho \cdot \|\mathbf{x}_{\mathrm{p}}\|^2 = \rho$ for all (l,k). This places OMP's matched-filter scoring on a common energy scale across the dictionary and is the reason no per-column normalisation is needed inside the OMP iteration.

The dictionary spans physical integer (l,k) bins only. Each fractional-Doppler physical path $(\tau_p, k_p^{\mathrm{real}})$ of §2.2 excites one main-lobe column $\phi_{(l_p,k_p)}$ together with $2k_{\mathrm{leak}}$ side-lobe columns at $(l_p, k_p \pm 1), \dots, (l_p, k_p \pm k_{\mathrm{leak}})$ through the Dirichlet kernel of (4); OMP recovers a subset of these columns directly, and the post-OMP DA-LS refit and MP-BP detection blocks of §2.5 operate on the $(2k_{\mathrm{leak}}+1)$-fold expanded virtual-tap representation. The fractional-Doppler half-width k_{leak} therefore does not enter the dictionary size Q; it enters only the downstream blocks via the Dirichlet expansion.

F.2 OMP algorithm steps

Given the chirp-domain observation $\mathbf{y}$ and the dictionary Φ, OMP recovers a sparse support $\hat{S}$ of size P together with the corresponding least-squares path-gain estimate $\hat{\mathbf{h}}$. The iteration is summarised in Algorithm 2 with per-step complex-multiplication counts.

The dominant per-iteration cost is the matched-filter sweep at $\mathcal{O}(NQ)$ in step 2(a); the least-squares solve at $\mathcal{O}(Ns + s^3)$ is sub-dominant because the support size $s \le P = 8$ remains small throughout and s^3 is therefore bounded by a constant much less than N. Summing the matched-filter sweep across P iterations and the least-squares cost across $s = 1, \dots, P$ gives a

total of

$$C_{\mathrm{OMP}} \;=\; \mathcal{O}(PNQ) \;+\; \mathcal{O}\big(N\sum_{s=1}^{P} s + \sum_{s=1}^{P} s^{3}\big) \;=\; \mathcal{O}(PNQ + P^{2}N + P^{4}) \;=\; \mathcal{O}(PNQ),$$

where the absorption uses $P \ll N$ and $Q = \mathcal{O}(N)$ from (11). With $Q = \mathcal{O}(N)$ the bound reduces to $\mathcal{O}(PN^{2})$, which is the form recorded in (12). This makes the matched-filter sweep step 2(a) the dominant block in the per-frame budget of (22), with a measured 14–18.6 M MAC at $N = 1024$ per Table 7.