

	METHOD STATEMENT		MS-CLE-HMC-14	
	Donning & Doffing of PPE's		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Patient isolation Areas/High risk areas
Task Description	Donning & Doffing of PPE's
Related RA/ JSA Ref.	HSEQ-RA-HMC-10

1. Training & induction Requirements			
Use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.			
2. Required Personal Protective Equipment (PPE)			
	Disposable Gloves		Shoe Covers Disposable - Optional Depends On The Risk Area.
	Disposable Mask		Disposable Hair Net - Optional Depends On The Risk Area.
	N95 Face Mask – Optional Depends On The Risk Area		Face Shield – Optional Depends On The Risk Area
	Medical Disposable Gown - Optional Depends On The Risk Area.		

	METHOD STATEMENT		MS-CLE-HMC-14	
	Donning & Doffing of PPE's		DATE	5/15/2024
			REVISION	V2.0

3. Required Materials

	Foam Hand Wash		Sanitizer
---	----------------	--	-----------

4. Pre-Job Check

- 4.1 Wash hands as per the approved method prior to commencing task.
- 4.2 Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.3 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.4 Ensure the correct size of the chosen PPE's.
- 4.5 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.

5. Steps

5.1 Donning

- 5.1.1 Identify and gather the proper PPE to don.
- 5.1.2 Put on isolation gown. Tie all the ties on the gown. Assistance may be needed by co-worker.
- 5.1.3 Put on disposable hairnet, wearing it this way pulls the meshes closer together. Locate across forehead and pull the hairnet over the crown. Ensuring all hair in the nape is covered. Locate under the ears to keep the hairnet securely in place.
- 5.1.4 Put on disposable shoe covers.
- 5.1.5 Put on N95 face mask/respirator/ disposable face mask. If the respirator has a nosepiece, it should be fitted to the nose with both hands, not bent or tented. Do not pinch the nosepiece with one hand. Respirator/facemask should be extended under chin. Both your mouth and nose should be protected. Do not wear respirator/facemask under your chin or store in scrubs pocket between patients.



	METHOD STATEMENT		MS-CLE-HMC-14	
	Donning & Doffing of PPE's		DATE	5/15/2024
			REVISION	V2.0

5.1.6 Put on gloves. Gloves should cover the cuff (wrist) of gown.



5.2 Doffing

5.1.1 Remove gloves. Ensure gloves removal does not cause additional contamination of hands. Gloves can be removed using more than one technique (e.g., glove-in-glove or bird beak).



5.2.2 Remove gown. Untie all ties (or unsnap all buttons). Do so in gentle manner, avoiding a forceful movement. Reach up to the shoulders and carefully pull gown down and away from the body. Rolling the gown down is an acceptable approach.



5.2.3 Perform hand hygiene using sanitizer.



5.2.4 Remove the hairnet.



5.2.5 Remove shoe covers.



5.2.6 Remove face shield or goggles. Carefully remove face shield or goggles by grabbing the strap and pulling upwards and away from head. Do not touch the front of face shield or goggles.



5.2.7 Carefully remove N95 face mask/respirator/ disposable face mask.

5.2.8 Perform hand hygiene using hand sanitizer or hand wash.

6. Health and safety – Points to remember

6.1 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.

6.2 Avoid physical contact with chemical (specially with eyes).

	METHOD STATEMENT		MS-CLE-HMC-14	
	Donning & Doffing of PPE's		DATE	5/15/2024
			REVISION	V2.0

- 6.3 To complete the job safely, follow the associated risk assessment.
- 6.4 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.5 Always follow your superior's guidelines when performing a task.
- 6.6 Comply with all HMC regulations for safety, good hygiene, and infection control.
- 6.7 Never leave any PPEs in the area unattended.
- 6.8 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.2 Wash your hands thoroughly after the task is completed (HMC Policies CL 7241 Hand Hygiene.)
- 7.3 Dispose trashes and PPE pouches to the waste bin.
- 7.4 Proceed to the work location as per the work allocation after donning of PPE's.
- 7.5 Make sure doffed PPEs disposed at the designated area and correct bin.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Medium & Low Risk
Task Description	Housekeeping Trolley Set up
Related RA/ JSA Ref.	HSEQ-RA-HMC-14

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Safety Goggles – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Surgical Mask		Disposable Head Cover – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Disposable Shoe Cover – Optional (Wherever Necessary as per HMC IPC Guidelines)

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk	DATE	5/16/2024	
		REVISION	V2.0	

3. Required Materials/ Tools			
	Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)		Filmop Rapido Microfiber Mop (For Top/Down System)
	Caution Board		Window Squeegee
	Dustpan with Brush		Pro 41 Glass Cleaner
	Oasis Pro 14 All Purpose Chemical		Spray Bottle with Colour Coded Nozzle – For Diluted Cleaning Chemicals Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area
	Head & Body Shower Gel Refill		Foam Hand Soap Refill

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

	Yellow Garbage Bag (for bio-hazard waste)		Black Garbage Bag (for general/non-medical waste)
	Applicator		Sponge
	Toilet Roll		Interfold Tissue
	Caddy Tray		Micro Fibre Cloth (To be used in all areas EXCEPT ISOLATION ROOMS AND OPERATION ROOMS)
	Dust Mop with Handle		Floor Squeegee

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Identify the work area Risk access and place the warning sign. If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides.
- 4.1.5 Ventilate the area where appropriate.

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.

5. Job Steps

5.1 Trolley set up procedure:

5.1.1

Colour coded MFC should be folded in a systematic way and arranged in appropriate colour coded boxes on top of the trolley, Colour coded chemical bottles can be placed along with the MFC if required (only in the High Areas Trolleys).



5.2 Trolley Cabin Arrangements

5.2.1 BOTTOM DRAWER

- Diluted chemical bottles with dilution/expiry date sticker
- Hand soap & Shower gel refills
- Individually folded Garbage bags for general waste, bio-hazard spill kit etc.



5.2.2 MIDDLE DRAWER

- Paper Consumables (Inter fold tissues and toilet rolls)



	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

5.2.3 TOP DRAWER

- Extra MFC's
- Basic PPE's etc.



5.2.4

Dirty hampers – Blue Bag for dirty MFC's and mops used in all patient and non-patient areas (except toilets) and RED bag for dirty MFC's, and mops used only inside toilets.



5.2.5

Use the tool holders available in the trolley to attach the Mop & Floor Squeegee Handles, Litter Picker, Caution Board, Soft Brush, Dustpan with brush etc.



5.3 Top-Down System

5.3.1 In a clean bucket, prepare 2 litres of diluted cleaning solution.

** Medium & Low Risk Areas - 16 ml of Ecolab (Oasis Pro 14), 2 litres of water. (This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).

5.3.2 Place 20-25 microfibre flat mops inside the plastic box with lid.

5.3.3 Place the box on a top of the sink in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.

5.3.4 Close the box with the lid and seal it properly.

5.3.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.

5.3.6 Place the box on the housekeeping cart.



5.4 Points to Remember: -

5.4.1 Appropriate label stickers to be placed on all 3 drawers with details of materials stored inside.

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

- 5.4.2 Chemical spray bottles will have color-coded trigger and nozzles based on the areas of usage Red for toilets, Blue for medium risk areas and Green for low-risk areas.
- 5.4.3 For the top-down system, 20-25 mop cloths to be placed inside the box, diluted chemical solution to be poured into the plastic container over the chemical tray - 2 Liters of water and 16 ml chemical (Oasis Pro 14), close the box with the lid and seal it properly, turn the box upside down for pre-soaking (charging or impregnating) the mops, pre soaking procedure after chemical application into the top-down box is very important. Soak the mop cloths for at least 20-30 minutes.
- 5.4.4 Tool holders and the additional holders must be available in the trolley.
- 5.4.5 Trolleys are designed with wheel locking system.
- 5.4.6 There are 2 different trolley with a safety closing feature. The 01 trolley have compartments will be lined with laundry bag for dirty mops and cloths , and other trolley have compartments with domestic garbage bag for domestic waste.
- 5.4.7 Door locking feature is also available on the cart along with a secretive storage space for the janitor can hide the door key. Ensure the trolley is always kept locked.
- 5.4.8 Housekeeping trolley can be stocked with all the required amenities to complete a shifts cleaning task.
- 5.4.9 The housekeeping trolley must be always well organized and well stocked before starting each shift.
- 5.4.10 A well-stocked housekeeping trolley will avoid unnecessary movements to the housekeeping room.
- 5.4.11 The number of supplies loaded on to the housekeeping trolley will be according to the assigned area or location.
- 5.4.12 Housekeeping trolleys are normally prepared from the area housekeeping room.
- 5.4.13 Never over stock or under stock the trolley, Overstocking will increase the risk of accidents or damage to the supplies. Whereas under stocking can be slow down the efficiency of cleaning tasks due to the unnecessary movements to the housekeeping room to collect the required materials.

5.5 Housekeeping Trolley Cleaning Methods:

- 5.5.1 Janitor should check housekeeping trolley before using to ensure its safety, and make sure there is no damage in its parts.
- 5.5.2 Clean all parts of Housekeeping trolley, Cleaning the soiled cloths and mops collection bag and its lid, tray, tool baskets, wringer, and bucket/ top-down system.
- 5.5.3 Using MFC with chemical/Disinfectant solution, wipe all surfaces of the housekeeping trolley including wheels.
- 5.5.4 Allow all surfaces to air dry.
- 5.5.5 Return housekeeping trolley to Housekeeping room for next use.
- 5.5.6 Report any broken or damaged parts to the supervisor.

6. Health and Safety – Points to Remember

- 6.1 Always place the precautionary/warning signage

	METHOD STATEMENT		MS-CLE-HMC-20	
	Housekeeping Trolley Set up – Medium & Low Risk		DATE	5/16/2024
			REVISION	V2.0

- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 Avoid physical contact with chemical (specially with eyes)
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Warning signs are checked, cleaned, disinfected, and removed as necessary.
- 7.2 MFC should be laundered or disposed of as appropriate.
- 7.3 Double Check if there are no tools, materials left in the area.
- 7.4 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.5 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.6 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.7 Are there any faults with your tools and PPE that you must report?
- 7.8 Report all Damages, Incidents & accidents / Health events to your team leader.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High Risk Areas
Task Description	Housekeeping Trolley Set up
Related RA/ JSA Ref.	HSEQ-RA-HMC-14

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Safety Goggles – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Surgical Mask		Disposable Head Cover – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Disposable Shoe Cover – Optional (Wherever Necessary as per HMC IPC Guidelines)

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

3. Required Materials / Tools

	Housekeeping Trolley with Top/Down System - Anti-bacterial (To be used ONLY in High-risk Areas)		Filmop Rapido Microfibre Mop (For Top/Down System)
	Caution Board		Window Squeegee
	Dustpan with Brush		Yellow Micro Fibre Cloth
	Oasis Pro 14 All Purpose Chemical		Spray Bottle with Colour Coded Nozzle – For Diluted Cleaning Chemicals Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area
	Pro 41 Glass Cleaner		Foam Hand Soap Refill
	Actichlor Chlorine Tablet		Head & Body Shower Gel Refill

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

	Yellow Garbage Bag (for bio-hazard waste)		Black Garbage Bag (for general/non-medical waste)
	Applicator		Sponge
	Toilet Roll		Interfold Tissue
	Caddy Tray		Floor Squeegee
	Dust Mop with Handle		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Identify the work area Risk access and place the warning sign. If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides.
- 4.1.5 Ventilate the area where appropriate.

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.

5. Job Steps

5.1 Trolley set up procedure:

Colour coded MFC should be folded in a systematic way and arranged in appropriate colour coded boxes on top of the trolley, Colour coded chemical bottles can be placed along with the MFC if required (only in the High Areas Trolleys).



5.2 Trolley Cabin Arrangements

5.2.1 **BOTTOM DRAWER**

- Diluted chemical bottles with dilution/expiry date sticker.
- Hand soap & Shower gel refills
- Individually folded Garbage bags for general waste, bio-hazard spill kit etc.



	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

5.2.2 MIDDLE DRAWER

- Paper Consumables (Inter fold tissues and toilet rolls)



5.2.3

Dirty hampers – Blue Bag for dirty MFC's and mops used in all patient and non-patient areas (except toilets) and RED bag for dirty MFC's and mops used only inside toilets.



5.2.4

Use the tool holders available in the trolley to attach the Mop & Floor Squeegee Handles, Litter Picker, Caution Board, Soft Brush, Dust pan with brush etc.



5.3 Top-Down System

5.3.1 In a clean bucket, prepare 2 litres of diluted cleaning solution.

**High Risk Areas - 16 ml of Ecolab Oasis Pro 14 chemical and 2 litres of water.

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).

- 5.3.2 Place 20-25 microfibre flat mops inside the plastic box with lid.
- 5.3.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 5.3.4 Close the box with the lid and seal it properly.
- 5.3.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 5.3.6 Place the box on the housekeeping cart.



5.4 Points to Remember: -

- 5.4.1 Appropriate label stickers to be placed on all 3 drawers with details of materials stored inside.
- 5.4.2 Chemical spray bottles will have color-coded trigger and nozzles based on the areas of usage Red for toilets, Yellow for high-risk areas, Blue for medium risk areas and Green for low-risk areas.
- 5.4.3 For the top-down system, 20-25 mop cloths to be placed inside the box, diluted chemical solution to be poured into the plastic container over the chemical tray - 2 Liters of water and 16 ml chemical (Oasis Pro 14), close the box with the lid and seal it properly, turn the box upside down for pre-soaking (charging or impregnating) the mops, pre soaking procedure after chemical application into the top-down box is very important. Soak the mop cloths for at least 20-30 minutes.
- 5.4.4 Tool holders and the additional holders must be available in the trolley.
- 5.4.5 Trolleys are designed with wheel locking system.
- 5.4.6 There are 2 waste collecting compartments in the trolley with a safety closing feature. The compartments will be lined with laundry bag, and domestic garbage bag, one compartment for the mops and cloths to be laundered and other for domestic waste.
- 5.4.7 Door locking feature is also available on the cart along with a secretive storage space for the janitor can hide the door key. Ensure the trolley is always kept locked.
- 5.4.8 Housekeeping trolley can be stocked with all the required amenities to complete a shift's cleaning task.
- 5.4.9 The housekeeping trolley must be always well organized and well stocked before starting each shift.
- 5.4.10 A well-stocked housekeeping trolley will avoid unnecessary movements to the janitor room.
- 5.4.11 The number of supplies loaded on to the housekeeping trolley will be according to the assigned area or location.
- 5.4.12 Housekeeping trolleys are normally stocked from the area housekeeping room.
- 5.4.13 Never over stock or under stock the trolley, Overstocking will increase the risk of accidents or damage to the supplies. Whereas under stocking can slow down the efficiency of cleaning tasks due to the unnecessary movements to the floor janitor room to collect the required materials.

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

5.5 Housekeeping Trolley Cleaning Methods:

- 5.5.1 Janitor should check housekeeping trolley before using to ensure its safety, and make sure there is no damage in its parts.
- 5.5.2 Clean all parts of Housekeeping trolley, Cleaning the soiled cloths and mops collection bag and its lid, tray, tool baskets, wringer, and bucket/ top-down system.
- 5.5.3 Using MFC with chemical/Disinfectant solution, wipe all surfaces of the housekeeping trolley including wheels.
- 5.5.4 Allow all surfaces to air dry.
- 5.5.5 Return housekeeping trolley to Housekeeping room for next use.
- 5.5.6 Report any broken or damaged parts to the supervisor.

6. Health and Safety – Points to Remember

- 6.1 Always place the precautionary/warning signage
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 Avoid physical contact with chemical (specially with eyes)
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Warning signs are checked, cleaned, disinfected, and removed as necessary.
- 7.2 MFC should be laundered or disposed of as appropriate.
- 7.3 Double Check if there are no tools, materials left in the area.
- 7.4 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.5 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.6 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.7 Are there any faults with your tools and PPE that you must report?
- 7.8 Report all Damages, Incidents & accidents / Health events to your team leader.

	METHOD STATEMENT		MS-CLE-HMC-19	
	Housekeeping Trolley Set up – High Risk Area		DATE	5/16/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-08	
	Dusting & Damp Wiping		DATE	5/15/2024
			REVISION	V3.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Dusting & Damp wiping
Related RA/ JSA Ref.	HSEQ-RA-HMC-06

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)	
Disposable Mask		Disposable Hair – Optional (Wherever Necessary as per HMC IPC Guidelines)	
N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)	
Disposable Medical Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)			

	METHOD STATEMENT		MS-CLE-HMC-08	
	Dusting & Damp Wiping		DATE	5/15/2024
			REVISION	V3.0

3. Required Equipment's and Tools

Caution Board		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area	
Oasis Pro14 Chemical		Snake Microfiber Hand Duster with Holder	
Actichlor Tablets		Disposable Cloth Yellow – ONLY to be used in ISOLATION Rooms.	
MFC Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty	
Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)	

	METHOD STATEMENT		MS-CLE-HMC-08	
	Dusting & Damp Wiping		DATE	5/15/2024
			REVISION	V3.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 For ladder use follow **GL-HSEQ-11-T12 Ladders Inspection and Use Checklist and GL-HSEQ-11-T13 Ladder Inspection Form**
- 4.1.5 Identify the work area Risk access and place the warning sign. If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides.
- 4.1.6 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.7 Switch off electric devices or hanging lights while performing the task.

4.2 Tools, Materials & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Check & prepare all the equipment and materials that may be required on service trolley to save wasted journeys.

4.3 Chemical Dilution & Usage

- 4.3.1 Always check that the appropriate cleaning chemicals are being used for the task (Oasis Pro 14, Pro 41, Actichlor solution etc.)
- 4.3.2 Ensure that the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.3.3 Chemicals spray bottles nozzle must be colour coded according to the risk area.
- 4.3.4 Diluted chemical solution is dispensed from the Automatic Chemical Dispensing machine located in the housekeeping rooms. The chemical dispensing machine is pre-calibrated to dispense the chemical solution as per HMC Infection Control guidelines.
- 4.3.5 The dilution ratio for Oasis Pro 14 and Pro 41 is 8ml chemical for 1 ltr water and 1:1000 ppm for Actichlor (1 Actichlor tablet added to 1 ltr water).
- 4.3.6 Always check the preparation date of the diluted cleaning chemicals. **The usage of the chemical solution must be within 24 hours of the dilution process.**
- 4.3.7 Ensure that you have COSHH Awareness and chemical handling trainings.
- 4.3.8 Follow the Proper dilution of the cleaning agents and should be referred to manufacturer's recommendation and HMC-IPC guidelines.

	METHOD STATEMENT	MS-CLE-HMC-08	
	Dusting & Damp Wiping	DATE	5/15/2024
		REVISION	V3.0

5. Job Steps

5.1 Start with dusting by using a dry folded MFC in a manageable area. Vertical surfaces working from top to bottom. MFC turned all clean side were used and replace if necessary.

5.2 Use snake microfiber hand dusters where the spaces hard to reach.

5.3 Take another clean & folded MFC, apply chemical into MFC by using a chemical spray bottle.

5.4 Wipe the dusted surface with damp MFC, task must be carried out in a systematic way using straight overlapping passes to clean all the surfaces effectively and efficiently.

5.5 Turn or change the MFC cloth if appropriate, re-folded after a manageable use.

5.6 Used MFC should be washed before recharging.

5.7 One MFC to one location shall be followed.

5.8 If any heavy stains found on the surface, then use a non- abrasive pad to remove and repeat damp wiping process again over the surface.

5.9 The surface shall let dry by itself without any intervention.

5.10 Refer to **MS-CLE-HMC-018**, **MS-CLE-HMC-019** for dusting and damp wiping in terminal cleaning high-risk areas.



6. Health and safety – Points to remember

6.1 Always place the precautionary/warning signage.

6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.

6.3 Handle all chemicals safely according to COSHH / SDS.

6.4 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.

6.5 Avoid physical contact with chemical (specially with eyes).

6.6 To complete the job safely, follow the associated risk assessment.

6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.

6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.

6.9 Use the appropriate tools and equipment for the task.

6.10 Staff to follow TBT for slip, trip & fall.

6.11 Always follow your superior's guidelines when performing a task.

6.12 Comply with all HMC regulations for safety, hygiene, and infection control.

6.13 Never leave any tool or material in the area unattended.

6.14 As much as possible, keep the pathways clear of obstructions.

6.15 Ensure that you have COSHH Awareness and chemical handling trainings.

	METHOD STATEMENT		MS-CLE-HMC-08	
	Dusting & Damp Wiping		DATE	5/15/2024
			REVISION	V3.0

6.16 Follow the Proper dilution of the cleaning agents and should be referred to manufacturer's recommendation and HMC-IPC guidelines.

6.17 Any damage to surfaces or a reportable incident should be reported to the team leader.

7. Quality Verification & Post Job Check

- 7.1 Make sure the vertical and horizontal surfaces are effectively cleaned, should be free from dust/dirt/stains/smudges/finger marks etc.
- 7.2 Warning signs, tools, material are checked, cleaned, disinfected, and removed as necessary.
- 7.3 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).
- 7.4 Wash your hands thoroughly as per (HMC Policies CL 7241 Hand Hygiene.)
- 7.5 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.6 MFC's and disposable cloths should be laundered or disposed as appropriate.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Ensure that the tools, signs, and barricading has been removed from the site and safely take them back to the HK room/store and keep the area clear for user.
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.
- 7.11 Report all damages, incidents & accidents / health events to your team leader.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Damp Mopping
Related RA/ JSA Ref.	HSEQ-RA-HMC-06

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)	
Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)	
N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)	
Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)			

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0

3. Required Equipment's and Tools

"Wet Floor" Signage		Mop bucket with Wringer (To be used ONLY in Isolation Rooms)	
Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)	
Microfibre Flat Mop With Velcro Strip (For Top/Down System) Yellow – High risk area Blue – Medium risk area Green – Low risk area Red – Washrooms		Mop holder with strips for Velcro system	
Aluminium Handle with 3 holes - Colour coded		Oasis Pro 14 Chemical	
Floor Scraper		Ecolab High Performance Neutral Floor Cleaner	
Disposable Mop – <u>ONLY for CONTACT ISOLATION ROOMS</u>		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty	

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0
	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Kentucky Mop with Clip and Handle	
	No Low Maintenance Floor Cleaner & Protector			

4. Pre-Job Check

- 4.1.1 Prior to commencing the damp mopping process, ensure that a thorough dust mopping of the area has been completed (except isolation rooms). For dust mopping procedure, please see MS - CLE-HMC-007- Dust mopping.
- 4.1.2 To remove any stubborn stains/marks before mopping, use an abrasive pad and in case of residual glue from floor stickering or chewing gum stuck on the floor, use a floor scrapper.

4.2 Infection Control & HSEQ

- 4.2.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.2.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.2.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.2.4 Identify the work area Risk access and place the warning sign. If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides.
- 4.2.5 Ventilate the area where appropriate.

4.3 Tools & Equipment

- 4.3.1 Check & prepare all the equipment that may be required for the task.
- 4.3.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.3.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.3.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.4 Top-Down System

- 4.4.1 In a clean bucket, prepare 2 litres of diluted cleaning solution.
- 4.4.2 ****High Risk Areas - 16 ml of Ecolab Oasis Pro 14 chemical and 2 litres of water.**
- 4.4.3 **** Medium & Low Risk Areas - 16 ml of Ecolab High Performance Neutral Floor Cleaner 2 litres of water.**
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.4 Place 20-25 microfibre flat mops inside the plastic box with lid.
- 4.4.5 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0

- 4.4.6 Close the box with the lid and seal it properly.
- 4.4.7 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.8 Place the box on the housekeeping cart.

4.5 Double Mop Bucket w/Wringer

- 4.5.1 For **ISOLATION Rooms**, a double mop bucket with wringer will be used with disposable mops.
- 4.5.2 Ensure that each Isolation room is assigned with a dedicated double mop bucket with wringer and the exact room number is written on this bucket set and it is stored in the housekeeping room.
- 4.5.3 In the blue coloured bucket, prepare a cleaning solution with 8 ml Oasis Pro 14 chemical to 1 litre of water ratio.

5. Job Steps

- 5.1 Using the Aluminium handle with mop holder, attach the pre-soaked microfiber flat mop to the mop holder.
- 5.2 ONLY for CONTACT ISOLATION ROOMS, ensure only disposable mops are used with dedicated top-down system.
- 5.3 Commence the process by mopping the floor along the edges of areas lengthwise. Mop edges adjacent to skirting boards (mop in parallel to skirting boards – cutting in)
- 5.4 Wipe skirting boards to remove splash marks, if any.
- 5.5 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned.
- 5.6 Always ensure one mop is to one room ratio.
- 5.7 After completion of task, remove the used/soiled dirty mop with the help of a picker and place inside the hampers in the housekeeping cart.
- 5.8 Place the dirty flat mops of all areas (except toilets) in the blue hamper bag and dirty mops from Toilets to be placed inside the red coloured hamper.
- 5.9 All disposable mops heads to be disposed inside contact isolation rooms.
- 5.10 Area mopped shall be left to dry and there shall be no obvious mop marks.
- 5.11 For marble floors, use Kentucky mops to apply Ecolab no-low maintenance floor cleaner and protector to get the maximum chemical contact on the marble pores.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage
 - 6.1.1 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
 - 6.1.2 Handle all chemicals safely according to COSHH / SDS.
 - 6.1.3 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0

- 6.1.4 Avoid physical contact with chemical (specially with eyes)
- 6.1.5 To complete the job safely, follow the associated risk assessment.
- 6.1.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.1.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.1.8 Only use appropriate tools and equipment for the task.
- 6.1.9 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.1.10 Never leave any tool or material in the area unattended.
- 6.1.11 As much as possible, keep the pathways clear of obstructions.
- 6.1.12 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.

7. Quality Verification & Post Job Check

- 7.1 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
 - 7.1.1 Ensure that all furniture, equipment etc. is returned to their original position and the room is reinstated.
 - 7.1.2 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
 - 7.1.3 Double Check if there are no tools, materials left in the area.
 - 7.1.4 Notify your team leader that the work is complete, and area is free of materials.
 - 7.1.5 Microfibre mops to be laundered and disposable cloths and mop should be disposed.
 - 7.1.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
 - 7.1.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
 - 7.1.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
 - 7.1.9 Are there any faults with your tools and PPE that you must report?
 - 7.1.10 Report all Damages, Incidents & accidents / Health events to your team leader.
 - 7.1.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		14.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024

	METHOD STATEMENT		MS-CLE-HMC-06	
	Damp Mopping		DATE	5/14/2024
			REVISION	V3.0
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-07	
	Dust Mopping		DATE	5/12/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Dust Mopping
Related RA/ JSA Ref.	HSEQ-RA-HMC-06

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable - Optional depends on the risk area.
	Disposable Mask		Disposable hair net - Optional depends on the risk area.
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown - Optional depends on the risk area.		

	METHOD STATEMENT		MS-CLE-HMC-07	
	Dust Mopping		DATE	5/12/2024
			REVISION	V2.0

3. Required Equipment and Tools			
	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Caution Board		Dust Mop sleeve with long handle – Low risk areas
	Dustpan & Brush		Aluminium Handle
	Plastic Mop holder		Microfiber Dust Control Mop Yellow – High risk area Blue – Medium risk area Green – Low risk area
	Dry Vacuum Machine		Floor Scraper

4. Pre-Job Check
4.1 Infection Control & HSEQ 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy). 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices) 4.1.3 To Identify the work area and place the barricades and warning signs as needed. 4.1.4 If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides. 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

	METHOD STATEMENT		MS-CLE-HMC-07	
	Dust Mopping		DATE	5/12/2024
			REVISION	V2.0

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Place the dust mop handles with their respective mops on the housekeeping trolley.
- 4.2.5 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

5. Job Steps

- 5.1 Check the area that needs to be cleaned for chewing gum and big waste items, if any collect it in a waste collection bag (use scrapper to remove chewing gum).
- 5.2 The chosen floor area to start dust mopping should be adjacent to the skirting board and swept by cutting in parallel to skirting boards.
- 5.3 Commence sweeping in a systemic manner, starting from the far end corner of the room, and coming back (S type action), the sweeping shall be in one stroke and the mop shall never be lifted during sweeping.
- 5.4 To check mop, turn it up slowly without lifting it, if mop is saturated with soil or dust, then it shall be cleaned using vacuum cleaner (to operate suction cleaner, ensure that the machine is off, the socket is off, connect the machine to the socket, put the socket ON and then the machine ON
- 5.5 Upon completion clean the mop with vacuum cleaner (if applicable)
- 5.6 Once the use of vacuum cleaner is completed, switch it off, switch power socket off, and unplug (never unplug by pulling cable)
- 5.7 Once sweeping is completed, soil shall be collected using Joby Kit and dispose the debris in the waste collection cart.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.8 Only use appropriate tools and equipment for the task.
- 6.9 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.10 Never leave any tool or material in the area unattended.
- 6.11 As much as possible, keep the pathways clear of obstructions.

	METHOD STATEMENT		MS-CLE-HMC-07	
	Dust Mopping		DATE	5/12/2024
			REVISION	V2.0

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE **(HMC Policies CL 7242 Infection Control Practices)**.
- 7.7 Wash your hands thoroughly after the task is completed **(HMC Policies CL 7241 Hand Hygiene.)**
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		12.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Glass Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-05- Glass Cleaning

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the Method statement and risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Medical Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Safety Goggles

	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

	High Visibility Jacket		Black Safety Goggles for External
	Gum Boots		Manual Handling Gloves
	Safety Helmet		

3. Required Equipment's and Tools			
	Caution Board		Podium Ladder for High Level Tasks
	Barricade		Bayersan Window Cleaning System
	Accessories Belt with Solution Tank, Battery and Motor		Glass Cleaning Pad – Part of the Bayersan Window Cleaning System

	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0
	Bucket for Chemical Solution		Caddy Tray	
	Glass Squeegee		MFC Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area	
	Applicator		Extension Pole	
	Disposable Cloth Yellow – High Risk Area		Outdoor Windows Cleaning System	
	Pro14 Chemical		Oasis Pro 14 Chemical Spray Bottle – Appropriate coloured nozzle to be used based on area of usage	
	Ecolab Oasis Pro 41 Glass Cleaner		Oasis Pro 41 Chemical Spray Bottle – Appropriate coloured nozzle to be used based on area of usage	

	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

	Housekeeping Trolley with Top/Down System		Housekeeping Trolley with Top/Down System - Anti-bacterial (To be used ONLY in High-risk Areas)
---	---	--	---

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task.
- 4.1.2 Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.3 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.4 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.5 To Identify the work area and place the warning signs as needed.
- 4.1.6 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Any damage to surfaces or a reportable incident should be reported to the team leader.
- 4.2.7 Always monitor the tyre pressure of outdoor window cleaning system and refill when necessary.

5. Job Steps

5.1 Low Level Glass Cleaning

- 5.1.1 Place “Cleaning in Progress” signage; “floor signs should be visible from all entry & exit points”.
- 5.1.2 Fill the chemical bucket with diluted Ecolab Oasis Pro Glass Cleaner.
- 5.1.3 Remove the dust from the glass surfaces with MFC/ dry applicator in a vertical motion.
- 5.1.4 Rinse the applicator inside the diluted glass cleaner chemical.



	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

- 5.1.5 Apply the cleaning agent (Ecolab Oasis Pro Glass Cleaner) on the glass surface by using an applicator.
- 5.1.6 Apply the applicator using a figure “S” pattern or in a systematic way (zig zag/vertical/ horizontal/parallel moves) with overlaps.
- 5.1.7 Using a glass squeegee, remove the chemical from the glass surface properly and make sure that there is no more chemical content left over.
- 5.1.8 Perform the task in a systematic way (zig zag/vertical/ horizontal/parallel moves) depends on the design of glass surface.
- 5.1.9 Pay attention to wipe the squeegee with MFC in every stroke.
- 5.1.10 Wipe out the excess water from the frames and glass surface with a dry MFC.
- 5.1.11 Remove any residual water from the glass using an MFC.
- 5.1.12 Empty dirty/soiled water in designated disposal area.
- 5.1.13 Perform damp moping task if the floor is wet during glass cleaning task.
Refer **MS-CLE-HMC-006** for damp mopping steps.
- 5.1.14 Remove the warning signs once the floor is completely dried.



5.2 For High Level Glass Cleaning

- 5.2.1 Use podium ladder and select the ladder depending on the height.
- 5.2.2 Adjust the height of the selected podium ladder.
- 5.2.3 Follow FMM work at height procedure while using a ladder.
- 5.2.4 Refer the below Podium Ladders Inspections and Use.
- 5.2.5 Use extension pole if the glass surface still not reachable with the help of a podium ladder.
- 5.2.6 Continue the glass cleaning steps as mentioned above.

5.3 Indoor Window Cleaning System

- 5.3.1 Assemble the window cleaning machine with required accessories. (Pad holder, extendable pole with chemical trigger, cleaning pad, belt along with solution tank/motor/battery)
- 5.3.2 Fill Oasis pro 41 diluted glass cleaner in the solution tank. (Available in the Ecolab chemical dispenser machine)
- 5.3.3 Wear the accessories belt on your waist.
- 5.3.4 Always check if the battery is fully charged before starting the task.
- 5.3.5 Check the working condition of the motor.
- 5.3.6 Connect the battery cable to the motor.
- 5.3.7 Attach the cleaning pad on the holder to start the task.
- 5.3.8 Adjust the pole length according to the task and height, make sure the lock engaged carefully.



	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

- 5.3.9 Start the cleaning by pressing on the trigger to apply chemical on the glass, apply chemical in a manageable area.
- 5.3.10 Wipe the glass over the applied chemical to remove the dust and dirt.
- 5.3.11 Should follow systematic overlapping passes while cleaning the glasses for better result or to do not miss any glass surface.
- 5.3.12 Attach another clean pad on pad holder to clean the excess chemical or dust left over on the glass surface.
- 5.3.13 Use podium ladder wherever required depends on the height of the glass surface.



5.4 Outdoor Window Cleaning System

- 5.4.1 Wheel the machine to scheduled task location.
- 5.4.2 Locate facility water source and attach the water hose pipe.
- 5.4.3 The other end of the hose pipe to be connected with the filter inlet.
- 5.4.4 Make sure the valve is firmly attached to the unit.
- 5.4.5 Attach the red water fed pole hose to the top of the filter unit.
- 5.4.6 Turn the valve to the 'off' position.
- 5.4.7 Attach the square brush on the top of the pole and close the clamp.
- 5.4.8 Attach the red hose to the T bar located at the end of the brush hose.
- 5.4.9 With all the attachments, extend the inline pole by releasing the black latch.
- 5.4.10 When the blue tape appears, retract the pole rather than extending it.
- 5.4.11 Switch on the facility's water supply before turning on the motor.
- 5.4.12 Adjust the height of water fed pole according to the area to be cleaned.
- 5.4.13 Control the water flow with valve based on the dirt and dust accumulation on the glass surface and frame.
- 5.4.14 Clean the glass surface and frames with the attached square brush in an up and down motion.
- 5.4.15 Always select the glass surfaces to be cleaned from top to bottom as the bottom glasses will be always dirty due to the water flow from the fed pole.
- 5.4.16 Chemical application not required for this task as the machine equipped with water purifying system that gives a better finishing on the glass surface and frames.



5.5 Sky Light Cleaning

- 5.5.1 Refer to 5.4 to use Outdoor windows cleaning system to clean skylight.
- 5.5.2 Use podium ladder wherever required depends on the height of the skylight from roof top.
- 5.5.3 After cleaning the skylight glass, carryout cleaning of skylight frames and claddings as mentioned below.
- 5.5.4 Remove the excess water from the skylight frames and claddings with an MFC.
- 5.5.5 Damp wipe the skylight frame and cladding with an MFC.
- 5.5.6 Move the outdoor window cleaning system and podium ladder to the next skylight area scheduled.
- 5.5.7 Continue cleaning the remaining skylights by following the above steps.



	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

5.6 Podium Ladders Inspections and Use.

- 5.6.1 Check all 4 castors are secure and the fixing bolts are tightened correctly.
- 5.6.2 Check all 2-wheel brakes operate and lock the wheel and castor into position.
- 5.6.3 Check the tubes and aluminium components of the podium step. There should not be any cracks or excessive dents or distortion.
- 5.6.4 Check there is free movement of all hinge points of the podium step. Check the plywood platform. There should not be excessive contamination, cracking, holes or damage, including any missing or damaged rivet fixings.
- 5.6.5 Check the following podium step locking mechanisms are operating and locking correctly. Ladder claws and locks, gate claw and lock, rear folding frame elbow locking joints and the platform locking tabs.
- 5.6.6 Make sure the total load (1 person plus tools & materials) should not be more than 150kg.
- 5.6.7 Make sure the 4 castors are pointing outwards and the wheel brakes are locked.
- 5.6.8 Check the access ladder is located correctly.
- 5.6.9 Make sure the podium step is on flat, level, dry and firm ground.
- 5.6.10 Make sure the podium step is correctly positioned to avoid overreaching.
- 5.6.11 Make sure the platform is at the correct height.
- 5.6.12 Make sure the safety gate is shut and locked once you are on the platform.

Key Notes:

- 5.6.13 Never stand on the guardrails, boxes, stepladders, or other objects on the platform, to gain additional working height.
- 5.6.14 Never suspend the podium step from another structure or level podium step.
- 5.6.15 The maximum number of occupants must not exceed one.
- 5.6.16 Never use the podium step if any part is damaged or shows signs of excessive wear.
- 5.6.17 Never move the podium step when a person is standing on it.
- 5.6.18 Never over-reach or lean too far over the side of the podium step.
- 5.6.19 Never use the podium step as a method of gaining access to another structure or level.
- 5.6.20 In addition, Use Pre use Ladder checklist.

6. Health and safety – Points to Remember

- 6.1.1 Always place the precautionary/warning signage.
- 6.1.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.1.3 Handle all chemicals safely according to COSHH / SDS.
- 6.1.4 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.
- 6.1.5 Avoid physical contact with chemical (specially with eyes).
- 6.1.6 To complete the job safely, follow the associated risk assessment.
- 6.1.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.1.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.1.9 Use the appropriate tools for the task.
- 6.1.10 Comply with all HMC regulations on safety, hygiene, and infection control.

	METHOD STATEMENT		MS-CLE-HMC-05	
	Glass Cleaning		DATE	5/14/2024
			REVISION	V2.0

6.1.11 Never leave any tool or material in the area unattended.

6.1.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1.1 Visually check the glass and its frames cleaned effectively, free from stains, finger marks, oil marks, smudges etc.
- 7.1.2 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
- 7.1.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.1.4 Double Check if there are no tools, materials left in the area.
- 7.1.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.1.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.1.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**)
- 7.1.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.1.9 Are there any faults with your tools and PPE that you must report?
- 7.1.10 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.1.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.
- 7.1.12 MFC's and applicator cloth should be laundered or disposed of as appropriate.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-10	
	WC Cleaning		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Washrooms
Task Description	WC Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-07

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Face Shield – Optional Depends On The Risk Area		Shoe Covers Disposable - Optional Depends On The Risk Area.
	Disposable Mask		Disposable Hair Net - Optional Depends On The Risk Area.
	N95 Face Mask – Optional Depends on The Risk Area		Disposable Gloves

	METHOD STATEMENT		MS-CLE-HMC-10	
	WC Cleaning		DATE	5/16/2024
			REVISION	V2.0

	Medical Disposable Gown - Optional Depends on The Risk Area.		Goggles
---	--	--	---------

3. Required Equipment and Tools			
	Caution Board		WC Brush
	Sponge		Maxx Into WC 2
	Pro 14 Chemical		Caddy Tray
	MFC Cloth Red – To be used in all toilets, EXCEPT HIGH-RISK AREAS		Disposable Cloth Red – To be used <u>ONLY IN</u> <u>HIGH-RISK AREAS</u>
	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)

	METHOD STATEMENT		MS-CLE-HMC-10	
	WC Cleaning		DATE	5/16/2024
			REVISION	V2.0

	Housekeeping Trolley with Top/Down System - Anti-bacterial (To be used ONLY in High-risk Areas)	
---	---	--

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 To Identify the work area and place the warning signs as needed.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.
- 4.2.5 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Any damage to surfaces or a reportable incident should be reported to the team leader.

5. Job Steps

- 5.1 Place the Cleaning in Progress signage, "Floor signs should be visible from all entry & exit points".
- 5.2 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.
- 5.3 Apply the Ecolab Maxx Into WC2 chemical in the WC and then close the lid.



	METHOD STATEMENT		MS-CLE-HMC-10	
	WC Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 5.4 Start the cleaning process from Clean to Dirty using a red coloured disposable cloth and Oasis Pro14 All-Purpose cleaner (8 ml/ltr).
- 5.5 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, rim, overflow, handrails, etc.
- 5.6 Rinse the external surface of the WC including seat cover and hidden areas with water to remove any urine splashes or visible dirt.
- 5.7 Clean external surface of the WC including seat cover and hidden areas of WC by using a red sponge and Oasis Pro 14 chemical.
- 5.8 Rinse with water after cleaning external surfaces and seat cover.
- 5.9 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.
- 5.10 Using the RED coloured MFC, spray the Oasis Pro 14 Solution from the spray bottle with Red Nozzle onto the Red coloured MFC and damp wipe the WC including the seat cover. For ISOLATION ROOMS, please use RED coloured disposable cloth.
- 5.11 Repeat the process with another dried RED MFC (disposable red cloth – for high-risk area) until the surfaces are completely dried.
- 5.12 Do not use RED coloured MFC on other surfaces except WC/Urinal bowl.
- 5.13 White coloured MFC can be used for other surfaces such as toilet bowl brush and waste bin placed beside WC.
- 5.14 After cleaning WC, rinse the floor with water to eliminate urine splashes and drops.
- 5.15 Push water to the drain with a floor squeeze.
- 5.16 Apply Oasis Pro 14 chemical on the floor to clean and disinfect the cubicle floor.
- 5.17 Damp mop the floor (Refer MS-CLE-HMC-06 - Damp Moping)




6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Use the appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

	METHOD STATEMENT		MS-CLE-HMC-10	
	WC Cleaning		DATE	5/16/2024
			REVISION	V2.0

7. Quality Verification & Post Job Check

- 7.1 Visually check the WC and seat cover free from any stains, dirt, or chemical residues.
- 7.2 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.3 Double Check if there are no tools, materials left in the area.
- 7.4 Notify your team leader that the work is complete, and area is free of materials.
- 7.5 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.6 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.7 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.8 Are there any faults with your tools and PPE that you must report?
- 7.9 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.10 Waste must be properly disposed as per SA-1054-Hazardous materials and waste management program.
- 7.11 MFC and disposable cloth should be laundered or disposed of as appropriate.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		20.08.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		20.08.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		22.08.2024

	METHOD STATEMENT		MS-CLE-HMC-09	
	Wash Basin Cleaning		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Washrooms
Task Description	Wash Basin Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-07 Wash Basin Cleaning

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe Covers Disposable - Optional Depends On The Risk Area.
	Disposable Mask		Disposable Hair Net - Optional Depends On The Risk Area.
	N95 Face Mask – Optional Depends On The Risk Area		Face Shield – Optional Depends On The Risk Area

	METHOD STATEMENT		MS-CLE-HMC-09	
	Wash Basin Cleaning		DATE	5/16/2024
			REVISION	V2.0

	Medical Disposable Gown - Optional Depends On The Risk Area.		
---	--	--	--

3. Required Equipment and Tools			
	Caution Board		Oasis Pro 14 Chemical
	Sponge		Caddy Tray
	Squeeze		White Coloured MFC – to be used for all washbasins EXCEPT in Isolation Rooms
	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Disposable Cloth White – to be used ONLY in Isolation Rooms
	Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)		Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)

4. Pre-Job Check
4.1 Infection Control & HSEQ

	METHOD STATEMENT		MS-CLE-HMC-09	
	Wash Basin Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 To Identify the work area and place the warning signs as needed.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemical (Oasis Pro 14) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Staff to follow the Proper dilution of the cleaning agents and should be referred to manufacturer's recommendation and HMC-IPC guidelines.

5. Job Steps

- 5.1 Place the warning yellow sign in a visible area.
 - a. in front of the wash basin that is going to be cleaned
 - b. or outside the washroom if it is a small area.
- 5.2 Remove the plughole, waste, hair and rinse the wash basin surface with water and place waste in the nearest waste bin.
- 5.3 Remember – do not get the finger trapped while removing the plughole cover.
- 5.4 Apply Oasis Pro 14 All Purpose cleaning solution into a sponge and scrub the wash basin and related surfaces after the chemical reaction time.
- 5.5 Use the squeegee to remove the chemical and the water left on the other surfaces.
- 5.6 Dry the surface using the MFC.
- 5.7 Pay attention to corners and hidden areas underneath and around the wash basin.
- 5.8 Rinse wash basin surface with water after scrubbing.
- 5.9 Remove the water from wash basin surfaces by using white MFC/ white disposable cloth and squeeze.
- 5.10 Repeat the process with a dry white MFC/ white disposable cloth till the surfaces are completely dried.
- 5.11 Wipe the plug hole and tap fittings with white MFC (White Disposable cloths for Isolation Rooms). Buff the steel fittings with a dry white MFC.
- 5.12 Fix the plughole into the appropriate space.



	METHOD STATEMENT		MS-CLE-HMC-09	
	Wash Basin Cleaning		DATE	5/16/2024
			REVISION	V2.0

6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.3 Handle all chemicals safely according to COSHH / SDS
- 6.4 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.
- 6.5 Avoid physical contact with chemical (specially with eyes)
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use the appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Visually check the wash basin free from stains, dirt, hair or any chemical residues.
- 7.2 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.3 Double Check if there are no tools, materials left in the area.
- 7.4 Notify your team leader that the work is complete, and area is free of materials.
- 7.5 Remove your PPE **(HMC Policies CL 7242 Infection Control Practices)**.
- 7.6 Wash your hands thoroughly after the task is completed **(HMC Policies CL 7241 Hand Hygiene.)**
- 7.7 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.8 Are there any faults with your tools and PPE that you must report?
- 7.9 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.10 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**
- 7.11 MFC/disposable cloth should be laundered or disposed of as appropriate.

	METHOD STATEMENT		MS-CLE-HMC-09	
	Wash Basin Cleaning		DATE	5/16/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, AAH
Department Name	Housekeeping
Job Location	Patient Room
Task Description	Regular Cleaning & Terminal Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-19

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown		Scrub Suit - wearing of scrub suit/disposable scrub suit is MANDATORY in surgical section

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System		Waste Collection Trolley BLUE - GENERAL Waste RED - Infectious Waste
	Caution Boards (Cleaning in Progress & Wet Floor)		Applicator
	Oasis Pro 14 All Purpose Chemical		Glass Squeegee
	Actichlor Chlorine Tablet		Floor Squeegee
	Suma D7 Stainless steel Polish		Dustpan with Brush
	Microfiber Dust Mop		Aluminium Handle with 3 holes - Colour coded and Plastic Mop Holder with Velcro Strips

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

	Kimberley Clark Hand Soap Refill		Blue Microfibre Rapido Mop (with Velcro attachment)
	Zebry pad		Red Microfibre Rapido Mop (with Velcro attachment)
	Toilet Roll		Floor Scraper
	MFC Red & White – Toilet Blue – Patient Room Yellow – High Risk Area (Optional)		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Interfold Tissue		Scouring Sponge
	Black Garbage Bag (for general/non-medical waste)		Wet & Dry Vacuum Machine
	Yellow Garbage Bag (for bio-hazard waste)		Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

	17" Scrubbing Pads		Scrubbing Machine (Single Disc)
	Sponge		Maxx Into WC2
	Caddy Tray		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Place the dust mop handles with their respective mops on the housekeeping trolley.
- 4.2.5 Ensure the trolley is well stocked with cleaning agents (chemicals), microfibre dusters and pre-Charged microfibre mops as per colour code, toilet rolls, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner etc.) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Fill a cleaning solution of 8 ml Oasis Pro 14 chemical to 1 litre of water ratio in a small bucket with BLUE handle and place it on top of the trolley/cart.
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

4.2.8 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.3 Floor Scrubbing Machine & Wet/Dry Vacuum Machine Pre-Check

- 4.3.1 Check that the unit switches on and off correctly.
- 4.3.2 Carry out a safety check of each part of the electrical equipment as appropriate.
- 4.3.3 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth from the machine to the plug, if there are any faults then the machine should not be used but should be marked as "out of order" in line with the reporting procedure.
- 4.3.4 The cable should be neatly placed and should at no time be present as a trip hazard.
- 4.3.5 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.
- 4.3.6 The casing of the machine should be complete and in good working condition; the wheels free from debris and freely moving.
- 4.3.7 Ensure correct accessories are selected, pad drives and pads or brushes depending on the floor type.
- 4.3.8 Avoid standing on the cable at any point, this is primarily for the operator's safety, it is possible that something sharp on the sole of a shoe could cut through the wire.
- 4.3.9 Cut out switches should be checked.

4.4 Top-Down System

4.4.1 Preparation of Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.1.1 In a clean bucket, fill 2 litres of diluted anti-bacterial cleaning solution
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.1.2 Place 20-25 blue and Red coloured microfibre flat mops inside the separate plastic box with lid and BLUE handle.
- 4.4.1.3 Pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.1.4 Close the box with the lid and seal it properly.
- 4.4.1.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.1.6 Place the box on the housekeeping cart.

4.4.2 Pre-charging of MFC Cloths in Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.2.1 Place folded blue MFC inside the bucket with blue coloured handle.
- 4.4.2.2 Pour one litre of diluted anti-bacterial solution which was dispensed from the chemical dispenser.
- 4.4.2.3 Pour evenly over the MFC and allow soaking time of 20 minutes to pre-charge (impregnating) the cloths.

5. Job Steps

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.1 Patient Room Cleaning

5.1.1 Cleaning the In-Patient Room

This cleaning procedure is carried out while patient admitted for treatment.

The following cleaning steps are to be followed:

- 5.1.1.1 Seek approval from nursing in charge to clean the patient room.
- 5.1.1.2 Identify the work area risk access and place the safety signages (caution boards) outside the patient room.
- 5.1.1.3 Wheel the housekeeping trolley and waste collection trolley just outside the patient room, do not take the trolley(s) inside.
- 5.1.1.4 Knock the door and ask permission to enter inside the patient room.
- 5.1.1.5 Greet the patient or visitors and state your purpose for being there, ask for any preferences or special requests during regular cleaning.
- 5.1.1.6 Inform the patient that you will return at a more convenient time if the approached time is not convenient for them.
- 5.1.1.7 The patient room doors should remain closed while the cleaning is performed.
- 5.1.1.8 Commence the cleaning process by first removing any large debris on the floor using a dustpan and brush. 
- 5.1.1.9 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Refer and follow CL 7242 IC in Housekeeping.
- 5.1.1.10 Remove all waste from the room as per policy (Refer to CL 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.
(infectious waste to be labelled with details)**
- 5.1.1.11 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste. 
- 5.1.1.12 After removal of waste from the patient room, commence the cleaning procedure by using a pre-charged blue MFC Charged in Oasis Pro 14 solution from the bucket with blue coloured handle. 
- 5.1.1.13 Clean all high touch areas/elements from top to bottom and clockwise or anti clockwise. 
- 5.1.1.14 Using a blue MFC, spray Oasis Pro 14 Solution from the spray bottle with blue nozzle onto the blue MFC, clean all surfaces (including frequently touch points), furniture and fixtures with Oasis Pro 14 chemical solution starting at the top using systematic passes, moving downwards. This includes all the frames, side tables, chairs, sofa, window curtain, sofa, garbage bins etc.

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.1.1.15 Wipe the mattress frame using a blue MFC charged in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base.



5.1.1.16 Seek approval from the patient before disinfecting the bed rails and frames.



5.1.1.17 Wipe down and clean the top and bottom of each removable component.



5.1.1.18 Always wipe the area of beneath the removable platforms before the components are put back in place.



5.1.1.19 Change the MFC regularly as and when required and dispose them in the laundry hamper.

5.1.1.20 Using a blue MFC Charged in Oasis Pro 14 solution, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures and any other high touch elements including waste bins (general and infectious waste).



5.1.1.21 After completion of all furniture and fixtures cleaning, move onto floor cleaning.

5.1.1.22 Mop the floor using pre-charged blue coloured microfibre mops from the top-down system bucket with BLUE Handle.

5.1.1.23 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.

5.1.1.24 Remove the dirty mop and place it in the red coloured hamper of the service trolley.

5.1.1.25 Check and replenish consumables.

5.1.2 Terminal Cleaning of Patient Room

Terminal cleaning of the patient room is usually carried out at the end of the day or between patient discharges, subject to instruction from nursing in charge.

The following cleaning steps are to be followed:

5.1.2.1 Identify the work area risk access and place the safety signages (caution boards) outside the patient room.

5.1.2.2 Wheel the housekeeping trolley and waste collection trolley just outside the patient room, do not take the trolley(s) inside.

5.1.2.3 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.

5.1.2.4 The patient room doors should remain opened while the cleaning is performed.



	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 5.1.2.5 Remove any large debris on the floor using a dustpan and brush.
- 5.1.2.6 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Follow the HMC SPIL procedure.
- 5.1.2.7 In case of any small amount of blood or body fluid found on the floor, wall or any other fixtures, spot clean using a blue MFC Charged in chlorine disinfectant solution (Actichlor 500 PPM).
- 5.1.2.8 Remove all waste from the room as per policy (refer to CI 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.
- 5.1.2.9 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste. 
- 5.1.2.10 Commence the cleaning process by starting from the ceiling.
- 5.1.2.11 Using zebry pad with Oasis Pro 14 solution.
- 5.1.2.12 Wipe the ceiling/ceiling tiles in systematic strokes with overlapping passes as to not miss any area.
- 5.1.2.13 After completion of wiping the ceiling, remove the dirty zebry pad and place it in the blue coloured hamper of the service trolley. 
- 5.1.2.14 Commence the process of cleaning the walls using the zebry pad spray with Oasis Pro 14 solution.
- 5.1.2.15 Wipe the walls moving the zebry pad from top to bottom.
- 5.1.2.16 Once the wall cleaning is completed, remove the dirty zebry pad, and place it in the blue coloured hamper of the service trolley.
- 5.1.2.17 Wipe the bed frame using a blue MFC charged in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base. 
- 5.1.2.18 To effectively clean the bed frame, the attachments need to be disassembled and moved.
- 5.1.2.19 Thoroughly inspect and disinfect the mattress including the sides and bottom.
- 5.1.2.20 Wipe down and clean the top and bottom of each removable component. 
- 5.1.2.21 Always wipe the area of beneath the removable platforms before the components are put back in place.
- 5.1.2.22 After cleaning the top surface of the bed frame, move towards the base and thoroughly wipe the underneath side of the bed frame. Continue wiping down till the legs and castor wheels.
- 5.1.2.23 Change the MFC regularly as and when required and dispose them in the laundry hamper.
- 5.1.2.24 Using a blue MFC Charged in Oasis Pro 14 solution, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures, and any other high touch elements including waste bins (general and infectious waste). 

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0



- 5.1.2.25 After completion of all furniture and fixtures cleaning, move onto floor cleaning.
- 5.1.2.26 Mop the floor using pre-charged blue coloured microfibre mops from the top-down system bucket +with BLUE Handle.
- 5.1.2.27 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.
- 5.1.2.28 Remove the dirty mop and place it in the red coloured hamper of the service trolley.
- 5.1.2.29 Prepare for Floor Scrubbing procedure.
- 5.1.2.30 Move all movable furniture to one half of the patient room.
- 5.1.2.31 Bring the Floor Scrubbing machine (single disc) and Wet & Dry vacuum inside the patient room.
- 5.1.2.32 Place the red coloured pad to the pad holder in the bottom of the scrubbing machine.
- 5.1.2.33 Fill 2 litres of anti-bacterial solution to the tank of the scrubbing machine.
- 5.1.2.34 Connect the electrical power cable to the electrical socket.
- 5.1.2.35 Commence the scrubbing process. Refer to the method statement for Floor Scrubbing (MS-CLE-HMC-004) for further information.
- 5.1.2.36 Start from the farthest corner of the room and run the machine in an overlapping pattern.
- 5.1.2.37 Ensure that all areas of the floor on half side of the room is covered.
- 5.1.2.38 Remove the chemical solution from the floor using a wet and dry vacuum.
- 5.1.2.39 While removing the water from the floor, also mop the floor and allow the area to dry.
- 5.1.2.40 After the floor is completely dry, move all furniture from the other half of the room to the scrubbed side of the room.
- 5.1.2.41 Commence the scrubbing process and follow steps 5.1.2.39 to 5.1.2.41.
- 5.1.2.42 After completion of the scrubbing and drying process, disinfect the floor by mopping the floor using pre-charged blue coloured mops in Pro 14 solution.
- 5.1.2.43 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.
- 5.1.2.44 Remove the dirty mop and place it in the red coloured hamper of the service trolley.
- 5.1.2.45 Reinstall all furniture to their original position.
- 5.1.2.46 Check and replenish consumables.

5.2 Toilet Cleaning

- 5.2.1 Soak a White Coloured MFC in Oasis Pro 14 solution from the Blue bucket, wrap the MFC over an applicator wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 5.2.2 Remove all waste from the toilet as per policy (refer to CI 7249 IC in Management of Infectious Waste)
- 5.2.3 Using the white coloured MFC, spray the Oasis Pro 14 Solution from the spray bottle with Red Nozzle onto the White MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.
- 5.2.4 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.
- 5.2.5 Apply the Ecolab Maxx into WC2 chemical in the WC and then close the lid. (If available)
- 5.2.6 Start the cleaning process from Clean to Dirty using a red coloured disposable cloth and Oasis Pro14 All-Purpose cleaner (8 ml/ltr).
- 5.2.7 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, rim, overflow, handrails, etc.
- 5.2.8 Clean external surface of the WC including seat cover and hidden areas of WC by using a red sponge and Oasis Pro 14 chemical.
- 5.2.9 Rinse with water after cleaning external surfaces and seat cover.
- 5.2.10 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.
- 5.2.11 Soak the white MFC in Pro 14 disinfectant solution wrap the MFC over an applicator wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.
- 5.2.12 Using the white MFC, spray the Pro 14 disinfectant solution from the spray bottle with Red Nozzle onto the white MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.
- 5.2.13 Using a White MFC spray Pro 14 disinfectant solution from the spray bottle with red nozzle onto the MFC to clean all surfaces.
- 5.2.14 Check and replenish consumables.
- 5.2.15 Place fresh garbage bags inside the garbage bins.
- 5.2.16 Using a Red microfiber Rapido mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of eight stroke on the floor itself.
- 5.2.17 Area mopped shall be left to dry and there shall be no obvious mop marks.
- 5.2.18 Before leaving the toilet, clean and disinfect all equipment and tools with Pro 14 disinfectant solution.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage near doors on both sides of the patient room.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**Refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 6.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.8 Only use appropriate tools and equipment for the task.
- 6.9 While handling waste, always treat every bag of waste as if it could have a sharp object in it.
- 6.10 Never compress the waste materials down into the waste bin with your hands.
- 6.11 Always carry the waste bags from the top and away from your body.
- 6.12 Always clean from top to bottom surfaces and clean to dirty areas.
- 6.13 When cleaning a surface, clean from back to front or farthest away to closest.
- 6.14 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.15 Never leave any tool or material in the area unattended.
- 6.16 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 Ensure all elements as per the Terminal Cleaning Checklist/patient room checklist are covered.
- 7.3 Supervisor to acknowledge submit a signed Terminal Cleaning Checklist to nursing department.
- 7.4 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024

	METHOD STATEMENT		MS-CLE-HMC-26	
	Patient Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, AAH
Department Name	Housekeeping
Job Location	ICU
Task Description	Regular Cleaning & Terminal Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-019

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown		Scrub Suit - wearing of scrub suit/disposable scrub suit is MANDATORY in surgical section

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System		Waste Collection Trolley BLUE - GENERAL Waste RED - Infectious Waste
	Caution Boards (Cleaning in Progress & Wet Floor)		Applicator
	Oasis Pro 14 All Purpose Chemical		Glass Squeegee
	Actichlor Chlorine Tablet		Floor Squeegee
	Stainless Steel Polish		Dustpan with Brush
	Microfiber Dust Mop		Aluminium Handle with 3 holes - Colour coded and Plastic Mop Holder with Velcro Strips
	Kimberley Clark Hand Soap Refill		Yellow Coloured Rapido Mop (with Velcro attachment)

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

	Toilet Roll		Red Microfibre Rapido Mop (with Velcro attachment)
	MFC Yellow – High Risk Area		Floor Scraper
	Interfold Tissue		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Black Garbage Bag (for general/non-medical waste)		Scouring Sponge
	Yellow Garbage Bag (for bio-hazard waste)		Wet & Dry Vacuum Machine
	17” Scrubbing Pads		Scrubbing Machine (Single Disc)
	Sponge		Into W/C

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

	Caddy Tray		Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage
	Zebry Pad with holder		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Place the dust mop handles with their respective mops on the housekeeping trolley.
- 4.2.5 Ensure the trolley is well stocked with cleaning agents (chemicals), disposable cloths, mops, toilet rolls, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner etc.) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Fill a cleaning solution of 8 ml Oasis Pro 14 chemical to 1 litre of water ratio in a small bucket with BLUE handle and place it on top of the trolley/cart.
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.2.8 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

4.3 Floor Scrubbing Machine & Wet/Dry Vacuum Machine Pre-Check

- 4.3.1 Check that the unit switches on and off correctly.
- 4.3.2 Carry out a safety check of each part of the electrical equipment as appropriate.
- 4.3.3 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth from the machine to the plug, if there are any faults then the machine should not be used but should be marked as "out of order" in line with the reporting procedure.
- 4.3.4 The cable should be neatly placed and should at no time be present as a trip hazard.
- 4.3.5 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.
- 4.3.6 The casing of the machine should be complete and in good working condition; the wheels free from debris and freely moving.
- 4.3.7 Ensure correct accessories are selected, pad drives and pads or brushes depending on the floor type.
- 4.3.8 Avoid standing on the cable at any point, this is primarily for the operator's safety, it is possible that something sharp on the sole of a shoe could cut through the wire.
- 4.3.9 Cut out switches should be checked.

4.4 Top-Down System

4.4.1 Preparation of Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.1.1 In a clean bucket, fill 2 litres of diluted anti-bacterial cleaning solution.
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.1.2 Place 20-25 yellow coloured microfibre flat mops inside the plastic box with lid and BLUE handle.
- 4.4.1.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.1.4 Close the box with the lid and seal it properly.
- 4.4.1.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.1.6 Place the box on the housekeeping cart.

4.4.2 Pre-charging of MFC Cloths in Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.2.1 Place folded Yellow MFC inside the bucket with blue coloured handle.
- 4.4.2.2 Pour one litre of diluted anti-bacterial solution which was dispensed from the chemical dispenser.
- 4.4.2.3 Pour evenly over the MFC and allow soaking time of 20 minutes to pre-charge (impregnating) the cloths.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

5. Job Steps

5.1 ICU Cleaning

5.1.1 Cleaning the ICU Room

This cleaning procedure is carried out while patient admitted for treatment.

The following cleaning steps are to be followed:

- 5.1.1.1 Seek approval from nursing in charge to clean the ICU.
- 5.1.1.2 Identify the work area risk access and place the safety signages (caution boards) outside the patient room.
- 5.1.1.3 Wheel the housekeeping trolley and waste collection trolley just outside the icu, do not take the trolley(s) inside.
- 5.1.1.4 Knock the door and ask permission to enter inside the ICU.
- 5.1.1.5 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.
- 5.1.1.6 Commence the cleaning process by first removing any large debris on the floor using a dustpan and brush.
- 5.1.1.7 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Refer and follow CL 7242 IC in Housekeeping.
- 5.1.1.8 Remove all waste from the room as per policy (Refer to CL 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.
(infectious waste to be labelled with details)**
- 5.1.1.9 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste.
- 5.1.1.10 After removal of waste from the ICU, commence the cleaning procedure by using a pre-charged Yellow MFC Charged in Oasis Pro 14 solution from the bucket.
- 5.1.1.11 Clean all high touch areas/elements from top to bottom and clockwise or anti clockwise.
- 5.1.1.12 Using a blue MFC, spray Oasis Pro 14 Solution from the spray bottle with blue nozzle onto the Yellow MFC, clean all surfaces (including frequently touch points), furniture and fixtures with Oasis Pro 14 chemical solution starting at the top using systematic passes, moving downwards. This includes all the frames, side tables, chairs, sofa, window curtain, sofa, garbage bins etc.
- 5.1.1.13 Wipe the mattress frame using a Yellow MFC charged in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base.
- 5.1.1.14 Wipe down and clean the top and bottom of each removable component.
- 5.1.1.15 Always wipe the area of beneath the removable platforms before the components are put back in place.



	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

5.1.1.16 Change the MFC regularly as and when required and dispose them in the laundry hamper.

5.1.1.17 Using a Yellow Charged in Oasis Pro 14 solution, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures and any other high touch elements including waste bins (general and infectious waste).

5.1.1.18 After completion of all furniture and fixtures cleaning, move onto floor cleaning.

5.1.1.19 Mop the floor using pre-charged Yellow coloured microfibre mops from the top-down system bucket with BLUE Handle.

5.1.1.20 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.

5.1.1.21 Remove the dirty mop and place it in the red coloured hamper of the service trolley.

5.1.1.22 Check and replenish consumables.



5.1.2 Cleaning the ICU Toilet

5.1.2.1 Remove all waste from the toilet as per policy (refer to CI 7249 IC in Management of Infectious Waste)

5.1.2.2 Using the white coloured MFC, spray the Oasis Pro 14 Solution from the spray bottle with Red Nozzle onto the White MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.

5.1.2.3 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.

5.1.2.4 Apply the Ecolab into WC chemical in the WC and then close the lid. (If available)

5.1.2.5 Start the cleaning process from Clean to Dirty using a red coloured MFC and Oasis Pro14 All-Purpose cleaner (8 ml/ltr).

5.1.2.6 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, rim, overflow, handrails, etc.

5.1.2.7 Clean external surface of the WC including seat cover and hidden areas of WC by using a red sponge and Oasis Pro 14 chemical.

5.1.2.8 Rinse with water after cleaning external surfaces and seat cover.

5.1.2.9 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

- 5.1.2.10 Using the white MFC, spray the Pro 14 disinfectant solution from the spray bottle with Red Nozzle onto the white MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.
- 5.1.2.11 Using a White MFC spray Pro 14 disinfectant solution from the spray bottle with red nozzle onto the MFC to clean all surfaces.
- 5.1.2.12 Using a Red microfiber Rapido mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of eight stroke on the floor itself.
- 5.1.2.13 Area mopped shall be left to dry and there shall be no obvious mop marks.
- 5.1.2.14 Check and replenish consumables.
- 5.1.2.15 Place fresh garbage bags inside the garbage bins.
- 5.1.2.16 Before leaving the toilet, clean and disinfect all equipment and tools with Pro 14 disinfectant solution.

5.1.3 Terminal Cleaning of ICU

Terminal cleaning of the ICU is usually carried out at the end of the day or between patient discharges, subject to instruction from nursing in charge.

The following cleaning steps are to be followed:

- 5.1.3.1 Identify the work area risk access and place the safety signages (caution boards) outside the ICU.
- 5.1.3.2 Wheel the housekeeping trolley and waste collection trolley just outside the ICU, do not take the trolley(s) inside.
- 5.1.3.3 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.
- 5.1.3.4 The ICU doors should remain closed while the cleaning is performed.
- 5.1.3.5 Remove any large debris on the floor using a dustpan and brush.
- 5.1.3.6 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Follow the HMC SPIL procedure.
- 5.1.3.7 In case of any small amount of blood or body fluid found on the floor, wall or any other fixtures, spot clean using a blue MFC Charged in chlorine disinfectant solution (Actichlor 500 PPM).
- 5.1.3.8 Remove all waste from the room as per policy (refer to CI 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.
- 5.1.3.9 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste.
- 5.1.3.10 Commence the cleaning process by starting from the ceiling.
- 5.1.3.11 Charge the zebry pad in the Oasis Pro 14 solution using a spray bottle.
- 5.1.3.12 Wipe the ceiling/ceiling tiles using the charged zebry pad in systematic strokes with overlapping passes to ensure no area is missed.
- 5.1.3.13 After wiping the ceiling, remove the dirty zebry pad and place it in the blue-coloured hamper of the service trolley.
- 5.1.3.14 Clean the walls using the charged zebry pad in Oasis Pro 14 solution.
- 5.1.3.15 Wipe the walls from top to bottom using the zebry pad.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

- 5.1.3.16 After cleaning the walls, remove the dirty zebry pad and place it in the blue-coloured hamper of the service trolley.
- 5.1.3.17 Wipe the bed frame using a Yellow MFC Charged in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base.
- 5.1.3.18 To effectively clean the bed frame, the attachments need to be disassembled and moved.
- 5.1.3.19 Thoroughly inspect and disinfect the mattress including the sides and bottom.
- 5.1.3.20 Wipe down and clean the top and bottom of each removable component.
- 5.1.3.21 Always wipe the area of beneath the removable platforms before the components are put back in place.
- 5.1.3.22 After cleaning the top surface of the bed frame, move towards the base and thoroughly wipe the underneath side of the bed frame. Continue wiping down till the legs and castor wheels.
- 5.1.3.23 Change the MFC regularly as and when required and dispose them in the laundry hamper.
- 5.1.3.24 Using a Yellow MFC Charged in Oasis Pro 14 solution, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures and any other high touch elements including waste bins (general and infectious waste).
- 5.1.3.25 After completion of all furniture and fixtures cleaning, move onto floor cleaning.
- 5.1.3.26 Mop the floor using pre-charged Yellow coloured microfibre mops from the top-down system bucket.
- 5.1.3.27 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.
- 5.1.3.28 Remove the dirty mop and place it in the red coloured hamper of the service trolley.
- 5.1.3.29 Prepare for Floor Scrubbing procedure.
- 5.1.3.30 Move all movable furniture to one half of the ICU.
- 5.1.3.31 Bring the Floor Scrubbing machine (single disc) and Wet & Dry vacuum inside the ICU.
- 5.1.3.32 Place the red coloured pad to the pad holder in the bottom of the scrubbing machine.
- 5.1.3.33 Fill 2 litres of anti-bacterial solution to the tank of the scrubbing machine.
- 5.1.3.34 Connect the electrical power cable to the electrical socket.
- 5.1.3.35 Commence the scrubbing process. Refer to the method statement for Floor Scrubbing (MS-CLE-HMC-004) for further information.
- 5.1.3.36 Start from the farthest corner of the room and run the machine in an overlapping pattern.
- 5.1.3.37 Ensure that all areas of the floor on half side of the room is covered.
- 5.1.3.38 Remove the chemical solution from the floor using a wet and dry vacuum.
- 5.1.3.39 While removing the water from the floor, also mop the floor and allow the area to dry.
- 5.1.3.40 After the floor is completely dry, move all furniture from the other half of the room to the scrubbed side of the room.
- 5.1.3.41 Commence the scrubbing process and follow steps 5.1.2.44 to 5.1.2.47
- 5.1.3.42 After completion of the scrubbing and drying process, disinfect the floor by mopping the floor using pre-charged Yellow coloured mops in Pro 14 solution.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

5.1.3.43 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.

5.1.3.44 Remove the dirty mop and place it in the red coloured hamper of the service trolley.

5.1.3.45 Reinstall all furniture to their original position.

5.1.3.46 Check and replenish consumables.

5.1.4 Terminal Cleaning of ICU Toilet

5.1.4.1 Charge the white zebry pad in the Oasis Pro 14 solution using a spray bottle and wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.

5.1.4.2 Remove all waste from the toilet as per policy (refer to CI 7249 IC in Management of Infectious Waste)

5.1.4.3 Using the white coloured MFC, spray the Oasis Pro 14 Solution from the spray bottle with Red Nozzle onto the White MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.

5.1.4.4 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.

5.1.4.5 Apply the Ecolab into WC chemical in the WC and then close the lid. (If available)

5.1.4.6 Start the cleaning process from Clean to Dirty using a red coloured disposable cloth and Oasis Pro14 All-Purpose cleaner (8 ml/ltr).

5.1.4.7 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, rim, overflow, handrails, etc.

5.1.4.8 Clean external surface of the WC including seat cover and hidden areas of WC by using a red sponge and Oasis Pro 14 chemical.

5.1.4.9 Rinse with water after cleaning external surfaces and seat cover.

5.1.4.10 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.

5.1.4.11 Using the white MFC, spray the Pro 14 disinfectant solution from the spray bottle with Red Nozzle onto the white MFC, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.

5.1.4.12 Using a White MFC spray Pro 14 disinfectant solution from the spray bottle with red nozzle onto the MFC to clean all surfaces.

5.1.4.13 Check and replenish consumables.

5.1.4.14 Place fresh garbage bags inside the garbage bins.

5.1.4.15 Using a Red microfiber Rapido mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of-eight stroke on the floor itself.

5.1.4.16 Area mopped shall be left to dry and there shall be no obvious mop marks.

5.1.4.17 Before leaving the toilet, clean and disinfect all equipment and tools with Pro 14 disinfectant solution.

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage near doors on both sides of the ICU.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**Refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.8 Only use appropriate tools and equipment for the task.
- 6.9 While handling waste, always treat every bag of waste as if it could have a sharp object in it.
- 6.10 Never compress the waste materials down into the waste bin with your hands.
- 6.11 Always carry the waste bags from the top and away from your body.
- 6.12 Always clean from top to bottom surfaces and clean to dirty areas.
- 6.13 When cleaning a surface, clean from back to front or farthest away to closest.
- 6.14 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.15 Never leave any tool or material in the area unattended.
- 6.16 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 Ensure all elements as per the Terminal Cleaning Checklist/patient room checklist are covered.
- 7.3 Supervisor to acknowledge submit a signed Terminal Cleaning Checklist to nursing department.
- 7.4 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

	METHOD STATEMENT		MS-CLE-HMC-43	
	ICU Cleaning		DATE	4/14/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		14.04.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		15.04.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.04.2024

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Isolation Room
Task Description	Terminal Cleaning for Droplet, Airborne Isolation & Protective Environment
Related RA/ JSA Ref.	HSEQ-RA-HMC-13

1. Training & Induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Safety Goggles
	Surgical Mask (For Droplet Isolation & Protective Environment)		N95 Mask (For Airborne Isolation)
	Disposable Gown		Disposable Shoe Cover
	Disposable Head Cover		

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

3. Required Materials/ Tools

	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System. (To be used ONLY in High-risk Areas)		Zebry pad
	Caution Board		Squeegee
	Double Mop Bucket with Wringer – For Isolation Rooms Only (Blue bucket for clean water & Red bucket for dirty water)		Spray Bottle with Color Coded Nozzle – For Diluted Cleaning Chemicals Yellow – High Risk Areas Red – Wash Room
	Oasis Pro 14 All Purpose Chemical		Sponge
	Pro 41 Glass Cleaner		Yellow Garbage Bag (for bio-hazard waste)
	Antichlor Chlorines Tablet (Applicable in contact isolation and to disinfect tools and equipment) (In case of SPIL)		Black Garbage Bag (for general/non-medical waste)

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0
	Caddy Tray		Waste Collection Trolley	
	Toilet Roll		Interfold Tissue	
	Dustpan with Brush		MFC – Yellow High Risk	

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 PPE to be donned (worn) upon entry into the Ante room.
- 4.1.4 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.5 Ventilate the area where appropriate.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required on service trolley to save wasted journeys.
- 4.2.2 Ensure the trolley is well stocked with cleaning agents (chemicals), disposable cloths and mops, toilet rolls, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.
- 4.2.3 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.4 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Prepare a cleaning solution of 8 ml Oasis Pro 14 chemical to 1 litre of water ratio in a small bucket with yellow handle and place it on top of the trolley/cart.

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

4.2.7 Ensure the trolley is well stocked with cleaning agents (chemicals), microfibre dusters and pre-soaked microfibre mops as per colour code, toilet rolls, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.

4.2.8 Place all chemical spray bottles (Oasis Pro 14, Pro 41 Glass Cleaner), sponge, yellow and red MFC cloths and mops, applicator, etc. on a caddy tray.

4.2.9 Wear appropriate PPE as per guidelines (**Refer to CL 7242 Infection Control Practices**).

5. Job Steps

5.1 Room Cleaning:

5.1.1 Identify the work area risk access and place the safety sign (caution board) outside the isolation room.

5.1.2 Wheel the trolley inside the ante room just outside the isolation room, do not take the trolley inside the isolation room.

5.1.3 If Ante room is not available, park the housekeeping trolley in front of isolation room entrance door on the corridor.

5.1.4 Carry the caddy tray along with two mop handles with yellow and red clips and place it in the Ante room.

5.1.5 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.

5.1.6 Remove curtains from the room and place them in linen hamper with green bag lined with a water-soluble bag.

5.1.7 Remove all waste from the room as per policy (**Refer to CL 7249 IC in Management of Infectious Waste**)

5.1.8 Commence the cleaning process and use Oasis Pro 14 chemical solution & Using the Zebry pad and wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.

5.1.9 Using the pre-soaked YELLOW coloured Charged MFC cloth in Oasis Pro 14 chemical solution, clean the bed in the room starting at the top using systematic passes, moving down to frame, not forgetting the base and wheels.

5.1.10 Using a pre - soaked YELLOW coloured Charged MFC in Oasis Pro 14 Solution , clean all surfaces (including frequently touch points), furniture and fixtures starting at the top using systematic passes, moving downwards. This includes mattress cover, pillows, and garbage bins. Use 8 sides on each cloth before disposing.

5.1.11 If there is a wash basin in the room, clean the sink area, faucet, splash board, hand soap dispenser, interfold tissue dispenser with the charged yellow MFC cloth using the Oasis Pro 14 solution.

5.1.12 Check and replenish consumables.

5.1.13 After allowing a contact time of 10 minutes, place fresh garbage bags inside the garbage bins.



	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

5.1.14 Mop the floor using pre soaked yellow coloured Microfibre mops from the top-down system bucket. In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the patient bed and work your way back towards the door ensuring that all the floor surfaces are covered.



5.1.15 Area mopped shall be left to dry and there shall be no obvious mop marks.

5.1.16 Refer to **MS-CLE-HMC-006 – Damp Moping** for damp moping steps.

5.1.17 Before leaving the room, clean and disinfect all equipment and tools with chlorine-based solution (Actichlor 1000 PPM)

5.2 Toilet Cleaning:

5.2.1 Use Oasis Pro 14 solution Chemicals & using with zebry pad and wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.



5.2.2 Remove all waste from the toilet as per policy (**Refer to CL 7249 IC in Management of Infectious Waste**)

5.2.3 Using the pre soaked white coloured MFC cloth in Oasis Pro 14 Solution, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.

5.2.4 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.

5.2.5 Apply the Ecolab max into WC2 chemical in the WC and then close the lid (If available).

5.2.6 Start the cleaning process from Clean to Dirty using a red coloured MFC cloth and Oasis Pro14 All-Purpose cleaner (8 ml/ltr).



5.2.7 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, rim, overflow, handrails, etc.

5.2.8 Clean external surface of the WC including seat cover and hidden areas of WC by using a red MFC cloth and Oasis Pro 14 chemical.



5.2.9 Rinse with water after cleaning external surfaces and seat cover.

5.2.10 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.

5.2.11 Using the pre charged RED coloured MFC cloth, clean the toilet brush and garbage bins.



5.2.12 Place fresh garbage bags inside the garbage bins.

5.2.13 Using a Red microfiber Rapido mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of eight stroke on the floor itself.

5.2.14 Area mopped shall be left to dry and there shall be no obvious mop marks.

5.2.15 Refer to **MS-CLE-HMC-006 – Damp Moping** for damp moping steps.

5.2.16 Before leaving the toilet, clean and disinfect all equipment and tools with chlorine-based solution. (Actichlor 1000 PPM)

5.2.17 Check and replenish consumables.

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

5.3 Regular Room Cleaning for Candida Auris Patient:

- 5.3.1 Last room to clean
- 5.3.2 Cleaning materials to be separated
- 5.3.3 Cleaning with Pro 14 Plus (8ml of chemical in 1 liter of water)
- 5.3.4 Disinfect with Actichlor (1 Actichlor tablet in 1 liter of water)
- 5.3.5 High touch surfaces shall be cleaned with Sporicidal Wipes

5.4 Terminal Room Cleaning for Candida Auris Patient:

- 5.4.1 Last room to clean.
- 5.4.2 Cleaning materials to be separated.
- 5.4.3 Cleaning with Pro 14 Plus (8ml of chemical in 1 liter of water)
- 5.4.4 Disinfect with Actichlor (10 Actichlor tablet in 1 liter of water)
- 5.4.5 High touch surfaces will be cleaned by Sporicidal Wipe.
- 5.4.6 Consumables items and curtains to be disposed.
- 5.4.7 Fumigation process to be done.
- 5.4.8 Terminal cleaning to be performed 3 times – 2 times before fumigation and 1 time after fumigation.

6 Health and Safety – Points to Remember

- 6.4 Always place the precautionary/warning signage
- 6.5 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.6 Handle all chemicals safely according to COSHH / SDS.
- 6.7 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.8 Avoid physical contact with chemical (specially with eyes)
- 6.9 To complete the job safely, follow the associated risk assessment.
- 6.10 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.11 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.12 Only use appropriate tools and equipment for the task.
- 6.13 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.14 Never leave any tool or material in the area unattended.
- 6.15 As much as possible, keep the pathways clear of obstructions.
- 6.16 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.

7 Quality Verification & Post Job Check

- 7.4 Visually check the isolation room and the toilet cleaned satisfactory.
- 7.5 Ensure the floor completely dried and ready for next use.
- 7.6 Warning signs, tools, equipment are checked, cleaned, disinfected, and removed as necessary.
- 7.7 Remove PPE (Refer to CL 7242 Infection Control Practices). PPE to be removed and discarded before exiting the room.
- 7.8 Wash your hands thoroughly (following hand hygiene policy).
- 7.9 Did you notice any hazards during the work task that wasn't mentioned in the Method Statement? (If yes, inform your supervisor)
- 7.10 Double Check there are no tools, materials left in the area.

	METHOD STATEMENT		MS-CLE-HMC-18	
	Isolation Room Terminal Cleaning (Droplet, Airborne & Protective Environment)		DATE	5/15/2024
			REVISION	V2.0

7.11 One last check to ensure room is ready and all equipment has been returned to correct position.

7.12 Notify your supervisor that the work is complete, and area is free of materials.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT	MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)	DATE	5/16/2024
		REVISION	2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Isolation Room
Task Description	Terminal Cleaning for Contact Isolation
Related RA/ JSA Ref.	HSEQ-RA-HMC-45

1. Training & Induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Safety Goggles
	Surgical Mask (For Droplet Isolation & Protective Environment)		N95 Mask (For Airborne Isolation)
	Disposable Gown		Disposable Shoe Cover
	Disposable Head Cover		

	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

3. Required Materials/ Tools				
	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System. (To be used ONLY in High-risk Areas)			Applicator
	Caution Board			Squeegee
	Double Mop Bucket with Wringer – For Isolation Rooms Only (Blue bucket for clean water & Red bucket for dirty water)			Yellow Disposable J Cloth (only to be used in the isolation room)
	14 plus antibacterial All Purpose Chemical			Red Disposable J Cloth (only to be used inside toilet – WC & Urinal Bowl)
	White Disposable J Cloth (only to be used inside toilet – Except WC and Urinal Bowl)			Spray Bottle with Color Coded Nozzle – For Diluted Cleaning Chemicals Yellow – High Risk Areas Red – Wash Room
	Pro 41 Glass Cleaner			Yellow Disposable Mop (only to be used in the isolation room)
	Actichlor Chlorine Tablet (Applicable in contact isolation and to disinfect tools and equipment) (In case of SPIL)			

	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

	Caddy Tray		Sponge
	Toilet Roll		Yellow Garbage Bag (for bio-hazard waste)
	Interfold Tissue		Black Garbage Bag (for general/non-medical waste)
	Dustpan with Brush		Waste Collection Trolley

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 PPE to be donned (worn) upon entry into the Ante room.
- 4.1.4 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.5 Ventilate the area where appropriate.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required on service trolley to save wasted journeys.
- 4.2.2 Ensure the trolley is well stocked with cleaning agents (chemicals), disposable cloths and mops, toilet rolls, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.
- 4.2.3 Choose appropriate colour coded tools & equipment and ensure they are assembled safely. Condition of tools – check if these are in clean, good working condition & safe to use.

	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

- 4.2.4 Always check the preparation date of the diluted cleaning chemicals (14 plus antibacterial, Pro 41 Glass Cleaner) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.5 Prepare a cleaning solution of 8 ml 14 plus antibacterial chemical to 1 litre of water ratio in a small bucket with yellow handle and place it on top of the trolley/cart.
- 4.2.6 For each Isolation room, ensure that a dedicated double mop bucket with wringer with exact room number is stored in the housekeeping room. In the yellow-coloured bucket, prepare a cleaning solution with 8 ml 14 plus antibacterial chemical to 1 litre of water ratio.
- 4.2.7 Place all chemical spray bottles (14 plus antibacterial, Pro 41 Glass Cleaner), sponge, yellow and red disposable cloths and mops, applicator, etc. on a caddy tray.
- 4.2.8 Wear appropriate PPE as per guidelines (**Refer to CL 7242 Infection Control Practices**).

5. Job Steps

5.1 Room Cleaning:

- 5.1.1 Identify the work area risk access and place the safety sign (caution board) outside the Contact isolation room.
- 5.1.2 Wheel the trolley inside the ante room just outside the isolation room, do not take the trolley inside the isolation room.
- 5.1.3 If Ante room is not available, park the housekeeping trolley in front of isolation room entrance door on the corridor.
- 5.1.4 Carry the caddy tray along with two mop handles with yellow and red clips and place it in the Ante room.
- 5.1.5 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.
- 5.1.6 Remove curtains from the room and place them in linen hamper with green bag lined with a water-soluble bag.
- 5.1.7 Remove all waste from the room as per policy (Refer to CL 7249 IC in Management of Infectious Waste)
- 5.1.8 Commence the cleaning process by charged a YELLOW coloured disposable cloth in 14 plus antibacterial solution from the yellow bucket, wrap the disposable cloth over an applicator wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.



	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

5.1.9 Using the pre-soaked YELLOW coloured disposable cloth and 14 plus antibacterial chemical solution, clean the bed in the room starting at the top using systematic passes, moving down to frame, not forgetting the base and wheels

5.1.10 Using a Yellow disposable cloth, spray 14 plus antibacterial Solution from the spray bottle with yellow nozzle onto the disposable cloth, clean all surfaces (including frequently touch points), furniture and fixtures with Oasis Pro 14 chemical solution starting at the top using systematic passes, moving downwards. This includes mattress cover, pillows, and garbage bins. Use 8 sides on each cloth before disposing.



5.1.11 If there is a wash basin in the room, clean the sink area, faucet, splash board, hand soap dispenser, interfold tissue dispenser with the yellow disposable cloth using 14 plus antibacterial solution.



5.1.12 Check and replenish consumables.

5.1.13 After allowing a contact time of 10 minutes, place fresh garbage bags inside the garbage bins.

5.1.14 Using a Yellow coloured disposable mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of eight stroke on the floor itself with 14 plus antibacterial chemical solution.



5.1.15 All surfaces, equipment and floors shall be disinfected with 0.1% (1000ppm) chlorine-based disinfectant.

5.1.16 Area mopped shall be left to dry and there shall be no obvious mop marks.



5.1.17 Refer to MS-CLE-HMC-006 – Damp Moping for damp moping steps.


5.1.18 Before leaving the room, clean and disinfect all equipment and tools with chlorine-based solution (Actichlor 1000 PPM)

5.2 Toilet Cleaning:

5.2.1 Charged a Red Coloured disposable cloth in 14 plus antibacterial solution, wrap the disposable cloth over an applicator wipe the ceiling tiles using systematic strokes followed by cleaning the walls from top to bottom with overlapping passes as not to miss any area.



	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

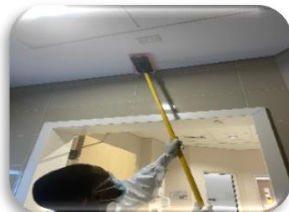

5.2.2 Remove all waste from the toilet as per policy (**Refer to CL 7249 IC in Management of Infectious Waste**)

5.2.3 Using the white coloured disposable cloth, pre – soaking in Oasis Pro 14, clean the washbasin, faucet, mirror, soap dispenser, tissue dispenser, shower hose & head, shower rod, shower curtain etc. Start at the top using systematic passes and move downwards.



5.2.4 Cover the WC bowl and flush it before starting and then push water back in the WC using the WC brush.

5.2.5 Apply the Ecolab Maxx into WC2 chemical in the WC and then close the lid (If available).



5.2.6 Start the cleaning process from Clean to Dirty using a red coloured disposable cloth and 14 plus antibacterial All-Purpose cleaner (8 ml/ltr).

5.2.7 Special attention shall be given to sanitary appliances and high-touch areas such as toilet handles, handrails, etc.



5.2.8 Clean external surface of the WC including seat cover and hidden areas of WC by using a red sponge and 14 plus antibacterial chemical.



	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

5.2.9 Rinse with water after cleaning external surfaces and seat cover.

5.2.10 Dispose the sponge after usage.

5.2.11 Lift the WC seat cover, use the toilet brush to clean inside the WC and flush while WC bowl is closed. Use flush water to clean brush and return it to its container.



5.2.12 Using the pre-soaked RED coloured disposable cloth, 14 plus antibacterial Solution clean the toilet brush and garbage bins.

5.2.13 All surfaces, fixtures and floors shall be disinfected with 0.1% (1000ppm) chlorine-based disinfectant

5.2.14 Check and replenish consumables.



5.2.15 Place fresh garbage bags inside the garbage bins.

5.2.16 Using a disposable mop, damp-mop the floor along the edges of areas lengthwise, using a figure-of eight stroke on the floor itself.

5.2.17 Area mopped shall be left to dry and there shall be no obvious mop marks.

5.2.18 Refer to MS-CLE-HMC-006 – Damp Moping for damp moping steps.

5.2.19 Before leaving the toilet, clean and disinfect all equipment and tools with chlorine-based solution. (Actichlor 1000 PPM)

6. Health and Safety – Points to Remember

6.1 Always place the precautionary/warning signage

6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.

6.3 Handle all chemicals safely according to COSHH / SDS.

6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).

6.5 Avoid physical contact with chemical (specially with eyes)

6.6 To complete the job safely, follow the associated risk assessment.

6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.

6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.

6.9 Only use appropriate tools and equipment for the task.

6.10 Comply with all HMC regulations for safety, hygiene, and infection control.

6.11 Never leave any tool or material in the area unattended.

6.12 As much as possible, keep the pathways clear of obstructions.

6.13 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.

	METHOD STATEMENT		MS-CLE-HMC-45	
	Isolation Room Terminal Cleaning (Contact)		DATE	5/16/2024
			REVISION	2.0

7. Quality Verification & Post Job Check

- 7.1 Visually check the isolation room and the toilet cleaned satisfactory.
- 7.2 Ensure the floor completely dried and ready for next use.
- 7.3 Warning signs, tools, equipment are checked, cleaned, disinfected, and removed as necessary.
- 7.4 Remove PPE (Refer to CL 7242 Infection Control Practices). PPE to be removed and discarded before exiting the room.
- 7.5 Wash your hands thoroughly (following hand hygiene policy).
- 7.6 Did you notice any hazards during the work task that wasn't mentioned in the Method Statement?
(If yes, inform your supervisor)
- 7.7 Double Check there are no tools, materials left in the area.
- 7.8 Wash your hands thoroughly (following hand hygiene policy).
- 7.9 One last check to ensure room is ready and all equipment has been returned to correct position.
- 7.10 Notify your supervisor that the work is complete, and area is free of materials.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
		HSEQ		
Reviewed & Approved By	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, AAH
Department Name	Housekeeping
Job Location	Operation Room
Task Description	Deep Cleaning & Terminal Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-17

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown		Scrub Suit - wearing of scrub suit/disposable scrub suit is MANDATORY in surgical section

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (Dedicated trolley only for Operating Rooms)		Waste Collection Trolley BLUE - GENERAL Waste RED - Infectious Waste (Dedicated trolley only for Operating Rooms)
	Caution Boards (Cleaning in Progress & Wet Floor)		Zebry pad
	Oasis Pro 14 All Purpose Chemical		Glass Squeegee
	Actichlor Chlorine Tablet		Floor Squeegee
	Suma D7 Stainless steel Polish		Dust-Pan with Brush
	Hydrex Surgical Scrub		Aluminium Handle with 3 holes - Colour coded and Plastic Mop Holder with Velcro Strips
	Kimberley Clark Hand Soap Refil		Yellow Coloured Rapido Mop (with Velcro attachment)

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

	Yellow Disposable J Cloth (to be used only INSIDE the Operation Room)		Floor Scraper
	Interfold Tissue		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Black Garbage Bag (for general/non-medical waste)		Scouring Sponge
	Yellow Garbage Bag (for bio-hazard waste)		Wet & Dry Vacuum Machine
	17" Scrubbing Pads		Scrubbing Machine (Single Disc)
	Podium Ladder for High Level Tasks		
	MFC Yellow – High Risk Area		

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Inspect the area thoroughly if found any maintenance or damages, informed to the concern person.
- 4.1.6 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Place the dust mop handles with their respective mops on the housekeeping trolley.
- 4.2.5 Ensure the trolley is well stocked with cleaning agents (chemicals), disposable cloths, mops, interfold tissue packs, garbage bags (black and yellow) etc. before starting work in line with the relevant COSHH card.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner, Actichlor Solution etc.) The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Prepare a 1000 ppm of chlorine-based disinfectant solution (1 tablet of Actichlor to 1 litre of water) in a small bucket with RED handle and place it on top of the trolley/cart.
- 4.2.8 Prepare a cleaning solution of 8 ml Oasis Pro 14 chemical to 1 litre of water ratio in a small bucket with BLUE handle and place it on top of the trolley/cart. (**needed clarification of charging or spraying**)
- 4.2.9 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.3 Floor Scrubbing Machine & Wet/Dry Vacuum Machine Pre-Check

- 4.3.3 Check that the unit switches on and off correctly.
- 4.3.4 Carry out a safety check of each part of the electrical equipment as appropriate.
- 4.3.5 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth from the machine to the plug, if there are any faults then the machine should not be used but should be marked as “out of order” in line with the reporting procedure.
- 4.3.6 The cable should be neatly placed and should at no time be present as a trip hazard.
- 4.3.7 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.
- 4.3.8 The casing of the machine should be complete and in good working condition; the wheels free from debris and freely moving.

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 4.3.9 Ensure correct accessories are selected, pad drives and pads or brushes depending on the floor type.
- 4.3.10 Avoid standing on the cable at any point, this is primarily for the operator's safety, it is possible that something sharp on the sole of a shoe could cut through the wire.
- 4.3.11 Cut out switches should be checked.

4.4 Top-Down System

4.4.1 Preparation of Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.1.1 In a clean bucket, prepare 2 litres of diluted anti-bacterial cleaning solution.
**High Risk Areas – 16 ml of Ecolab Oasis Pro 14 chemical and 2 litres of water.
 (This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.1.2 Place 20-25 yellow coloured microfibre flat mops inside the plastic box with lid and BLUE handle.
- 4.4.1.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.1.4 Close the box with the lid and seal it properly.
- 4.4.1.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.1.6 Place the box on the housekeeping cart.

4.4.2 Preparation of Chlorine Disinfectant Solution (Actichlor)

- 4.4.2.1 In a clean bucket, add 2 Actichlor chlorine tablets to 2 litres of clean water to prepare a chlorine disinfectant solution (1000 ppm).
- 4.4.2.2 Place 20-25 yellow coloured microfibre flat mops inside the plastic box with lid and RED handle.
- 4.4.2.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chlorine disinfectant solution into the plastic box over the chemical tray.
- 4.4.2.4 Close the box with the lid and seal it properly.
- 4.4.2.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.2.6 Place the box on the housekeeping cart.

5. Job Steps

5.1 Operation Room Cleaning

5.1.1 Cleaning the Operation Room Between Cases

This cleaning procedure is carried out between 2 surgeries (after completion of one surgery and before commencement of the other). This type of cleaning is carried out only after recommendation from Surgical team.

The following cleaning steps are to be followed:

- 5.1.1.1 Identify the work area risk access and place the safety signages (caution boards) outside the operation room. Ensure a signage is near both doors of the operation room.

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 5.1.1.2 Wheel the housekeeping trolley and waste collection trolley just outside the operation room, do not take the trolley(s) inside.
 ** Remember – both these trolleys are dedicated only for the surgical department and MUST NOT be used in any other areas of the hospital.



- 5.1.1.3 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.

- 5.1.1.4 The operating room doors should remain closed while the cleaning is performed.

- 5.1.1.5 Commence the cleaning process by first removing any large debris on the floor using a dustpan and brush.

- 5.1.1.6 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Follow the HMC SPIL procedure.

- 5.1.1.7 Remove all waste from the room as per policy (refer to CI 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.



- 5.1.1.8 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste.

- 5.1.1.9 After removal of waste from the operation room, commence the cleaning procedure by charging a YELLOW coloured MFC cloth in Oasis Pro 14 solution from the blue bucket.

- 5.1.1.10 Clean all high touch areas/elements starting from the ceiling mounted pendants arms, light handles etc. Start from the farthest point from the light and wipe down all surfaces with Oasis Pro 14 solution.

- 5.1.1.11 Pivot the light fixture and continue wiping the top surface of the light fixture.

- 5.1.1.12 Use sporicidal wipes provided by the surgical team to wipe the light reflector surface. Allow a contact time of 3-5 minutes to dry.

- 5.1.1.13 Wipe the operation table using a charged MFC in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base.



- 5.1.1.14 To effectively clean the operating table, the attachments need to be disassembled and moved.

- 5.1.1.15 Thoroughly inspect and disinfect the table pad including the sides and bottom of the pad.

**Ensure not to stack a clean pad on a surface that has not yet been cleaned.

- 5.1.1.16 Wipe down and clean the top and bottom of each removable component.

- 5.1.1.17 Always wipe the area of beneath the removable platforms before the components are put back in place.

- 5.1.1.18 After cleaning the top surface of the operating table, move towards the base and thoroughly wipe the underneath side of the table. Continue wiping down till the legs and castor wheels.

- 5.1.1.19 Change the MFC cloth when its visibly soiled.

- 5.1.1.20 Using a charged MFC in Oasis Pro 14 solution, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures and any other high touch elements including waste bins (general and infectious waste).



	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.1.1.21 After completion of all furniture and fixtures cleaning, move onto floor cleaning.

5.1.1.22 Mop the floor using pre-charged yellow coloured microfibre mops from the top-down system.

5.1.1.23 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular attention to the area under the operating table and work your way back towards the door ensuring that all the floor surfaces are covered.



5.1.1.24 Remove the dirty mop and place it in the red coloured hamper of the service trolley.

5.1.2 **Terminal Cleaning of Operation Room**

Terminal cleaning of the operation room is usually carried out at the end of the day or between cases, subject to instruction from surgical team.

The following cleaning steps are to be followed:

5.1.2.1 Identify the work area risk access and place the safety signages (caution boards) outside the operation room. Ensure a signage is near both doors of the operation room.

5.1.2.2 Wheel the housekeeping trolley and waste collection trolley just outside the operation room, do not take the trolley(s) inside.

5.1.2.3 **** Remember** – both these trolleys are dedicated only for the surgical department and MUST NOT be used in any other areas of the hospital.

5.1.2.4 Ensure all dirty/soiled linen have been removed by the nursing team prior to commencing cleaning.

5.1.2.5 The operating room doors should remain closed while the cleaning is performed.

5.1.2.6 Remove any large debris on the floor using a dustpan and brush.

5.1.2.7 If any blood or body fluid spillage is observed on the floor, immediately clean it using the absorbent pads from the spill kit. Follow the HMC SPILL procedure.

5.1.2.8 In case of any small amount of blood or body fluid found on the floor, wall or any other fixtures, spot clean using a disposable cloth charged in Oasis Pro 14 solution.

5.1.2.9 Remove all waste from the room as per policy (refer to CI 7249 IC in Management of Infectious Waste). Always start with domestic waste first followed by removal of infectious waste.

5.1.2.10 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and RED compartment for INFECTIOUS waste.

5.1.2.11 Commence the cleaning process by starting from the ceiling.

5.1.2.12 Using a zebry pad, Wipe the ceiling/ceiling tiles in systematic strokes with overlapping passes as to not miss any area.

5.1.2.13 After completion of wiping the ceiling, remove the dirty MFC and place it in the blue coloured hamper of the service trolley.



5.1.2.14 Commence the process of cleaning the walls using the zebry pad with Oasis Pro 14 solution.

5.1.2.15 Wipe the walls moving the MFC from top to bottom.

5.1.2.16 Once the wall cleaning is completed, remove the zebry pad and place it in the blue coloured hamper of the service trolley.

5.1.2.17 Clean all high touch areas/elements starting from the ceiling mounted pendants arms, light handles etc. Start from the farthest point from the light and wipe down all surfaces with Oasis Pro 14 solution.

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 5.1.2.18 Pivot the light fixture and continue wiping the top surface of the light fixture.
- 5.1.2.19 Wipe the operation table using a charged MFC in Oasis Pro 14 solution. Start from the top and move downwards towards the frame and base.
- 5.1.2.20 To effectively clean the operating table, the attachments need to be disassembled and moved.
- 5.1.2.21 Thoroughly inspect and disinfect the table pad including the sides and bottom of the pad.
**Ensure not to stack a clean pad on a surface that has not yet been cleaned.
- 5.1.2.22 Wipe down and clean the top and bottom of each removable component.
- 5.1.2.23 Always wipe the area of beneath the removable platforms before the components are put back in place.
- 5.1.2.24 After cleaning the top surface of the operating table, move towards the base and thoroughly wipe the underneath side of the table. Continue wiping down till the legs and castor wheels.
- 5.1.2.25 Change the MFC cloth as when it is visibly dirty.
- 5.1.2.26 Using a charged MFC, wipe all doors, door frame, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures and any other high touch elements including waste bins (general and infectious waste).
- 5.1.2.27 Continue using charged MFC cloth to clean worktables and chairs.
- 5.1.2.28 Repeat the process 5.1.2.20 to 5.1.2.31 using Actichlor Chlorine solution to disinfect all surfaces.
- 5.1.2.29 After completion of all furniture and fixtures cleaning, move onto floor cleaning.
- 5.1.2.30 Mop the floor using pre-charged yellow coloured microfibre mops from the top-down system with BLUE Handle.
- 5.1.2.31 Prepare for Floor Scrubbing procedure.
- 5.1.2.32 Move all movable furniture to one half of the operation room.
- 5.1.2.33 Bring the Floor Scrubbing machine (single disc) and Wet & Dry vacuum inside the operation room.
- 5.1.2.34 Place the red coloured pad to the pad holder in the bottom of the scrubbing machine.
- 5.1.2.35 Fill 2 litres of anti-bacterial solution to the tank of the scrubbing machine.
- 5.1.2.36 Connect the electrical power cable to the electrical socket.
- 5.1.2.37 Commence the scrubbing process. Refer to the method statement for Floor Scrubbing (MS-CLE-HMC-004) for further information.
- 5.1.2.38 Start from the farthest corner of the room and run the machine in an overlapping pattern.
- 5.1.2.39 Ensure that all areas of the floor on half side of the room is covered.
- 5.1.2.40 Remove the chemical solution from the floor using a wet and dry vacuum.
- 5.1.2.41 Rinse the floor with the water and remove the water from the floor using a wet and dry vacuum.
- 5.1.2.42 While removing the water from the floor, also mop the floor and allow the area to dry.
- 5.1.2.43 After the floor is completely dry, move all furniture from the other half of the room to the scrubbed side of the room.
- 5.1.2.44 Commence the scrubbing process and follow steps 5.1.2.44 to 5.1.2.47.
- 5.1.2.45 After completion of the scrubbing and drying process, disinfect the floor by mopping the floor using pre-charged yellow coloured microfibre mops charged in Actichlor solution.
- 5.1.2.46 In a systematic way, mop the floor in a figure 8 shape, using continuous strokes overlapping passes to make sure that all the areas are effectively and efficiently cleaned. Pay particular

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

attention to the area under the operating table and work your way back towards the door ensuring that all the floor surfaces are covered.

5.1.2.47 Remove the dirty mop and place it in the red coloured hamper of the service trolley.

5.1.2.48 Reinstall all furniture to their original position.

5.2 Scrub Area Cleaning

- 5.2.1 Apply Pro 14 solution on SS Sink, surgical scrub dispenser, splash guard, under the sink and tissue dispenser.
- 5.2.2 Allow a contact time of 5-10 minutes.
- 5.2.3 Scrub the SS Sink with yellow coloured sponge and rinse it with water.
- 5.2.4 Wipe the scrub sink using systematic strokes from top to bottom with overlapping passes as not to miss any area.
- 5.2.5 Disinfect the scrub sink area by wiping in systematic strokes from top to bottom with overlapping passes as not to miss any area.
- 5.2.6 Clean all areas thoroughly including wash basin, faucet, surgical scrub dispenser, splash guard, under the sink and tissue dispenser.
- 5.2.7 After completion of cleaning and disinfection, remove and discard gloves and perform hand hygiene as per HMC Policies CL 7241 Hand Hygiene.
- 5.2.8 Replenish consumables such as Tissue, Surgical Scrub etc.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage near doors on both sides of the operation room.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.8 Only use appropriate tools and equipment for the task.
- 6.9 While handling waste, always treat every bag of waste as if it could have a sharp object in it.
- 6.10 Never compress the waste materials down into the waste bin with your hands.
- 6.11 Always carry the waste bags from the top and away from your body.
- 6.12 Always clean from top to bottom surfaces and clean to dirty areas.
- 6.13 When cleaning a surface, clean from back to front or farthest away to closest.
- 6.14 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.15 Never leave any tool or material in the area unattended.
- 6.16 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 Ensure all elements as per the Terminal Cleaning Checklist are covered.

	METHOD STATEMENT		MS-CLE-HMC-24	
	Operation Room Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 7.3 Supervisor to acknowledge submit a signed Terminal Cleaning Checklist to surgical department.
- 7.4 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

NOTE

This document belongs to Facilities Management and Maintenance (FMM). It is their proprietary property. Without the express written consent of the FMM, the materials may not be duplicated in whole or in part to any other entity. Emails with comments or ideas regarding this method statement should be sent to the HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Spillage Clean Up
Related RA/ JSA Ref.	HSEQ-RA-HMC-35

1. Training & induction Requirements

You are to:

- 1.1 Complete a Site & Workplace induction training.
- 1.2 Complete the training of **CL 7241 Hand Hygiene policies**.
- 1.3 Complete the training of **CL 7242 IC in Housekeeping policies**.
- 1.4 Complete the training of **SA 1054_ HAZMAT & Waste management Program PPT policies**.
- 1.5 Being trained & with proper documentation with the task method statement **MS-CLE-HMC-000** and competent to do the job.
- 1.6 To be trained and completed the risk assessment that is required for the job.
- 1.7 To use correct tools & equipment for the job
- 1.8 To use correct PPE for the job **as per the HMC policies CL 7242 Infection Control Practices**.
- 1.9 Describe donning & doffing of PPE's and importance of infection control in an isolation area.
- 1.10 Use the appropriate chemical and able to understand and explain the dilution rate.

2. Required Personal Protective Equipment (PPE)

Hand protection - Disposable Gloves or Rubber Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)	
Disposable Mask		Disposable Hair – Optional (Wherever Necessary as per HMC IPC Guidelines)	

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

3. Required Equipment's and Tools				
Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)		Type 1 – Biohazard Body Fluid Single Application Clean Up Spillage Kit		
		Type 2 – Spillage Kit		
N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)		
Disposable Medical Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Caution Board		
Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area		Oasis Pro14 Chemical		
Actichlor Tablets		Snake Microfiber Hand Duster with Holder		

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

Disposable Cloth Yellow – ONLY to be used in ISOLATION Rooms.		Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)	
---	---	--	---

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if required, ensure that it is covered with a waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Take the appropriate PPE, check before wearing as per the guidelines (Refer to HMC policies CL 7242 Infection Control Practices).
- 4.1.3 Refer to HMC policies SA 1054_ HAZMAT & Waste management Program.
- 4.1.4 Ensure that you have received chemical handling and RA, MS, SDS, and COSHH training.
- 4.1.5 Identify the work area assess the risk access and place the warning sign. For corridor or an open space work area such as patient waiting area etc., ensure to place caution sign in both sides to notify the public and the staff.
- 4.1.6 Ventilate the area where appropriate.

4.2 Tools, Materials & Equipment

- 4.2.1 Check and prepare the required spillage kit.
- 4.2.2 Check & prepare all the equipment required for the task.
- 4.2.3 Choose appropriate colour coded tools & equipment and ensure to assemble safely.
- 4.2.4 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.5 Check & prepare all the equipment and materials required on service trolley to save wasted journeys.

4.3 Chemical Dilution & Usage

- 4.3.1 It is vital to always verify that the cleaning chemicals being utilized are specifically intended for the given activity. (Oasis Pro 14, Pro 41, Actichlor solution etc.)
- 4.3.2 Ensure that the chemicals spray bottles are all properly labelled with details such as dilution/expiry date & time.
- 4.3.3 Chemicals spray bottles nozzle must be colour coded according to the risk area.
- 4.3.4 Diluted chemical solution is dispensed from the Automatic Chemical Dispensing machine located in the housekeeping rooms. The chemical dispensing machine is pre-calibrated to dispense the chemical solution as per HMC Infection Control guidelines.

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

- 4.3.5 The dilution ratio for Oasis Pro 14 and Pro 41 is 8ml chemical for 1 ltr water and 1:1000 ppm for Actichlor (1 Actichlor tablet added to 1 ltr water).
- 4.3.6 Always check the preparation date of the diluted cleaning chemicals. The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.3.7 Ensure you have received training on chemical handling, RA, MS, SDS, and COSHH.
- 4.3.8 Follow the Proper dilution of the cleaning agents and should be referred to manufacturer's recommendation and HMC-IPC guidelines.

4.4 Spill Response – Guidelines in Assessing the Risk Involved

- 4.1.1 In the event of the spill, ensure to maintain your safety and safety of all personnel.
- 4.1.2 Evaluate the potential hazards as certain chemical spills may not be as dangerous as others.
- 4.1.3 Hydraulic oil will not create the same breathing hazards as concentrated acid, but acid will be less of a fire hazard than gasoline.
- 4.1.4 Those familiar with the chemicals in their workplace will have less difficulty identifying risks.
- 4.1.5 Risk includes not only the obvious direct risks to spill responders but also the risks to other equipment and materials in the area.
- 4.1.6 Acid spills are more dangerous in the presence of oxidisable materials such as oils and fuels.
- 4.1.7 When in doubt, leave the spill response to someone who knows what to do.

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

5. Job Steps

In Line with HMC Policy, SA 1054- HAZMAT & Waste management Program Please Follow Below Protocols.

DESCRIPTION	APPLICATION	DILUTION	CONTACT TIME (MINUTES)	NOS. OF CONTAINER (Bag)	CAPACITY (Liters)	
ECOLAB OASIS PRO 14 PLUS ANTIBACTERIAL ALL-PURPOSE CLEANER (Corrosive and Irritant)	Concentrated one-step Hospital Use disinfectant cleaner that is effective against a broad spectrum of bacteria, is virucidal* [including HIV-1, the AIDS Virus and Hepatitis B Virus and Hepatitis C Virus], clean and deodorize surfaces in rest rooms and toilet areas, and other places where bacterial growth can cause malodors.	8 ml 1 liter water	5	1	2	
ECOLAB OASIS PRO 41 AMMONIATED GLASS CLEANER (Corrosive)	Streak free fast drying performance on windows, mirrors, glass, plastic, acrylics and painted surfaces	4 ml 1 liter water	N/A	1	2	
ECOLAB HIGH PERFORMANCE NEUTRAL FLOOR CLEANER (Irritant)	High Performance Neutral Floor Cleaner is an ultra-low foaming, neutral floor cleaner designed for daily use in automatic scrubber and mop buckets	4 ml 1 liter water	5	1	2	
PREPARATION - HIGH POWER ACTICHLOR (NaDCC) TABLET x 1.7 g. (Irritant, Harmful to the Environment)						
AVAILABLE % OF CHLORINE	AVAILABLE PPM OF CHLORINE	APPLICATION	DILUTION	CONTACT TIME (MINUTES)	NOS. OF CONTAINER	CAPACITY (Tablet)
0.1%	1000	Large Blood Spill Terminal cleaning of Clostridium Difficile & MRSA Isolation Room	5 Tablets 1 liter water	10	1	200
0.05%	500	Small Blood Spill	1 Tablet 2 liters water	10		
0.05%	500	Routine Cleaning All Patients Rooms and routine daily cleaning of Isolation room	1 tablet 2 liters water	10		

fmm فم لم	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

1. Follow **S.P.I.L. / S.C.A.D.** procedure.
2. Call **Control Room on Tel Ext. _____** and give the following information's:
 - a. name of the caller
 - b. nature of the emergency
 - c. exact location
 - d. first initial action
3. Fill an **O.V.A.**



EMERGENCY REPORTING PROCEDURES

S	Secure the area and wear appropriate PPE.	S	Stop the leak/spill
P	Protect patients, visitors, co-workers away from the spill.	C	Contain the leak/spill
I	Inform control room.	A	Absorb the leak/spill
L	Leave clean up to Trained representative	D	Dispose contaminated materials

SPILL MANAGEMENT

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

5.1 TYPE 1 SPILLAGE CLEAN UP – Body Fluids e.g., Blood, Vomit, Urine, etc.

- 5.1.1 Prepare all equipment required for the task.
- 5.1.2 Place cleaning in progress sign/barriers within ½ metre of spillage.
- 5.1.3 Collect a Type 1 – Biohazard Body Fluid Spillage Kit from the Janitorial Trolley or from the cleaning room.
- 5.1.4 Put on all Personal Protective Equipment (PPE) provided in the Type 1 Spillage Kit.
- 5.1.5 Check for any needles and sharps, carefully dispose, and secure those in a sharp's container. If found, immediately inform the nurse in charge to record and take necessary action.
- 5.1.6 Whenever possible, ensure that there is a proper ventilation in the work area.
- 5.1.7 Using the absorbent granules, sprinkle over the entire affected area, taking care not to touch the spillage with bare skin.
- 5.1.8 Allow the spill to turn gelatinous, then using the scoop and scraper, place detritus into the biohazard bag.
- 5.1.9 Continue the process until all the detritus are collected and cleared.
- 5.1.10 Spray the area with disinfectant and leave for 2-3 minutes. Clean the area with dry wipes, then place bottle and wipes into the biohazard bag.
- 5.1.11 Remove the apron and gloves and place them into the biohazard bag.
- 5.1.12 Clean your hands thoroughly with the cleansing wipe, then put the used wipe into the biohazard bag, seal, and dispose of appropriately in the yellow bin at specified locations.
- 5.1.13 Once completed, remove, clean, and disinfect all the cleaning equipment and caution signs, placing items back to the trolley or in storeroom.
- 5.1.14 Hard floor areas to be cleaned thoroughly right after the spillage clean up; for guidance, refer to the method statements MS-CLE-HMC- 06 Damp Mopping, MS-CLE-HMC- 04 Floor Scrubbing with Machine and MS-CLE-HMC- 02 External Areas Floor Washing & Scrubbing as appropriate.
- 5.1.15 For soft floor or carpet, affected area to be cleaned thoroughly right after the spillage clean up, refer to the method statement of MS-CLE-HMC- 21 Carpet Shampooing.
- 5.1.16 Inspect the spill kit and notify the supervisor if any supplies need to be replenished.
- 5.1.17 Wash your hands thoroughly as per (HMC Policies CL 7241 Hand Hygiene).

5.2 TYPE 2 SPILLAGE CLEAN UP – Chemicals & Vehicle Oils

- 5.2.1 Collect a Type 2 "Spill Control Kit" from the cleaning room and caution signs.
- 5.2.2 Proceed to the spillage, place cleaning in progress sign within two metres of the spillage.

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

- 5.2.3 Risk assesses the area & when in doubt, leave the spill response to someone who knows what to do and immediately inform the Supervisor.
- 5.2.4 Wear appropriate Personal Protection Equipment (PPE) before contact with any hazardous substances (refer to SDS).
- 5.2.5 If it is safe to do so, begin to contain the spread of the spill. Stop the source of the spill to prevent its growth. Tip up drums or shut off valves. If drains are at risk, seal them off with a Neoprene Drain Mat. Prevent the spill from spreading by surrounding it with socks and booms.
- 5.2.6 If the spill is of a highly reactive chemical, such as an acid or caustic, neutralise the chemical activity of the liquid to enhance worker safety and reduce the costs and dangers associated with handling the disposing of these substances.
- 5.2.7 Whether applying neutralisers or absorbing the spill; always work from the outside to the inside. Sorbent socks and booms have considerable capacity by themselves. Push sorbents along the ground towards the centre of the spill. If the spill is larger than the sorbent capacity of the socks and booms that surround it, use sorbent pillows or sheet to absorb the remaining liquid.
- 5.2.8 Ensure no residue remains and if needed, wash the area of the spill.
- 5.2.9 Dispose the spill according to its nature. Collect all waste residues and contaminated absorbents into a suitable container and label, identifying liquid and characteristics of the liquid absorbed.
- 5.2.10 Exercise care when overseeing contaminated absorbents.
- 5.2.11 For hard floors, thorough cleaning to be done on the affected area right after the completion of the spillage clean up, refer to the method statement of MS-CLE-HMC- 06 Damp Mopping, MS-CLE-HMC- 04 Floor Scrubbing with Machine and MS-CLE-HMC- 02 External Areas Floor Washing & Scrubbing as appropriate.
- 5.2.12 For soft floors or carpets, thorough cleaning to be done on the affected area right after the completion of the spillage clean up, refer to the method statement of MS-CLE-HMC- 21 Carpet Shampooing as appropriate.
- 5.2.13 Inspect the spill kit and notify the supervisor if any supplies need to be replenished.
- 5.2.14 Once completed, remove, clean, and disinfect all the cleaning equipment and caution signs, placing items back to the trolley or in storeroom.
- 5.2.15 Wash your hands thoroughly as per (HMC Policies CL 7241 Hand Hygiene.)

6. Health and safety – Points to remember

- 6.11 Always place the precautionary/warning signage.
- 6.12 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

- 6.13 Handle all chemicals safely according to COSHH / SDS.
- 6.14 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).
- 6.15 It is advisable to refrain from engaging in physical contact with chemicals, particularly when it comes to the eyes.
- 6.16 To complete the job safely, follow the associated risk assessment.
- 6.17 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.18 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.19 Use the appropriate tools and equipment for the task.
- 6.110 Staff to follow TBT for slip, trip & fall.
- 6.111 Always follow your superior's guidelines when performing a task.
- 6.112 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.113 Never leave any tool or material in the area unattended.
- 6.114 As much as possible, keep the pathways clear of obstructions.
- 6.115 Ensure that you have COSHH Awareness and chemical handling trainings.
- 6.116 Follow the Proper dilution of the cleaning agents and should be referred to manufacturer's recommendation and HMC-IPC guidelines.
- 6.117 Any damage to surfaces or a reportable incident should be reported to the team leader.
- 6.118 Waste Disposal: Any waste generated during the cleanup process should be disposed of properly and in accordance with HMC regulations and guidelines.
- 6.119 Report All Major Spillages to HMC Dept Such as Environmental Safety Team, SMS, AED & FMM Management.

7. Quality Verification & Post Job Check

- 7.11 Ensure that all horizontal and vertical surfaces have been cleaned; they should be clear of any dust, grime, stains, smudges, finger marks, etc.
- 7.12 Warning signs, tools, material are checked, cleaned, disinfected, and removed, as necessary.
- 7.13 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).
- 7.14 Wash your hands thoroughly as per (HMC Policies CL 7241 Hand Hygiene.)
- 7.15 During the execution of the work task, did you observe any additional dangers that were not specified in the Method Statement? (In that case, notify your team supervisor.)
- 7.16 MFC's and disposable cloths should be laundered or disposed as appropriate.
- 7.17 Notify your team leader that the work is complete, and area is free of materials.
- 7.18 Make sure the tools, signs, and barricades are carefully removed from the site and returned to the HK room/store, leaving the area unobstructed.
- 7.19 Are there any faults with your tools and PPE that you must report?
- 7.110 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.
- 7.111 Report all damages, incidents & accidents / health events to your team leader.
- 7.112 OTL / Supervisor to make a note or report of what happened to cause the spill, what actions were taken and what recommendations would prevent a spill, or aid in future spill response.

	METHOD STATEMENT		MS-CLE-HMC-42	
	SPILLAGE CLEAN UP		DATE	11/22/2023
			REVISION	1.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		
Reviewed & Recommended By	Eldhose George	Cleaning Manager		
	Juan M. Roque	HSEQ Manager		
Approved By	Samee Mohamed	Project Manager		

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, AAH
Department Name	Housekeeping
Job Location	MRI Room
Task Description	Regular Cleaning & Terminal Cleaning
Related RA/ JSA Ref.	

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown		Scrub Suit - wearing of scrub suit/disposable scrub suit is MANDATORY in surgical section

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Housekeeping Trolley with Top/Down System		Waste Collection Trolley BLUE - GENERAL Waste RED - Infectious Waste
	Caution Boards (Cleaning in Progress & Wet Floor)		Zebry Pad (Blue) with holder
	Oasis Pro 14 All Purpose Chemical		Disposable Mops & Cloth (Isolation Rooms)
	Oasis Pro 41 Glass Cleaner		MFC Blue – MRI Room
	Microfiber Dust Mop		Aluminium Handle with 3 holes - Colour coded and Plastic Mop Holder with Velcro Strips
	Dustpan with Brush		Blue Microfibre Rapido Mop (with Velcro attachment)
	Yellow Garbage Bag (for bio-hazard waste)		Black Garbage Bag (for general/non-medical waste)

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

	Caddy Tray		Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage.
---	------------	--	---

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands according to the approved method before starting the task. Check for any cuts or abrasions on hands; if present, cover them with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy).
- 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices).
- 4.1.3 Identify the work area and display warning signs as necessary.
- 4.1.4 Place warning signs on both entrance and exit doors.
- 4.1.5 Ensure the work area is clear of hindrances or obstacles that could affect the cleaning or housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check and prepare all equipment required for the task.
- 4.2.2 Ensure tools are made of approved anti-magnetic material, verified by an MRI competent team member.
- 4.2.3 Select appropriate color-coded tools and equipment and assemble them safely.
- 4.2.4 Check the condition of tools for cleanliness, proper functionality, and safety.
- 4.2.5 Place dust mop handles with their respective mops on the housekeeping trolley.
- 4.2.6 Ensure the trolley is stocked with cleaning agents (chemicals), MFCs, MFM's, garbage bags (black and yellow), etc.
- 4.2.7 Always check the preparation date of diluted cleaning chemicals (Oasis Pro 14, Pro 41 Glass Cleaner, etc.). The chemical solution must be used within 24 hours of dilution.

4.3 Top-Down System

4.4.1 Preparation of Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.1.1 In a clean bucket, fill 2 litres of diluted anti-bacterial cleaning solution (This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.1.2 Place 20-25 blue-coloured microfiber flat mops inside the plastic box with a BLUE handle.
- 4.4.1.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.1.4 Close the box with the lid and seal it properly.
- 4.4.1.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.1.6 Place the box on the housekeeping cart.

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

4.4.2 Pre-charging of MFC Cloths in Anti-Bacterial Solution (Oasis Pro 14)

- 4.4.2.1 Place folded blue MFC inside the bucket with a blue-coloured handle.
- 4.4.2.2 Pour one liter of diluted anti-bacterial solution dispensed from the chemical dispenser.
- 4.4.2.3 Pour evenly over the MFC and allow soaking time of 20 minutes to pre-charge (impregnating) the cloths.

5. Job Steps

- 5.1 Seek approval from the nursing in charge to clean the MRI room.
- 5.2 Janitors or supervisors with pacemakers, neurostimulators, or metallic implants must not enter the MRI room.
- 5.3 No loose metal objects are allowed inside the MRI room.
- 5.4 Identify the work area, assess risks, and place caution signage (caution boards) outside the MRI room.
- 5.5 Wheel the housekeeping trolley and waste collection trolley just outside the MRI reception; do not take the trolleys inside.
- 5.6 Log in the janitor's checklist.
- 5.7 Start the cleaning process by removing any large debris on the floor using a dustpan and brush.
- 5.8 Remove all waste from the room as per policy (SA-1054-Hazardous materials and waste management program & CL 7249 IC in Management of Infectious Waste). Always start with domestic waste first, followed by removal of infectious waste. (Infectious waste should be labelled with details.)
- 5.9 Place the waste bags in the waste collection trolley. Use the BLUE compartment for GENERAL waste and the RED compartment for INFECTIOUS waste.
- 5.10 Begin the cleaning process by starting from the ceiling.
- 5.11 Charge the blue zebry pad in the Oasis Pro 14 solution using a spray bottle.
- 5.12 Wipe the ceiling/ceiling tiles using the charged blue zebry pad in systematic strokes with overlapping passes to ensure no area is missed.
- 5.13 After wiping the ceiling, remove the dirty zebry pad and place it in the blue-colored hamper of the service trolley.
- 5.14 Clean the walls using the charged blue zebry pad in Oasis Pro 14 solution.
- 5.15 Wipe the walls from top to bottom using the zebry pad.
- 5.16 After cleaning the walls, remove the dirty zebry pad and place it in the blue-colored hamper of the service trolley.
- 5.17 Clean all surfaces, furniture, and fixtures with a pre-charged blue MFC soaked in Oasis Pro 14 solution or by spraying Oasis Pro 14 Solution from the spray bottle onto the blue MFC. Start at the top and work downwards systematically. This includes all doors and frames, cupboard tops, domestic garbage bins, wall-mounted A/C grills, etc.
- 5.18 Use another blue MFC charged with Oasis Pro 41 solution to clean the window glass and glass panels.
- 5.19 Clean all high-touch areas/elements from top to bottom and in a clockwise or anti-clockwise manner.
- 5.20 Change the MFC regularly as needed and dispose of them in the laundry hamper.
- 5.21 Use a blue MFC soaked in Oasis Pro 14 solution to wipe all doors, door frames, door handles, glass in doors, kick plates, cabinets, all furniture/fixtures, and any other high-touch elements.
- 5.22 After cleaning all furniture and fixtures, proceed to dust mopping.
- 5.23 Dust mop the floor using a blue-coloured microfiber dust mop.

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 5.24 Start dust mopping adjacent to the skirting board, sweeping parallel to the skirting boards.
- 5.25 Sweep systematically, starting from the far end corner of the room and coming back in an "S" type action without lifting the mop during sweeping.
- 5.26 After dust mopping, proceed to floor cleaning.
- 5.27 Mop the floor using pre-charged, blue-coloured microfiber mops from the top-down system bucket with a BLUE Handle.
- 5.28 Mop the floor in a systematic manner, using continuous strokes overlapping passes in a figure 8 shape, ensuring all areas are effectively cleaned and work your way back towards the door to cover all floor surfaces.
- 5.29 Remove the dirty mop and place it in the red-coloured hamper of the service trolley.
- 5.30 Log out of the janitor's checklist.
- 5.31 Remove the caution signs only when the floor is completely dried.
- 5.32 Notify the nursing team that the MRI room is ready for the next patient.
- 5.33 Terminal Cleaning After Isolation Patient Visit – Contact/Droplet/Airborne Isolation - Follow MS-CLE-HMC-18 - Isolation Room Terminal Cleaning.

6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage near doors on both sides of the MRI room.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**Refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.7 Only use appropriate tools and equipment for the task.
- 6.8 While handling waste, always treat every bag of waste as if it could have a sharp object in it.
- 6.9 Never compress the waste materials down into the waste bin with your hands.
- 6.10 Always carry the waste bags from the top and away from your body.
- 6.11 Always clean from top to bottom surfaces and clean to dirty areas.
- 6.12 When cleaning a surface, clean from back to front or farthest away to closest.
- 6.13 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.14 Never leave any tool or material in the area unattended.
- 6.15 As much as possible, keep the pathways clear of obstructions.

	METHOD STATEMENT		MS-CLE-HMC-44	
	MRI Cleaning		DATE	5/16/2024
			REVISION	V2.0

7. Quality Verification & Post Job Check

- 7.1 After completing the task, ensure that the area's appearance is clean and satisfactory.
- 7.2 Confirm that all elements outlined in the MRI room checklist have been addressed.
- 7.3 If any furniture/equipment was moved during cleaning, ensure it is restored to its original state (reinstate the area).
- 7.4 Remove tools, signs, and barricading from the task location and safely return them to the HK room/store, keeping the area clear for users.
- 7.5 Double-check that no tools or materials are left in the area.
- 7.6 Notify your team leader that the work is complete, and the area is free of materials.
- 7.7 Remove your PPE according to HMC Policies CL 7242 Infection Control Practices.
- 7.8 Thoroughly wash your hands after completing the task as per HMC Policies CL 7241 Hand Hygiene.
- 7.9 Did you notice any additional hazards during the work task that were not mentioned in the Method Statement? If yes, inform your team leader.
- 7.10 Report any faults with your tools and PPE that you must report.
- 7.11 Report all damages, incidents, accidents, or health events to your team leader.
- 7.12 Ensure waste is properly disposed of according to SA-1054-Hazardous materials and waste management program.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facility management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Cleaning and Disinfection of Work Materials
Related RA/ JSA Ref.	HSEQ-RA-HMC-11

1. Training & Induction Requirements

You are to: Have a Site & Workplace induction; have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; only to use correct tools & equipment for the job, use correct PPE for the job; use correct chemical and explain the dilution if required; describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Safety Goggles

	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

3. Required Equipment and Tools

	Caution Board		MFC Cloth Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area
	Disposable Cloth Yellow – High Risk Area		Pro14 Chemical
	Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area		Fully equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Washing & Drier Machine		Fully equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)
	Actichlor Chlorine Tablet (Optional)		Plastic Container
	Washing Detergent Liquid		Water Soluble Bags

	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control in Housekeeping Department**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 To Identify the work area and place the warning signs as needed.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14) usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Any damage to tools, equipment or a reportable incident should be reported to the team leader.

5. Job Steps


5.1 Cleaning of Tools

- 5.1.1 Collect all used cleaning materials in the Housekeeping Trolley.
- 5.1.2 At the end of the shift, take the Housekeeping Trolley to the housekeeping room.
- 5.1.3 Clean all the equipment, mops, handles, buckets, containers etc. using MFC sprayed with Oasis Pro 14 Plus.
- 5.1.4 All cleaning materials from the trolley must be cleaned, disinfected, and left to dry.



	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

5.1.5 Thoroughly clean the housekeeping trolley including the base, wheels etc. and leave to dry.



5.1.6 After drying, all cleaned tools and materials to be placed on the trolley.



5.1.7 All consumables such as paper, plastic, hand soap etc. to be replenished in the housekeeping trolley.

5.1.8 The housekeeping trolley must be set up and kept ready for the next shift.

5.1.9 The janitor handing over the shift must fill in the trolley cleaning checklist and ensure that all elements of the checklist are completed.



5.1.10 The janitor taking over the shift must verify the checklist and counter sign the document after checking that the Housekeeping Trolley is ready for use.

5.1.11 For isolation rooms, clean all equipment, tools and housekeeping trolley inside the Ante room with Oasis Pro 14 and disinfect with Actichlor solution at 1000 ppm (1 tablet in 1 litre of water)



5.1.12 In the absence of an Ante room, the equipment shall be cleaned outside the patient room, and placed in the dedicated corner of the housekeeping room and labelled as "Isolation Room".



5.1.13 Toilet bowl brush should be cleaned and disinfected inside the toilet cubicle.

5.1.14 Rinse, drain and leave material to dry for next use.

5.1.15 The buckets should be kept flipped for complete drying.

5.2 Cleaning Micro Fibre Cloth (MFC)/Micro Fibre Mop (MFM)

5.2.1 After usage, all used MFC's and MFM's to be collected in the trolley and transported to the disposal hold within each department.



5.2.2 If MFC's and MFM's visibly soiled with body fluid, then it shall be placed in a water-soluble bag for laundering.

5.2.3 At the end of each shift, all MFC's and MFM's must be transported to the Housekeeping Laundry room for cleaning.



5.2.4 Place the MFC's and MFM's in the washing machine separately according to their colour coding.

5.2.5 Ensure to never use bleach or use fabric softener for MFC/MFM.

5.2.6 Only trained operators handle washing/drier machine operations.

5.2.7 The temperature must be set to 60-90 degrees Celsius for the washing and drying cycles.



5.2.8 Add adequate quantity of washing liquid into the washing machine detergent slot based on the load of MFC's and MFM's to be washed.

5.2.9 Close the door of washing machine and press start for the washing process.

5.2.10 After washing cycle, transfer MFC's / MFM's to the drier machine with the help of a clean plastic container.



	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

- 5.2.11 Select appropriate mode and press start button.
- 5.2.12 Once drying cycle is completed, transfer the dried MFC/MFM to the assigned storage area for next use with the help of a dry plastic container.
- 5.2.13 All material should be folded, covered in a dust bag and stored in a clean and dry area to avoid growth of micro-organisms.

6. Health and Safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control in Housekeeping Department)**.
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Use the appropriate tools for the task.
- 6.10 Staff to follow TBT for slip, trip & fall.
- 6.11 Always follow your superior's guidelines when performing a task.
- 6.12 Comply with all HMC regulations for safety, good hygiene, and infection control.
- 6.13 Never leave any tool or material in the area unattended.
- 6.14 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Visually check the tools, equipment and materials cleaned & disinfected effectively.
- 7.2 Discarded or dis coloured MFC/MFM must be disposed as appropriate.
- 7.3 Check the issuance date of MFC/MFM on the fabric to track and whenever it hits the 200 days mark, the MFC/MFM must be discarded.
- 7.4 Damaged tools must be disposed as per the quality standards.
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE **(HMC Policies CL 7242 Infection Control in Housekeeping Department)**.
- 7.9 Wash your hands thoroughly after the task is completed **(HMC Policies CL 7241 Hand Hygiene.)**

	METHOD STATEMENT		MS-CLE-HMC-15	
	Cleaning and Disinfection of Work Materials		DATE	5/13/2024
			REVISION	V2.0

- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous Materials and Waste Management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		13.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		15.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.05.2024

	METHOD STATEMENT		MS-CLE-HMC-13	
	Steel Polishing		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Steel Polishing
Related RA/ JSA Ref.	HSEQ-RA-HMC-09


1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Medical Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Safety Goggles

	METHOD STATEMENT		MS-CLE-HMC-13	
	Steel Polishing		DATE	5/16/2024
			REVISION	V2.0

3. Required Equipment and Tools			
	Caution Board		
	Pro14 Chemical		Sponge
	MFC Cloth Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area		Caddy Tray
	Squeegee		Plastic Sheet
	Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area		Masking Tape
	Housekeeping Trolley With Top/Down System (To Be Used In All Areas EXCEPT High-Risk Areas)		Housekeeping Trolley With Top/Down System - Anti-Bacterial (To Be Used ONLY In High-Risk Areas)

4. Pre-Job Check
4.1 Infection Control & HSEQ 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy). 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices)

	METHOD STATEMENT		MS-CLE-HMC-13	
	Steel Polishing		DATE	5/16/2024
			REVISION	V2.0

- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the Work signage caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.2 TOOLS & EQUIPMENT

- 4.2.1 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 To identify the work area and place the barricades and warning signs as needed.

5. Job Steps

- 5.1 Place the warning sign “Cleaning in progress” at the appropriate area and visible for public.
- 5.2 Using a clean MFC, wipe the area of the steel surface to remove dust and finger marks that adhered to the steel surface.
- 5.3 Clean and disinfect the steel surfaces by spraying Oasis Pro 14 chemical solution into an MFC and apply it on the surface.
- 5.4 Remove the excess chemical from the surface by using a squeegee. Ensure that no chemical is left over on the surface.
- 5.5 Apply steel polish chemical into a sponge and gently rub it into the steel surface in a manageable size.
- 5.6 Application process should be carried out in a systematic manner (vertical or horizontal overlapping passes).
- 5.7 Remove the chemical residue from the surface by using a squeegee. Ensure that no chemical is left over on the surface and allow the surface to dry.



	METHOD STATEMENT		MS-CLE-HMC-13	
	Steel Polishing		DATE	5/16/2024
			REVISION	V2.0

5.8 Take a dry MFC again to buff the steel surface to get the maximum shine.



6. Health and safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes)
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Use the appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.
- 6.13 Always pay full attention to the operations of the Cleaning equipment as well as the task you are doing.

7. Quality Verification & Post Job Check

- 7.1 Visually check the steel surface cleaned efficiently and shiny, should be free from any stains, marks, smudges, chemical residues, finger marks etc.
- 7.2 Make sure the steel surrounding also cleaned properly.
- 7.3 Warning signs, materials, tools, equipment etc. checked, cleaned, disinfected, and removed as necessary.
- 7.4 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).
- 7.5 Wash your hands thoroughly as per HMC Policies CL 7241 Hand Hygiene.
- 7.6 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.7 MFC's should be laundered as appropriate.
- 7.8 Notify your team leader that the work is complete, and area is free of materials.
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.

	METHOD STATEMENT		MS-CLE-HMC-13	
	Steel Polishing		DATE	5/16/2024
			REVISION	V2.0

- 7.11 Any Spillages should be cleaned up immediately, and the floor to be left dry.
- 7.12 Report all damages, incidents & accidents / health events to your team leader.
- 7.13 Waste must be properly disposed as per SA-1054-Hazardous materials and waste management program.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facility management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium Risk Areas
Task Description	Usage and Cleaning of Needle Resistant Gloves
Related RA/ JSA Ref.	N/A

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Medical Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Safety Goggles

	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves		DATE	5/16/2024
			REVISION	V2.0

3. Required Equipment and Tools

	Needle Resistant Gloves		Washing Machine with Drier
	Pedal Operated 240L Bin (Black)		Pedal Operated 240L Bin (Yellow)
	Resealable Bags		Oasis Pro 14 All Purpose Chemical
	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on the type of risk level		MFC

4. Pre-Job Check

4.1 Issuance & Control

- 4.1.1 The waste management team will collect the needle resistant gloves from the Housekeeping Store in their respective project.
- 4.1.2 A receipt note should be signed by the staff while receiving the needle resistant gloves from the store.
- 4.1.3 Needle resistant gloves assigned only for a dedicated waste handler allocated in each location.
- 4.1.4 Supervisor to conduct a fit test of the gloves for all waste management staff and staff to check the condition of the gloves prior to receipt.
- 4.1.5 The assigned employee is responsible to wash and disinfect his needle resistant gloves at end of each shift.
- 4.1.6 By regularly washing your gloves, longevity of use is highly increased – keeping you and your team safer, longer.

	METHOD STATEMENT	MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves	DATE	5/16/2024
		REVISION	V2.0

4.2 Infection Control & HSEQ

- 4.2.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.2.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.2.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.2.4 Ensure that the work area is free from any hindrance or obstacles that could affect the Housekeeping / Waste Management operations.

5. Job Steps

5.1 Donning of Needle Resistant Gloves

- 5.1.1 It is applicable to only authorized FMM Waste Management Team to have control measures in place.
- 5.1.2 Wear latex disposable gloves first, then needle resistant gloves above that, this will help to avoid getting the hand sweat on the needle resistant gloves from inside, as well as any unpleasant odour (optional).
- 5.1.3 Tighten the wrist strap after all fingers and palm are comfortably placed inside the glove.



5.2 Usage of Needle Resistant Gloves

- 5.2.1 Ensure that you are wearing Needle Resistant Gloves before entering the waste disposal area to transfer the waste (general and medical waste) into appropriate skip deployed in the disposal area. (Domestic waste skips and 660L medical waste bin)
- 5.2.2 Always hold the waste bag from the top and away from the body.
- 5.2.3 Do not touch the bag or compress it from the sides, bottom or top.
- 5.2.4 When transferring medical waste into the 660L bins in the infectious waste holding area (basement) and general waste into the compactor, always be very careful to keep the bag away from the body and it is safely transferred directly into the bin/compactor.
- 5.2.5 NRG not required in department waste holding area/dirty utility as the waste transferring happening only in waste disposal area at basement. Once the 240L domestic/Medical bin filled with 75% (3/4) waste, the same bin transported to waste disposal area located at basement.
- 5.2.6 NRG required to use only when transferring the waste from waste collection trolley to disposal area waste skips/bins.
- 5.2.7 NRG should not be used while transporting the waste from waste holding area till disposal area.

5.3 Doffing of Needle Resistant Gloves

- 5.3.1 Doffing of needle resistant gloves after transferring the waste from the waste collection trolley to the waste disposal area skips/Bins.
- 5.3.2 Loosen the wrist strap and remove Needle Resistant Gloves.



	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves		DATE	5/16/2024
			REVISION	V2.0

- 5.3.3 Remove and dispose the disposable gloves and follow **HMC Policies CL 7241- Hand Hygiene**.
- 5.3.4 At the end of shift, staff should take the gloves to the FMM designated laundry on site to launder the gloves.

5.4 Disinfection of Needle Resistant Gloves

- 5.4.1 After completion of waste disposal, go to the nearest housekeeping room assigned for NRG disinfection and storage purpose. (Nearest to the waste disposal area - domestic and Medical waste).
- 5.4.2 Remove the Needlestick Resistant Gloves (NRG) and Continue to wear vinyl or nitrile gloves when disinfecting the NRG.
- 5.4.3 Disinfect NRG with 14 plus antibacterial all-purpose cleaner and maintain contact time of 5 mins.
- 5.4.4 Wipe the whole portion of the used gloves after 5 minutes and let it dry.
- 5.4.5 Disinfected NRG shall be placed in a new resealable bag for next use.
- 5.4.6 Resealable bags should be labelled with staff name to identify their own used NRG throughout the shift.
- 5.4.7 Dispose inner vinyl or nitrile gloves and perform hand hygiene.
- 5.4.8 DO NOT share NRG with other user unless gloves are washed and dried.
- 5.4.9 Do not spray any form of bleach on NRG, it can damage the gloves easily. e.g., Actichlor, chlorine-based disinfectant.



5.5 Washing & Storage of Needle Resistant Gloves

- 5.5.1 Machine wash the Needle Resistant Gloves during end of the shift. While cleaning with washing machine, it is recommended cool wash with a mild laundry detergent and low tumble dry. (Do NOT use bleach and iron).
- 5.5.2 Hang indoors for a complete dry after low tumble dry (If required). Do not iron.



	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves		DATE	5/16/2024
			REVISION	V2.0

5.5.3 Needle Resistant Gloves should be stored in clean, dry conditions, away from direct sunlight and extreme temperatures.

5.5.4 Clean laundered gloves shall then be placed on new resealable bags in the assigned housekeeping room at basement (inside NRG storage cupboard) for staff use.



5.6 Routine Checks of Needle Resistant Gloves

- 5.6.1 Glove life varies depending on the application, environment, and amount of use. It is vital that you perform routine glove checks before beginning work every day.
- 5.6.2 Take note of areas that have begun to wear down, such as loose Velcro or a worn-down name tag. If you see holes in the synthetic leather or TP-X® material on the palm of your glove, this is an indication that its protective qualities may be compromised, putting you at risk of injury. Lingering moisture or a strong odour are also signs that your gloves may need to be replaced.
- 5.6.3 Keeping an eye out for these issues (and others) takes you one step further from a worksite hand injury, which is the goal of hand protection.
- 5.6.4 All above is to prevent needle sticks and punctures from sharps, as well as offering optimal resistance to cuts during the waste collection to disposal process.

5.7 Proper Glove Care – Recommendation from Manufacturer

- 5.7.1 By regularly washing your Needle Resistant Gloves, they can last up to 300% longer, and keep you safer. When working on a job, you can easily wash your gloves on site.

****The below steps are not applicable for current NRG usage****

5.8 Waste Collection Process Single Room and Shared Rooms/Common Patient Bay Areas such as ED, Day care unit: -

- 5.8.1 This process is applicable in places such as single rooms, shared rooms, common patient bay area's i.e., Emergency Department, Day Care Unit, etc.
- 5.8.2 If an activity includes more than waste collection (e.g., discharge or terminal cleaning) inside the single patient room or shared rooms/common patient bay areas, NRG must be used only to collect waste. This should be done prior to any other cleaning task. Once completed, then remove NRG using the doffing process described below (refer to 5.3.) followed by other cleaning activities before moving to another room or location.
- 5.8.3 If the purpose of the activity is only for waste collection and will involve several rooms or shared rooms/common patient bay areas, then NRG can be worn when moving from one room/bed to another by using the "non-touch method" when opening doors/door handles and curtains (e.g., using elbow).
- 5.8.4 Alternatively, someone should be there to assist in opening doors/curtains. Once the activity is done the staff should follow the doffing process described below (Refer to: 5.3)
- 5.8.5 The gloves shall be used to transfer waste from waste bin to the trash trolley and disposing to the 660 litres bin.

6. Health and safety – Points to Remember

	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves	DATE	5/16/2024	
		REVISION	V2.0	

- 6.1 These gloves are cut and puncture resistant, not cut and puncture proof.
- 6.2 Do not use with moving or serrated blades or tools.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area.
- 6.4 Handle all chemicals safely according to COSHH / SDS.
- 6.5 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 While handling waste, always treat every bag of waste as if it could have a sharp object in it.
- 6.8 Never compress the waste materials down into the waste bin with your hands.
- 6.9 Always carry the waste bags from the top and away from your body.
- 6.10 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.11 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.12 Staff to follow TBT for slip, trip & fall and manual handling.
- 6.13 Always follow your superior's guidelines when performing a task.
- 6.14 Comply with all HMC regulations for safety, hygiene, and infection control.

7. Quality Verification & Post Job Check

- 7.1 Visually check the Needle Resistant Gloves are cleaned & disinfected effectively.
- 7.2 Waste collection trolley/240L bin must be washed and disinfected during each trip of waste disposal.
(Refer to MS-CLE-HMC-003 - Waste Collection & Waste Bin Cleaning - Domestic & Medical Waste)
- 7.3 Make sure the department disposal hold room/dirty utility has been replaced with cleaned/disinfected 240L waste bin with colour coded waste bag.
- 7.4 Remove your PPE **(HMC Policies CL 7242 Infection Control Practices)**.
- 7.5 Wash your hands thoroughly after the task is completed **(HMC Policies CL 7241 Hand Hygiene)**
- 7.6 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader).
- 7.7 Are there any faults with your tools and PPE that you must report?
- 7.8 Report all Damages, Incidents & Accidents / Health events to your team leader.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024

	METHOD STATEMENT		MS-CLE-HMC-23	
	Usage and Cleaning of Needle Resistant Gloves		DATE	5/16/2024
			REVISION	V2.0

Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Domestic-Clinical Waste Collection and Waste Bin Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-03 Domestic-Clinical Waste Collection and Waste Bin Cleaning

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

	Medical Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Safety Goggles
	Needle Resistant Gloves		Gum Boots

3. Required Equipment and Tools

	Caution Board		Hard Brush with Handle
	Rubber Hose Pipe		Sponge
	MFC		Caddy Tray
	Floor Squeegee		Dustpan Brush

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

	14 Plus Antibacterial all-purpose cleaner		Housekeeping Trolley with Top/Down System (To Be Used in All Areas EXCEPT High-Risk Areas)
	Housekeeping Trolley with Top/Down System - Anti-Bacterial (To Be Used ONLY In High-Risk Areas)		Waste Collection Trolley
	14 Plus Antibacterial all-purpose cleaner Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Black Garbage Bags for Domestic Waste
	Yellow Garbage Bags for Clinical Waste		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to **HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (Refer to **HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the Caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

4.1.7 Follow FMM heat stress policy while collecting external waste collection.


4.2 TOOLS & EQUIPMENT

- 4.2.1 Check & prepare all equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.
- 4.2.5 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (14 Plus Antibacterial all-purpose cleaner). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 To identify the work area and place the barricades and warning signs as needed.
- 4.2.8 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.2.9 A Housekeeping Team shall be assigned for transport of infectious waste.
- 4.2.10 Be aware of the possible presence of biohazard/infectious wastes when handling all wastes.
- 4.2.11 Make sure the domestic garbage bags labelled with appropriate waste traceability code shared by HMC OHS team - **RLGH – HMC 29, RLGH S&T – HMC 29.1, MHS – HMC 32, AAH - 35**
- 4.2.12 Make sure the clinical waste bags labelled with clinical waste sticker along with facility name, date etc.

5. Job Steps

5.1 Domestic Waste Collection

- 5.1.1 Identify the garbage level in the bin and if it is exceeding the limit (75% /three-fourth (¾) full /as needed)
- 5.1.2 Always use needle resistant gloves while transferring any waste between waste bins or skips.
- 5.1.3 Remove the garbage along with the bag, tie it carefully.
- 5.1.4 Non-hazardous waste from wards, clinics, and offices etc., such as paper, wood, cardboard cartons, fabrics, food refuses, plastic, and rubber scraps should be put in black plastic bag which is placed inside the domestic waste bins.
- 5.1.5 Report and record if any sharps found in the domestic garbage.
- 5.1.6 Keep bags away from your body and do not push it with your hands.
- 5.1.7 Move the tied garbage bag into a waste collection trolley and transport to the waste disposal area in the facility.

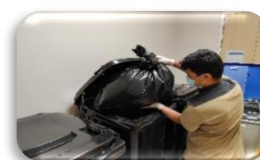

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

5.1.8 Make sure the garbage bags labelled with appropriate waste traceability code shared by HMC OHS team. RLGH – HMC 29, RLGH S&T – HMC 29.1, MHS – HMC 32.

5.1.9 Do not transfer garbage from one bag to another or compress it to fill with more garbage.

5.1.10 Do not drag the garbage bag on the floor.

5.1.11 Clear the large pieces of garbage left over at the bottom of the waste bin. (If applicable)



5.2 Infectious or Clinical Waste Collection

5.2.1 Infectious or Clinical waste shall be bagged into a Yellow Plastic Bag.

5.2.2 Always use needle resistant gloves while handling sharp waste.

5.2.3 When this bag is three-fourth ($\frac{3}{4}$) full /as needed, it should be labeled, sealed, tied, and transport into clinical waste holding area at the facility.

5.2.4 Sharp boxes - when ($\frac{3}{4}$) full /as needed close the lid carefully, shall be bagged into a yellow plastic bag, it should be labelled (provided by HMC with auto clave specification), sealed, tied - all these tasks should be carried out by nursing team.

5.2.5 Transport the sharp boxes into clinical waste holding area at the facility.

5.2.6 Sharp waste must be handled with extra care and placed in the designated leak and puncture resistant containers.

5.2.7 Keep bags away from your body and do not push it with your hands.

5.2.8 Do not transfer garbage from one bag to another or compress it to fill with more garbage.

5.2.9 Do not drag the garbage bag on the floor.



5.3 Waste Bin Washing

5.3.1 Move the waste bins to the designated bin washing area.

5.3.2 Wash the waste bin with water and apply antibacterial cleaning solution (Ecolab 14 Plus Antibacterial all-purpose cleaner) on a sponge into the bin surfaces.



	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

5.3.3 Depending on the bin size, use a long handle brush to scrub the bins effectively.

5.3.4 Rinse with water and make sure that there is no content of chemical on the bin surface.

5.3.5 Make sure bin liner replaced with fresh one and provided waste traceability code. RLGH – HMC 29, RLGH S&T – HMC 29.1, MHS – HMC 32. (Domestic Waste)



6. Health & Safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Always make sure that waste bins should not be filled more than $\frac{3}{4}$ or 75% of the waste bin.
- 7.2 Visually check the waste bins cleaned and disinfected after every waste disposal.
- 7.3 Always use non leak garbage bags.
- 7.4 Use correct labelling for infectious and non-infectious waste before disposing to waste holding area.
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)

	METHOD STATEMENT		MS-CLE-HMC-03	
	Domestic-Clinical Waste Collection and Waste Bin Cleaning		DATE	5/13/2024
			REVISION	V2.0

- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		13.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed &	Juan M. Roque	HSEQ Manager		
Approved By	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-35	
	Recycle Waste Collection and Disposal		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Low Risk Areas
Task Description	Recycle Waste Collection and Disposal
Related RA/ JSA Ref.	HSEQ-RA-HMC-28


1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Mask
	Manual Handling Gloves		

3. Required Equipment, Tools & Consumables

	Caution Board		Recycle Waste Bin
---	---------------	--	-------------------

	METHOD STATEMENT		MS-CLE-HMC-35	
	Recycle Waste Collection and Disposal		DATE	5/15/2024
			REVISION	V2.0
	240L Pedal Operated Green Coloured Recycle Waste Bin - For Plastic Waste		240L Pedal Operated Grey Coloured Recycle Waste Bin - For Aluminium Waste	
	240L Pedal Operated Black Coloured Recycle Waste Bin - For Other Waste		240L Pedal Operated Blue Coloured Recycle Waste Bin - For Paper Waste	
	Grey Coloured Recycle Waste Bag - For Aluminium Waste		Black Coloured Recycle Waste Bag – For Other Waste	
	Green Coloured Recycle Waste Bag - For Plastic Waste		Blue Coloured Recycle Waste Bag - For Paper Waste	
	Recycle Waste Cage			

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 To Identify the work area and place warning signs as needed.
- 4.1.4 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

	METHOD STATEMENT		MS-CLE-HMC-35	
	Recycle Waste Collection and Disposal		DATE	5/15/2024
			REVISION	V2.0

4.2 Tools & Equipment

- 4.2.1 Check & arrange 240L recycle waste collection bins for each type of recycle waste.
- 4.2.2 Choose appropriate colour coded 240L recycle waste collection bins.
- 4.2.3 Condition of recycle bins – check if these are in clean, good working condition & safe to use.

5. Job Steps

5.1 Recycle Waste Collection

- 5.1.1 Identify the recycle waste level in the deployed recycle waste bins, waste must be removed if it is exceeding the limit **(75% /three-fourth (¾) full /as needed)**.
- 5.1.2 Open the bin lid with your foot by pressing on the recycle waste bin pedal operating system.
- 5.1.3 Lift the recycle waste container then remove the waste and tie the bag carefully.
- 5.1.4 Transfer the recycle waste bag into the colour coded **240L** waste bins to transport the recycle waste to the disposal area.
- 5.1.5 Replace the empty colour coded waste bags in the appropriate compartments for next use.



نفايات أخرى Other waste	بلاستيك Plastic	ورق Paper	ألومنيوم Aluminum
----------------------------	--------------------	--------------	----------------------

5.2 Recycle Waste Transport and Disposal

- 5.2.1 Transport the **240L** colour coded recycle waste bin to the designated recycle waste disposal area.
- 5.2.2 Recycle waste should not mix with other recycle waste streams.
- 5.2.3 Dispose each recycle waste streams into the recycle waste cage deployed on the designated location at the facility.
- 5.2.4 Make sure each recycle streams disposed into the appropriate recycle waste cage compartment.
- 5.2.5 Maintain the recycle waste cage and surroundings always neat and tidy.



	METHOD STATEMENT		MS-CLE-HMC-35	
	Recycle Waste Collection and Disposal		DATE	5/15/2024
			REVISION	V2.0

5.3 General Recycle Waste Flow



5.4 Recycle Waste Bin Cleaning

- 5.4.1 Wash and disinfect the recycle waste bin containers and 240L colour coded recycle bins – refer to **MS-CLE-HMC-003 - Waste Collection & Waste Bin Cleaning**.
- 5.4.2 Clean, polish and disinfect the recycle waste bin – refer to **MS-CLE-HMC-008- Dusting & Damp Wiping** & **MS-CLE-HMC-013 - Steel Polishing**.

6. Health and safety – Points to remember

- 6.1 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.2 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.3 To complete the job safely, follow the associated risk assessment.
- 6.4 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.5 Only use appropriate tools and equipment for the task.
- 6.6 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.7 Never leave any tool or material in the area unattended.
- 6.8 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 Recycle waste bin positioning must be accurate as before. (Reinstate the area).
- 7.3 Finishing of recycle waste bin stainless steel polishing must be satisfactory.
- 7.4 Cleaned and disinfected 240L colour coded recycle waste bins must be arranged and stored in a designated area.
- 7.5 Maintain the recycle waste cage and surroundings always neat and tidy.
- 7.6 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.7 Double Check if there are no tools, materials left in the area.
- 7.8 Notify your team leader that the work is complete, and area is free of materials.
- 7.9 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.10 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**.)
- 7.11 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)

	METHOD STATEMENT		MS-CLE-HMC-35	
	Recycle Waste Collection and Disposal		DATE	5/15/2024
			REVISION	V2.0

- 7.12 Are there any faults with your tools and PPE that you must report?
- 7.13 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.14 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		16.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		17.05.2024

	METHOD STATEMENT		MS-CLE-HMC-017	
	Staircase Cleaning		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Medium/ Low Risk Areas
Task Description	Staircase Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-18

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Gum Boots (If required)
	Disposable Mask		Safety Goggles
	Helmet for Low head room / bump areas		

	METHOD STATEMENT		MS-CLE-HMC-017	
	Staircase Cleaning		DATE	5/15/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Caution Board		Hard Brush with Handle
	Barricade		Floor Scraper
	Dustpan & Brush		Caddy Tray
	MFC		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Oasis Pro14 all-purpose cleaner		Non-Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Kentucky Mop with Clip and Handle		Ecolab High Performance Floor Cleaner
	Double Mop Bucket		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area

	METHOD STATEMENT		MS-CLE-HMC-017	
	Staircase Cleaning		DATE	5/15/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Staff to have COSHH Briefing prior to use the chemical.
- 4.1.4 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.5 Warning sign to be placed on both the entrance/exit doors.
- 4.1.6 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Always check the preparation date of the diluted cleaning chemical (Oasis Pro14 all-purpose cleaner, Ecolab High Performance Floor Cleaner). (dilution ratio – 8 ml into 1 Ltr of water)
- 4.2.5 The usage of the chemical solution must be within 24 hours of the dilution process

5. Job Steps

5.1 Staircase Cleaning

- 5.1.1 Remove any trashes, visible dirt dry leaf etc. from the floor with a dustpan and brush.
- 5.1.2 Identify stains on the floor and do necessary spotting with floor scrapper/nonabrasive pads/hard brush.
- 5.1.3 Check for any damage and pest infestation and report as per the procedure.
- 5.1.4 Clean the ceiling, Wall, fixtures, fittings etc. with MFC – **Refer to MS-CLE-HMC-08 Dusting & Damp wiping.**
- 5.1.5 Sweep the stairs, landing area from top to bottom paying particular attention to edges and corners. **Refer to MS-CLE-HMC-07 Dust moping.**
- 5.1.6 Pick up soil, place into refuse sack and remove to the disposal point.
- 5.1.7 Clean the floor with a damp Kentucky mop, clean adjacent skirting by cutting in a parallel to skirting. **Refer to MS-CLE-HMC-06 Damp moping.**
- 5.1.8 Ensure the mop bucket behind line of work on the landing.
- 5.1.9 Pay particular attention to the edges, corners, and risers.
- 5.1.10 Rinse the mop frequently and change the cleaning solution if required.



	METHOD STATEMENT		MS-CLE-HMC-017	
	Staircase Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.2 Balusters and Handrails Cleaning.

5.2.1 Clean the balusters and handrails using a MFC paying particular attention to balustrade rail, string capping, outer string, and the handrail.

5.2.2 Refer to MS-CLE-HMC-08 Dusting & Damp wiping.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage near doors.
- 6.2 The team leader or supervisor should continue to look for the lone workers.
- 6.3 Watchout for the low head rooms / Bumps
- 6.4 Wear the right non-slip safety footwear for the job.
- 6.5 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.6 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.7 To complete the job safely, follow the associated risk assessment.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 Floor, wall, balusters, handrails etc. must be free from dirt or dust.
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

	METHOD STATEMENT		MS-CLE-HMC-017	
	Staircase Cleaning		DATE	5/15/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low Risk Areas
Task Description	Floor Scrubbing with Machine
Related RA/ JSA Ref.	HSEQ-RA-HMC-04 - Floor Scrubbing with Machine

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)		Gum Boots

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

3. Required Equipment and Tools				
	Caution Board			Kentucky Mop With Clip And Handle (Colour Coded) Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area Red – Washrooms
	Single Disc Machine			Floor Squeeze
	Pro14 Chemical			MFC Cloth Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area
	Wet & Dry Vacuum Machine			Ecolab High Performance Floor Cleaner
	Double Mop Bucket			Dustpan & Brush
	Floor Scraper			Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

	Housekeeping Trolley With Top-Down System		Microfiber Flat Mop With Velcro Strip (For Top/Down System) Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area Red – Washrooms
	Mop Holder with Strips for Velcro System		Aluminium Mop Handle
	Scrubbing Pads		

4. Pre-Job Check

4.1 Machine Pre-check

- 4.1.1 Check that the unit switches on and off correctly.
- 4.1.2 Carry out a safety check of each part of the electrical equipment as appropriate.
- 4.1.3 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth from the machine to the plug, if there are any faults then the machine should not be used but should be marked as “out of order” in line with the reporting procedure.
- 4.1.4 The cable should be neatly placed and should at no time be present as a trip hazard.
- 4.1.5 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.
- 4.1.6 The casing of the machine should be complete and in good working condition; the wheels free from debris and freely moving.
- 4.1.7 Ensure correct accessories are selected, pad drives and pads or brushes depending on the floor type.
- 4.1.8 Avoid standing on the cable is primarily for the operative’s safety, it is possible that something sharp on the sole of a shoe could cut through the wire, ensure that they are aware it is with their wellbeing in mind that this is stressed as a safety point.
- 4.1.9 Cut out switches should be checked- if present and identify potential hazard whilst working.
- 4.1.10 Prior to commencing the damp mopping process, ensure that a thorough dust mopping of the area has been completed (except isolation rooms). For dust mopping procedure, please see MS - CLE-HMC-007-Dust moping.

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

- 4.1.11 To remove any stubborn stains/marks before mopping, use an abrasive pad and in case of residual glue from floor stickering or chewing gum stuck on the floor, use a floor scrapper.

4.2 Infection Control & HSEQ

- 4.2.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.2.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.2.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.2.4 Identify the work area Risk access and place the warning sign. If the area is like a corridor or an open space such as patient waiting area etc. the warning sign needs to be placed on both sides.
- 4.2.5 Ventilate the area where appropriate.

4.3 Tools & Equipment

- 4.3.1 Check & prepare all the equipment that may be required for the task.
- 4.3.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.3.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.3.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.4 Top-Down System

- 4.4.1 In a clean bucket, prepare 2 litres of diluted cleaning solution (16 ml of Ecolab Oasis Pro 14 chemical and 2 litres of water). This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room.
- 4.4.2 Place 20-25 microfibre flat mops inside the plastic box with lid.
- 4.4.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.4 Close the box with the lid and seal it properly.
- 4.4.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.6 Place the box on the housekeeping cart.

4.5 Double Mop Bucket w/Wringer

- 4.5.1 For ISOLATION Rooms, a double mop bucket with wringer will be used along with disposable mops.
- 4.5.2 Ensure that each Isolation room is assigned with a dedicated double mop bucket with wringer and the exact room number is written on this bucket set and it is stored in the housekeeping room.
- 4.5.3 In the blue coloured bucket, prepare a cleaning solution with 8 ml Oasis Pro 14 chemical to 1 litre of water ratio.

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

5. Job Steps

5.1 Check the status of the Pad/Brush

- 5.1.1 Ensure that the machine is not yet plug to the outlet.
- 5.1.2 Lay down the machine slowly.
- 5.1.3 Remove the pad from the drive plate.
- 5.1.4 Check the pad/brush condition: Flip the pad if it is dirty or damaged.
- 5.1.5 Replace it if its thickness has been reduced by 50% of the original size.
- 5.1.6 Place the pad / brush on the drive plate.
- 5.1.7 If it is a new pad, it is recommended to immerse the pad in water before using it (especially if you don't have a lot of experience with this machine).

5.2 Filling the solution tank

- 5.2.1 Add water and the chemical in a bucket (it will depend on the type of floor to be cleaned) and fill the solution tank with the chemical diluted. Follow the Chemical dilution ratio Ecolab High Performance Floor Cleaner – 4/8 ml chemical in 1 Litre of water.

5.3 Brush/Pad Selection Guidelines

- 5.3.1 The machine is having the proper pad/brush for the activity to be done?
 - White pad - for polishing and shine.
 - Red pad – for scrubbing general areas.
 - Green pad – for scrubbing general areas.
 - Black pad – stone/Hard surfaces.
 - Brush – stone, pavement.

Please note: - It is very important that you check with your team leader what is the pad to use if you are not familiar with the area / task to do.

5.4 Initiate the machine operation by following the below steps.

- 5.4.1 Place the barricade at the entrance of the area to be clean.
- 5.4.2 Place “work in progress” signage.
- 5.4.3 Plug the electric cable into the power supply.
- 5.4.4 Adjust the height of the handle (approximately at the height of the waist) using the lever available.
- 5.4.5 Press both switch locks, press the brush motor switch at the same time.
- 5.4.6 Now the machine is started, and the switch lock can be released.
- 5.4.7 Lift the bar connected to the solution tank to start pouring the diluted chemical on the floor.



	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

- 5.4.8 Cleaning should be commenced from the farthest point from the exit using systematic overlapping passes, leaving a clean, even, and reflective surface ensuring the cable is always behind you, where applicable.
- 5.4.9 Depend on the floor size and soilage it may be necessary to change the pad. If electrical the machine should be safely unplugged whilst the pad is checked and changed as required.
- 5.4.10 Run the machine following the directions shown in the picture with overlaps. Ensure that all the areas have been covered.
- 5.4.11 If there is not enough water or if you are staying too much time on the same spot, "polo" marks will be left on the floor.
- 5.4.12 Leave the floor for 5 minutes contact time.
- 5.4.13 You need to be very careful not to damage the tiles or walls.
- 5.4.14 While working next to glass walls, it is necessary to place rubber protectors to prevent the machine from reaching the glass.
- 5.4.15 Remove the chemical from the floor by using a and wet dry vacuum or a squeegee.
- 5.4.16 Rinse the floor with fresh water and remove the water by using wet & dry vacuum machine. Make sure no more chemical accumulation of l remains on the floor surface.
- 5.4.17 Use a mop to dry the floor and keep the barricade on the area until is 100% dry.
- 5.4.18 Fold properly the cables without leaving any knot.
- 5.4.19 Take the machine to the designated area for its storage.



6. Health and safety – Points to remember


- 6.1.1 Wet Floor Caution signboard shall be displayed when cleaning to prevent accidents and floor should be allowed to dry thoroughly. Use large caution sign (e.g., concertina) for long corridors, high traffic areas, hallways, lobbies, etc. to protect patients, staff, and visitors from stepping on to the floor.
- 6.1.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.1.3 Handle all chemicals safely according to COSHH / SDS.
- 6.1.4 Use appropriate PPEs as per **(HMC Policies CL 7242 Infection Control Practices)**.
- 6.1.5 Avoid physical contact with chemical (specially with eyes).
- 6.1.6 To complete the job safely, follow the associated risk assessment.
- 6.1.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.1.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.1.9 Use the appropriate tools and equipment for the task.
- 6.1.10 Staff to follow TBT for slip, trip & fall.
- 6.1.11 Always follow your superior's guidelines when performing a task.
- 6.1.12 Comply with all HMC regulations for safety, good hygiene, and infection control.

	METHOD STATEMENT		MS-CLE-HMC-04	
	Floor Scrubbing with Machine		DATE	5/15/2024
			REVISION	V3.0

- 6.1.13 Never leave any tool or material in the area unattended.
- 6.1.14 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Before leaving an area perform a visual check to ensure all items are cleaned and in their appropriate place.
- 7.1.1 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
- 7.1.2 Ensure that all furniture, equipment etc. is returned to their original position and the room is reinstated.
- 7.1.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.1.4 Notify your team leader that the work is complete, and area is free of materials.
- 7.1.5 MFC to be laundered as appropriate.
- 7.1.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.1.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.1.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.1.9 Are there any faults with your tools and PPE that you must report?
- 7.1.10 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.1.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.
- 7.1.12 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Indoor areas – Corridors & Open Spaces
Task Description	Floor Cleaning with Auto Scrubber Machine
Related RA/ JSA Ref.	HSEQ-RA-HMC-21

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the Method statement and risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe covers disposable
	Disposable Mask		Disposable hair net
	N95 Face Mask – Optional depends on the risk area		Face shield – Optional depends on the risk area
	Medical Disposable Gown		Scrub Suit - wearing of scrub suit/disposable scrub suit is MANDATORY in surgical section

	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

	High Visibility Jacket		Manual Handling Gloves
---	------------------------	---	------------------------

3. Required Equipment, Tools & Consumables

	Walk Behind Scrubber Machine		Ride on Scrubber Machine
	Cleaning Robot		Caution Boards (Cleaning in Progress & Wet Floor)
	Oasis Pro 14 All Purpose Chemical		Dustpan with Brush
	Ecolab High Performance Floor Cleaner		Floor Scraper
	Non-Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty		Scouring Sponge
	Scrubbing Pads		Hose Pipe

fmm فالم لم	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0
	Caddy Tray		Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage	
	MFC		Fully Equipped Anti-Bacterial Housekeeping Trolley with Top/Down System (To be used ONLY in High-risk Areas)	
	Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)			

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing **(Refer to HMC policies CL 7241 Hand Hygiene Policy)**.
- 4.1.2 Wear appropriate PPE as per guidelines **(Refer to HMC policies CL 7242 Infection Control Practices)**
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Log in the machinery checklist as necessary.
- 4.2.5 Ensure the trolley is well stocked with cleaning agents (Oasis Pro 14 All Purpose Chemical, Ecolab High Performance Floor Cleaner), mops, MFC etc. before starting work in line with the relevant COSHH card.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14 All Purpose Chemical, Ecolab High Performance Floor Cleaner – 8 ml into 1 Litre of water). The usage of the chemical solution must be within 24 hours of the dilution process.

	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).

- 4.2.7 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.3 Floor Scrubbing Machines Pre-Check

- 4.3.1 Check that the unit switches on and off correctly.
- 4.3.2 Carry out a safety check of each part of the electrical equipment as appropriate.
- 4.3.3 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth from the machine to the plug, if there are any faults then the machine should not be used but should be marked as "out of order" in line with the reporting procedure.
- 4.3.4 The cable should be neatly placed and should at no time be present as a trip hazard.
- 4.3.5 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.
- 4.3.6 The casing of the machine should be complete and in good working condition; the wheels free from debris and freely moving.
- 4.3.7 Ensure correct accessories are selected, pad drives and pads or brushes depending on the floor type.
- 4.3.8 Avoid standing on the cable at any point, this is primarily for the operator's safety, it is possible that something sharp on the sole of a shoe could cut through the wire.
- 4.3.9 Cut out switches should be checked.

4.4 Top-Down System

4.4.1 Preparation of Anti-Bacterial Solution (Oasis Pro 14)




- 4.4.1.1 In a clean bucket, fill 2 litres of diluted anti-bacterial cleaning solution
(This solution is diluted and dispensed from the Ecolab dispenser located in the housekeeping room).
- 4.4.1.2 Place 20-25 blue coloured microfibre flat mops inside the plastic box with lid and BLUE handle.
- 4.4.1.3 Place the box on a clean pallet in the housekeeping room and pour the diluted chemical solution into the plastic box over the chemical tray.
- 4.4.1.4 Close the box with the lid and seal it properly.
- 4.4.1.5 Turn the box upside down for pre-soaking (charging or impregnating) the mops for at least 20-30 minutes.
- 4.4.1.6 Place the box on the housekeeping cart.

	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

5. Job Steps

5.1 Floor Cleaning with Walk Behind Scrubber

- 5.1.1 Plan work route, when necessary, remove furniture and equipment if required.
- 5.1.2 Commence the dust mopping task before using walk behind scrubber machine, **Refer to MS -CLE-HMC-007 – Dust Mopping.**
- 5.1.3 Switch off charger by unplug charger cable from red battery plug. Reconnect the red battery plug to the machine.
- 5.1.4 Disconnect the battery charger cable from the mains electricity supply.
- 5.1.5 Fill the tank with a clean water. The clean water temperature must not exceed 40 °C.
- 5.1.6 Prepare floor cleaning chemical (**Ecolab High Performance Floor Cleaner**) from the chemical dispenser into a clean bucket and pour into the machine solution tank.
- 5.1.7 If the squeegee is not connected to the machine: install and fasten it with the handwheels, then connect to the suction hose.
- 5.1.8 If the squeegee is in upper position, lower it with the lever.
- 5.1.9 Place the brush or the pad-holder under the deck. Use the appropriate brush to clean the floor.
- 5.1.10 Lower the brush deck with the pedal.
- 5.1.11 Turn on the key, then slightly press the handle switch to engage the brush.
- 5.1.12 Adjust (if needed) the solution flow level according to the cleaning performance and application.
- 5.1.13 Clean the floor, having regard to the brush position and pressure in relation to the soil age, using a systematic overlapping pattern and changing or turning the brushes or pads as necessary.
- 5.1.14 Remove the splashes from walls, skirtings, or other items as they occur.
- 5.1.15 Clean the water left over on the floor with pre-charged damp mop if any.
- 5.1.16 Once you have finished cleaning empty the recovery tank with the hose. Then empty the solution tank with the transparent hose. This must be carried in a designated area.
- 5.1.17 Wash with clean water the recovery tank and the vacuum grid.
- 5.1.18 Press the click-off button and wait for the brush/pad holder to fall on the floor. Remove to clean or change brush.
- 5.1.19 Take the squeegee off and remove debris.
- 5.1.20 Check and clean the squeegee blades.
- 5.1.21 Clean the filter by removing the transparent cover and the gasket.
- 5.1.22 Check the machine body and frame then clean and disinfect the major touch points, body etc.
- 5.1.23 Charge the batteries: Connect the battery charger cable to the mains electricity supply
- 5.1.24 Park the machine at designated area with the recovery tank cover open.
- 5.1.25 If the machine has been used until the Red light illuminates on the battery level indicator on the machine, a full recharge of the batteries (10-12 hours) will be required. Failure to carry out this this procedure may cause damage to the batteries. Charging the batteries after every use is recommended.

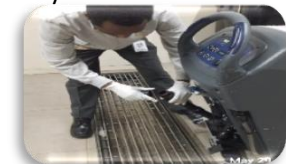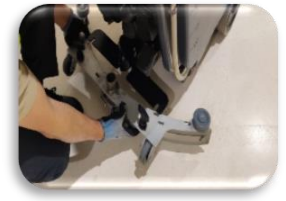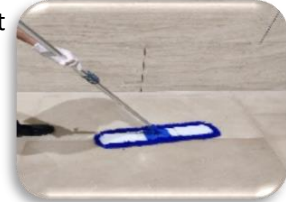

Floor Cleaning with Auto Scrubber Machines

DATE	5/26/2024
REVISION	V2.0

5.2 FLOOR CLEANING WITH RIDE ON SCRUBBER


- 5.2.1 Plan work route, when necessary, remove furniture and equipment if required.
- 5.2.2 Commence the dust mopping task before using walk behind scrubber machine, **Refer to MS -CLE-HMC-007 – Dust Mopping.**
- 5.2.3 Disconnect battery charger and store the cable.
- 5.2.4 Disconnect the battery charger cable from the mains electricity supply.
- 5.2.5 Fill the solution tank with fresh water. The freshwater temperature must not exceed 40 °C.
- 5.2.6 Prepare floor cleaning chemical (**Ecolab High Performance Floor Cleaner**) from the chemical dispenser into a clean bucket and pour into the machine solution tank.
- 5.2.7 Solution level indicator is on the side of the tank shows current level.
- 5.2.8 If the squeegee is not connected to the machine: install and fasten it by using the two knobs, then connect the suction hose.
- 5.2.9 Adjust squeegee angle and blade pressure for optimal water pick-up by turning the adjustment knob on the support.
- 5.2.10 Place the brush or the pad-holder under the deck and install it manually. Use the appropriate brush to clean the floor.
- 5.2.11 Insert the operator key and start the machine. Lower the brush by pressing the brush button.
- 5.2.12 Push the drive pedal to start cleaning. Adjust the maximum forward speed by the speed potentiometer. For the reverse mode press the R on the control panel.
- 5.2.13 Adjust (if needed) the solution flow level according to the cleaning performance and application.
- 5.2.14 Clean the floor, having regard to the brush position and pressure in relation to the soil age, using a systematic overlapping pattern and changing or turning the brushes or pads as necessary.
- 5.2.15 Remove the splashes from walls, skirtings, or other items as they occur.
- 5.2.16 Once you have finished cleaning empty the recovery tank with the hose. Then empty the solution tank with the transparent hose.
- 5.2.17 Wash with fresh water the recovery tank and the vacuum grid.
- 5.2.18 Press the click-off button and wait for the brush/pad holder to fall on the floor.
- 5.2.19 Remove to clean or change brush.
- 5.2.20 Take the squeegee off and remove debris.
Check and clean the squeegee blades.
- 5.2.21 Check the machine body and frame then clean and disinfect with Oasis PRO 14 chemical the major touch points, body etc.
- 5.2.22 Charge the batteries: Connect the battery charger cable to the electrical socket.
- 5.2.23 Park the machine at designated area with the recovery tank cover open.



	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

5.3 FLOOR CLEANING WITH ROBOT

- 5.3.1 Before commencing the task, make sure the device is fully charged.
- 5.3.2 Fill the water in the tank according to the water level mentioned on the machine.
- 5.3.3 Locate the machine for the assigned task.
- 5.3.4 Turn on the machine key.
- 5.3.5 Unlock the monitor and log in with required user credentials.
- 5.3.6 Choose the appropriate run mode according to the task, wet run for scrubbing purpose and dry run for sweeping purpose.
- 5.3.7 Select the mapped location where the task to be commenced.
- 5.3.8 Attach the required accessories such as squeegee blade for wet run and dust mop cloth for dry run.
- 5.3.9 Observe the machine operation always.
- 5.3.10 After the selected area's task completion, change the machine in manual mode.
- 5.3.11 Continue cleaning with remaining mapped locations as the entire ground floor corridor mapped into 4 sections.
- 5.3.12 Continue the same steps till completion of remaining mapped areas.
- 5.3.13 Recharge the battery if required in between the task.
- 5.3.14 After completion, wheel the robot into the nearest housekeeping room.
- 5.3.15 Clean and disinfect the with Oasis PRO 14 chemical touch points and body.
- 5.3.16 Detach the accessories and dust mop for laundry.
- 5.3.17 Do not change the water for 3-4 days as the machine inbuilt with water purifying system, the machine purifies dirty water into clean water and transferring to the clean water tank by default.
- 5.3.18 Return the machine into designated storage area.
- 5.3.19 Remove the key and store in the key rack.
- 5.3.20 Put on the machine for charge for next use.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage near doors.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.7 Only use appropriate tools and equipment for the task.
- 6.8 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.9 Never leave any tool or material in the area unattended.
- 6.10 As much as possible, keep the pathways clear of obstructions.

	METHOD STATEMENT		MS-CLE-HMC-27	
	Floor Cleaning with Auto Scrubber Machines		DATE	5/26/2024
			REVISION	V2.0

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of the floor shall be clean and satisfactory.
- 7.2 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Ensure the machine cleaned and disinfected properly.
- 7.4 Log out the machinery checklist as necessary.
- 7.5 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		26.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		27.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		29.05.2024

	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing		DATE	5/14/2024
			REVISION	V2.0

NOTE This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	External areas
Task Description	External Areas floor washing & scrubbing
Related RA/ JSA Ref.	HSEQ-RA-HMC-02-External areas floor washing & scrubbing

1. Training & induction Requirements


You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Hiflex Gloves
	Dust Face Mask		Black Safety Goggles for External
	Gum Boots		High Visibility Jacket

	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing		DATE	5/14/2024
			REVISION	V2.0

3. Required Equipment and Tools

	Barricade		Wringer Trolley
	Dustpan & Brush		14 Plus Antibacterial all-purpose cleaner
	MFC		Hard Brush with Handle
	Hose Pipe		Pressure Wash Machine
	Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty		Floor Squeegee
	Cable Protector		Caddy Tray

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).

	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing		DATE	5/14/2024
			REVISION	V2.0

4.1.2 Wear appropriate PPE as per guidelines **(Refer to HMC policies CL 7242 Infection Control Practices)**

4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.

4.1.4 Place the Work signage caution board.

4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.1.7 Follow FMM heat stress policy.

4.2 Tools & Equipment

4.2.1 Check & prepare all the equipment that may be required for the task.

4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.

4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.

4.2.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.

4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab Oasis orange force 137). Dilution ratio – 4/8 ml chemical into 1 Litre of water (If in case chemical not available from the Ecolab chemical dispenser machine).

4.2.6 The usage of the chemical solution must be within 24 hours of the dilution process.

4.2.7 Ensure for electrical equipment PAT test is done.

5. Job Steps

5.1 Job Steps

5.1.1 Remove the trashes and waste from the floor with a dustpan and brush.

5.1.2 Identify stains on the floor and do necessary spotting with the help of hard brush and available chemical related to the surface. Use Ecolab Oasis Orange Force 137.

5.1.3 Make sure you follow chemical contact time (30 to 60 seconds) - depends on the floor surface and stain to achieve a good result.

5.1.4 Identify available water points nearby and connect hose pipe / collect water into a container.



	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing	DATE	5/14/2024	
		REVISION	V2.0	

- 5.1.5 Spread water into a manageable area especially where the chemical is applied.
- 5.1.6 Remove the soiled water from the surface with the help of a floor squeegee.
- 5.1.7 Rinse the floor again with water to avoid any chemical residues on the floor surface.
- 5.1.8 Remove the excess water from the floor again with the help of a floor squeegee.
- 5.1.9 Make sure the floor is free from water.



5.2 For Operating Pressure wash machine.

- 5.2.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage. Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses and connections.
- 5.2.2 Steps for using power wash machine.
- 5.2.3 Install the nozzle and the spray lance.
- 5.2.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.2.5 Tighten the screw connection between the hose and the machine.
- 5.2.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.2.7 Switch on the Machine with the key, push down accelerator & boost the engine.
- 5.2.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.2.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from you. Pull the trigger to begin spraying the water.
- 5.2.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.2.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.2.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.2.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.2.14 High pressure flat spray (25°) for large dirt areas
- 5.2.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.2.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.2.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet and body out of the way. Maintain good footing.
- 5.2.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.2.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.2.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.2.21 Shut off water supply.
- 5.2.22 Remove the plug and recoil / rewind all cables and hoses.



	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing		DATE	5/14/2024
			REVISION	V2.0

- 5.2.23 Clean the equipment and check for safety of Equipment.
- 5.2.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.2.25 Return the equipment and materials to the Designated storage area.

6. Health and safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handle tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.
- 6.13 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.

7. Quality Verification & Post Job Check

- 7.1 Visually check the floor is free from any stains, mud, dirt accumulation, chemical residues, excess water etc.
- 7.2 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

	METHOD STATEMENT		MS-CLE-HMC-02	
	External Areas Floor Washing & Scrubbing		DATE	5/14/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		14.05.2024
Reviewed By	Akshay Raj Mancheri	HSEQ Officer		18.05.2024
	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-028	
	Safe Use of Road Sweeper Machine City Ranger 2260		DATE	5/12/2024
			REVISION	V2.0

NOTE


This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH
Department Name	Housekeeping
Job Location	External Parking Areas and Service Roads
Task Description	Safe Use of Road Sweeper Machine – City Ranger 2260
Related RA/ JSA Ref.	HSEQ-RA-HMC-22 Safe Use of Road Sweeper Machine – City Ranger 2260

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Dust Face Mask		High Visibility Jacket
	Disposable Mask		Manual Handling Gloves
	Gum Boot		Black Safety Goggles for External areas
	Ear Plug/Headset		Disposable Gloves

	METHOD STATEMENT		MS-CLE-HMC-028	
	Safe Use of Road Sweeper Machine City Ranger 2260		DATE	5/12/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Road Sweeper-City Ranger-2260		Hose Pipe with Reel
	MFC		Caddy Tray
	Oasis Pro14 All- Purpose Cleaner		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Green – Low Risk Area
	Floor Squeegee		Pressure Washer Machine
	Jerry Can – For fuel Filling		

	METHOD STATEMENT		MS-CLE-HMC-028	
	Safe Use of Road Sweeper Machine City Ranger 2260		DATE	5/12/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.4 Follow FMM heat stress policy.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Check that operator is trained and competent to operate the machine.
- 4.2.3 Check if the operator has equipment familiarization
- 4.2.4 Check if the O & M is available for the machine and operator is aware of it.
- 4.2.5 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.6 Log in to the daily machine usage checklist.
- 4.2.7 Ensure the city ranger machine is filled with adequate fuel, fuel filling must be from a Jerry can into the fuel tank.
- 4.2.8 Ensure the required pressure level of each tyre. (Refer to section 5.2)
- 4.2.9 Make sure the city ranger sweeping brushes installed properly and functioning.

5. Job Steps

5.1 Machine Safety

- 5.1.1 Avoid roll-over
- 5.1.2 Do not drive the machine in a place where can slide, tip or roll.
- 5.1.3 Do not drive on slopes with an incline of more than 10°.



5.2 Tire Pressure

- 5.2.1 The tire pressure must be checked and adjusted to 1.5 bar (22 psi) when the Suction Sweeper is attached.
- 5.2.2 Lower tire pressure increases the risk of roll-overs.

5.3 Fuel Check and Filling

- 5.3.1 Make sure the machine has filled with sufficient fuel to cover the areas as per the schedule.
- 5.3.2 If fuel need to be filled then, must contact team leader for assistance.
- 5.3.3 Fuel filling must be executed in front of team leader by the operator.
- 5.3.4 Fuel must be filled from the Jerry can to the fuel tank.
- 5.3.5 Open the fuel tank neck cap, connect the Jerry can funnel into the fuel tank neck, lift the jerry can carefully to flow the fuel into the fuel tank through the fuel tank neck.

- 5.3.6 Make sure there is no fuel overflow from the fuel tank during the filling and after.
- 5.3.7 Close the fuel cap properly and lock it.
- 5.3.8 Always keep adequate fuel in the fuel tank.
- 5.3.9 If any spillage happened during the filling process, observe if the fuel evaporates from the floor/road.
- 5.3.10 Jerry can have to be cleaned and returned to the appropriate storage space.

5.4 Emptying the Hopper


- 5.4.1 Before emptying the hopper, make sure that the machine is firmly placed on.
- 5.4.2 A level surface and is not "angled that there is sufficient space for the open back cover.
- 5.4.3 Make sure the hopper is secured.
- 5.4.4 Check the hopper is firmly attached to the Machine.
- 5.4.5 Prevent people from standing close to the Suction Sweeper.
- 5.4.6 Make sure there is no one close to the machine when it is in use.



5.5 Assembling the Hopper Frame

- 5.5.1 The hopper frame is folded up and hung on the hopper delivery.
- 5.5.2 Assembling the hopper frame:

- 5.5.2.1 Take the hopper frame down and unfold it.
- 5.5.2.2 Put the frame together using the two bolts supplied.

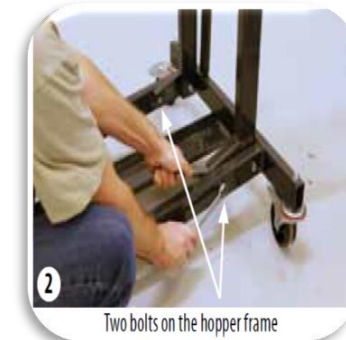


5.6 Moving the Hopper Frame:

- 5.6.1 The hopper frame can be transported on the Suction Sweeper. Fold it down in reverse order and hang it on the hopper.
- 5.6.2 The hopper must never be emptied when the hopper frame is hanging on the Suction Sweeper.

5.7 Checks Before Start-up


- 5.7.1 Topping-up the water It is important the water tank is filled up before starting.

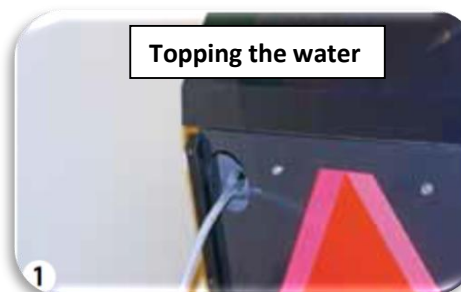

- 5.7.2 The water level can be read on the right side of the hopper.




- 5.7.3 A water sprayer is positioned in the Hopper.

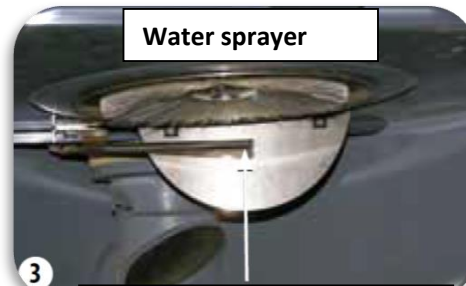

- 5.7.4 A water-sprayer is positioned in front of each brush. Two water-sprayers have enough water for approx. 1 ¾ hours of use.

- 5.7.5 Four water-sprayers have enough water for 1¼ hours of use.

- 5.7.6 If the only water-sprayer in the hopper issued, then it will have enough water for four hours of use.

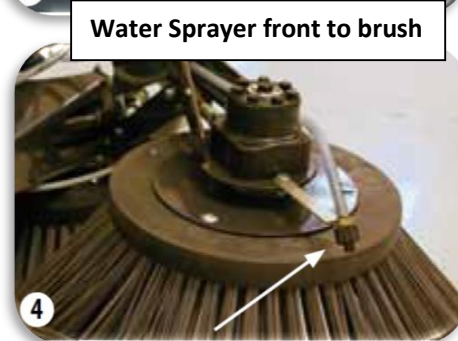

5.8 Adjusting Brushes

- 5.8.1 Adjust the brushes using the nose wheel. Adjust the brushes so that they precisely brush the ground to give a maximum clearing width, with half of the brush bristles touching the ground at any given time.
- 5.8.2 Correctly adjusted brushes last longer.
- 5.8.3 Make sure the brushes do not press too hard against the surface being cleaned.
- 5.8.4 Adjusting the angle of the external side-brush



- 5.8.4.1 Loosen the counter nut.
- 5.8.4.2 Unscrew the parallel rod.
- 5.8.4.3 The forward edge of the brush flowers.
- 5.8.4.4 Screw the parallel rod back.
- 5.8.4.5 The forward edge of the brush lifts.
- 5.8.4.6 The optimal brushing position is with the forward 1/3 of the brushes in contact with the ground.



5.9 Adjusting the Vacuum Nozzle

- 5.9.1 Adjust the distance between the surface and vacuum nozzle using the height-adjustment fixture.
- 5.9.2 With the nose wheel screwed all the way down, the distance between the hydraulic motor and the ground is 95 mm.
- 5.9.3 This adjustment also affects the coupling between the front brushes and the machine. Check that the vacuum hose is tightly connected to the vacuum nozzle.



5.10 Checking the Rotary Filter and Turbine

- 5.10.1 Checking the rotary filter and turbine. Remove any dirt before starting.



5.11 Checking the Rotary Filter Water-Sprayer.

5.11.1 Engage the handbrake.

5.11.2 Turn the ignition key to position WITHOUT starting the machine.



5.11.3 Switch the rear PTO ON.



5.11.4 Check water comes out of the water-sprayer below the filter in the hopper tank.




5.11.5 The Suction Sweeper must not be used if the water sprayer in the hopper is not working. Stop the turbine immediately. If there is imbalance/vibration in the filter or in the turbine. Low-level switch has been fitted which automatically stops the water pump if the water tank is empty.


5.12 Suction Sweeper Start-up

5.12.1 Start the machine Switch ON the rear PTO. Water for the rotary filter starts to flow when the rear PTO is switched on.

5.12.2 Switch ON the front PTO (brushes rotate).

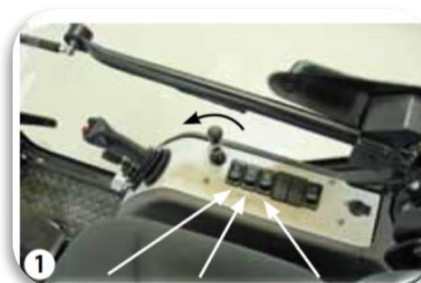

- 5.12.3 Lower the front brushes by moving the joystick down.
- 5.12.4 Engage the weight distribution using the red button on the joystick.
- 5.12.5 The front brushes will now adjust to ground conditions.
- 5.12.6 Drive the machine wherever the cleaning required.
- 5.12.7 Give special attention to the road edges and corners.

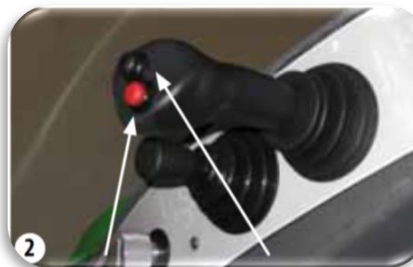

5.13 Using External Vacuum Hose

- 5.13.1 Engage the handbrake.
- 5.13.2 Switch the rear hydraulics ON while holding the manual start button down.

- 5.13.3 Push the throttle to maximum.

- 5.13.4 Turn the change-over handle so the arrow points down.



- 5.13.5 Lift the locking clip and pull the vacuum hose out.



- 5.13.6 Pull out the vacuum nozzle.



5.14 Emptying the Hopper

5.14.1 The hopper can empty directly onto the ground or tip into container. Before emptying the hopper, make sure that: The machine is on a level surface, and that there is sufficient space for the opened back cover. STOP the front and rear PTO.



5.14.2 Drive to the nearest disposal area. Begin emptying by using the lower joystick to tip the hopper.

5.14.3 Lower the joystick once the hopper is empty (The hopper will move back to its normal position).



5.14.4 Release the handle when the hopper is back in position. The hopper is fitted with a hose-break valve, which will close if the hopper lowers too quickly.

5.14.5 If this happens, raise the hopper a little again, and then lower it slowly.

5.14.6 The rear hatch must not be opened until suction has ceased. Otherwise, there is a risk of personal injury. The suction continues to run for approx. 15 s after the turbine has been switched off (PTO rear). There is a risk of crushing while the hopper is being emptied.



5.14.7 Make sure the hopper is completely lowered after emptying!

5.15 Emptying the Hopper for Water.

5.15.1 The water in the hopper can be emptied by unscrewing the drain plug.



	METHOD STATEMENT		MS-CLE-HMC-028	
	Safe Use of Road Sweeper Machine City Ranger 2260		DATE	5/12/2024
			REVISION	V2.0

5.16 Cleaning/Replacing Filter System and Turbine.

5.16.1 Daily cleaning and maintenance will extend the lifetime of both the machine and the attachment. Clean the Suction Sweeper with water after use. Avoid high pressure cleaning of the snap couplings. Clean the snap couplings with an MFC.



5.16.2 Cleaning/replacing filter system and turbine Attention! In case of imbalance in the filter or turbine, the machine must be stopped immediately to prevent vibration damage.



5.16.3 Checking the filter and turbine daily. Dirt can cause imbalance in the rotary filter and turbine. It must be removed immediately! Give special attention to the filter and turbine while the machine is operating in difficult conditions.

5.16.4 Cleaning the rotary filter and turbine. Remove the rotary filter and rotary filter grill and clean with water (max. temp 50°C). Check for dirt on the turbine and clean.



5.16.5 Flush the turbine until it is clean. A high-pressure cleaner is recommended for this purpose. Attach the rotary filter grill and rotary filter. Bolt should be tightened to 45 Nm of torque. If the rotary filter cannot be cleaned or is worn, it should be replaced.



6. Health and safety – Points to remember

- 6.1 As the machine is articulated, the rear end of the machine swings out when turning.
- 6.2 Make sure that no one is near the machine while it is in use as there is a danger of crushing.
- 6.3 Do not let go of the lever when the hopper tank is lowered as that is dangerous. Keep a good grip of the lever until the hopper is on the machine.
- 6.4 Make sure no one gets their fingers trapped when the hopper is lowered after tipping.
- 6.5 The hopper must never be emptied when the hopper frame is hanging on the Suction Sweeper
- 6.6 Wear the right non-slip safety footwear for the job.
- 6.7 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.8 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).

	METHOD STATEMENT		MS-CLE-HMC-028	
	Safe Use of Road Sweeper Machine City Ranger 2260		DATE	5/12/2024
			REVISION	V2.0

- 6.9 To complete the job safely, follow the associated risk assessment.
- 6.10 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.11 Only use appropriate tools and equipment for the task.
- 6.12 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.13 Never leave any tool or material in the area unattended.
- 6.14 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 City ranger must be cleaned, and major touch points must be disinfected.
- 7.3 Park the City ranger in a designated parking space.
- 7.4 Log out the machine usage checklist.
- 7.5 Request to purchase fuel if fuel tank doesn't have adequate fuel for next use.
- 7.6 Report all Damages, Incidents & accidents / Health events to your Team Leader if any.
- 7.7 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.8 Double Check if there are no tools, materials left in the area.
- 7.9 Notify your team leader that the work is complete, and area is free of materials.
- 7.10 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.11 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.12 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (If yes, inform your team leader)
- 7.13 Are there any faults with your tools and PPE that you must report?
- 7.14 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		12.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		17.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		18.05.2024

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

NOTE This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	External areas
Task Description	Facade Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-25

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shaded Safety Goggles
	Dust Mask		High Visibility Jacket
	Gum Boots		Safety Helmet
	Hiflex Hand Gloves		

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

3. Required Equipment and Tools

	Caution Board		Ecolab Oasis Orange Force 137
	Barricade		Wringer Trolley
	Safety Cones		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Dustpan & Brush		Pro 14 Chemical
	MFC		Hard Brush with Handle
	Hose Pipe		Pressure Wash Machine
	Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty		Floor Squeegee
	Cable Protector		Caddy Tray

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0
	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Bucket for Chemical Solution	
	Ecolab Oasis Pro 41 Glass Cleaner		Oasis Pro 41 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage	
	Extension Pole and Applicator		Podium Ladder	
	Glass Squeegee			

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task.
- 4.1.2 Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.3 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.4 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.5 Barricade the area as appropriate.
- 4.1.6 Place the Work signage caution board.
- 4.1.7 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.8 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.
- 4.1.9 Follow FMM heat stress policy.
- 4.1.10 For External areas, stop the task if the wind speed is 12.5 m/s or more. Follow GL-HSEQ-02-Working Under Severe Weather Conditions
- 4.1.11 Staff to know about HMC Emergency protocols and Location of the FMM First aid kit.

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab Oasis orange force 137/Ecolab Pro 41). Dilution ratio – 8 ml chemical into 1 Litre of water (If in case chemical not available from the Ecolab chemical dispenser machine).
- 4.2.6 The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Ensure for electrical equipment PAT test is done.

4.3 Permit to work

- 4.3.1 Obtain permit to work from the concerned departments followed by HMC permit to work form.
- 4.3.2 Follow FMM permit to work form with required signatures, maintain according to the required frequencies recommended by HSEQ department.
- 4.3.3 Approved permit to work form must be available in the file with façade cleaning team for any time inspection.
- 4.3.4 A briefing must be conducted to the façade team by the team leader with that particular day's permit to work and target to be achieved etc.
- 4.3.5 HSE officers to be inspected the area before starting the task to make sure everything safe and readiness to proceed with the task.

5. Job Steps

5.1 Cleaning of Wall and cladding.

- 5.1.1 Select manageable size of the wall to be cleaned in one stretch, always follow the cleaning direction from top to bottom.
- 5.1.2 Place the podium ladder on the selected area – refer the below **5.5 Podium Ladders Inspections and Use.**
- 5.1.3 Make sure appropriated PPEs are worn before commencing the task.
- 5.1.4 Identify visible stains on the wall, apply diluted Ecolab pro 14 chemical on the stain and scrub with an abrasive pad.
- 5.1.5 After removing the visible stains, start using the pressure washer machine to clean the wall surface effectively, use the pressure washer gun by following systematic overlapping passes (vertical/horizontal). Refer to the below **5.4 Operating Pressure Washer Machine.**
- 5.1.6 After completion of wall washing with pressure washer machine on the selected wall surface, check on the metal claddings, perform damp wiping with a damp MFC – refer to **MS-CLE-HMC-008 for Damp wiping the cladding surface.**

5.2 Cleaning of Windows and Frames.

- 5.2.1 Refer to **MS-CLE-HMC-005 – Glass Cleaning.**

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

5.3 Cleaning of External Floor - Refer to MS-CLE-HMC-002 - External Area Floor Washing and Scrubbing

- 5.3.1. Identify stains on the floor and do necessary spotting with the help of hard brush and available chemical related to the surface. Use diluted Ecolab Oasis Orange Force 137.
- 5.3.2. identify available water points nearby and connect hose pipe / collect water into a container.
- 5.3.3. Use pressure washer machine to clean the floor effectively, refer to **5.4 Operating Pressure Washer Machine.**
- 5.3.4. Remove the soiled water from the surface with the help of a floor squeegee, push the water into the nearest drainage system.
- 5.3.5. Remove the excess water from the floor with the help of a floor squeegee.
- 5.3.6. Wash the drain plate to remove accumulated dust or excess mud with pressure washer machine or with hose pipe.
- 5.3.7. Make sure the floor is free from water before leaving the location.

5.4 For Operating Pressure wash machine.

- 5.4.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage.
- 5.4.2 Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses and connections.
- 5.4.3 Install the nozzle and the spray lance.
- 5.4.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.4.5 Tighten the screw connection between the hose and the machine.
- 5.4.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.4.7 Switch on the Machine with the key, push down accelerator & Boost the engine.
- 5.4.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.4.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from the user. Pull the trigger to begin spraying the water.
- 5.4.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.4.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.4.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.4.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.4.14 High pressure flat spray (25°) for large dirt areas
- 5.4.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.4.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.4.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet and body out of the way. Maintain good footing.
- 5.4.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.4.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.4.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.4.21 Shut off water supply.

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

- 5.4.22 Remove the plug and recoil / rewind all cables and hoses.
- 5.4.23 Clean the equipment and check for safety of Equipment.
- 5.4.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.4.25 Return the equipment and materials to the Designated storage area.

5.5 Podium Ladder Inspections and Use.

- 5.5.1 Check all 4 castors are secure and the fixing bolts are tightened correctly.
- 5.5.2 Check all 2-wheel brakes operate and lock the wheel and castor into position.
- 5.5.3 Check the tubes and aluminium components of the podium step. There should not be any cracks or excessive dents or distortion.
- 5.5.4 Check there is free movement of all hinge points of the podium step. Check the plywood platform.
- 5.5.5 There should not be excessive contamination, cracking, holes or damage, including any missing or damaged rivet fixings.
- 5.5.6 Check the following podium step locking mechanisms are operating and locking correctly. Ladder claws and locks, gate claw and lock, rear folding frame elbow locking joints and the platform locking tabs.
- 5.5.7 Make sure the total load (1 person plus tools & materials) should not be more than 150kg.
- 5.5.8 Make sure the 4 castors are pointing outwards and the wheel brakes are locked.
- 5.5.9 Check the access ladder is located correctly.
- 5.5.10 Make sure the podium step is on flat, level, dry and firm ground.
- 5.5.11 Make sure the podium step is correctly positioned to avoid overreaching.
- 5.5.12 Make sure the platform is at the correct height.
- 5.5.13 Make sure the safety gate is shut and locked once you are on the platform.

5.5.1 Key Notes:

- 5.5.1.1 Never stand on the guardrails, boxes, stepladders, or other objects on the platform, to gain additional working height.
- 5.5.1.2 Never suspend the podium step from another structure or level podium step.
- 5.5.1.3 The maximum number of occupants must not exceed one.
- 5.5.1.4 Never use the podium step if any part is damaged or shows signs of excessive wear.
- 5.5.1.5 Never move the podium step when a person is standing on it.
- 5.5.1.6 Never over-reach or lean too far over the side of the podium step.
- 5.5.1.7 Never use the podium step as a method of gaining access to another structure or level.
- 5.5.1.8 In addition, Use Pre use Ladder checklist.

6. Health and Safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handle tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.

	METHOD STATEMENT		MS-CLE-HMC-31	
	Facade Cleaning		DATE	5/13/2024
			REVISION	V2.0

- 6.11 Never leave any tool or material in the area unattended.
6.12 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Visually check the wall, claddings, floor, windows etc. is free from any stains, mud, dirt accumulation, chemical residues, excess water etc.
7.2 Wait until the floor entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
7.4 Double Check if there are no tools, materials left in the area.
7.5 Notify your team leader that the work is complete, and area is free of materials.
7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
7.9 Are there any faults with your tools and PPE that you must report?
7.10 Report all Damages, Incidents & accidents / Health events to your team leader to mention in the work completion report.
7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		13.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		14.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		15.05.2024

	METHOD STATEMENT		MS-CLE-HMC-12	
	Suction Cleaning		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Suction Cleaning (with vacuum machine)
Related RA/ JSA Ref.	HSEQ-RA-HMC-08

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.


2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Disposable Shoe Covers – Optional (Wherever Necessary as per HMC IPC Guidelines)
	Disposable Mask		Disposable Hair Net – Optional (Wherever Necessary as per HMC IPC Guidelines)
	N95 Face Mask – Optional (Wherever Necessary as per HMC IPC Guidelines)		Face Shield – Optional (Wherever Necessary as per HMC IPC Guidelines)

	METHOD STATEMENT		MS-CLE-HMC-12	
	Suction Cleaning		DATE	5/16/2024
			REVISION	V2.0

	Medical Disposable Gown – Optional (Wherever Necessary as per HMC IPC Guidelines)	
---	---	--

3. Required Equipment and Tools

	Caution Board		Vacuum Machine
	Pro14 Chemical		MFC Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area
	Dustpan & Brush		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy).
- 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the Work signage caution board.

	METHOD STATEMENT		MS-CLE-HMC-12	
	Suction Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.2 TOOLS & EQUIPMENT

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 To identify the work area and place the barricades and warning signs as needed.
- 4.2.7 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.2.8 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.
- 4.2.9 Cable wires are checked for any knuckles, cuts, or damages and reported immediately if unsafe to use towards the Direct Supervisor or else, recoil the cable wire correctly back to the machine.
- 4.2.10 Before checking the power of the Suction Cleaning Machine, make sure to check the socket if it is turned off before plugging the machine to the outlet, the power of the machine then is tested if it works properly.
- 4.2.11 Ensure equipment PAT test is done.

5. Job Steps

- 5.1 Place warning sign “Cleaning in progress” at the entrance or exit that should be visible to all whoever passing nearby.
- 5.2 Adjust the furniture position suitable to perform the task.
- 5.3 Large items of rubbish are cleared by using dustpan and brush before suction cleaning is commenced.
- 5.4 Check for damage or heavy stains to be reported to team leader immediately.
- 5.5 If in case of any removable stains or chewing gum stains – refer to MS-CLE-HMC-021 Carpet Shampooing.



	METHOD STATEMENT		MS-CLE-HMC-12	
	Suction Cleaning		DATE	5/16/2024
			REVISION	V2.0

5.6 To start work, position the cable behind the line of work.

5.7 Always pay attention to the edges and corners using the crevice nozzle or with suitable head.

5.8 Adjust the brush/beater bar to suit the surface.

5.9 Traffic lanes must be given more attention when doing the suction cleaning.

5.10 Task carried out systematically in parallel overlapping passes so that all areas are effectively and efficiently cleaned.

5.11 Re-check the surface again to identify if any area missed and repeat the task where required.

Re arrange the furniture to exact position.



6. Health and safety – Points to remember

6.1 Always place the precautionary/warning signage

6.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.

6.3 Handle all chemicals safely according to COSHH / SDS.

6.4 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).

6.5 Avoid physical contact with chemical (specially with eyes).

6.6 To complete the job safely, follow the associated risk assessment.

6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.

6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.

6.9 Use the appropriate tools and equipment for the task.

6.10 Comply with all HMC regulations for safety, hygiene, and infection control.

6.11 Never leave any tool or material in the area unattended.

6.12 As much as possible, keep the pathways clear of obstructions.

6.13 Always pay full attention to the operations of the cleaning equipment as well as the task you are doing.

7. Quality Verification & Post Job Check

7.1 Visually check the floor/carpet cleaned well, should be free from dust, debris, stains etc.

7.2 Make sure the furniture returned to the right place if those removed during cleaning.

7.3 Carpet should be dried if carpet spotting process carried out.

7.4 Warning signs, materials, tools, equipment etc. checked, cleaned, disinfected, and removed as necessary.

7.5 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).

7.6 Wash your hands thoroughly as per HMC Policies CL 7241 Hand Hygiene.

7.7 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)

7.8 MFC's should be laundered as appropriate.

	METHOD STATEMENT		MS-CLE-HMC-12	
	Suction Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 7.9 Notify your team leader that the work is complete, and area is free of materials.
- 7.10 Ensure that the tools, signs, and barricading has been removed from the site and safely take them back to the HK room/store and keep the area clear for user.
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.
- 7.13 Report all damages, incidents & accidents / health events to your team leader.
- 7.14 Waste must be properly disposed as per SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Carpet shampooing
Related RA/ JSA Ref.	HSEQ-RA-HMC-15

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe Covers Disposable - Optional Depends On The Risk Area.
	Disposable Mask		Disposable Hair Net - Optional Depends On The Risk Area.
	N95 Face Mask – Optional Depends On The Risk Area.		Face Shield – Optional Depends On The Risk Area.

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

	Medical Disposable Gown - Optional Depends On The Risk Area.		Gum Boots (Optional)
---	--	---	----------------------

3. Required Equipment and Tools			
	Caution Board		Chemical Container
	Sponge		MFC Cloth Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area
	Ecolab Sapur Carpet Shampoo		Ecolab Revitalize Miracle Spotter
	Wet & Dry Vacuum Machine		Air Blower
	Caddy Tray		Dry Vacuum Machine

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

	Carpet Shampooing Machine		Carpet Extractor Machine
	Scraper		Hand Brush
	Single Disc Machine		White Bristle Brush – For Single Disc Machine
	Extractor Machine		Housekeeping Trolley With Top/Down System (To Be Used In All Areas EXCEPT High-Risk Areas)
	Housekeeping Trolley With Top/Down System - Anti-Bacterial (To Be Used ONLY In High-Risk Areas)		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the Work signage caution board.

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.2 Tools & Equipment

4.2.1 Check & prepare all the equipment that may be required for the task.

4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.

4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.

4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.

4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab Revitalize Carpet Upholstery Extraction Cleaner, Ecolab Revitalize Miracle Spotter). The usage of the chemical solution must be within 24 hours of the dilution process.

4.2.6 Chemical dilution ratio - Oasis Pro 14, Ecolab Revitalize Carpet Upholstery Extraction Cleaner – 4/8 ml into 1 Litre of water (Applicable only when the chemical not available in Ecolab chemical dispenser)

4.2.7 Ensure equipment PAT test is done.

4.2.8 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.

4.2.9 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.3 Machine Pre- checks

4.3.1 Safety checks each part of the electrical equipment as appropriate.

4.3.2 Cables should be checked for exposed wires, cuts or scrapes - by running a clean colour coded cloth appropriate for the area the machine works in over it from the machine to the plug, if there are any.

4.3.3 The cable should be neatly placed and should at no time present a trip hazard.

4.3.4 Filters should be clean and correctly fitted, if the filter is clogged it should be cleaned or changed.

4.3.5 The casing of the machine should be complete and in good working condition and the wheels free from debris and freely moving.

4.3.6 Ensure correct accessories are selected, pad drives and pads or brushes depends on the floor type.

4.3.7 Report procedure for faulty items, this could be marking the machine with an Out of Order sign and ringing the company helpline with the make, model and serial number.

4.3.8 Always give your full attention to the operation of the cleaning equipment and the task you are doing.

4.3.9 The correct position in which the machine should be started according to manufacturer's operating instruction.

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

5. Job Steps

- 5.1 Place warning sign “Cleaning in Progress” at the entrance or exit that should be visible to public.
- 5.2 Vacuum the carpet with the help of a dry vacuum machine – Refer to **MS-CLE-HMC-012 Suction cleaning**.
- 5.3 Pay attention to clean carpet corners/edges while vacuuming.
- 5.4 Identify minor/major stains on the carpet.
- 5.5 Apply Ecolab Revitalize Miracle Spotter (Ready to use) into a sponge.
- 5.6 (soft side). Alternative use of MFC/soft hand brush for carpet spotting.
- 5.7 Gently execute spotting on the minor/major stains on the carpet.
- 5.8 Wipe over the spotted area with MFC to clear the stain.
- 5.9 Remove gum stains using with scrapper or gum removing tool.
- 5.10 Make sure there are no damages on the carpet fibre.
- 5.11 Pour diluted Ecolab Revitalize Carpet Upholstery Extraction cleaner.
- 5.12 into the machine solution tank with the help of a chemical container.
- 5.13 Run the carpet shampooing machine over the selected carpet portion.
- 5.14 Shampooing should be commenced from the farthest point from the exit.
- 5.15 Control the chemical flow according to the chemical requirement.
- 5.16 on the carpet and the dirt accumulation.
- 5.17 Should follow systematic overlapping passes while shampooing for better result or to miss any carpet portion.
- 5.18 Machine operation should be in the following the directions shown in the picture with overlaps. Ensure that all the areas have been covered.
- 5.19 If carpet shampooing commencing with a single disc machine,
- 5.20 Then use carpet extractor machine/ wet and dry vacuum machine to remove.
- 5.21 The applied chemical solution from the carpet.
- 5.22 Redo with carpet extractor machine if the carpet remains wet.
- 5.23 Leave the carpet for drying in room temperature or with the help of blower machine (optional depends on the urgency).
- 5.24 Replace the furniture if those removed while carrying carpet shampooing task.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools. Handle all chemicals safely according to COSHH / SDS.
- 6.3 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).
- 6.4 Avoid physical contact with chemical (specially with eyes).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.7 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.8 Use the appropriate tools and equipment for the task.
- 6.9 Staff to follow TBT for slip, trip & fall.
- 6.10 Always follow your superior's guidelines when performing a task.

	METHOD STATEMENT		MS-CLE-HMC-21	
	Carpet Shampooing		DATE	5/15/2024
			REVISION	V2.0

- 6.11 Comply with all HMC regulations for safety, good hygiene, and infection control.
6.12 Never leave any tool or material in the area unattended.
6.13 As much as possible, keep the pathways clear of obstructions.
6.14 Always pay full attention to the operations of the cleaning equipment as well as the task you are doing.

7. Quality Verification & Post Job Check

- 7.1 Visually check the selected carpet portion cleaned effectively, should be free from visible stains, dirt, dust etc.
7.2 If any permeant stains noticed, report to your team leader immediately.
7.3 Carpet should be completely dried before removing the blower machine and warning sign.
7.4 Warning signs, materials, tools, equipment etc. checked, cleaned, disinfected, and removed as necessary.
7.5 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).
7.6 Wash your hands thoroughly as per HMC Policies CL 7241 Hand Hygiene.
7.7 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
7.8 MFC's should be laundered as appropriate.
7.9 Notify your team leader that the work is complete, and area is free of materials.
7.10 Ensure that the tools, signs, and barricading has been removed from the site and safely take them back to the HK room/store and keep the area clear for user.
7.11 Are there any faults with your tools and PPE that you must report?
7.12 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.
7.13 Any Spillages should be cleaned up immediately, and the floor to be left dry.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

			MS-CLE-HMC-11	
	Fabric Sofa Shampooing		DATE	5/15/2024
			REVISION	2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	High/Medium/ Low risk areas
Task Description	Fabric sofa shampooing
Related RA/ JSA Ref.	HSEQ-RA-HMC-08

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Shoe Covers Disposable - Optional Depends On The Risk Area.
	Disposable Mask		Disposable Hair Net - Optional Depends On The Risk Area.
	N95 Face Mask – Optional Depends On The Risk Area		Face Shield – Optional Depends On The Risk Area
	Medical Disposable Gown - Optional Depends On The Risk Area.		Goggles

			MS-CLE-HMC-11	
	Fabric Sofa Shampooing		DATE	5/15/2024
			REVISION	2.0

3. Required Equipment and Tools

	Caution Board		Chemical Container
	Sponge		MFC Cloth Yellow – High Risk Area Blue – Medium Risk Area Green – Low Risk Area
	Ecolab Revitalize Carpet Upholstery Extraction Cleaner		Ecolab Revitalize Miracle Spotter
	Wet & Dry Vacuum Machine		Air Blower
	Caddy Tray		Dry Vacuum Machine
	Extractor Machine		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Yellow – High Risk Areas Blue – Medium Risk Area Green – Low Risk Area

			MS-CLE-HMC-11	
	Fabric Sofa Shampooing		DATE	5/15/2024
			REVISION	2.0

	Housekeeping Trolley with Top/Down System - Anti-bacterial (To be used ONLY in High-risk Areas)		Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
---	---	---	--

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the work signage caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.

4.2 TOOLS & EQUIPMENT

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.
- 4.2.5 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.6 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab Revitalize Carpet Upholstery Extraction Cleaner, Ecolab Revitalize Miracle Spotter). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Chemical dilution ratio - Oasis Pro 14, Ecolab Revitalize Carpet Upholstery Extraction Cleaner – 4/8 ml into 1 Litre of water (Applicable only when the chemical not available in Ecolab chemical dispenser)
- 4.2.8 Ensure equipment PAT test is done.

	MS-CLE-HMC-11	
	DATE	5/15/2024
	REVISION	2.0

Fabric Sofa Shampooing

5. Job Steps

- 5.1 Place warning sign "Cleaning in progress" at the entrance or exit that should be visible to public.
- 5.2 Move the fabric sofa to a convenient place where the task can perform smoothly.
- 5.3 Vacuum the fabric sofa with the help of a dry vacuum machine – Refer to MS-CLE-HMC-012 Suction cleaning.
- 5.4 Identify the minor or major stains over the fabric.
- 5.5 Apply Ecolab Revitalize Miracle Spotter (Ready to use) into a sponge (soft side).
- 5.6 Gently execute spotting on minor or major stains on the fabric.
- 5.7 Wipe over the spotted area with MFC to clear the stains.
- 5.8 Take diluted Ecolab Revitalize Carpet Upholstery Extraction Cleaner in a chemical container.
- 5.9 Beat the chemical with a hand brush in a circular motion to create chemical foam for fabric shampooing.
- 5.10 Take the chemical foam on a sponge and rub gently on the fabric in one direction in systematic parallel over lapping passes.
- 5.11 Make sure the entire fabric surfaces covered with shampoo foam and carefully rubbed.
- 5.12 Wait for contact time to react the chemical into the fabric (60 to 120 seconds)
- 5.13 Remove the chemical foam with the help of an extractor machine or wet vacuum machine.
- 5.14 Do not miss any fabric surface where the shampoo foam applied.
- 5.15 Redo the application of extraction machine if the fabric looks still wet.
- 5.16 Leave the sofa for drying in room temperature or with the help of blower machine (optional depends on the urgency).



			MS-CLE-HMC-11
	Fabric Sofa Shampooing	DATE	5/15/2024
		REVISION	2.0

6. Health and safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handled tools instead.
- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs as per (HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Use the appropriate tools and equipment for the task.
- 6.10 Staff to follow TBT for slip, trip & fall.
- 6.11 Always follow your superior's guidelines when performing a task.
- 6.12 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.13 Never leave any tool or material in the area unattended.
- 6.14 As much as possible, keep the pathways clear of obstructions.
- 6.15 Always pay full attention to the operations of the Cleaning equipment as well as the task you are doing.

7. Quality Verification & Post Job Check

- 7.1 Visually check the fabric sofa cleaned effectively, should be free from visible stains, dirt, dust etc.
- 7.2 If any permeant stains noticed, report to your team leader immediately.
- 7.3 Fabric should be completely dried before removing the blower machine and warning sign.
- 7.4 Re arrange the fabric sofa to the exact position.
- 7.5 Warning signs, materials, tools, equipment's etc. checked, cleaned, disinfected, and removed as necessary.
- 7.6 Remove your PPE as per (HMC Policies CL 7242 Infection Control Practices).
- 7.7 Wash your hands thoroughly as per HMC Policies CL 7241 Hand Hygiene.
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 MFC's should be laundered as appropriate.
- 7.10 Notify your team leader that the work is complete, and area is free of materials.
- 7.11 Ensure that the tools, signs, and barricading has been removed from the site and safely take them back to the HK room/store and keep the area clear for user.
- 7.12 Are there any faults with your tools and PPE that you must report?
- 7.13 Staff to Report to his / her team leader for any unusual situation or any new hazard that need to be added to the RAMS.
- 7.14 Any Spillages should be cleaned up immediately, and the floor to be left dry.
- 7.15 Report all damages, incidents & accidents / health events to your team leader.

			MS-CLE-HMC-11	
	Fabric Sofa Shampooing		DATE	5/15/2024
			REVISION	2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		16.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		18.05.2024

	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH-HMC
Department Name	Housekeeping
Job Location	Courtyards Beside Administration & Restaurant
Task Description	Courtyard Floor Washing
Related RA/ JSA Ref.	HSEQ-RA-HMC-27 - Courtyard Floor Washing

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Black Safety Goggles for External
	Dust Face Mask		High Visibility Jacket
	Gum Boots		Manual Handling Gloves
	Safety Helmet		

	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Caution Board		Hard Brush with Handle
	Barricade		Floor Squeegee
	Dustpan & Brush		Caddy Tray
	MFC		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Hose Pipe with Reel		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Pressure Washer Machine		Ecolab Oasis Orange Force 137

	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Follow FMM heat stress policy.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Hose reels must be in functioning condition.
- 4.2.5 Always check the preparation date of the diluted cleaning chemical (Ecolab Oasis orange force 137). Dilution ratio – 4/8 ml chemical into 1 Litre of water.
- 4.2.6 The usage of the chemical solution must be within 24 hours of the dilution process
- 4.2.7 Ensure for electrical equipment PAT test is done.

5. Job Steps

5.1 Manual Floor Washing

- 5.1.1 Remove any trashes, dry leaf etc. from the floor with a dustpan and brush.
- 5.1.2 Identify stains on the floor and do necessary spotting with the help of hard brush.
- 5.1.3 Floors are checked for any adhesive soiling, use abrasive pad and Ecolab Oasis Orange Force 137. as required only.
- 5.1.4 Identify available water points nearby and connect hose pipe / collect water in a wringer bucket trolley from the nearest housekeeping room.
- 5.1.5 Due to unavailability of water outlets in Administration area and Restaurant area courtyards, hose pipes shall be connected from the roof top water outlets and the hose pipe shall be dragged down from the roof top till courtyard floor.
- 5.1.6 Other hose reel shall be used inside the courtyard only when required.
- 5.1.7 One janitor shall be stand on the roof top to adjust the hose pipe direction further down to courtyard.
- 5.1.8 Spread water into a manageable area and use hard brush to remove the sand and dust.



	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

- 5.1.9 Chemical shall be used only when heavy/oil stain found on the floor (spotting with additional precautions) applicable for the courtyards designed with land scape; this is to protect the plants from any type of chemical reaction.
- 5.1.10 Push the soiled water into the nearest drainage from the floor surface with a floor squeegee.
- 5.1.11 Rinse the floor again with water to remove complete dirt from the floor.
- 5.1.12 Remove the excess water from the floor again with a floor squeegee.
- 5.1.13 Clean the drain plate with water and wipe with a clean green coloured MFC.
- 5.1.14 Make sure the floor is free from water before removing the caution sign and barricade.
- 5.1.15 Hose pipe must be pulled back slowly and carefully to avoid any scratches or damages on the courtyard side glasses.



5.2 For Operating Pressure wash machine.

- 5.2.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage. Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses and connections.
- 5.2.2 **Steps for using power wash machine.**
- 5.2.3 Install the nozzle and the spray lance.
- 5.2.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.2.5 Tighten the screw connection between the hose and the machine.
- 5.2.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.2.7 Switch on the Machine with the key, push down accelerator & Boost the engine.
- 5.2.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.2.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from you. Pull the trigger to begin spraying the water.
- 5.2.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.2.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.2.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.2.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.2.14 High pressure flat spray (25°) for large dirt areas
- 5.2.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.2.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.2.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet and body out of the way. Maintain good footing.



	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

- 5.2.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.2.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.2.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.2.21 Shut off water supply.
- 5.2.22 Remove the plug and recoil / rewind all cables and hoses.
- 5.2.23 Clean the equipment and check for safety of Equipment.
- 5.2.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.2.25 Return the equipment and materials to the Designated storage area.

6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage near doors.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.7 Only use appropriate tools and equipment for the task.
- 6.8 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.9 Never leave any tool or material in the area unattended.
- 6.10 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

	METHOD STATEMENT		MS-CLE-HMC-33	
	Courtyard Floor Washing		DATE	5/14/2024
			REVISION	V2.0

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		14.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		15.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.05.2024

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0

NOTE This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	External areas
Task Description	Security Cabin Deep Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-16

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, use correct PPE for the job; Use correct chemical and explain the dilution if required; Describe donning & doffing of PPE's and importance of infection control in an isolation area.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Mechanical Gloves Nitrile Coated Palm Coat (For Manual handling works)
	Dust Face Mask		Black Safety Goggles for External
	Gum Boots		High Visibility Jacket

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0

3. Required Equipment and Tools

	Caution Board		Podium Ladder for High Level Tasks
	Barricade		Wringer Trolley
	Dustpan & Brush		Pro 14 Chemical
	MFC		Hard Brush with Handle
	Hose Pipe		Pressure Wash Machine for concrete wall.
	Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty		Floor Squeegee
	Cable Protector		Caddy Tray

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0
 	Oasis Pro 14 Chemical Spray Bottle with nozzle – appropriate coloured nozzle to be used based on area of usage		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)	
	Ecolab Oasis Pro Glass Cleaner		Spray Bottle With Colour Coded Nozzle – For Diluted Cleaning Chemicals	

4. Pre-Job Check

4.1 INFECTION CONTROL & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing **(Refer to HMC policies CL 7241 Hand Hygiene Policy)**.
- 4.1.2 Wear appropriate PPE as per guidelines **(Refer to HMC policies CL 7242 Infection Control Practices)**
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the Work signage caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.
- 4.1.7 Follow FMM heat stress policy.

4.2 TOOLS & EQUIPMENT

- 4.2.2 Check & prepare all the equipment that may be required for the task.
- 4.2.3 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.4 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.5 Floors are checked for any adhesive soiling, use a non-abrasive pad as required only.
- 4.2.6 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.7 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Oasis Pro 41). Dilution ratio – 4/8 ml chemical into 1 Litre of water (If in case chemical not available from the Ecolab chemical dispenser machine).
- 4.2.8 The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.9 Ensure for electrical equipment PAT test is done.

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0

5. Job Steps

5.1 EXTERNAL AREA

- 5.1.1 Notify security team with security cabins deep cleaning schedule. Inspect security cabins to find out any damages or defects before commencing the task if any, report it to the maintenance team and record it for work completion report. (Cracks, breakage, permanent stains, colour fade etc.
- 5.1.2 Barricade the area according to the traffic movements and place caution boards "Cleaning in progress".
- 5.1.3 Identify hard stains on the external wall.
- 5.1.4 Use abrasive pad and Pro 14 chemical to remove stains if any. (Dilution ratio 1:4/8 depends up on the stain)
- 5.1.5 Start washing external walls with pressure wash machine. (Top to bottom) Refer the below steps for using jet pressure washer machine.
- 5.1.6 Push the dirty/excess water from the floor to the nearest drain hole.
- 5.1.7 Clean exterior window glasses and frames (refer **MS-CLE-HMC-005 - Glass Cleaning**).



5.2 INTERNAL AREA

- 5.2.1 Empty the trash bin if it is filled with ¾ of trashes, replace with new bin liner.
- 5.2.2 Clean ceiling panels and high walls with a long stick (refer **MS-CLE-HMC-008- Dusting & Damp Wiping**)
- 5.2.3 Remove wall marks (internal) with abrasive pad and Pro 14 chemical to remove stains if any. (Dilution ratio 1:4/8 depends on the stain)
- 5.2.4 Clean all the furniture and other assets with MFC and Oasis Pro 14 chemical (refer **MS-CLE-HMC-008- Dusting & Damp Wiping**).
- 5.2.5 Clean interior window glasses, mirror, and frames (refer **MS-CLE-HMC-005 - Glass Cleaning**).
- 5.2.6 Scrub the floor with machine (refer **MS-CLE-HMC-004 - Floor scrubbing**).



5.3 FOR WASHROOM CLEANING PROCEDURE (If available in the security cabin)

- 5.3.1 Empty the trash bin if it is filled with ¾ of trashes, replace with new bin liner.
- 5.3.2 Clean ceiling panels and high walls with a long stick (refer **MS-CLE-HMC-008- Dusting & Damp Wiping**)
- 5.3.3 Remove wall marks (internal) with abrasive pad and Pro 14 chemical to remove stains if any. (Dilution ratio 1:4/8 depends on the stain).
- 5.3.4 Clean interior window glasses, mirror, and frames (refer **MS-CLE-HMC-005 - Glass Cleaning**).
- 5.3.5 Clean the WC (refer **MS-CLE-HMC-010 - WC Cleaning**).
- 5.3.6 Clean the Wash basin (refer **MS-CLE-HMC-009 - Wash Basin Cleaning**).
- 5.3.7 Scrub the floor (refer **MS-CLE-HMC-004 - Floor scrubbing**).

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.4 FOR OPERATING PRESSURE WASH MACHINE.

- 5.4.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage. Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses and connections.
- 5.4.2 Steps for using power wash machine.
- 5.4.3 Install the nozzle and the spray lance.
- 5.4.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.4.5 Tighten the screw connection between the hose and the machine.
- 5.4.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.4.7 Switch on the Machine with the key, push down accelerator & Boost the engine.
- 5.4.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.4.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from you. Pull the trigger to begin spraying the water.
- 5.4.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.4.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.4.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.4.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.4.14 High pressure flat spray (25°) for large dirt areas
- 5.4.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.4.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.4.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet and body out of the way. Maintain good footing.
- 5.4.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.4.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.4.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.4.21 Shut off water supply.
- 5.4.22 Remove the plug and recoil / rewind all cables and hoses.
- 5.4.23 Clean the equipment and check for safety of Equipment.
- 5.4.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.4.25 Return the equipment and materials to the Designated storage area.



6. Health and safety – Points to Remember

- 6.1 Always place the precautionary/warning signage.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area, use long handle tools instead.

	METHOD STATEMENT		MS-CLE-HMC-22	
	Security Cabin Deep Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 6.3 Handle all chemicals safely according to COSHH / SDS.
- 6.4 Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.5 Avoid physical contact with chemical (specially with eyes).
- 6.6 To complete the job safely, follow the associated risk assessment.
- 6.7 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.8 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.9 Only use appropriate tools and equipment for the task.
- 6.10 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.11 Never leave any tool or material in the area unattended.
- 6.12 As much as possible, keep the pathways clear of obstructions.
- 6.13 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.

7. Quality Verification & Post Job Check

- 7.1 Visually check the security cabin is free from any stains, mud, dirt accumulation, chemical residues, excess water etc.
- 7.2 Wait until the floor is entirely dry before removing the barricades, and then double-check that the floor is dry and clean.
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene**).
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your team leader.
- 7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH-HMC
Department Name	Housekeeping
Job Location	External Area
Task Description	Pergola Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-34

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Black Safety Goggles for External (Day)
	Dust Face Mask		High Visibility Jacket
	Gum Boots		Manual Handling Gloves
	Safety Helmet		Safety Goggles (Night)

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables				
	Caution Board		Hard Brush with Handle	
	Barricade		Floor Squeegee	
	Dustpan & Brush		Caddy Tray	
	MFC		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)	
	Hose Pipe with Reel		Podium Ladder	
	Pressure Washer Machine (Electric)		Ecolab Oasis Orange Force 137	

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

	Cable and hose Protector		Applicator and Extension Pole
	Flat Trolley for material movements		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Follow FMM heat stress policy.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Hose reels must be in functioning condition.
- 4.2.5 Always check the preparation date of the diluted cleaning chemical (Ecolab Oasis orange force 137). Dilution ratio – 4/8 ml chemical into 1 Litre of water.
- 4.2.6 The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.7 Ensure for electrical equipment PAT test is done.

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

5. Job Steps

5.1 Pergolas Cleaning

- 5.1.1 Choose the area of pergola to be cleaned.
- 5.1.2 Barricade the area of the works to avoid any patient /visitor accessing the area.
- 5.1.3 Place the podium ladder on the selected area according to the height of pergola.
- 5.1.4 Reach to the desired area to be cleaned through the podium ladder.
- 5.1.5 Cleaning of the pergolas shall be start from top and end at bottom.
- 5.1.6 Remove any visible dirt/dust from the pergola frames with a MFC and Abrasive pad if required.
(Refer to MS-CLE-HMC-08 Dusting & Damp Wiping)
- 5.1.7 The cleaning of pergola frames shall be performed from the highest level of the pergolas frame using the power washer machine.
- 5.1.8 Power washer gun nozzle to be adjusted to low mode to avoid wasting of water aligned with environmental safety.
- 5.1.9 Use a dry applicator attached with an extension pole can push the excess water from the pergola frame surface if any.
- 5.1.10 Wipe the pergola frames and lights with a dry MFC.
- 5.1.11 Change the MFC whenever required.
- 5.1.12 Move to another area after the completion of above steps.



5.2 Pergolas Floor Washing.

- 5.2.1 Refer to **MS-CLE-HMC-02 External Area Floor Washing and Scrubbing.**
- 5.2.2 If the pergola is situated close to plant, avoid using chemicals.

5.3 For Operating Pressure Wash Machine.

- 5.3.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage. Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses, and connections.
- 5.3.2 Steps for using power wash machine.
- 5.3.3 Install the nozzle and the spray lance.
- 5.3.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.3.5 Tighten the screw connection between the hose and the machine.
- 5.3.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.3.7 Switch on the Machine by turn on mode switch.

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

- 5.3.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.3.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from you. Pull the trigger to begin spraying the water.
- 5.3.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.3.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.3.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.3.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.3.14 High pressure flat spray (25°) for large dirt areas
- 5.3.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.3.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.3.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet, and body out of the way. Maintain good footing.
- 5.3.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.3.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.3.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.3.21 Shut off water supply.
- 5.3.22 Remove the plug and recoil / rewind all cables and hoses.
- 5.3.23 Clean the equipment and check for safety of Equipment.
- 5.3.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.3.25 Return the equipment and materials to the Designated storage area.

6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage near doors.
- 6.2 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.3 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.4 To complete the job safely, follow the associated risk assessment.
- 6.5 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.6 Only use appropriate tools and equipment for the task.
- 6.7 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.8 Never leave any tool or material in the area unattended.
- 6.9 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of pergolas frames, lights, floor etc. shall be clean and satisfactory.
- 7.2 In case any waste bins are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Excess water must be removed from the floor and the floor must be free of water.

	METHOD STATEMENT		MS-CLE-HMC-40	
	Pergola Cleaning		DATE	5/12/2024
			REVISION	V2.0

- 7.4 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.5 Double Check if there are no tools, materials left in the area.
- 7.6 Notify your team leader that the work is complete, and area is free of materials.
- 7.7 Remove your PPE **(HMC Policies CL 7242 Infection Control Practices)**.
- 7.8 Wash your hands thoroughly after the task is completed **(HMC Policies CL 7241 Hand Hygiene.)**
- 7.9 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.10 Are there any faults with your tools and PPE that you must report?
- 7.11 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.12 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		12.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		14.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.05.2024

	METHOD STATEMENT		MS-CLE-HMC-36	
	Ashtray Cleaning		DATE	5/14/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH/MHS/RLGH
Department Name	Housekeeping
Job Location	All External Entrances
Task Description	Ashtray Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-30

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Black Safety Goggles for External
	Dust Face Mask		High Visibility Jacket
	Safety Shoes		

	METHOD STATEMENT		MS-CLE-HMC-36	
	Ashtray Cleaning		DATE	5/14/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Caution Board		Spray Bottle
	Garbage Trolley		Caddy Tray
	Dustpan & Brush		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	MFC		Oasis Pro 14 All Purpose Chemical
	Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**).
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.

	METHOD STATEMENT		MS-CLE-HMC-36	
	Ashtray Cleaning		DATE	5/14/2024
			REVISION	V2.0

- 4.1.4 Warning sign to be placed on both the entrance/exit doors.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Follow FMM heat stress policy.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Always check the preparation date of the diluted cleaning chemical (Ecolab Pro 14). Dilution ratio – 4/8 ml chemical into 1 Litre of water.
- 4.2.5 The usage of the chemical solution must be within 24 hours of the dilution process

5. Job Steps

- 5.1 Identify the work area risk access and place the safety sign (caution board) nearby.
- 5.2 When the smoking stand is not blocked, place a damp green duster over the ashtray and take it to the janitorial room.
- 5.3 Spray water on the ashtray in the smoking area to ensure that the cigarette buds are already put off before throwing them in the garbage bag.
- 5.4 Clear the cigarette buds and other litters from the ashtray using disposable gloves and dustpan.
- 5.5 Clean and wash the ashtray using Pro 14 chemical using the green sponge.
- 5.6 Clean the smoking stand using a green damp duster.
- 5.7 The ashtray's sand needs to be replaced each month.



6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage near doors.
- 6.2 Wear the right non-slip safety footwear for the job.
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.7 Only use appropriate tools and equipment for the task.
- 6.8 Comply with all HMC regulations for safety, hygiene, and infection control.

	METHOD STATEMENT		MS-CLE-HMC-36	
	Ashtray Cleaning		DATE	5/14/2024
			REVISION	V2.0

- 6.9 Never leave any tool or material in the area unattended.
6.10 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
7.2 In case any furniture/equipment etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
7.4 Double Check if there are no tools, materials left in the area.
7.5 Notify your team leader that the work is complete, and area is free of materials.
7.6 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
7.7 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
7.9 Are there any faults with your tools and PPE that you must report?
7.10 Report all Damages, Incidents & accidents / Health events to your Team Leader.
7.11 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		14.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		15.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.05.2024

	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facility management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH RLGH, MHS,
Department Name	Housekeeping
Job Location	External Car Parking
Task Description	Car Parking & Canopy Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-23

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Black Safety Goggles for External
	Dust Face Mask		High Visibility Jacket
	Gum Boots		Manual Handling Gloves
	Safety Helmet		Apron.

	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Caution Board		Hard Brush with Handle
	Barricade		Floor Squeegee
	Dustpan & Brush		Caddy Tray
	MFC		Fully Equipped Housekeeping Trolley with Top/Down System (To be used in all areas EXCEPT High-risk Areas)
	Hose Pipe with Reel		Abrasive Pads White: Light Duty Green: Medium Duty Brown & Black: Heavy Duty
	Electric Pressure Washer Machine		Ecolab Oasis Orange Force 137
	Oasis Pro14 all-purpose cleaner		Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Green – Low Risk Area

	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

	Podium Ladder		Wet & Dry Vacuum Machine
	Double Mop Bucket		Cable and hose Protector
	Flat Trolley for material movements		

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.4 Warning sign to be placed on both the entrance/exit of parking slot.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Notify security team/SMS team before commencing the task to control the traffic to the scheduled area. (Pre-Approval)
- 4.1.7 Ensure no vehicles parked under the scheduled area before commencing the task.
- 4.1.8 If any vehicles noticed, the team leader to be communicated to the security office to do the necessary movement of vehicles from the parking to another.
- 4.1.9 Ensure staff have a training on level 1 working at height and safe usage of ladders.
- 4.1.10 Follow FMM heat stress policy **during summer**.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.

	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

- 4.2.2 Log in to the daily machine usage checklist for pressure washer machine & wet dry vacuum machine.
- 4.2.3 Perform pre use inspection of the ladder using the ladder checklist.
- 4.2.4 Check that operator is trained and competent to operate the power wash machine. **What type of training? Equipment familiarization**
- 4.2.5 Check if the O & M is available for the machine and operator is aware of it?
- 4.2.6 Choose appropriate **colour coded tools** & equipment and ensure they are assembled safely.
- 4.2.7 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.8 Hose reels must be in functioning condition.
- 4.2.9 Always check the preparation date of the diluted cleaning chemical (Ecolab Oasis orange force 137/ Oasis Pro 14 all-purpose Cleaner). Dilution ratio – 4/8 ml chemical into 1 Litre of water.
- 4.2.10 **The usage of the chemical solution must be within 24 hours of the dilution process**
- 4.2.11 Ensure for electrical equipment PAT test is done.

5. Job Steps

5.1 Canopy Washing.

- 5.1.1 Choose the area of carpark to be cleaned.
- 5.1.2 Barricade the area of the works to avoid any patient/vehicle accessing the area.
- 5.1.3 Place warning signs and a notice indicating “works at height”. Work in Progress
- 5.1.4 Place the podium ladder on the selected area according to the height of canopy.
- 5.1.5 Reach to the desired area to be cleaned through the podium ladder.
- 5.1.6 Cleaning of the canopies shall be start from top and end at bottom.
- 5.1.7 Remove any visible dirt/dust from the canopies steel bar with a MFC and Abrasive pad if required.
(Refer to MS-CLE-HMC-08 Dusting & Damp Wiping)
- 5.1.8 The cleaning of exterior canopies shall be performed from the highest level of the canopy using the power washer machine.
- 5.1.9 Power washer gun nozzle to be adjusted to low mode to avoid Damaging the canopy fabric & wasting of water aligned with environmental safety.
- 5.1.10 Wash Interior surfaces of the canopy with pressure washer machine same as the above process which includes the steel bars.
- 5.1.11 Use a dry applicator attached with an extension pole can push the excess water from exterior canopy surface if any.
- 5.1.12 Wipe the canopy steel bars and the lights with a dry MFC.
- 5.1.13 Change the MFC whenever required.



	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

5.1.14 Move to another area after the completion of above steps.

5.2 Parking Floor Washing.

5.2.1 Refer to **MS-CLE-HMC-02 External Area Floor Washing and Scrubbing.**

5.3 For Operating Pressure wash machine.

- 5.3.1 Read your operator's manual and follow the manufacturer's instructions for safe use, maintenance, and storage. Assemble equipment and check for safety, paying particular attention to any plugs, cables, hoses, and connections.
- 5.3.2 Steps for using power wash machine.
- 5.3.3 Install the nozzle and the spray lance.
- 5.3.4 Connect high pressure hose: to the hand spray gun using safety pin / lock /to the Pressure machine.
- 5.3.5 Tighten the screw connection between the hose and the machine.
- 5.3.6 Connect the supply water hose (minimum length 7.5 m, minimum diameter 3/4") to the facilities water valve for continuous supply of water (for e.g., a tap- Cold Water). Open the water supply.
- 5.3.7 Switch on the Machine with the key, push down accelerator & boost the engine.
- 5.3.8 Position the spray tip at least 2 feet (0.6 m) from the surface to start.
- 5.3.9 Hold the nozzle at a 45-degree angle to the surface. This will help direct loosened debris away from you. Pull the trigger to begin spraying the water.
- 5.3.10 Gradually move the tip closer. You risk damaging the surface if you hold the tip closer than 12 inches (0.3 m)
- 5.3.11 Move the spray in a side-to-side motion, without spraying too long in any one spot.
- 5.3.12 Turn the spray pipe towards the left or right to select the desired spray type.
- 5.3.13 High pressure circular spray (0°) for especially stubborn dirt.
- 5.3.14 High pressure flat spray (25°) for large dirt areas
- 5.3.15 Flat low-pressure spray (CHEM) for operating using detergents or cleaning at low pressure.
- 5.3.16 To keep control of the water stream, hang on to the spray wand with both hands.
- 5.3.17 Avoid contact with the high-pressure stream of water. Keep your hands, feet, and body out of the way. Maintain good footing.
- 5.3.18 Do not reach so far that you lose your balance. Never point the sprayer at another person, whether the pressure washer is operating or not. It could discharge unexpectedly.
- 5.3.19 Do not use a pressure washer in an area where the water could contact electrical equipment.
- 5.3.20 On Job completion Switch off the engine to "STOP" till the engine comes to a halt.
- 5.3.21 Shut off water supply.
- 5.3.22 Remove the plug and recoil / rewind all cables and hoses.
- 5.3.23 Clean the equipment and check for safety of Equipment.
- 5.3.24 Remove excess water from floor surfaces and leave as dry as is possible using a long-handled squeegee, directing water to the nearest drains.
- 5.3.25 Return the equipment and materials to the Designated storage area.



	METHOD STATEMENT		MS-CLE-HMC-029	
	Car Parking & Canopy Cleaning		DATE	5/12/2024
			REVISION	V2.0

6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage.
- 6.2 Wear the right non-slip safety footwear for the job. (Gumboot)
- 6.3 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.4 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.5 To complete the job safely, follow the associated risk assessment.
- 6.6 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.7 Only use appropriate tools and equipment for the task.
- 6.8 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.9 Never leave any tool or material unattended in the work area
- 6.10 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of canopy, steel bars, **lights**, parking floor etc. shall be clean and satisfactory.
- 7.2 In case any waste bins are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Excess water must be removed from the floor and road must be free of water.
- 7.4 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.5 Double Check if there are no tools, materials left in the area.
- 7.6 Notify your team leader that the work is complete, and area is free of materials.
- 7.7 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.8 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.9 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (If yes, inform your team leader)
- 7.10 Are there any faults with your tools and PPE that you must report?
- 7.11 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.12 If you detect any fault in the machine, communicate same to storekeeper.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program**.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		12.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		14.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		16.05.2024

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Control Room
Task Description	PC Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-12

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Antistatic Gloves		Dust Mask
	Safety Goggles		Antistatic Wrist Band

3. Required Materials/Tools

	Caution Board "Cleaning in Progress"		MFC – Pink – Dry Application Green – Wet Application
---	--------------------------------------	---	--

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

	Acrylic Duster		Antistatic Vacuum/Blower Machine
	Chemical - Ecolab PRO 41		Chemical Spray Bottle – Ecolab PRO 41
	Chemical - Ecolab PRO 14		Chemical Spray Bottle – Ecolab PRO 14
	Housekeeping Trolley		3 Inch Soft Brush

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy).
- 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices)
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the work signage caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.
- 4.1.7 Ensure adequate ventilation as appropriate.
- 4.1.8 Ensure electrical wall socket switches are in off position while plugging the vacuum machine or PC power cables.
- 4.1.9 Make sure vacuum/blower machine switch is in “off” mode before plugging on electrical wall socket.
- 4.1.10 Check that the unit switches on and off correctly.

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

4.1.11 Carry out a safety check of each part of the vacuum machine as appropriate.

4.2 TOOLS & EQUIPMENT

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab PRO 41). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Chemical dilution ratio 4/8 ml chemical into 1 Litre of water, if in case chemical not available in the chemical dispenser machine.

5. Job Steps

5.1 Points to remember:

- 5.1.1 Contact Hospital Security Department for required approvals before scheduling and commencing the task.
- 5.1.2 Proceed to control room, knock on the door, and enter only after permission is granted.
- 5.1.3 Log in/out to control room is mandatory.
- 5.1.4 Note down if any issues are reported by control room team regarding any damages on the PC or its accessories before commencing the task.
- 5.1.5 Visually check for any other damages which is not reported by control room team, report if any.
- 5.1.6 Switching off the PC's and unplugging before commencing the cleaning task is recommended in order to avoid any electrical hazards.
- 5.1.7 Ask for assistance from control room team to switch off/on PC to avoid any interruptions of control room system functions/operations.
- 5.1.8 Wait till the PC completely shuts down, please remember ONLY THE CONTROL ROOM OPERATOR SHOULD SHUT DOWN THE PC.
- 5.1.9 After the PC is shut down completely, switch of the power supply, first from the extension cord/power strip (if any in use) followed by electrical wall socket.
- 5.1.10 Disconnect the power cables from the extension cord/power strip.
- 5.1.11 Take a picture of the cable connections before unplugging them from the slots this will help you reconnect the cables in the same order after the work is completed.

5.2 Steps:

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

5.2.1 CPU

- 5.2.1.1 Move the CPU to space where it is more convenient to perform the task outside the control room.
- 5.2.1.2 Wear the Antistatic wrist band and connect to the base of the CPU while vacuuming and cleaning the inside of the CPU.
- 5.2.1.3 Keep the CPU on a table in a vertical standing position.
- 5.2.1.4 Carefully remove the CPU side cover.
- 5.2.1.5 Clean the internal parts of the CPU with an antistatic vacuum/blower machine, use nozzle to reach between the parts and congested spaces inside the CPU.
- 5.2.1.6 Use blower mode of the machine in lower pressure to blow the dust from the CPU internal parts.
- 5.2.1.7 Make sure you don't touch any internal / delegate part of the PC with the blower / vacuum nozzle.
- 5.2.1.8 Close the CPU side cover carefully after removing the dust from internal parts of the CPU.
- 5.2.1.9 Use acrylic hand duster to remove the dust from CPU external body including cables.
- 5.2.1.10 Perform the dusting of exterior surfaces and cables with a PINK coloured dry MFC cloth.
- 5.2.1.11 Damp wipe exterior surfaces with chemical charged (PRO 14 cleaner) GREEN coloured MFC cloth. Use Pro 14 chemical spray bottle to charge the MFC cloth.
- 5.2.1.12 Wait till the chemical completely dried.
- 5.2.1.13 Return the CPU back to its place and plug in all the cables back to the CPU as it was prior to disconnection (refer to the picture taken earlier to ensure the cables are connected to the right socket).
- 5.2.1.14 Double check if all the cables are connected properly.
- 5.2.1.15 Connect the power cord to the extension cable/power strip.

5.2.2 Monitor

- 5.2.2.1 Use acrylic hand duster/3-inch hand brush to remove the dust from monitor external surfaces. Pay attention while cleaning cables, edges, corners, front and back side of monitor etc.
- 5.2.2.2 Use antistatic vacuum cleaner to remove any accumulated dust remains in the external surfaces, if required.
- 5.2.2.3 Perform the dusting of exterior surfaces and cables with a PINK coloured dry MFC cloth.

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 5.2.2.4 Damp wipe exterior surfaces with chemical charged (Oasis PRO 14) GREEN coloured MFC cloth except cables and monitor glass.
- 5.2.2.5 Damp wipe monitor glass with another chemical charged GREEN MFC (Oasis PRO 41 – Glass Cleaner) (Use 2 different GREEN MFC cloths for different chemical application)
- 5.2.2.6 Make sure not to wipe any electrical socket or cables with a damp/wet cloth.
- 5.2.2.7 Wipe the exterior surfaces of monitor glass with a PINK coloured dry MFC cloth.
- 5.2.2.8 Position the monitor and to the right place as it was.
- 5.2.2.9 Connect the plug of the extension cord/power strip to the wall socket.
- 5.2.2.10 Switch on the wall socket followed by switching on the extension cord/power strip.
- 5.2.2.11 Switch on the PC by pressing power button on the CPU.
- 5.2.2.12 Always ask assistance from control room team to ensure all wires are connected in the right place and confirm if the CPU is functional.
- 5.2.2.13 Notify the control room Operator about the completion of the job and to verify the connections and PC restart.

5.2.3 VMS (Video management system), Keyboard, and other accessories

- 5.2.3.1 Switch off VMS one at a time, ask assistance from control room team to switch off/unplug.
- 5.2.3.2 Use acrylic hand duster/3-inch hand brush to remove the dust from external surfaces of VMS/keyboard/other accessories.
- 5.2.3.3 Use antistatic vacuum cleaner to remove any accumulated dust remains in the external surfaces especially on keyboard (Optional for VMS and other accessories).
- 5.2.3.4 Perform the dusting of exterior surfaces and cables with a PINK coloured dry MFC cloth.
- 5.2.3.5 Damp wipe exterior surfaces and cables with chemical charged (Pro14) GREEN coloured MFC cloth, wait till chemical completely dried out. Use Pro 14 chemical spray bottle to charge the MFC cloth.
- 5.2.3.6 Switch on the VMS and the other accessories, ask assistance from control room team.

6. Health and Safety – Points to Remember


- 6.1** Always place the precautionary/warning signage
- 6.2** Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.3** Do not clean any internal part or any electrical cable with damp cloth or chemical.
- 6.4** Handle all chemicals safely according to COSHH / SDS.
- 6.5** Use appropriate PPEs (refer to HMC Policies CL 7242 Infection Control Practices).
- 6.6** Avoid physical contact with chemical (specially with eyes).

	METHOD STATEMENT		MS-CLE-HMC-16	
	PC Cleaning		DATE	5/15/2024
			REVISION	V2.0

- 6.7 To complete the job safely, follow the associated risk assessment.
- 6.8 Follow the HMC guidelines with regards to COVID 19 Precautionary measures.
- 6.9 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.10 Only use appropriate tools and equipment for the task.
- 6.11 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.12 Never leave any tool or material in the area unattended.
- 6.13 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 Visually check the CPU, Monitor, VMS and other accessories should be free from any dust, dirt, finger marks, stains etc.
- 7.2 Make sure all the units switched on and plugged in, all the accessories back into right position and place.
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Double Check if there are no tools, materials left in the area.
- 7.5 Notify your team leader that the work is complete, and area is free of materials.
- 7.6 Remove your PPE (HMC Policies CL 7242 Infection Control Practices).
- 7.7 Wash your hands thoroughly after the task is completed (HMC Policies CL 7241 Hand Hygiene.)
- 7.8 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.9 Are there any faults with your tools and PPE that you must report?
- 7.10 Report all Damages, Incidents & accidents / Health events to your team leader.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		15.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	RLGH, MHS, See & Treat, AAH
Department Name	Housekeeping
Job Location	Internal & External areas
Task Description	CCTV Cleaning
Related RA/ JSA Ref.	HSEQ-RA-HMC-01

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; be briefed in the risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job

2. Required Personal Protective Equipment (PPE)

	Anti-static Gloves		Safety Goggles
	Dust Mask		Safety Helmet
	Hi-visibility Safety Vest		Safety Harness
	Lanyard		

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

3.Required Materials/ Tools

	Caution Board		Barricade
	Ladder		MFC – Pink – Dry Application Green – Wet Application
	Acrylic Duster		3 in Soft Cleaning Brush
	Oasis Pro 41 Glass Cleaner Chemical		Oasis Pro 14 All Purpose Cleaner
	Chemical Spray Bottle		Abrasive Pad
	WD 40 Chemical		Chemical Spray Bottle – Ecolab PRO 14

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (Refer to HMC policies CL 7241 Hand Hygiene Policy).
- 4.1.2 Wear appropriate PPE as per guidelines (Refer to HMC policies CL 7242 Infection Control Practices).
- 4.1.3 Ensure you have been trained in RA, MS, SDS, COSHH and chemical handling.
- 4.1.4 Place the work signage caution board.
- 4.1.5 Ensure that the work area is free from any hindrance or obstacles that could affect the Cleaning / Housekeeping operation.
- 4.1.6 Before commencing the task, any damage to surfaces or any incident should be reported to the team leader.
- 4.1.7 Ensure adequate ventilation as appropriate.
- 4.1.8 Are employees physically fit and free from any disability that may prevent them from working safely.
- 4.1.9 Ensure the employees are trained and third party certified for the use of high access equipment.
- 4.1.10 Check the MEWP is inspected and have 3rd party certificate.
- 4.1.11 Check expiry of WD-40 Chemical

4.2 Tools & equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.3 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.4 Ensure the chemicals spray bottles are properly labelled with details such as dilution /expiry date & time.
- 4.2.5 Always check the preparation date of the diluted cleaning chemicals (Oasis Pro 14, Ecolab PRO 41). The usage of the chemical solution must be within 24 hours of the dilution process.
- 4.2.6 Chemical dilution ratio 4/8 ml chemical into 1 Litre of water, if in case chemical not available in the chemical dispenser machine.

5. Job Steps

5.1. Steps

- 5.1.1 Contact Hospital Security Department for required approvals before scheduling and commencing the task.
- 5.1.2 Proceed to hospital control room for further permissions and permits, note down if there are any issues that are reported by control room team for any of the cameras that are scheduled for cleaning.
- 5.1.3 Signing in / out of control room is mandatory.

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 5.1.4 After obtaining all relevant approvals, review the CCTV camera cleaning schedule and identify camera locations.
- 5.1.5 Ensure a well-stocked cleaning toolbox is set up with adequate supplies required for the task.
- 5.1.6 Prior to commencement of the task, setup workstation to execute the task.
- 5.1.7 Place the ladder on an even surface (refer to procedure for Working with Ladders & Step Ladders -GL - HSEQ-11 Work at Height and prevention of falls).
- 5.1.8 Visually check whether the camera bracket is mounted properly.
- 5.1.9 Report if any damages or direction changes before commencing the task.

5.2 Steps for cleaning CCTV cameras: -

- 5.2.1 Clean exterior surface of cameras and brackets by using 3-Inch soft brush.
- 5.2.2 Use acrylic dusters to remove dust from the dome.
- 5.2.3 Perform the dusting of exterior surfaces with a **PINK** coloured dry MFC cloth.
- 5.2.4 Damp wipe exterior surfaces with chemical charged (Oasis Pro 41 Glass cleaner) **GREEN** coloured MFC cloth.
- 5.2.5 Wipe the exterior surfaces with a **PINK** coloured dry MFC cloth.
- 5.2.6 After completion of the cleaning process, visually check the camera for any dust or moisture inside the dome and notify control room immediately.
- 5.2.7 For outdoor cameras, ensure all poles for the cameras are cleaned as well.
- 5.2.8 Ensure Identification labels are not damaged during the cleaning process; labels to be covered with transparent tape if required.
- 5.2.9 After completion of scheduled camera cleaning routine for the day, submit the completion report to control room for approval and signature.

5.3 Steps for cleaning camera pole: -

- 5.3.1 Place the reachable podium ladder in front of the pole.
- 5.3.2 Start the cleaning task from top to bottom cleaning process.
- 5.3.3 Perform dusting of exterior surfaces with a **PINK** coloured dry MFC cloth.
- 5.3.4 Check for visible stains and clean it with an abrasive pad and Pro 14 chemical.
- 5.3.5 Notify if any permeant stain/mark/rust on the pole.
- 5.3.6 Damp wipe exterior surfaces with chemical charged (Oasis Pro 14 All purpose) **GREEN** coloured MFC cloth.
- 5.3.7 Wipe the exterior surfaces with a **PINK** coloured dry MFC cloth.
- 5.3.8 Make sure all the screws, nuts and bolts on the pole are sprayed with WD-40 chemical to avoid rust.

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

5.3.9 After completion of the cleaning process, visually check the camera poles for any dust or dirt and make sure the camera pole completely cleaned as per the standards.

5.4 List of departments from which they need to take approvals from before they begin the work under the heading “Permission to Work Process”.

5.4.1 HMC Hospitality Team.

5.4.2 FMM Facilities management.

5.4.3 Team Site Security Team / Control Room.

5.5 Persons Responsible for the cleaning operations.

5.5.1 FMM Team Leader / Cleaning Supervisor /Area Supervisor

6. Health and Safety – Points to Remember

6.1 Points to Remember

- 6.1.1 Any existing damage such as scratches and breakages must be noted and brought to the attention of the supervisor, who will immediately report to the site manager & HSEQ.
- 6.1.2 Work will not continue without confirmation from Site Manager.
- 6.1.3 Always ensure that the cleaning schedule has been approved from HMC Hospitality team.
- 6.1.4 Check 360 degree around the workplace to identify any unusual conditions or new hazard, report it immediately to your superior.
- 6.1.5 Use the right tools / equipment for the right job.
- 6.1.6 Always perform the task under the guidance of your supervisor.
- 6.1.7 Follow the HMC requirements in terms of Safety and Good hygiene & Infection Control practice.
- 6.1.8 Follow the Relevant SOP Procedures based on the task.
- 6.1.9 Perform the task safely – Do NOT do if it is NOT SAFE. Ask for guidance from supervisor.
- 6.1.10 Always be alert with full attention towards the task on hand and cleaning equipment.

6.2 Rules for risk prevention when working with chemical or Biological Agent

- 6.2.1 Follow the guidelines of the SDS / COSHH assessment.
- 6.2.2 PPE's must always be worn whenever work liable to cause exposure to the Chemical's or biological agents is being undertaken.
- 6.2.3 **Information, instruction and training:** As a general principle, all employees must be given sufficient information on the hazards that they may encounter during their work specially working with Chemical's and Biological Agent.

7. Quality Verification & Post Job Check

- 7.1 Make sure camera dome cover is properly cleaned and fittings are intact.

	METHOD STATEMENT		MS-CLE-HMC-01	
	CCTV Cleaning		DATE	5/16/2024
			REVISION	V2.0

- 7.1.1 Cleaning quality will be checked by the FMM Cleaning Specialist and can be verified by HMC Facilities management representative.
- 7.1.2 Warning signs are checked, cleaned, disinfected, and removed as necessary.
- 7.1.3 MFC should be laundered or disposed of as appropriate.
- 7.1.4 Report any damage to fixtures or reportable incident to direct Supervisor.
- 7.1.5 Did you notice any hazards during the work task that wasn't mentioned in this Method Statement and Job? (if yes, inform your supervisor)
- 7.1.6 Double Check there are no tools, materials left in the area.
- 7.1.7 Remove PPE and Wash hands after completing the task.
- 7.1.8 Notify your supervisor that the work is complete, and area is free of materials.

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		22.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		23.05.2024

	METHOD STATEMENT		MS-CLE-HMC-41	
	BMU operations		DATE	5/16/2024
			REVISION	V2.0

NOTE

This document is the proprietary property of facilities management and maintenance (FMM). The contents may not be copied or wholly or partially to any other party without the written permission of the FMM. Any suggestions/feedback on this method statement to be emailed to HSEQ Department at hseqfmm@fmm.qa.

Client Name	Hamad Medical Corporation
Project Name	AAH
Department Name	Housekeeping
Job Location	External High Access Areas
Task Description	BMU operations
Related RA/ JSA Ref.	HSEQ-RA-HMC-20

1. Training & induction Requirements

You are to: Have a Site & Workplace induction; Have been briefed in the Method statement and risk assessment for this job, be trained, documented and competent to do the job; Only to use correct tools & equipment for the job, Use correct PPE for the job.

2. Required Personal Protective Equipment (PPE)

	Disposable Gloves		Black Safety Goggles for External
	Dust Face Mask		High Visibility Jacket
	Full Body Safety Harness with lanyard		Manual Handling Gloves
	Safety Helmet with chin starp		

	METHOD STATEMENT		MS-CLE-HMC-41	
	BMU operations		DATE	5/16/2024
			REVISION	V2.0

3. Required Equipment, Tools & Consumables

	Caution Board		Barricades and warning tape
	MFC		Oasis Pro14 all-purpose cleaner & disinfectant
	Spray Bottle for Oasis Pro 14 Diluted Chemical (Nozzle colour depends on the risk area) Green – Low Risk Area		Anchorage Suspension Davit Arm System
	BMU Cradle		Rope

4. Pre-Job Check

4.1 Infection Control & HSEQ

- 4.1.1 Wash hands as per the approved method prior to commencing task. Check hands for any cuts and abrasions, if yes cover with waterproof dressing (**Refer to HMC policies CL 7241 Hand Hygiene Policy**).
- 4.1.2 Wear appropriate PPE as per guidelines (**Refer to HMC policies CL 7242 Infection Control Practices**)
- 4.1.3 Only trained personnel should perform the work with required competent supervision.
- 4.1.4 Staff to have COSHH Briefing prior to use the chemical.
- 4.1.5 Available required permit to work (PTW) /Notification of Project/Work / INOT (Approved documents must be ready 48 hours prior to work commencement)
- 4.1.6 Facility focal point must be informed on work commencement.
- 4.1.7 Tool box talk and onsite briefing must be conducted before work commencement.
- 4.1.8 To Identify the work area and place the barricades and warning signs as needed.
- 4.1.9 Warning sign to be placed on both the entrance/exit doors.
- 4.1.10 Ensure that the work area is free from any hindrance or obstacles that could affect the Housekeeping operation.
- 4.1.11 Follow FMM heat stress policy.

	METHOD STATEMENT		MS-CLE-HMC-41	
	BMU operations		DATE	5/16/2024
			REVISION	V2.0

- 4.1.12 Follow FMM Work at height procedure.
- 4.1.13 Follow working under severe weather condition procedure.
- 4.1.14 Ensure staff have work at height training.
- 4.1.15 Ensure to check the wind speed time to time using anemometer.

4.2 Tools & Equipment

- 4.2.1 Check & prepare all the equipment that may be required for the task.
- 4.2.2 Ensure the Operators have equipment familiarization.
- 4.2.3 Operator to perform pre use inspection using GL-HSEQ-11-T15 BMU Pre-Use Check List inspection
- 4.2.4 Choose appropriate colour coded tools & equipment and ensure they are assembled safely.
- 4.2.5 Condition of tools – check if these are in clean, good working condition & safe to use.
- 4.2.6 Ensure the BMU unit having 3rd party certificate.
- 4.2.7 Ensure the Operators have valid 3rd party operator's certification.
- 4.2.8 Ensure Operators must know about Operations manual of the BMU.
- 4.2.9 Ensure that all control measures are available, and the operations will comply with Method Statement.
- 4.2.10 Never use tools that contain strong solvents and abrasives.
- 4.2.11 While cleaning with different material always consider cleaning methods for the most sensitive materials.
- 4.2.12 Water deposition on the cradle body, inside the platform and in different locations must be prevented since will cause corrosion.
- 4.2.13 Ensure BMU unit/Davit arm functioning properly and report if any damages noticed before start using.

5. Job Steps

5.1 BMU Davit Arm installation.

- 5.1.1 Identify the task location where the davit arm to be installed.
- 5.1.2 Move the davit arm by carrying with support of 3 to 4 employees.
- 5.1.3 Place the davit arm over the arm legs which is fixed on the roof top.
- 5.1.4 Locate hole of davit arm and the leg on same sequence then insert the lock into the connecting hole.
- 5.1.5 Ensure the locks are inserted properly and functioning.
- 5.1.6 Follow the above steps while changing the area to another.

5.2 Work Sequence of BMU Unit

- 5.2.1 Set-up working area, set-up tools and equipment required for the task.
- 5.2.2 Place the cradle on the selected work area where the task to be performed.
- 5.2.3 Set-up area and BMU system and place corresponding signage and applicable barricade.
- 5.2.4 Plug the BMU electrical supply wire on the electrical panel.
- 5.2.5 Put on the power key and switch on - Initiate the green light inside the cradle.
- 5.2.6 Ensure that the BMU system is safe and ready to operate with required updated documents.
- 5.2.7 Set-up required equipment and tools to be used in the actual working area to be review and tested and testing the emergency stop system prior start the work.
- 5.2.8 Extend the cradle cable till the davit arm located on the roof top.
- 5.2.9 Cable extension shall be done by attaching the cable on a rope from the cradle.

	METHOD STATEMENT		MS-CLE-HMC-41	
	BMU operations		DATE	5/16/2024
			REVISION	V2.0

- 5.2.10 Another staff shall be pulling the other end of the rope attached with cradle cable from the roof top.
- 5.2.11 Once the cable reached on the roof top davit arm location, engage the connections of davit arm and the cable then lock it carefully.
- 5.2.12 Adjust the tightness cradle hoist left and right.
- 5.2.13 After the tightness adjusted, set the control hoist on cradle booth.
- 5.2.14 Lift the cradle by operating the control panel up to 7 feet height.
- 5.2.15 Once confirmed that the wire rope installations are correct and safe to use, the cradle operator on the ground will energize the cradle.
- 5.2.16 When the green light inside the cradle switched on, that indicate the BMU system is ready and safe to use.
- 5.2.17 Using manual switches to turn left, right, up and down and set at the middle to operate bottle hoist.
- 5.2.18 Once the desired area reached, the cleaning task shall be performed from top to bottom.
- 5.2.19 Continuous closed supervision is required while performing the task.
- 5.2.20 After task completion, put down the BMU to the safe levelled area by controlling down button and control the low bypass button before touching the floor to engage the low bypass safety feature.
- 5.2.21 Clean the cradle and disinfect the major touch point by using Oasis Pro14 all-purpose cleaner and disinfectant.
- 5.2.22 In case of any emergency, use emergency stop/release button to bring down the cradle.

6. Health and safety – Points to remember

- 6.1 Always place the precautionary / warning signage nearby doors.
- 6.2 Pay full attention while access OR Egress to / From the BMU cradle, extra caution for the edges to be considered.
- 6.3 During severe weather conditions OR sandstorm, no work is allowed on the Cradle.
- 6.4 Do not handle the electrical power supply plug with wet hands! Pull the electrical plug by holding onto the plug and not by the cord.
- 6.5 Ensure all switches are in the OFF position, before plugging the plug into the mains socket.
- 6.6 Wear the right non-slip safety footwear for the job.
- 6.7 Stay in a comfortable working position, do not over-stretch to reach the task area rather than using long handled tools.
- 6.8 Use appropriate PPEs (**refer to HMC Policies CL 7242 Infection Control Practices**).
- 6.9 To complete the job safely, follow the associated risk assessment.
- 6.10 Perform a complete workplace 360 degrees check for any unusual conditions or new hazards and report them to your team leader right away.
- 6.11 Only use appropriate tools and equipment for the task.
- 6.12 Comply with all HMC regulations for safety, hygiene, and infection control.
- 6.13 Never leave any tool or material in the area unattended.
- 6.14 As much as possible, keep the pathways clear of obstructions.

7. Quality Verification & Post Job Check

- 7.1 After completion of the task, the appearance of area shall be clean and satisfactory.
- 7.2 In case any furniture/waste bin etc. are moved from the cleaning area, it shall be restored back to its original state (reinstate the area).
- 7.3 Ensure that the tools, signs, and barricading has been removed from the task location and safely take them back to the HK room/store and keep the area clear for user.
- 7.4 Ensure the davit arms back to the position, detach and store in a safe place if required.

	METHOD STATEMENT		MS-CLE-HMC-41	
	BMU operations		DATE	5/16/2024
			REVISION	V2.0

- 7.5 Park the cradle in a designated parking area.
- 7.6 Double Check if there are no tools, materials left in the area.
- 7.7 Notify your team leader that the work is complete, and area is free of materials.
- 7.8 Remove your PPE (**HMC Policies CL 7242 Infection Control Practices**).
- 7.9 Wash your hands thoroughly after the task is completed (**HMC Policies CL 7241 Hand Hygiene.**)
- 7.10 Did you notice any additional hazards during the work task that wasn't mentioned in the Method Statement? (if yes, inform your team leader)
- 7.11 Are there any faults with your tools and PPE that you must report?
- 7.12 Report all Damages, Incidents & accidents / Health events to your Team Leader.
- 7.13 Waste must be properly disposed as per **SA-1054-Hazardous materials and waste management program.**

Authority	Name	Position	Signature	Date
Prepared By	Priyanka Awasthi	Area Supervisor		16.05.2024
Reviewed By	Eldhose P George	Cleaning Operations Manager		18.05.2024
Reviewed & Approved By	Juan M. Roque	HSEQ Manager		
	Samee Mohamed	Project Manager		19.05.2024