

Signal Processing Methods for Lubrication Condition Monitoring of Ball Bearings: A Systematic Review

Frederik Appel Vardinghus-Nielsen

August 27, 2026

Abstract

Write abstract last, after all sections are complete.

Contents

1	Introduction	3
1.1	Existing Reviews and Their Limitations	3
1.2	Contribution and Scope of This Review	4
1.3	Paper Organisation	4
2	Systematic Literature Search	6
2.1	Search Strategy	6
2.2	Inclusion and Exclusion Criteria	6
2.3	Search Results and PRISMA Flow	6
3	The Online LCM Pipeline	8
3.1	Pipeline Steps	8
4	Lubrication Physics, Models and Degradation Mechanisms	9
4.1	Lubrication Regimes	9
4.2	The Stribeck Curve	9
4.3	Hamrock–Dowson Model	10
4.4	Λ -Ratio	10
4.5	κ -Ratio	11
4.6	Lubricant Degradation Mechanisms	11
5	Physical Origins of Measurable Signals	12
6	Sensing Methods	14
6.1	Sensing Methods Taxonomy	14
6.2	Signal Transmission Path and Attenuation	15
6.3	Passive and Non-Invasive Methods	15
6.3.1	Acoustic Emission	15
6.3.2	Vibration	16
6.3.3	Ultrasound	17
6.3.4	Audible Sound (20 Hz–20 kHz)	17
6.3.5	Thermal Monitoring	17
6.4	Active Methods	18
6.4.1	Active Ultrasonic Reflectometry	18
6.4.2	Electrical Methods	18
6.4.3	Surface Acoustic Wave Sensing	18
6.4.4	Optical Methods	19
6.4.5	Magnetic and Inductive Methods	19

7	Signal Processing Methods	20
7.1	Time-Domain Statistical Methods	20
7.1.1	Standard Statistical Moments and Energy Metrics	20
7.1.2	Threshold Methods	22
7.2	Frequency-Domain Methods	22
7.2.1	Power Spectral Density and Bearing Characteristic Frequencies	22
7.2.2	Envelope Analysis	22
7.2.3	Higher-Order Spectral Statistics and Spectral Shape Descriptors	22
7.2.4	Fractional-Octave Filter Banks	23
7.2.5	Multi-Band Hit-Rate and Wear Particle Index	23
7.3	Time-Frequency and Decomposition Methods	23
7.3.1	Short-Time Fourier Transform	23
7.3.2	Wavelet Transform	24
7.3.3	Signal Decomposition Methods	24
7.4	Signal Enhancement Methods	24
7.4.1	Minimum Entropy Deconvolution	24
7.5	Physics-Based and Model-Driven Methods	24
7.5.1	Quasi-Static Spring-Layer Model for Ultrasonic Reflectometry	24
7.5.2	Electrical Circuit Models	25
7.5.3	Kappa and Lambda as Regression Targets	25
7.6	Machine Learning and Deep Learning	25
7.6.1	Classical Machine Learning	25
7.6.2	Deep Learning	25
7.7	Multi-Sensor Data Fusion	26
7.7.1	Feature-Level Fusion	26
7.8	Master Cross-Reference Matrix	26
8	Comparative Analysis	28
8.1	Sensitivity to Lubrication Fault Type	28
8.2	Sensitivity to Operating Conditions	29
8.3	Practical Deployment Requirements	29
8.4	Technology Maturity	31
8.5	Summary of Comparative Findings	31
9	Research Gaps and Future Directions	32
9.1	Absence of Standardised Benchmark Datasets	32
9.2	Speed- and Load-Invariant Signal Processing	32
9.3	Grease Lubrication Monitoring Is Underexplored	32
9.4	Maintenance Decision Integration	32
9.5	Multi-Sensor Fusion for Passive, Non-Invasive Sensing	33
9.6	Self-Supervised and Foundation Model Approaches for Data-Scarce LCM	33
10	Conclusion	35
	References	36

1 Introduction

Rolling element bearings let parts rotate with minimal friction in almost every kind of rotating machine: motors, pumps, wind turbines, machine tools, trains. What makes this possible is a thin film of oil or grease, that keeps the rolling balls from touching their metal tracks. As long as that film is intact, the bearing runs cool and wears slowly. Once it breaks down – because there is too little lubricant, the lubricant has degraded, or it has become contaminated – metal starts touching metal, friction rises, heat builds up, and wear accelerates sharply, ultimately causing premature mechanical failure. Lubrication problems are estimated to cause 30–80% of all rolling element bearing failures, more than mechanical overload or installation errors combined [1–5].

The cost of this is substantial. A single bearing failure can shut down an entire production line, and the resulting downtime typically costs far more than the bearing itself. The problem is especially acute where access is difficult: at an offshore wind farm, replacing one failed bearing can require a vessel and a crane crew, and a single unplanned trip can cost more than the part it replaces several times over [6]. Reducing lubrication-related failures is therefore a large available opportunity for improving machine uptime and cutting maintenance spend across industry.

Despite this, most industrial lubrication schedules are still time-based: lubricant is topped up or replaced at a fixed interval, regardless of whether the bearing actually needs it at that moment. Re-lubricating too early wastes lubricant, raises operating temperature, and – for grease – can disrupt the bearing’s internal grease distribution, ironically accelerating degradation. Re-lubricating too late lets the film thin out and wear begin before anyone notices. The correct interval depends on bearing geometry, speed, load, temperature, and the lubricant’s own condition – a moving target that no fixed schedule can track [6].

Condition-based relubrication (CBR) replaces the schedule with a measurement: lubricate when a sensor signal shows it is actually needed, not before. CBR depends on *lubrication condition monitoring* (LCM) – continuously estimating whether the lubricant film is thick enough, how degraded the lubricant has become, and whether it is contaminated. Reliable LCM would let maintenance teams act on the bearing’s actual condition rather than a guess.

LCM has received far less research attention than the related and more mature problem of detecting mechanical bearing faults from vibration, which is now standard practice in industry. This is not because the necessary sensors are missing: a range of sensing technologies capable of picking up lubrication-related signals – acoustic emission, ultrasound, vibration, electrical capacitance, and others – have already been demonstrated in laboratory studies and ultrasound is used with simple relative threshold methods in industrial applications. The bottleneck is what happens after sensing: turning a raw sensor signal into a reliable estimate of lubrication condition that still works once the bearing’s speed, load, or temperature changes. This signal processing step is fragmented across sensing technologies and rarely tested outside the lab. Closing that gap is the subject of this review.

Throughout this review, *online* monitoring means continuous sensing on a bearing that keeps running, with no need to stop it or extract lubricant; *in-line* monitoring means sensors built into the lubricant circulation system, which also requires no stoppage. Both are in scope. Methods that need a brief interruption (*at-line*) or a lab sample (*offline*) are not.

1.1 Existing Reviews and Their Limitations

Table 1 lists the reviews most closely related to this one and what each covers.

Should
this be
in table
form?

Review	Focus	Limitation relative to this review
Wakiru et al. [6]	LCM for maintenance decision support	Centred on invasive lubricant sampling and analysis, not online sensing
Shang et al. [7]	Film thickness measurement	Active/invasive methods only (optical, electrical, ultrasonic)
Wang et al. [8]	Bearing condition monitoring, incl. film thickness and debris	Mostly active/invasive; passive methods mentioned only in passing
Hansen et al. [9]	Ultrasonic reflectometry calibration	Single active method only
Cen et al. [10]; Becker-Dombrowsky et al. [11]	Electrical capacitance / impedance	Single active method only
Dai et al. [2]	In-situ film thickness by capacitance	Single active method only
Zhu et al. [12, 13]	Online lubricant sensors, oil monitoring	Active/invasive methods only
Sun et al. [14]	Wear debris monitoring	Active methods only
Dou et al. [15]	Ultrasonic film thickness	Single active method only

Table 1: Reviews related to lubrication condition monitoring and how their scope differs from this review.

Three limitations are shared by all of them. First, none organises the field by signal processing method – signal processing is treated as a detail beneath each sensing technology, not as a subject in its own right. Second, almost all focus on active or invasive sensing, leaving passive, non-invasive methods underrepresented even though these offer the easiest path to industrial retrofitting without halting machine operation. Third, none identifies signal processing – rather than sensor hardware – as the main reason LCM has not moved from the lab into industrial deployment.

1.2 Contribution and Scope of This Review

This review makes four contributions:

1. **A systematic taxonomy of signal processing methods for LCM**, organised by method family and applied across all sensing technologies – the first such taxonomy in the LCM literature.
2. **A structured comparison** of sensing and signal processing combinations across four dimensions: sensitivity to different lubrication faults, sensitivity to changing operating conditions, practical deployment requirements, and technology maturity.
3. **A clear list of signal-processing-specific research gaps**, each with a concrete suggested research direction.
4. **Coverage of all sensing technologies** – active and passive, invasive and non-invasive – with extra depth on the passive, non-invasive methods most relevant to retrofitting existing industrial bearings.

This review covers online and in-line LCM literature for rolling element bearings (primarily ball bearings), restricted to studies that describe their signal processing method in enough detail to assess its assumptions and limitations. Studies on bearing fault detection with no lubrication-specific focus, and studies on journal bearings or other non-bearing tribological contacts, are excluded. The literature search covers publications up to July 2026.

Update in the end if contributions are changed

1.3 Paper Organisation

Section 2 describes the search and inclusion criteria. Section 3 defines the online LCM pipeline and establishes the scope of this review within it. Section 4 introduces the relevant lubrication physics and degradation mechanisms. Section 5 explains how lubrication condition shows up physically in sensor signals. Section 6 surveys sensing technologies, including the active/passive and invasive/non-invasive classification used throughout. Section 7 – the main contribution –

reviews signal processing methods by family. Section 8 compares sensing and signal processing combinations. Section 9 sets out research gaps and future directions, and Section 10 concludes.

Update
once fin-
ished

2 Systematic Literature Search

2.1 Search Strategy

The literature search was conducted in January–February 2026 using the databases Google Scholar, ScienceDirect, Scopus, and ResearchGate, supplemented by citation graph exploration via Connected Papers to identify relevant works not captured by keyword search alone. Boolean search strings were constructed from combinations of the following keyword groups:

- *Application domain*: lubrication, lubrication condition monitoring, film thickness, lubrication degradation, lubricant starvation, grease condition, oil condition.
- *Component*: ball bearing, rolling element bearing, roller bearing.
- *Sensing modality*: vibration, acoustic emission, ultrasound, sound, microphone, thermal, infrared, electrical, capacitance, impedance, optical, magnetic, inductive.
- *Signal processing*: signal processing, feature extraction, time domain, frequency domain, wavelet, machine learning, deep learning, neural network, regression, classification.
- *Monitoring mode*: online, in-line, in-situ, condition monitoring.

2.2 Inclusion and Exclusion Criteria

Inclusion criteria	Exclusion criteria
Study concerns lubrication condition in rolling element bearings (including ball bearings, cylindrical roller bearings, tapered roller bearings, or slew bearings)	Study concerns journal bearings, thrust washers, or non-bearing lubricated contacts exclusively
Sensing method and signal processing approach are described in sufficient detail to assess the physical principle, processing operations, and output	Study provides only qualitative descriptions of sensing and processing without sufficient methodological detail
Monitoring is online, in-line, or in-situ (data collected during bearing operation)	Monitoring is exclusively offline (lubricant laboratory analysis without online data collection)
Study focuses on lubrication condition as the primary monitoring target (film thickness, viscosity, degradation, contamination, or regime)	Study concerns bearing fault detection or RUL estimation with no specific lubrication condition focus
English-language peer-reviewed journal papers, conference proceedings or manuals from industrial applications for LCM	Non-peer-reviewed sources (technical reports, white papers, patents)

Table 2: Inclusion and exclusion criteria for the systematic literature search.

2.3 Search Results and PRISMA Flow

A total of 131 sources were initially identified through the literature search. After removal of duplicates across databases, 48 sources were identified as treating the topic of online or in-line LCM for rolling element bearings. Of these, 33 treated monitoring with active or invasive sensing methods and 20 treated passive and non-invasive sensing methods (some sources address both). All 48 are included as the primary basis for this review; the broader set of 131 sources provides supporting context for theoretical background, signal processing methodology, and industrial applications.

Figure and text will be adjusted with updated numbers in the end.

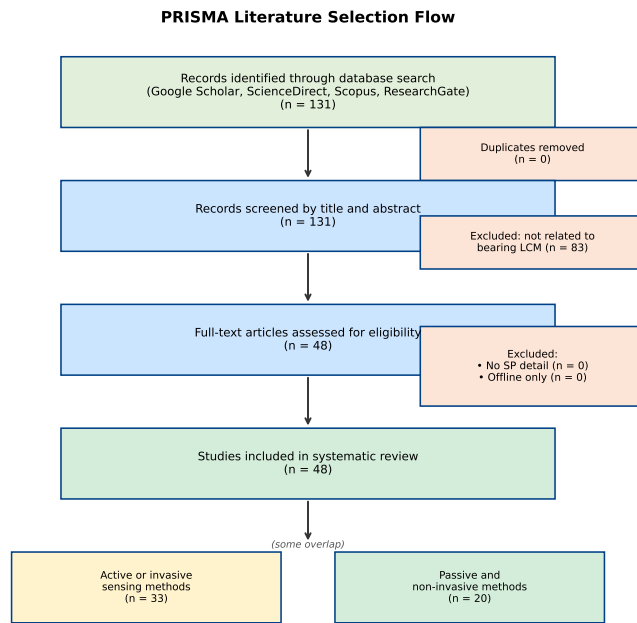


Figure 1: PRISMA-style literature selection flow diagram. Numbers reflect the search conducted in January–February 2026.


3 The Online LCM Pipeline

Translating raw sensor data from a running bearing into a lubrication condition estimate and, ultimately, a maintenance decision requires a sequence of distinct operations. Figure 2 shows the four-step online LCM pipeline that organises this review. Each step is described below; the scope of this review is steps 1–3, with signal processing as the primary focus.

3.1 Pipeline Steps

An LCM system can be broken down into four steps, shown in Figure 2:

1. **Sensing:** collecting data from a bearing in operation.
2. **Signal processing:** turning the raw sensor data into a more compact or more informative form, ready for the next step.
3. **Lubrication condition assessment:** estimating the lubrication regime, film thickness, degradation, or contamination level from the processed data (see Section 4).
4. **Maintenance decision:** deciding when and how much to relubricate, based on that assessment.

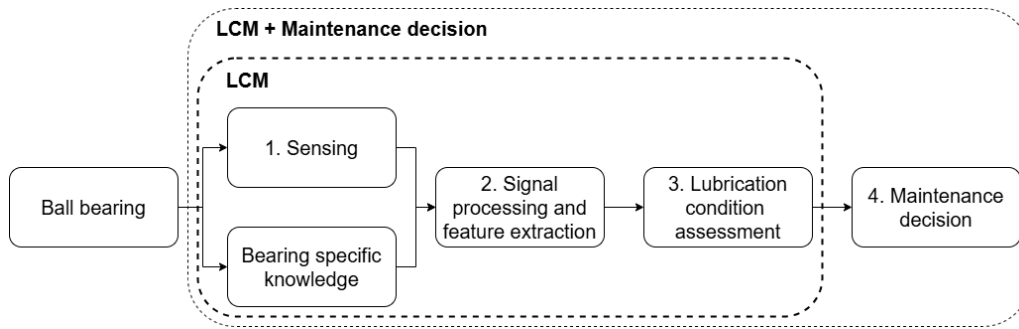

Finalize that this is the pipeline. Maybe others have different ideas about this.

Figure 2: Steps in online LCM of a running ball bearing. Signal processing sits between the raw sensor data and the lubrication condition assessment.

A given LCM system may stop at step 3, leaving the maintenance decision (step 4) as a separate downstream task.

4 Lubrication Physics, Models and Degradation Mechanisms

A complete model of lubricant film formation in ball bearings has not yet been established and the physicochemical behaviour of lubricants under the high speed, high pressure conditions in bearings remains incompletely characterised [10] [2] [16]. Instead, multiple theoretical models exist which seek to estimate the lubrication film thickness in running ball bearings and the sufficiency thereof under specific operating conditions and with different lubricants.

The following subsections present the theoretical models most commonly used in LCM research and the mechanisms that affect lubrication conditions. The theoretical models serve two distinct roles: they provide the physics-based reference against which sensor measurements are calibrated, and they establish which physical quantities – film thickness, friction, heat generation, and elastic wave emission – can in principle be observed by each class of sensing method. This connection between lubricant physics and observable signal is the foundation for understanding which signal processing operations are meaningful for each modality. The degradation mechanisms are important for understanding the physical origins of signals and the specific monitoring targets that signal processing methods should be optimised for.

4.1 Lubrication Regimes

Lubrication films formed in ball bearings under operation are generally classified into three regimes depending on the physical contact between balls and raceways and how the bearing load is distributed [17]:

- **Boundary lubrication:** the entire load is carried by surface-to-surface contact (ball to raceway). This regime produces the highest friction, arising solely from sliding of asperities against each other. Wear rate is high, and heat generation and elastic stress-wave emission are correspondingly intense.
- **Mixed lubrication:** load is shared between a thin lubricant film and surface asperity contacts. Friction and wear are reduced compared to the boundary regime but asperity contacts continue to generate transient stress waves detectable by acoustic and vibration sensors.
- **Elastohydrodynamic lubrication (EHL):** all load is carried by a lubricant film between the balls and raceway. The high pressure building up in the contact zone causes elastic deformation of the solid materials, sustaining the film. Friction is at its minimum for full-film EHL and rises again at excessive viscosities due to viscous shear losses. Wear is minimal and elastic wave emission is negligible, making this the ideal operating regime for bearing longevity.

The progression through these regimes as lubrication conditions deteriorate determines both the nature and the intensity of the signals accessible to passive sensing methods.

4.2 The Stribeck Curve

The Stribeck curve describes the relationship between the friction coefficient in a fluid-lubricated contact and the Hersey number $\eta n/p$, where η is the dynamic viscosity, n is the rotational speed, and p is the contact pressure [18]. As the Hersey number decreases – due to lower speed, lower viscosity, or higher load – the bearing transitions from the EHL regime, through mixed lubrication, into boundary lubrication, and the friction coefficient rises sharply. The curve is illustrated in Figure 3

The Stribeck curve is directly relevant to signal processing because the friction coefficient governs the amplitude of signals detectable by passive methods: higher friction produces stronger elastic wave emission (detectable by acoustic emission and ultrasound sensors), higher heat generation (detectable by temperature and infrared sensors), and increased mechanical vibration (detectable by accelerometers and microphones). A bearing operating in the EHL regime near the Stribeck minimum will produce weaker passive signals than one in boundary lubrication. This has two important signal processing consequences: first, monitoring under optimal lubrication (and in a neighbourhood of the optimum) is inherently a low-SNR problem; second, any feature that is strongly correlated to friction can in principle serve as a lubrication condition indicator. Hou and Zhang [19] demonstrate this explicitly by mapping acoustic emission amplitude and energy onto lubrication regime clusters, with the joint distribution in a two-dimensional (amplitude, energy) space discriminating boundary, mixed, and EHL conditions.

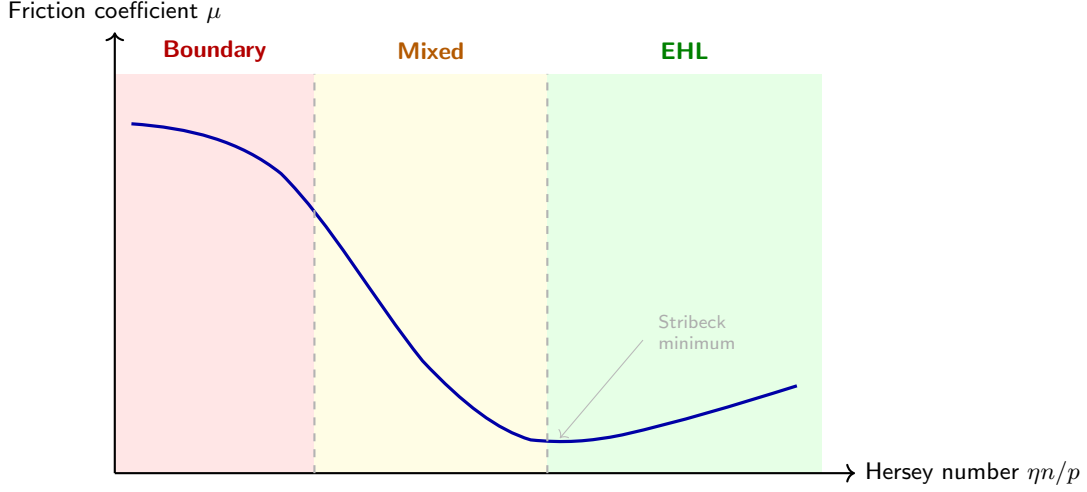


Figure 3: Schematic Stribeck curve showing friction coefficient μ as a function of Hersey number $\eta n/p$, where η is dynamic viscosity, n rotational speed, and p contact pressure. As the Hersey number decreases the bearing transitions from full-film EHL through mixed lubrication into boundary lubrication, with a sharp rise in friction coefficient. The Stribeck minimum marks the onset of full-film lubrication.

4.3 Hamrock–Dowson Model

The Hamrock–Dowson model is a widely used empirical model for calculating the minimum film thickness¹, h_m , in ball bearings. It is given by

$$\frac{h_m}{R'_x} = 3.63 U^{0.68} G^{0.49} W^{-0.073} (1 - e^{-0.68k}), \quad (1)$$

where

- R'_x and R'_y are the effective radii in the direction parallel and transverse to the lubricant entrainment, respectively,
- $U = \eta_0 u_e / (E' R'_x)$ is a dimensionless speed parameter, with u_e the lubricant entrainment speed and E' the effective elastic modulus,
- $W = w_z / (E' R'_x)^2$ is a dimensionless load parameter, with w_z the applied normal load,
- $G = \alpha^* E'$ is a dimensionless material parameter, with α^* the pressure-viscosity coefficient, and
- $k = 1.03(R'_y/R'_x)^{2/\pi}$ is the elliptic parameter.

Further derivation and physical motivation of these parameters can be found in [10, 20–22]. In the LCM context, the Hamrock–Dowson model is most often used not to predict film thickness directly, but to generate reference values of h_m against which sensor-derived estimates can be calibrated [1, 19, 23].

4.4 Λ -Ratio

The Λ ratio is the ratio between the lubrication film thickness and the composite surface roughness of the bearing components, and is widely used to assess the lubrication regime. It is defined as

$$\Lambda = \frac{h_m}{\sqrt{R_{q1}^2 + R_{q2}^2}}, \quad (2)$$

where h_m is the minimum film thickness and R_{q1} , R_{q2} are the root-mean-square roughness values of the two contacting surfaces. In practice, R_{q1} and R_{q2} are obtained either by direct measurement – contact stylus profilometry for raceway surfaces, or non-contact optical methods for the ball

¹Minimum occurring film thickness between ball and raceway when the bearing is in operation.

surface – or taken from the bearing manufacturer’s specified roughness in the data sheet. Because running-in wear smooths asperities over time, roughness is not strictly constant over a bearing’s service life, so it might be necessary to re-measure it after an operating period.

Lubrication regimes are conventionally assigned as: $\Lambda < 1$ (boundary), $1 \leq \Lambda \leq 3$ (mixed), $\Lambda > 3$ (EHL). The Λ ratio is the primary physical target variable in some LCM studies that use sensor signals to estimate the lubrication regime [1, 19, 24].

Hansen et al. [20] note that the conventional Λ ratio has shortcomings in the EHL regime arising from elastic asperity deformation, and propose an improved Λ^* ratio:

$$\Lambda^* = \frac{h^*}{z_0} = \frac{h_m + \delta_a}{z_0}, \quad (3)$$

where δ_a is the elastic asperity deformation in EHL and z_0 is the relaxed-state height of the surface profile.

4.5 κ -Ratio

The κ ratio is a model-based indicator of lubricant viscosity adequacy for a specific bearing under specific operating conditions. It is defined as

$$\kappa = \frac{\nu}{\nu_1}, \quad (4)$$

where ν is the kinematic viscosity of the applied lubricant under the operating conditions and ν_1 is the reference kinematic viscosity calculated from the ISO 281 standard for the bearing diameter and rotational speed [1]. Interpretation guidelines are as follows [25]:

- $\kappa < 0.1$: boundary lubrication; the rolling element load is predominantly carried by asperity contact between rolling element and raceway. This threshold is not strict – lubrication conditions change gradually around it.
- $0.1 < \kappa < 1$: transitional regime; film formation is incomplete.
- $1 \leq \kappa \leq 4$: the range for which most bearing applications are designed; $\kappa = 4$ corresponds to full-film lubrication, where the rolling contact load is entirely carried by the lubricant film.
- $\kappa > 4$: does not further increase bearing rating life, but may still be desirable for added reliability margin, e.g. under frequent start-stop cycling.

Given the fact that κ can be tied to lubrication conditions it can also in theory be tied to the Stribeck curve and lubrication regimes. Jakobsen et al. [1, 26] use κ as the regression target for data-driven models trained on vibration and ultrasound features, linking directly to the ISO standard and enabling quantitative LCM without invasive lubricant sampling. It should be noted that κ is time-invariant for a given bearing and operating condition; it therefore captures viscosity inadequacy if the conditions remain constant but does not account for lubricant degradation or contamination that develops over time.

4.6 Lubricant Degradation Mechanisms

For oil-lubricated bearings, degradation proceeds primarily through thermal and oxidative aging (which increases viscosity temporarily, then reduces it as polymer chains break down), contamination by wear particles or external debris, and oil starvation from insufficient supply or replenishment. For grease-lubricated bearings the degradation picture is more complex. Grease consists of a base oil held in a thickener matrix and degradation involves base-oil bleed-out (reducing available lubricant), mechanical working of the thickener (altering consistency), thermal degradation (affecting both base oil and thickener), and contamination [27–29]. Cen et al. [30] specifically study the effect of thermal aging on grease film thickness in ball bearings and show measurable film thickness reduction with aging time. These differing degradation mechanisms mean that signal processing pipelines tuned to detect oil starvation may not transfer directly to grease monitoring applications and vice versa, a gap explicitly identified in Section 9.

5 Physical Origins of Measurable Signals

The connection between lubricant physics and measurable signals is the key link between the theoretical models in Section 4 and the sensing and signal processing methods reviewed in Sections 6 and 7. Table 3 maps each physical mechanism through which lubrication condition becomes observable to the sensing modality that captures it, the frequency band available for signal processing, the LCM quantities it encodes, and the principal practical constraint on its use.

Physical mechanism	Signal type	Sensing modality	Freq. range at sensor	LCM quantities encoded	Principal constraint
Asperity contact, micro-fractures, and lubricant sliding friction at ball-raceway interface under insufficient lubricant film	Transient elastic stress waves	AE sensors; passive ultrasound (§6.3.1, §6.3.3)	20–500 kHz (path-limited) [31, 32]	Lubrication regime (Λ); starvation severity; abrasive contamination events [19, 24, 33–35]	Path attenuation 30–60 dB at 500 kHz through housing; usable bandwidth geometry- and mounting-specific [31, 32]
Rolling/sliding friction and impulsive excitation from asperity contacts at ball-raceway and ball-cage interfaces	Broadband structural vibration; radiated audible sound	Accelerometers; microphones (§6.3.2, §6.3.4)	Vibration: 3–20 kHz+ (MEMS), 2.5–30 kHz+ (piezoelectric) [36]; Sound: 20 Hz–20 kHz	Lubrication adequacy (κ); starvation onset [3, 26, 37]	Most accelerometers cover well under 30 kHz; only the highest-bandwidth piezoelectric parts exceed it, at reduced sensitivity; LCM-informative content predominantly >30 kHz [1]
Viscous shear heating and boundary-lubrication friction	Bearing temperature rises	Thermocouples; IR thermography (§6.3.5)	DC–10 Hz (thermally diffusion-limited)	Sustained lubrication inadequacy; long-term friction regime shift [38, 39]	Thermal response lags lubrication onset by seconds to minutes; insensitive to transient or intermittent starvation events
Lubricant film thickness and dielectric state alter electrical properties of bearing contact	Change in capacitance, impedance, or resistance	Electrical sensors (§6.4.2)	DC–10 MHz (excitation dependent)	Film thickness (h_m , Λ); lubricant degradation state; contamination [10, 11, 40]	Bearing electrical isolation and shaft brush or slip-ring contacts required; not retrofittable to standard machines
Partial reflection of ultrasonic pulses at the lubricant-raceway interface	Reflected ultrasonic pulse; reflection coefficient	Active ultrasonic reflectometry (§6.4.1)	1–200 MHz (applied excitation)	Film thickness (h_m) via spring-layer model [41–43]	Double-path transmission loss; precise coupling, alignment, and reference calibration required; not retrofittable [9]
Attenuation and mode conversion of surface acoustic waves interacting with the lubricant film on the raceway surface	Attenuated, phase-shifted surface acoustic wave	SAW sensors (§6.4.3)	Not reported in reviewed literature	Film thickness and lubrication condition via attenuation and wave-velocity shift [44]	Requires piezoelectric probe coupled to raceway surface; practical deployment constraints not established in reviewed literature
Magnetic field perturbation by ferromagnetic or conductive wear particles in lubricant flow	Inductance change; eddy current signature	Inductive/magnetic debris sensors (§6.4.5)	DC–kHz (debris transit)	Ferrous wear debris count and size; contamination severity [45]	Applicable only to oil-circulating systems; inapplicable to grease-lubricated or sealed bearings
Optical interaction of light with lubricant film (interference, fluorescence) or suspended debris (scattering)	Interference pattern; scattered or attenuated light intensity	Optical interferometry; LIF; machine-vision (§6.4.4)	Optical (THz–PHz)	Film thickness (h_m) via interferometry or laser-induced fluorescence [7]; debris count and size via machine vision [46, 47]	Interferometry and LIF require transparent contact zone (purpose-built test rigs only); machine vision requires in-line optical access to lubricant flow

Table 3: Physical mechanisms linking lubrication conditions in ball bearings to measurable signals. ‘Freq. range at sensor’ is the band available to signal processing methods after transmission through the structural path from the contact zone to the sensor; see Section 6.2. ‘LCM quantities encoded’ identifies the lubrication-condition-relevant information carried by each signal, directly connecting physical origin to the sensing discussion in Section 6 and the comparative analysis in Section 8. Sensing modality cross-references refer to subsections of Section 6.

Recent mechanistic work refines the asperity-contact picture in the first row of Table 3. Zhang et al. [34] couple a roller-bearing dynamics model with an AE generation model and show, validated on greases of distinct viscosities, that AE under mixed lubrication arises from two superposed sources rather than asperity contact alone: AE driven by the normal load on asperities scales with the square root of rotational speed, while AE driven by lubricant-traction sliding friction scales quadratically with speed. Which mechanism dominates is lubricant-dependent – high-viscosity grease, with its higher traction coefficient, produces friction-dominated, quadratically increasing AE, whereas low-viscosity grease remains asperity-load-dominated. This provides a mechanistic explanation for why the AE-lubrication relationship is configuration- and lubricant-specific, as observed empirically in Section 6.3.1.

The physical mechanisms in Table 3 directly motivate the sensing method taxonomy in Section 6, the signal processing choices reviewed in Section 7, and the comparative fault-type sensitivity analysis in Table 5.

6 Sensing Methods

This section covers sensing methods for recording signals which are informative of lubrication conditions in ball bearings. The section presents a taxonomy for categorising sensing methods and presents the methods grouped according to this taxonomy.

6.1 Sensing Methods Taxonomy

We classify sensing methods for online LCM of ball bearings along two independent axes. A method is **active** if it supplies external energy into the bearing system to probe its response; it is **passive** if it relies solely on signals generated by the bearing under operation. A method is **invasive** if it requires unobstructed access to the lubricant film, direct physical contact with the lubricant, sensors mounted inside the bearing, or structural modifications to the bearing or its housing; it is **non-invasive** if none of these requirements apply. Online and in-line monitoring modes are defined in Section 1.

These two axes define four categories illustrated in Figure 4: active/invasive, active/non-invasive, passive/invasive, and passive/non-invasive. Notice that passive/invasive methods is empty: the methods eligible for this category did not qualify as online or in-line, e.g. oil sampling.

In general, the current active methods directly measure the relevant quantities, e.g. lubricant contamination or film thickness, while passive methods rely on signals which arise as a consequence of changing lubrication conditions. The passive methods are therefore more indirect and function as proxy measures for lubrication conditions. The passive/non-invasive category is, nevertheless, of particular industrial relevance because its methods can be applied to bearings in service without modification and without interrupting operation. The present review covers all four categories for completeness but gives greatest depth to the passive/non-invasive methods given their greater industrial applications and more significant current research gap.

	Passive	Active
Non-invasive	<i>Acoustic Emission</i> <i>Vibration</i> <i>Passive Ultrasound</i> <i>Audible Sound</i> <i>Thermal Monitoring</i>	<i>Ultrasonic Reflectometry</i>
Invasive	<i>(none identified)</i>	<i>Optical interferometry</i> <i>Electrical methods</i> <i>Surface Acoustic Wave</i> <i>Magnetic/Inductive debris detection</i>

Figure 4: Classification of sensing methods for lubrication condition monitoring along two independent axes: active vs. passive signal acquisition, and invasive vs. non-invasive installation requirements. The passive/invasive quadrant contains no identified methods: sensing methods that require physical access to the lubricant (invasive) almost invariably do so to supply or measure a controlled excitation (active).

The subsections below describe each sensing modality with a standardised structure: (i) physical principle, (ii) what lubrication information it is sensitive to, (iii) sensor hardware and technology considerations, and (iv) installation and operational characteristics. Signal processing methods are treated in depth in Section 7. A factor common to all modalities is the transmission path between the signal origin and the sensor, which is treated first as it governs which signals are accessible at the sensor regardless of modality.

6.2 Signal Transmission Path and Attenuation

All online sensing methods for LCM share a fundamental constraint: the sensor cannot be placed at the signal origin. The bearing contact zone – where asperity contacts, lubricant film formation, and wear events occur – is physically inaccessible to a sensor. Any measurable signal must first propagate from the contact zone to the sensor through a series of solid media and mechanical interfaces. Understanding this transmission path is not merely a practical installation concern. It directly constrains which signal processing operations are valid, which frequency bands are informative, and how results from laboratory rigs transfer to industrial deployments.

For a sensor mounted on the bearing housing, the signal originates at the ball–raceway contact zone on the outer ring and propagates through two sequential material bodies and their connecting interfaces: bulk propagation through the outer ring, the outer ring–housing bore interface (press fit, clearance fit, or clamped, depending on the bearing arrangement), bulk propagation through the housing, and the sensor coupling layer. Each interface boundary introduces frequency-dependent attenuation; cumulative losses over a typical path through the outer ring and the ring–housing interface mean that a 500 kHz AE signal may arrive at the sensor attenuated by 30–60 dB relative to the source [31, 32]. This range spans the difference between a detectable signal and pure noise. For active methods such as ultrasonic reflectometry and SAW sensing, the path is traversed twice, compounding the problem. The transmission path therefore acts as a low-pass filter whose effect increases with the number of transmission interfaces and the length of the transmission path. This path is illustrated in Figure 5.

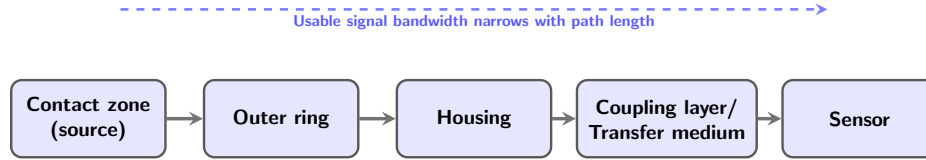


Figure 5: Signal transmission path from the ball–raceway contact zone to a housing-mounted sensor. The interface between the outer ring and housing bore – press fit, clearance fit, or clamped, depending on the bearing arrangement – is the dominant attenuation element for high-frequency content. Cumulative path losses of 30–60 dB at 500 kHz render the usable frequency bandwidth at the sensor geometry-, mounting-, and material-specific, limiting the transferability of signal processing configurations across experimental setups.

This has two direct consequences for signal processing.

First, frequency-domain configurations derived from one experimental setup do not automatically transfer to another. The frequency content including the resonant frequencies of the housing structure and the spectral bandwidth and intensity of the content observable at the sensor are all geometry-specific. This limits the portability of signal processing configurations tuned on laboratory test rigs to industrial deployments with different sensor placements, housing geometries, or coupling conditions.

Second, sensor placement is a signal processing decision, not only an installation practicality. Mounting a sensor across a bolted flange, a material transition, or a long structural path can render high-frequency content undetectable regardless of sensor sensitivity and distort other frequency content in unpredicted ways. For non-contact microphone monitoring, the additional transmission from the housing surface into air is frequency-dependent: audible sound (20 Hz–20 kHz) propagates relatively efficiently, but ultrasonic frequencies (>40 kHz) undergo rapid geometric spreading and air absorption [48], limiting non-contact acoustic monitoring to the audible and near-ultrasonic range.

6.3 Passive and Non-Invasive Methods

6.3.1 Acoustic Emission

Physical principle. Acoustic emission (AE) refers to transient, high-frequency elastic stress waves – typically in the range 20 kHz to 1 MHz – spontaneously generated within the bearing material and contact interfaces as a result of tribological processes. These processes include asperity contact and micro-fracture under inadequate lubrication, crack initiation and propagation under contact stress, wear particle generation, and frictional energy release at rolling and sliding contacts [19, 35, 49].

Literature on LCM. AE is sensitive to the lubrication regime: as the specific film thickness Λ decreases from EHL toward boundary lubrication, asperity contacts increase in frequency and severity, generating more AE energy.

This is demonstrated by multiple sources: Cornel et al. [24] find an inverse correlation between AE amplitude and Λ in cylindrical roller bearings under controlled lubrication conditions; Hou and Zhang [19] show that amplitude and energy features from AE signals in thrust ball bearings map onto distinct lubrication regime clusters and can be used to estimate Λ with high accuracy; Miettinen et al. [33] show that the pulse count rate increases monotonically with grease starvation. An important exception to the monotonic amplitude-lubrication relationship is the non-monotonic energy response observed by Hou and Zhang, in which transitioning from dry contact to low-viscosity lubrication initially *decreases* AE energy before it rises again with increasing viscosity due to viscous damping forces on the bearing ring. This highlights that AE-lubrication relationships are configuration-specific and require calibration.

Zhang et al. [34] provide a mechanistic account of lubricant-dependence: in cylindrical roller bearing tests with greases of distinct viscosities, they show AE arises from two different sources: asperity contact (RMS scaling with the square root of speed) and lubricant friction (RMS scaling quadratically with speed). They furthermore show that high-viscosity grease produces friction-dominated AE signals which are strongly speed-dependent, while AE signals from low-viscosity grease are more asperity-contact dominated. They additionally show that low-viscosity grease produces more strongly fluctuating AE than high-viscosity grease across all frequency sub-bands.

Tandon et al. [50] compare vibration, AE, stator current, and shock pulse for grease contamination detection in electric motor ball bearings, finding AE most effective for early-stage contamination detection.

Sensor technology. AE sensors are almost exclusively piezoelectric, available in two configurations with different SNR–bandwidth trade-offs. Resonant sensors are tuned to a single resonant frequency providing very high sensitivity in a narrow bandwidth but discarding spectral content outside that band. Wideband sensors sacrifice sensitivity for a nominally flat response across 100 kHz to 1 MHz, which are more suited for the frequency-domain and time-frequency signal processing methods reviewed in Section 7. For LCM applications where the informative frequency content is a priori unknown or lubrication-condition-dependent, wideband sensors are preferable. Sensor-to-housing coupling (adhesive bond, magnetic mounting, or grease couplant) is a significant source of variability: a poorly bonded sensor can introduce 10–20 dB of additional loss at high frequencies [32], making coupling consistency a prerequisite for any quantitative AE feature.

Since AE signals are high frequency, they require a high sample rate (≥ 500 kHz) to adequately capture all content. This poses a challenge since large data volumes are generated by continuous AE acquisition at the required sampling rates, which most studies address through windowed statistical features, interval sampling, or event-triggered recording.

6.3.2 Vibration

Physical principle. Vibration signals are sensitive to lubrication conditions through two mechanisms: (1) impulsive excitation from asperity contacts at inadequate Λ , increasing broadband vibration energy, and (2) changes in the rolling element bearing dynamics (stiffness, damping) associated with changes in the lubrication film.

Literature on LCM. Vibration-based condition monitoring is the most mature and industrially widespread sensing approach for rolling element bearings, with a substantial body of literature on bearing fault detection and remaining useful life estimation [51, 52]. Its application to lubrication condition monitoring is more limited, primarily because lubrication-related processes excite frequency content above 30 kHz, which lies at or beyond the upper limit of typical accelerometers and requires dedicated high-frequency accelerometers or acoustic emission sensors [1]. Jakobsen et al. [26] demonstrate that vibration statistics and spectral kurtosis are correlated with κ values and can be used to predict lubrication adequacy. Xu et al. [3] show that minimum entropy deconvolution applied to vibration signals enhances weak impulsive events associated with lubricant starvation, improving detectability. Zhang et al. [53] target grease-lubricated bearings specifically, classifying lubrication state into insufficiency, degradation, and contamination from vibration using a deep-learning pipeline rather than handcrafted statistics.

Sensor technology. Two accelerometer technologies are relevant to LCM, with fundamentally different characteristics. MEMS accelerometers respond from 3 kHz up to more than 20 kHz but not

significantly above 30kHz, missing a large part of the informative band for LCM, which lies above 30 kHz. Piezoelectric accelerometers offer wider bandwidths, from 2.5 kHz up to more than 30 kHz across available devices [36]. The highest-bandwidth piezoelectric parts therefore reach into part of the LCM-informative range but typically at reduced sensitivity relative to their lower-bandwidth counterparts. The consistent finding in the reviewed literature that vibration-based LCM is limited compared to AE and passive ultrasound reflects this hardware constraint: the most LCM-relevant signal content lies at or beyond the practical range of standard industrial accelerometers [1].

6.3.3 Ultrasound

Physical principle. Ultrasound signals are generated passively by the bearing itself and require no external excitation. These signals are generated by friction, wear, and asperity contacts in the bearing and therefore contain information on lubrication state and changes. Ultrasound signals as such respond to these changes earlier in the degradation process than lower-frequency vibration [1].

Literature on LCM. Passive ultrasound monitoring is currently used industrially for LCM. Products such as UE Systems Ultraprobe [54], Sonotec, and AccuTrak employ threshold-based methods that compare the measured ultrasound level against a baseline established under adequate lubrication conditions, instructing relubrication when the level rises a specified number of dB above the reference [55]. Jakobsen et al. [1] demonstrate that more sophisticated processing of passive ultrasound – using band-pass filtering, time-domain features, and regression models – can predict κ values rather than just threshold exceedances.

Sensor technology. Ultrasonic sensors typically use piezoelectric elements, but their frequency coverage differs by product class. Fixed-threshold sensors often use a narrow resonant band around 35 kHz to 42 kHz [56, 57]. Some handheld inspection instruments instead offer a much wider, tunable range, e.g. 20 kHz to 100 kHz in 1 kHz increments [54]. This allows the operator to select a frequency band suited to the fault type being investigated. Garvey [58] employs a 30 kHz band of ultrasonic measurements to isolate friction and lubrication related information from mechanical faults. Industrial instruments often translate measurements of ultrasonic signals into the hearable domain to allow human inspection of the sound level and characteristics [55]. In research, low-cost MEMS ultrasonic microphones (e.g. SPH0641LU, bandwidth to 80 kHz) have been demonstrated as an accessible sensor for passive ultrasound LCM [59]. This is still an emerging technology that may enable low-cost, integrated monitoring nodes but their sensitivity and bandwidth characteristics for LCM applications have not yet been systematically evaluated in the reviewed literature.

6.3.4 Audible Sound (20 Hz–20 kHz)

Physical principle. Asperity contacts, friction, and wear events generate broadband mechanical noise, a portion of which is radiated as airborne sound through the bearing housing. Changes in lubrication regime alter the amplitude and spectral distribution of this emission. Georgiev et al. [37] demonstrate that frequency-domain features extracted from microphone array measurements show measurable changes as lubrication levels vary, and propose classification via fuzzy logic or neural networks.

Sensor technology. The practical advantage of microphone-based monitoring is its fully non-contact nature, enabling installation without any access to the bearing. MEMS microphones now achieve noise floors below 30 dB(A) with flat frequency response to 20 kHz [36], making them suitable for bearing monitoring at very low cost. The main limitation is susceptibility to ambient noise in industrial environments. Signal quality is highly dependent on the acoustic environment of the installation and proximity to the bearing and ambient noise influence the measurements.

6.3.5 Thermal Monitoring

Physical principle. Heat generation is caused by friction and wear inside the bearing, serving as an indicator of lubrication regime. Under adequate EHL lubrication, viscous heat generation is modest and as the bearing transitions to mixed or boundary lubrication, frictional heat increases significantly [39].

Literature on LCM. Moussa et al. [38] demonstrate a passive thermography approach to bearing condition monitoring in which temperature trend analysis provides early-warning capability. The primary physical limitation of thermal monitoring for LCM is its slow response, since heat must build up and diffuse through the bearing before it is detectable. Temperature rise is therefore a downstream consequence of sustained inadequate lubrication, making the approach better suited to early warning of developing degradation trends than to detection of transient lubrication events.

Sensor technology. Thermocouples and resistance temperature detectors provide point measurements with response times of seconds to tens of seconds, which is adequate for trend monitoring but not for transient events. Infrared thermography cameras provide spatially temperature maps without contact but require line-of-sight to the bearing housing surface. Fibre Bragg grating sensors, demonstrated by Janssens et al. [60] and Mohammed et al. [61], offer both thermal and mechanical (vibration) sensing in a single fibre.

6.4 Active Methods

6.4.1 Active Ultrasonic Reflectometry

Physical principle. Active ultrasonic methods transmit high-frequency (1–200 MHz) pulses from a piezoelectric transducer into the bearing raceway. At the interface between the raceway and the lubricant film, a portion of the wave is reflected. The reflection coefficient depends on the acoustic impedance of the lubricant film, which is a function of both film thickness and lubricant bulk modulus. Using physics-based acoustic propagation models – most commonly the quasi-static spring-layer model [41] – the film thickness can be recovered from the measured reflection coefficient.

Literature on LCM. Active ultrasonic methods can provide quantitative, real-time measurement of EHL film thickness under operating conditions and has been covered in multiple papers [42, 43, 62, 63]. Li et al. [16] extend this to the wind turbine pitch bearing, demonstrating film thickness measurement via ultrasonic reflection in a large-scale industrial component. Chen et al. [64] address the data-volume challenge of high-frequency ultrasonic acquisition using sub-Nyquist sampling. The tribo-acoustic tachometer of Tatzgern et al. [65] additionally recovers cage rotational speed from the same ultrasonic reflection signal, providing simultaneous kinematic and lubrication information from a single device.

Sensor technology. Although transducers can in principle be mounted externally on the bearing housing, the requirement for precise transducer coupling, alignment, and calibration creates practical barriers to deployment on standard industrial bearings that are not present for passive sensing methods [9, 66].

6.4.2 Electrical Methods

Physical principle. Electrical sensing methods treat the ball bearing and lubricant as elements of an electrical circuit. An externally applied electrical signal – voltage or current – probes the electrical properties of the lubricant film, which change with film thickness, lubricant degradation, and debris content.

Literature on LCM. Three variants are used and are described extensively in reviews: electrical capacitance [2, 10, 67], electrical impedance [11, 40], and electrical resistance [21]. All require an externally applied electrical signal, making them active methods. Grease-lubricated bearings present additional modelling challenges due to the heterogeneous dielectric properties of the thickener matrix [29, 68].

6.4.3 Surface Acoustic Wave Sensing

Surface acoustic waves (SAWs) are acoustic waves propagating along the surface of elastic materials with rapid depth decay. Piezoelectric probes actively excite SAWs that travel along the raceway surface. As these waves interact with the lubricant film, energy is transferred to the fluid causing wave attenuation, while the lubricant loading also shifts the wave velocity, producing a measurable time delay at a receiving transducer. Both attenuation and time delay of the induced wave can thus be related to lubrication film thickness and condition [44].

6.4.4 Optical Methods

Optical methods use light-based techniques to either measure lubricant film thickness directly or detect and classify wear debris.

Optical film thickness measurement. Optical interferometry and laser-induced fluorescence are the reference methods for EHL film thickness measurement, underpinning much of the fundamental understanding of EHL contact physics [7]. Both require optical access to the contact zone and are restricted to purpose-built tribological test rigs with transparent windows – neither has been demonstrated on standard industrial bearings under field conditions. They are consequently not applicable to online LCM in industrial deployment, but can serve as ground-truth measurement methods against which other sensing approaches are calibrated.

Machine-vision debris detection. Machine-vision approaches analyse lubricant debris content using image processing on in-line optical sensors in the lubricant flow path. Liu et al. [46] apply multi-target tracking with Kalman filtering for debris counting and size estimation and Wang et al. [47] use a background-difference extraction step followed by convolutional neural network classification to distinguish debris from bubbles, achieving 91.8% accuracy in a large-diameter, high-flow-rate pipe system. These methods operate on particles in the lubricant flow rather than on the contact zone directly, and can be integrated into oil circulation systems. Unlike interferometry, they are compatible with industrial deployment but provide no film thickness information. Their diagnostic value is therefore for contamination and wear monitoring rather than lubrication regime assessment.

6.4.5 Magnetic and Inductive Methods

Magnetic and inductive methods detect metallic wear debris in the lubricant by monitoring perturbations in a magnetic field [14]. An excitation coil generates an alternating magnetic field in or around the lubricant flow path. Ferromagnetic particles perturb the magnetic field primarily through their high permeability, while non-ferrous conductive particles can induce eddy currents that alter the coil impedance. These effects may produce differences in amplitude and phase in the measured signal. Magnetic methods require access to the lubricant flow and are therefore applicable only to oil-circulating systems, meaning that they cannot be used with grease-lubricated or sealed bearings. Shi et al. [69] demonstrate an ultrasensitive impedance-based microsensor for oil condition monitoring applicable to small particle sizes.

7 Signal Processing Methods

This section provides the primary systematic contribution of this review: a taxonomy of signal processing methods applied to LCM of ball bearings, organised by processing family rather than by sensing modality. For each family the method is first described on its own terms – its mathematical basis, assumptions, and outputs – and then its specific applications across sensing modalities are discussed, drawing on the literature surveyed. A master cross-reference matrix linking SP method families to sensing modalities is provided in Table 4 at the end of this section.

The organisation of this section reflects the signal processing chain from raw sensor data to a lubrication condition estimate. Time-domain and frequency-domain methods (Sections 7.1–7.2) operate directly on the measured signal. Time-frequency and decomposition methods (Section 7.3) address non-stationarity. Signal enhancement methods (Section 7.4) improve the signal before feature extraction. Physics-based and model-driven methods (Section 7.5) incorporate lubrication physics to convert processed signals into physically interpretable quantities. Finally, machine learning and data fusion methods (Sections 7.6–7.7) learn mappings from processed features to lubrication condition labels or regression targets. Figure 6 provides an overview of this taxonomy.

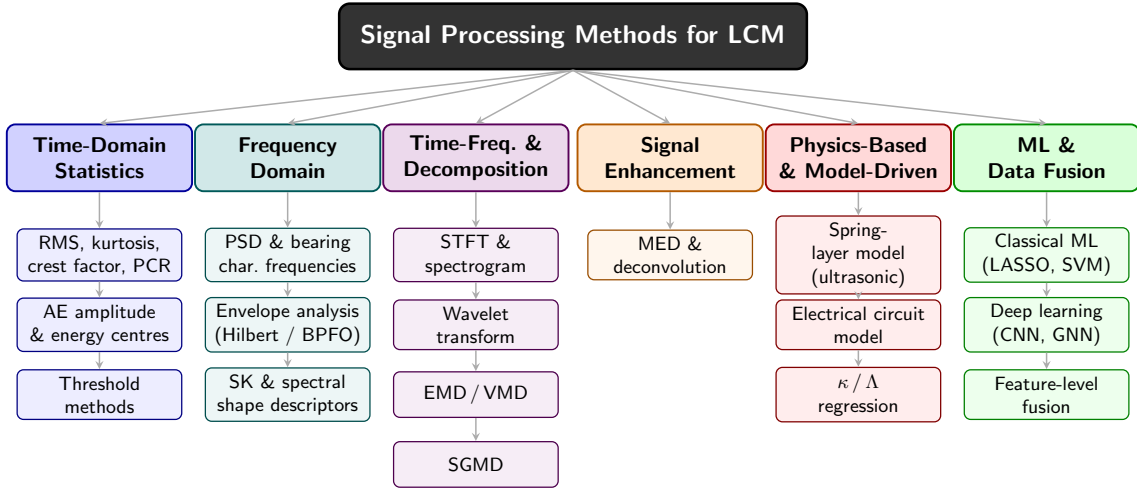


Figure 6: Taxonomy of signal processing method families applied to lubrication condition monitoring of rolling element bearings. Methods are organised by processing family rather than by sensing modality; the master cross-reference matrix (Table 4) maps each family to the sensing modalities for which LCM application has been demonstrated in the reviewed literature.

7.1 Time-Domain Statistical Methods

Time-domain statistical methods extract scalar features from a windowed segment of the raw or bandpass-filtered sensor signal. They are computationally lightweight, robust to non-stationarity within the window, and directly interpretable in physical terms. These properties make them the most practically deployed class of methods in both research and industrial LCM applications.

7.1.1 Standard Statistical Moments and Energy Metrics

The most widely reported features are:

- **Root mean square (RMS):** Reflects the total signal energy over the window and defined as

$$x_{\text{RMS}} = \sqrt{\frac{1}{N} \sum_{i=1}^N x_i^2}. \quad (5)$$

For passive methods, RMS increases monotonically with worsening lubrication in the mixed and boundary regimes due to increasing asperity contact energy. Widely reported for AE [19, 24, 70–72], vibration [1, 3, 26], passive ultrasound [1], and thermal monitoring [38].

- **Kurtosis:** Measures the impulsiveness of the signal relative to a Gaussian distribution (for

which $K = 3$) and defined as

$$K = \frac{\frac{1}{N} \sum_{i=1}^N (x_i - \bar{x})^4}{\left(\frac{1}{N} \sum_{i=1}^N (x_i - \bar{x})^2 \right)^2}. \quad (6)$$

High kurtosis indicates sparse, high-amplitude transients such as those produced by asperity micro-contacts or incipient crack impacts. Usgame Sandoval et al. [73] report an ~ 8.6 -fold increase in AE kurtosis from normal to severe fault in tapered roller bearings. Yoshioka and Shimizu [70] note that under grease lubrication, kurtosis of the raw vibration signal decreases as damage transitions from sparse impulsive AE to a continuous broadband noise floor – a counter-intuitive reversal that illustrates the importance of bearing-specific calibration. Kurtosis applied to spectral representations forms the basis for higher-order spectral analysis of lubrication signals (Section 7.2.3).

- **Crest factor:** peak-to-RMS ratio. Sensitive to impulsive events but tends to decrease as the signal transitions from sparse impulses to continuous broadband noise, similarly to kurtosis. Applied to passive ultrasound and vibration signals for lubrication condition monitoring by Jakobsen et al. [1].
- **Hjorth parameters:** three features derived from successive derivatives of the signal – *activity* (signal variance), *mobility* (ratio of the standard deviation of the first derivative to that of the signal, proportional to mean frequency), and *complexity* (ratio of the mobility of the first derivative to the mobility of the signal, reflecting bandwidth). Jakobsen et al. [1] apply all three to high-pass filtered passive ultrasound signals and find good correlation with κ ; combined with linear regression or a shallow neural network they predict κ with good precision. No other paper in the reviewed literature reports Hjorth parameters for LCM.
- **AE amplitude and energy centres (Hou & Zhang):** Rather than a single scalar, Hou and Zhang [19] define the amplitude centre $A_c = \frac{1}{N} \sum A_i$ and energy centre $E_c = \frac{1}{N} \sum E_i$ over a 10-minute window, and form the two-dimensional pair (A_c, E_c) . The joint distribution in this space exhibits spatially distinct clusters for boundary, mixed, and EHL lubrication, enabling regime classification without a hard threshold. A speed-dependent weighted power-law regression of the form

$$\Lambda_E = W_A \cdot f_A(A_c, n) + W_E \cdot f_E(E_c, n) \quad (7)$$

combines the two features – with W_A, W_E linear in shaft speed n – to estimate the film thickness ratio Λ with 89.3% accuracy. This is the most physically grounded time-domain AE approach reported in the reviewed literature.

- **Pulse count rate (PCR):** the number of AE threshold crossings per unit time. Miettinen et al. [33] show that PCR increases monotonically with grease starvation and distinguishes ten grease formulations by thickener type and base-oil viscosity. PCR is the computational minimal AE processing approach and forms the basis of the industrial threshold methods (Section 7.1.2).
- **Ring-down count:** the total number of threshold crossings within a single AE burst event. Usgame Sandoval et al. [73] report a ~ 266 -fold increase in ring-down count from normal to severe fault – the most sensitive single time-domain feature in their study, outperforming kurtosis and RMS.
- **Coefficient of quartile deviation (CQD):** a robust, distribution-shape-based measure of dispersion in the time-varying RMS, defined as $CQD = (Q_3 - Q_1)/(Q_3 + Q_1)$ for quartiles Q_1, Q_3 of the RMS time series within a window. Zhang et al. [34] use CQD to quantify the fluctuation level of AE signals in cylindrical roller bearings and show that low-viscosity grease produces significantly higher CQD (greater RMS fluctuation) than high-viscosity grease across all analysed frequency sub-bands, consistent with a shift in the dominant AE generation mechanism (Section 6.3.1).

Speed and load normalisation. Time-domain features are sensitive to changes in operating speed and load independently of lubrication condition. Cornel et al. [24] demonstrate this concretely: the AE amplitude- λ relationship follows distinct curves at 500 rpm and 3000 rpm, making a single amplitude threshold insufficient for regime classification across speeds. This confounding

effect is addressed by normalising features against a speed-dependent or load-dependent baseline; Hou and Zhang [19] explicitly incorporate speed as a predictor in their film-thickness regression. Without such normalisation, a feature increase caused by a speed change is indistinguishable from a lubrication-related change, which limits the applicability of fixed-threshold industrial methods to constant-speed machinery.

7.1.2 Threshold Methods

The simplest operational approach is to compare a time-domain feature – most commonly the ultrasound dB level or AE RMS – against a threshold established during a reference measurement under known adequate lubrication. If the feature rises a specified number of dB above the reference, relubrication is recommended [55]. This is the method employed by industrial instruments such as UE Systems Ultraprobe and Sonotec’s handheld devices. The advantages are simplicity, interpretability, and no requirement for labelled training data. The critical disadvantage is that the threshold carries no information about operating condition: a speed or load change will trigger a false alarm, and gradual lubrication degradation that produces a slow trend may not exceed the threshold until damage is well developed.

7.2 Frequency-Domain Methods

Frequency-domain methods transform the time-domain signal into a spectral representation, enabling identification of narrowband features associated with periodic bearing kinematics superimposed on broadband tribological noise.

7.2.1 Power Spectral Density and Bearing Characteristic Frequencies

The Fourier transform and power spectral density (PSD) reveal the distribution of signal energy across frequency. In the context of LCM, two types of spectral content are of interest: (1) broadband increases in spectral energy associated with increased asperity contact under inadequate lubrication, and (2) narrowband peaks at bearing characteristic frequencies – the ball pass frequency of the outer race (BPFO), ball pass frequency of the inner race (BPFI), ball spin frequency (BSF), and fundamental train frequency (FTF) – which indicate rolling element excitation of resonances in the bearing structure. Frequency-domain features carry lubrication-related information beyond what is captured by time-domain statistics alone.

7.2.2 Envelope Analysis

Envelope analysis demodulates a high-frequency carrier signal – such as a structural resonance excited by bearing impacts – to extract the low-frequency amplitude modulation produced by periodic contact events [51]. The approach consists of: (1) bandpass filtering around a resonance frequency to isolate the carrier, (2) computing the analytic signal via the Hilbert transform to obtain the instantaneous envelope, and (3) computing the FFT of the envelope (the envelope spectrum) to reveal modulation frequencies. In the LCM context, envelope analysis is most naturally applied to AE signals above 100 kHz, where lubrication-induced asperity contact events modulate the high-frequency carrier.

7.2.3 Higher-Order Spectral Statistics and Spectral Shape Descriptors

Higher-order spectral statistics and shape descriptors characterise the spectral distribution beyond its energy content. Whether computed on a one-dimensional amplitude spectrum or per frequency bin across the time dimension of a two-dimensional STFT spectrogram, these are fundamentally shape analyses: kurtosis measures impulsiveness and peakedness, skewness measures asymmetry, flatness the energy concentration relative to white noise, and center frequency, RMS frequency, and bandwidth-related measures the location and spread of spectral energy.

Jakobsen et al. [26] apply spectral kurtosis (SK) to vibration signals from grease-lubricated ball bearings under alternating lubrication conditions, with speed and temperature varied to span κ from approximately 0.2 to 3.0. SK is computed as the normalised fourth moment of the STFT coefficient distribution at each frequency bin across successive time slices, reducing the two-dimensional spectrogram to a one-dimensional kurtosis profile. Band energy extracted from a lubrication-sensitive kurtogram band (7500–12000 Hz) is correlated directly with κ using Pearson and Spearman coefficients; values of $r = -0.76$, $\rho = -0.84$ are reported during the first hot-run

stage ($\kappa < 0.5$). The kurtogram band energy serves as the lubrication condition indicator itself, not as a selector for downstream envelope analysis.

Zhang et al. [74] take a complementary approach, computing 15 spectral shape descriptors (features F10–F24 in their Table 1) from vibration signals in the 0–3 kHz and 10–12.8 kHz bands and from AE signals in the 20–40 kHz band. These include dominant frequency, band-specific energy, center frequency, RMS frequency, spectral mean and standard deviation, spectral flatness, frequency-domain skewness and kurtosis, and normalised bandwidth. Features are selected by monotonicity and time-correlation criteria and combined with time-domain statistics as node embeddings in an MTAD-GAT model for lubrication degradation detection; temperature receives no spectral processing. The kurtosis term in Zhang et al. (F15) is the fourth standardised moment of the one-dimensional amplitude spectrum – a global scalar shape statistic – whereas Jakobsen et al.’s SK is a per-frequency-bin statistic computed over the time dimension of the STFT; both are instances of applying kurtosis to a spectral representation.

7.2.4 Fractional-Octave Filter Banks

Rather than a single broadband metric, fractional-octave filter banks decompose the signal into a set of frequency bands following a geometric frequency progression. Renhart et al. [72] apply a 1/12-octave filter bank (spanning approximately 50–425 kHz) to AE signals from journal bearing segments. Within each band and time window, they compute the composite parameter $P_5 = x_{\text{RMS}} \cdot K$ – the product of RMS and kurtosis – which is sensitive to transient impulsive events that are simultaneously energetic and non-Gaussian. The approach reveals mechanistic discrimination unavailable from broadband time-domain statistics: the 86.8 kHz band is dominant during adhesive wear at low speeds, while the 206–232 kHz bands increase at higher speeds and are attributed to particle-driven wear. This frequency-resolved mechanistic discrimination is a key advantage of spectral processing for LCM.

7.2.5 Multi-Band Hit-Rate and Wear Particle Index

The Delft University group [35] employ a three-band sensor array (40–100 kHz, 95–180 kHz, 180–580 kHz) for AE monitoring of large-scale low-speed slew bearings. An AE hit is recorded when the signal in a given band exceeds a threshold with a minimum SNR of 20 dB, and the hit rate is normalised by loading cycles to remove the effect of varying test duration. A Wear Particle Index (WPI) derived from the normalised hit rate shows linear correlation with abrasive particle mass fraction in grease. Crucially, non-abrasive (soft) particles produce negligible additional hits, demonstrating that AE hit-rate is selective for hardness contrast rather than total particle mass – a practically important limitation for contamination monitoring.

A related but distinct use of sub-band decomposition is mechanism attribution rather than fault or wear detection. Zhang et al. [34] divide the 1–200 kHz AE spectrum into 20 kHz-wide sub-bands and, within each, fit the RMS-versus-speed trend and its coefficient of determination (R^2) to identify whether the asperity-load ($\sqrt{\text{speed}}$) or sliding-friction (speed^2) mechanism dominates. This reveals that the two AE generation mechanisms identified in Section 5 are not uniformly distributed across frequency: for low-viscosity grease the lower sub-bands trend closer to the square-root relationship while higher sub-bands trend closer to quadratic, whereas for high-viscosity grease the quadratic trend holds across all sub-bands.

7.3 Time-Frequency and Decomposition Methods

Time-frequency methods represent signal energy jointly in time and frequency, addressing the non-stationarity that characterises LCM signals arising from variable operating conditions or transient lubrication events.

7.3.1 Short-Time Fourier Transform

The STFT divides the signal into short, overlapping windows and computes the FFT of each, yielding a spectrogram. The time-frequency resolution is governed by the window length (longer windows yield better frequency resolution but poorer time resolution). For LCM, the spectrogram is used to track the evolution of spectral features over time and to visualise non-stationary changes associated with lubrication degradation. The STFT is also used within the SK framework as the basis for computing the kurtogram [26].

7.3.2 Wavelet Transform

The continuous wavelet transform (CWT) provides time-frequency resolution that adapts to the local signal frequency through a scaling parameter: short wavelets at high frequencies and long wavelets at low frequencies, giving better time resolution where signals are fast-varying and better frequency resolution where they are slow-varying. This property is well-suited to AE bursts, which are transient and broadband. Renhart et al. [72] apply the CWT with a Morse (generalised Morse) wavelet to individual AE bursts triggered by the P_5 criterion, producing amplitude scalograms that reveal a two-stage within-event mechanism: an initial high-frequency asperity impact followed by a lower-frequency relaxation. Adaptive wavelet denoising – in which the wavelet decomposition threshold is optimised by a kurtosis-entropy criterion – is a further variant applicable to bearing signals, though no reviewed study applies this specifically to lubrication condition monitoring.

The discrete wavelet transform (DWT) and its multi-resolution analysis framework enable simultaneous extraction of features at multiple frequency scales, which is in principle applicable to vibration signals for LCM, though no reviewed study reports DWT specifically for lubrication condition monitoring of vibration signals.

7.3.3 Signal Decomposition Methods

Empirical mode decomposition (EMD) and its variants – ensemble EMD (EEMD) and variational mode decomposition (VMD) – adaptively decompose a signal into intrinsic mode functions without requiring a predefined basis, making them suited to non-linear and non-stationary bearing signals [8]. Although these methods are used in general bearing condition monitoring, no study in the reviewed LCM literature applies EMD or VMD specifically to lubrication condition estimation, leaving them as a potential avenue for future work.

Symplectic geometry mode decomposition (SGMD) is a decomposition method based on the symplectic geometry of the phase space of the signal’s trajectory matrix. Yu et al. [45] apply SGMD to signals from inductive debris sensors, extracting debris-particle signatures buried in noise and harmonic interference. Pan et al. [75] provide the methodological foundation. The method offers improved separation of overlapping frequency components compared to EMD-based methods in specific application scenarios.

7.4 Signal Enhancement Methods

Signal enhancement methods improve the signal-to-noise ratio or impulsiveness of the raw sensor data prior to feature extraction, without reducing the signal to a scalar feature.

7.4.1 Minimum Entropy Deconvolution

Minimum entropy deconvolution (MED) designs a finite impulse response (FIR) filter that maximises the kurtosis (equivalently, minimises the entropy) of the filter output, thereby recovering the sparse impulsive excitation source from a convolved, noisy observation. In the LCM context, the impulsive sources are the transient mechanical impacts associated with asperity contacts or rolling element passage over roughened raceways under starved lubrication. Xu et al. [3] demonstrate that MED applied to vibration signals significantly enhances the detection of lubrication starvation-related impulses, enabling spectral centroid and envelope features to detect starved conditions that are not detectable in the unprocessed signal. The method assumes that the source signal is sparse (impulsive), which may not hold for all lubrication fault types. Multipoint optimal minimum entropy deconvolution adjusted (MOMEDA) and its variants extend MED to multi-channel and periodic-source scenarios.

7.5 Physics-Based and Model-Driven Methods

Physics-based methods incorporate lubricant or structural mechanics models to convert processed signals into physically interpretable quantities such as film thickness or lubrication regime.

7.5.1 Quasi-Static Spring-Layer Model for Ultrasonic Reflectometry

Active ultrasonic reflectometry measures the reflection coefficient R of an ultrasonic pulse at the raceway–lubricant interface. For a thin lubricant film (film thickness much less than the acoustic

wavelength), the spring-layer model relates R to the film stiffness K^* :

$$R = \frac{Z_2 - Z_1 - iZ_1Z_2/\omega K^*}{Z_2 + Z_1 + iZ_1Z_2/\omega K^*} \quad (8)$$

where Z_1 , Z_2 are the acoustic impedances of the raceway and lubricant materials, ω is the angular frequency of the ultrasonic pulse, and K^* is the complex stiffness of the lubricant layer related to film thickness h and lubricant bulk modulus E^* by $K^* = E^*/h$ [15, 41]. This model enables direct, calibrated film thickness estimation from the measured reflection coefficient. Validation against Hamrock–Dowson predictions is reported in [42, 43, 62]. Phase-based algorithms that improve accuracy for thin films are described in [66]. Sub-Nyquist sampling to reduce data acquisition requirements while retaining film thickness accuracy is demonstrated by Chen et al. [64]. Li et al. [16] extend the spring-layer model to the curved contact geometry of wind turbine pitch bearings using ray-modelling corrections for transducer curvature and surface geometry.

7.5.2 Electrical Circuit Models

For electrical sensing methods (capacitance, impedance, resistance), physics-based circuit models relate the measured electrical signal to the lubricant film thickness. The bearing is modelled as a parallel combination of capacitive and resistive elements whose values depend on the film thickness, lubricant dielectric constant, and Hertzian contact geometry. Cen et al. [10] and Becker-Dombrowsky et al. [11] review the capacitance and impedance formulations respectively. Maruyama et al. [40] apply the impedance model to practical deep-groove ball bearings under operating conditions. Two approaches to model calibration are reported: purely physics-based models using known material properties, and empirical calibration tests using reference lubricants to derive a relationship between the measured signal and Hamrock–Dowson-predicted film thickness [10, 67].

7.5.3 Kappa and Lambda as Regression Targets

A model-driven approach for passive sensing methods uses κ or Λ – computed from the Hamrock–Dowson model and operating parameters – as the regression target for data-driven models trained on sensor features. This provides a physically grounded target variable linked to ISO standards without requiring invasive lubricant sampling. Jakobsen et al. [1] combine the Hjorth parameters defined in Section 7.1.1 with LASSO regression and shallow neural networks to predict κ from passive ultrasound signals, directly bridging physics-based lubrication modelling and data-driven signal processing.

7.6 Machine Learning and Deep Learning

Data-driven methods learn mappings from handcrafted or raw signal features to lubrication condition labels or continuous condition estimates. They can be organised into classical machine learning (operating on handcrafted features) and deep learning (operating on raw signals or spectrograms).

7.6.1 Classical Machine Learning

Classical machine learning methods – support vector machines (SVM), random forests, logistic regression, and regularised linear regression (LASSO) – are applied to vectors of handcrafted features extracted by the time-domain, frequency-domain, or time-frequency methods described above. Jakobsen et al. [1] demonstrate that LASSO regression on passive ultrasound features achieves good κ prediction while providing interpretable feature weights.

7.6.2 Deep Learning

Deep learning methods operate on raw signals or intermediate representations (spectrograms, graph adjacency matrices) and learn features jointly with the classification or regression task. Key architectures applied to LCM include:

- **Convolutional neural networks (CNNs):** applied to lubricant debris images for particle classification [47]. Zhang et al. [71] apply a vision-language large language model (PaLiGemma) to images of AE time-domain waveforms for automated wear detection, reporting higher classification accuracy than conventional threshold methods.

- **Graph neural networks (GNNs):** Zhang et al. [74] represent multi-sensor data (vibration, AE, temperature) as a graph and apply graph convolutional operations to detect lubrication degradation, leveraging sensor correlations that are not captured by independent feature extraction.
- **Generative adversarial domain transfer (GANs):** Zhang et al. [53] address the zero-labelled-fault-data problem directly with a multiscale residual and semantic-consistency CycleGAN (MSRS-CycleGAN) that translates labelled multi-state laboratory vibration signals into field-style signals, using healthy-only field vibration as the unlabelled target domain. Multiscale residual convolutional blocks improve sensitivity to the broadband, high-frequency signatures characteristic of lubrication anomalies (as opposed to the narrowband impulsive signatures of mechanical damage), and a semantic-consistency loss preserves the insufficiency/degradation/contamination state distinction during lab-to-field style transfer. A downstream autoencoder trained only on healthy field data performs anomaly detection, followed by CNN classification of the generated field-style anomaly signals into lubrication states. This is the only reviewed method that produces usable lubrication-anomaly training data for a field deployment with no labelled field-fault examples at all.

A consistent challenge for deep learning in LCM is the scarcity of labelled training data from real bearing degradation under controlled lubrication conditions. Controlled accelerated tests are expensive to run, and publicly available LCM datasets with varied lubrication conditions and sensing modalities are not currently available. Generative domain transfer [53] is an emerging response to this challenge for the specific case of lab-to-field transfer, though it remains distinct from the self-supervised and foundation-model directions discussed in Section 9.6, which target representation learning from unlabelled data rather than synthesis of labelled examples in a new domain.

7.7 Multi-Sensor Data Fusion

Multi-sensor fusion combines information from multiple sensing modalities to obtain lubrication condition estimates more accurate or robust than any single modality alone.

7.7.1 Feature-Level Fusion

Feature-level (early) fusion concatenates feature vectors from multiple sensors into a single feature vector before the classification or regression step. Zhang et al. [74] provide the clearest example in the lubrication condition monitoring literature: vibration, AE, and temperature signals are represented as a graph in which nodes correspond to sensing modalities and edges encode their relationships through a priori domain knowledge; a graph attention network trained on this structure detects lubrication degradation, and the multi-sensor system outperforms any single-modality baseline. The graph-attention architecture is notable because it learns which modality combinations are most informative for a given operating condition, rather than weighting all sensor contributions equally.

7.8 Master Cross-Reference Matrix

Table 4 summarises the application of SP method families to each sensing modality, as found in the reviewed literature. A filled cell indicates the combination has been demonstrated for LCM in at least one reviewed study.

SP Method Family	<i>Vibration</i>	<i>Acoustic Emission</i>	<i>Ultrasound (passive)</i>	<i>Sound / Microphone</i>	<i>Thermal</i>	<i>Active Ultrasonic</i>	<i>Electrical</i>	<i>Magnetic / Oil</i>
Time-domain statistics	✓	✓	✓		✓			✓
Threshold methods		✓	✓					
PSD / Bearing char. freqs	✓	✓	✓	✓				
Envelope analysis		✓						
Spectral shape & kurtosis	✓	✓						
Octave filter bank		✓						
STFT / Spectrogram	✓							
Wavelet transform		✓						
Signal decomposition (SGMD)								✓
MED / Deconvolution	✓							
Spring-layer model						✓		
Electrical circuit model							✓	
κ/Λ regression target	✓	✓	✓					
Classical ML (SVM, LASSO)	✓	✓	✓	✓				✓
Deep learning (CNN, GNN, GAN)	✓	✓			✓			
Multi-sensor fusion	✓	✓			✓			✓

Table 4: Master cross-reference matrix of signal processing method families and sensing modalities for LCM of ball bearings. A ✓ indicates the combination has been demonstrated in at least one study included in this review.

8 Comparative Analysis

This section synthesises the evidence from Sections 6 and 7 into a structured comparison of sensing and signal processing method combinations along four dimensions: sensitivity to specific lubrication fault types, sensitivity to operating conditions, practical deployment requirements, and technology maturity. The goal is not to identify a single best method – no such universal optimum exists, since the optimal combination is application-specific – but to characterise the trade-offs that determine which combination is appropriate for a given deployment context.

8.1 Sensitivity to Lubrication Fault Type

Three principal lubrication fault types are of interest in bearing LCM: (1) *lubricant starvation* (insufficient quantity), (2) *viscosity degradation* (thermal or oxidative aging reducing viscosity), and (3) *contamination* (external or wear debris in the lubricant). These faults produce partially distinct signal signatures, which determines which SP methods are most applicable to each. Table 5 summarises the reported sensitivity of each method combination to each fault type.

Sensing method	SP method	Starvation	Viscosity degradation	Contamination
Vibration	Time-domain (RMS, kurtosis)	Moderate [3, 26]	Low–Moderate [26]	
Vibration	MED + envelope	High [3]		
Vibration	Spectral kurtosis + κ regression	Moderate–High [26]	Moderate [26]	
AE	Time-domain (RMS, PCR)	High [19, 24, 33]	Moderate [24]	Moderate [33]
AE	Octave filter bank (P_5)	High [72]		High [72]
AE	Multi-band hit-rate + WPI			High (abrasive only) [35]
Passive ultrasound	Threshold (dB)	Moderate [55]		
Passive ultrasound	Spectral kurtosis + κ regression	Moderate–High [1]		
Thermal	Time-domain (trend)	Moderate (slow response) [38]		
Active ultrasonic	Spring-layer model	High (film thickness) [42, 43]	High (film thickness) [42]	
Electrical	Circuit model	High (film thickness) [10, 11]		
Magnetic / inductive	Mode decomp. + pulse			High (ferrous debris) [45]

Table 5: Reported sensitivity of sensing and signal processing method combinations to three principal lubrication fault types. All ratings are based on direct experimental evidence in the reviewed literature. Empty cells indicate the combination has not been assessed for that fault type in the reviewed literature. Parenthetical notes indicate the specific quantity or condition reported.

Several cross-cutting observations emerge from Table 5. First, no single passive non-invasive method combination provides high sensitivity to all three fault types simultaneously. AE with time-domain features performs best across starvation, viscosity degradation, and contamination, but the sensitivity to contamination is selective for abrasive hard particles (as demonstrated by the Delft group for AE hit-rate). Active ultrasonic and electrical methods provide quantitative film thickness estimates and are therefore inherently sensitive to both starvation and viscosity degradation through their direct relationship with h_m , but they do not directly detect debris contamination. Magnetic and inductive methods specifically target ferrous debris and provide complementary coverage for contamination monitoring, but require access to the lubricant flow and are inapplicable to grease-lubricated or sealed bearings.

Second, passive methods are most sensitive to starvation – the fault type that generates the greatest increase in asperity contact energy – and least sensitive to viscosity degradation. Viscosity degradation reduces κ and shifts the lubrication regime boundary, but whether the operating point crosses into mixed or boundary lubrication depends on the initial viscosity margin; bearings operating with a large film thickness reserve may remain in the EHL regime even with significantly degraded lubricant, producing little change in passive sensor signals.

Third, the temporal response of thermal monitoring is qualitatively different from acoustic methods: temperature rise is a consequence of sustained elevated friction and therefore lags the

onset of inadequate lubrication by minutes to hours, whereas AE and vibration respond on the timescale of individual asperity contacts (microseconds to milliseconds). Thermal monitoring is therefore better suited to detecting the existence of inadequate lubrication conditions than to detecting their onset or intermittent occurrence.

8.2 Sensitivity to Operating Conditions

All passive sensing methods are confounded by variations in operating speed, load, and temperature to varying degrees. This confounding is the primary practical challenge for LCM in industrial machinery that operates at variable conditions. Table 6 summarises the known dependencies and compensation strategies reported in the literature.

Method	Speed dependence	Load dependence	Temperature dependence	Compensation strategy
Vibration time-domain	High [26]	High [26]		Speed/load normalisation; κ as target [26]
Vibration spectral kurtosis + κ regression	High [26]	High [26]		κ target encodes speed, load, viscosity via Hamrock–Dowson model [26]
AE time-domain	High [19]	Moderate [24]		Speed-weighted features [19]
AE frequency domain (octave, SK)				No compensation strategy reported in reviewed literature
Passive ultrasound threshold	High [55]			Reference measurement at same operating point [55]
Passive ultrasound κ regression	Moderate [1]	Moderate [1]		κ target implicitly encodes operating conditions; most principled passive compensation strategy [1]
Thermal monitoring			N/A (temperature is the signal)	Thermal model as baseline [38]
Active ultrasonic (film)	Low (direct measurement) [42]	Low [42]	Moderate (lubricant viscosity varies) [42]	EHL model with temperature correction [42]
Electrical (capacitance/impedance)	Low (direct measurement) [10]	Low [10]	Moderate (dielectric constant varies) [11]	Temperature-corrected circuit model [10]

Table 6: Operating condition dependence of sensing and signal processing method combinations for LCM, with reported compensation strategies.

The fundamental difficulty for passive methods is that the same signal change – an increase in RMS, AE energy, or ultrasound dB level – can be produced by an increase in speed, load, or temperature as well as by worsening lubrication. Active methods (electrical, ultrasonic reflectometry) provide more direct film thickness measurements and are inherently less speed- and load-dependent, though they remain sensitive to temperature through lubricant viscosity. The κ regression approach of Jakobsen et al. [1, 26] is noteworthy as a principled strategy for passive methods: by training regression models with κ as the target – a variable that already encodes the speed, load, and viscosity dependence through the Hamrock–Dowson and ISO 281 models – the learned model implicitly compensates for these operating condition effects.

8.3 Practical Deployment Requirements

Table 7 compares sensing and signal processing method combinations on practical deployment characteristics relevant to industrial implementation.

Sensing method	Bearing modif.	Sensor installation constraints	Sampling rate	Real-time capable	Calibration / data requirements
AE	None	Flat surface, direct structural path to bearing bore; avoid joints and material changes; bond or clamp required for high-freq. coupling	>500 kHz	Partial (features only)	Baseline measurement under known lubrication condition [55]; labelled data for ML
Vibration	None	Standard industrial accelerometer mount (stud, adhesive, magnet); location affects frequency content but less critically than AE	≤ 50 kHz	Yes	No baseline required; labelled data for ML
Passive ultrasound	None	As for AE, but less sensitive to exact path geometry at 20–100 kHz; industrial instruments are handheld or clamp-on	20–500 kHz	Yes	Baseline reference at known good lubrication [55]; labelled data for regression
Sound / microphone	None	Non-contact; proximity (< 0.5 m) and low ambient noise critical; high-freq. content lost beyond 20 kHz in air	≤ 50 kHz	Yes	No baseline; labelled data for ML
Thermal	None	Housing surface or non-contact IR; robust to mounting position; slow response renders exact location unimportant	Low (Hz)	Yes	No; threshold or trend analysis
Active ultrasonic	Transducer coupling	Requires permanent or clamp-on transducer with controlled couplant; alignment critical; curved surfaces need geometric correction [16]	>1 MHz	Partial	Calibration reference signal essential [9]; no labelled data (model-based)
Electrical	Electrical path through bearing	Requires electrical isolation of bearing from frame; brush or slip-ring contacts to rotating shaft; not retrofittable in standard machines	kHz–MHz	Partial	Calibration reference [10]; no labelled data (model-based)
Magnetic / inductive	Access to lubricant flow	Sensor in or around lubricant line or sump; not applicable to grease-lubricated sealed bearings	kHz	Yes	Particle count baseline; no labelled data

Table 7: Practical deployment characteristics of sensing methods for LCM. “Bearing modification” refers to structural changes to the bearing or housing beyond sensor attachment. “Real-time capable” refers to whether the SP method can produce condition estimates at bearing rotational rates without offline computation. Installation constraints reflect both sensor coupling requirements and signal propagation considerations (Section 6.2).

Passive non-invasive methods (AE, vibration, ultrasound, sound, thermal) share the critical practical advantage that they require no bearing modification and can in principle be retrofitted to bearings in service. The trade-off is that their signals carry lubrication information mixed with other sources (machine vibration, electromagnetic interference, structural resonances), requiring more sophisticated SP to extract the lubrication-relevant component. Active and invasive methods provide cleaner, more direct lubrication information at the cost of installation complexity and, in some cases, bearing modification.

The installation constraints in Table 7 highlight a practical hierarchy among passive non-invasive methods. AE is the most installation-sensitive: the frequency-dependent attenuation described in Section 6.2 means that signal quality degrades significantly if the sensor is separated from the bearing by bolted joints, material transitions, or long structural paths. A sensor poorly positioned relative to the bearing can render high-frequency AE content undetectable regardless of its nominal sensitivity. Passive ultrasound at 20–100 kHz is more tolerant of imperfect mounting, which partly explains its wider industrial adoption. Vibration accelerometers, operating at yet lower frequencies, are the most robust to mounting position variations. Thermal sensors, operating at DC, are entirely insensitive to structural transmission path effects. Among passive methods, AE imposes the highest data-rate requirement (>500 kHz sampling) due to the high-frequency nature of the emitted waves, which creates storage and computation challenges for continuous real-time monitoring. The two-dimensional amplitude-energy framework of Hou and Zhang [19] demonstrates a computationally demanding offline analysis; real-time implementations would require significant simplification or dedicated hardware.

8.4 Technology Maturity

Table 8 characterises the technology readiness of each method combination on a three-level scale: *Research* (demonstrated only in controlled laboratory conditions), *Prototype* (demonstrated on industrial components or in field trials, but not in commercial products), and *Industrial* (available in commercial products or deployed in regular industrial use).

Sensing method	SP method	Maturity	Representative evidence
Passive ultrasound	dB threshold	Industrial	UE Systems, Sonotec, AccuTrak products [55]
Vibration	Time-domain + frequency-domain (general bearing CM; LCM via threshold)	Industrial	Widely deployed; Brüel & Kjær, SKF, Schaeffler products
Active ultrasonic	Spring-layer model	Prototype	[16, 42, 43]
Electrical (capacitance/impedance)	Circuit model	Prototype	[10, 11, 67]
AE	Time-domain (RMS, PCR)	Prototype	[19, 24, 33]
Vibration	κ regression (LASSO, NN)	Research	[26]
Passive ultrasound	κ regression	Research	[1]
AE	Octave filter bank + P_5	Research	[72]
AE	GNN / multi-sensor fusion	Research	[74]
Sound / microphone	Frequency features + ML	Research	[37]
SAW	Mode conversion	Research	[44]
Active ultrasonic	Reflection + induction tachometry	Research	[65]

Table 8: Technology maturity of sensing and signal processing method combinations for LCM. Maturity levels: *Industrial* – commercially deployed; *Prototype* – demonstrated on industrial components or in field tests; *Research* – demonstrated in controlled laboratory studies only. Note: the *Industrial* maturity of vibration refers to general bearing condition monitoring; LCM-specific vibration deployment is limited to simple threshold methods not identified as a dedicated LCM product in the reviewed literature.

A striking observation is the large gap between the industrial deployment of passive ultrasound threshold methods and the research-stage status of virtually all more sophisticated SP approaches. The threshold method – despite its well-documented limitations (speed-load confounding, no degradation modelling) – is the only passive non-invasive LCM method in routine commercial deployment. All regression, ML, and physics-informed SP methods remain at the research stage, with none yet validated in a full industrial deployment at scale. This gap constitutes a primary motivation for the research direction described in Section 9.

8.5 Summary of Comparative Findings

The comparative analysis reveals a structural inversion at the core of the LCM field: the sensing methods most accessible for industrial deployment – passive, non-invasive, retrofittable without bearing modification – are supported by the least mature signal processing, while the methods with the most physically grounded and quantitatively capable SP (active ultrasonic reflectometry, electrical circuit models) impose installation barriers that restrict them to controlled test environments or high-value dedicated assets. Industrial deployment of passive LCM is consequently dominated by threshold methods developed in the early 2000s, while the diagnostically superior SP approaches – physics-informed κ regression, multi-sensor GNN fusion – remain at the research stage, validated only under constant operating conditions. Closing this gap requires SP methods that are simultaneously physically interpretable, robust to operating condition variation, and deployable on standard industrial hardware without bearing modification – the challenge that defines the research gaps identified in Section 9.

9 Research Gaps and Future Directions

The comparative analysis in Section 8 reveals several gaps in the current state of LCM research that are specifically related to signal processing. This section identifies six gaps that represent the most consequential barriers to advancing passive, non-invasive LCM from research to industrial practice, and proposes future research directions for each.

9.1 Absence of Standardised Benchmark Datasets

The reviewed literature presents results from a wide variety of experimental setups: different bearing types, sizes, operating speed and load ranges, lubricant types, fault induction methods, and measurement configurations. No standardised publicly available dataset exists for LCM analogous to the CWRU, FEMTO-ST, or MFPT datasets that have enabled systematic comparison of fault detection methods in the broader bearing diagnostics community. As a result, no reviewed study is directly comparable to another in quantitative terms, and the relative merits of different SP approaches cannot be rigorously assessed from the literature alone.

Future direction: A standardised LCM benchmark dataset should include multiple passive sensing modalities (AE, vibration, passive ultrasound) recorded simultaneously with an active reference method (electrical capacitance, active ultrasonic film thickness, or friction measurement) that provides ground-truth Λ values or Stribeck curve data. The dataset should span the boundary, mixed, and EHL regimes under systematically varied speed, load, and temperature, with both oil and grease lubrication and at least one contamination condition. Making such a dataset publicly available would substantially accelerate research in both SP methods and data-driven approaches.

9.2 Speed- and Load-Invariant Signal Processing

Virtually all SP methods in the reviewed literature are validated under constant or near-constant speed and load conditions. Real industrial machinery operates under continuously varying loads and speeds, and no SP method has been demonstrated to provide reliable LCM under realistically varying industrial operating conditions. The κ regression approach of Jakobsen et al. [1] is the most principled attempt at operating-condition-aware processing, but it is validated only over a limited range of discrete operating points and does not address continuous variation.

Future direction: SP methods for LCM under variable operating conditions should be developed and validated. Promising approaches include: physics-informed normalisation that uses the Hamrock–Dowson model to compute a condition-dependent baseline feature level; order tracking to convert time-domain features to shaft-angle domain, removing speed dependence from periodic signal components; and operating-condition-aware machine learning models that take speed and load as conditioning inputs or use contrastive learning to learn operating-condition-invariant representations.

9.3 Grease Lubrication Monitoring Is Underexplored

The majority of quantitative SP results in the reviewed literature concern oil-lubricated bearings under controlled laboratory conditions. Grease lubrication – which is employed in the majority of industrial rolling element bearings – presents additional complexity: grease degrades through base-oil bleed-out, thickener structural breakdown, thermal degradation, and contamination while the relationship between grease condition and measurable signal is less well characterised than for oil [27, 28, 30]. Miettinen et al. [33] and Scheeren et al. [49] are among the few studies that specifically characterise passive AE for grease lubrication.

Future direction: Controlled studies systematically varying grease degradation state (base-oil bleed-out, aging time, thickener degradation, contamination type and concentration) while simultaneously measuring passive sensor signals and reference quantities (film thickness by electrical or optical methods, grease rheological properties by in-situ rheometry, or friction measurements for Stribeck curve data) are needed. The specific contribution of thickener structure to AE and vibration signals – separate from base-oil film-forming effects – has not been isolated in the reviewed literature.

9.4 Maintenance Decision Integration

The LCM pipeline in Figure 2 includes a maintenance decision step (relubrication timing and quantity) downstream of the condition assessment. In the reviewed literature, this integration is

almost entirely absent: studies terminate at condition assessment (classifying lubrication regime or estimating Λ/κ) without translating the estimate into a relubrication decision. The industrial threshold methods (UE Systems, Sonotec) effectively collapse the assessment and decision steps into a single threshold, but this approach is overly conservative and does not account for degradation rate or operating conditions. No reviewed SP method produces an output directly usable as a relubrication decision criterion – for example, lubrication amount for restoring adequate lubrication conditions, a predicted time-to-failure under the current lubrication condition, or an optimal relubrication interval estimate.

Future direction: Prognostic models that extend the LCM output from current condition assessment to future condition prediction should be developed. Remaining useful life (RUL) estimation for lubrication degradation – distinct from mechanical fault RUL – is an open problem. Approaches could include survival models as in [76] conditioned on the lubrication condition estimate, continuous feedback based upon applied lubrication, or reinforcement learning-based relubrication policies that optimise between the costs of under- and over-lubrication.

9.5 Multi-Sensor Fusion for Passive, Non-Invasive Sensing

Multi-sensor fusion is demonstrated in the reviewed literature primarily in controlled laboratory settings with multiple passive sensors on the same test rig [24, 74]. No reviewed study demonstrates multi-modal passive non-invasive LCM on a bearing in an actual industrial machine, where sensor placement is constrained, ambient noise is high, and the sensing system must operate autonomously. The complementarity of AE, vibration, and passive ultrasound for lubrication fault detection is argued in multiple papers but not quantified in a unified experimental framework with a common ground-truth reference.

Future direction: A systematic experimental study combining AE, vibration, passive ultrasound, and temperature sensing simultaneously on an industrial bearing under realistic operating conditions, with an active film thickness reference, would establish the quantitative benefit of multi-modal fusion for LCM. Early and late fusion architectures should be compared against each sensor modality alone using consistent fault conditions and evaluation metrics.

9.6 Self-Supervised and Foundation Model Approaches for Data-Scarce LCM

A fundamental barrier to data-driven LCM is the scarcity of labelled training data. Generating controlled bearing degradation data under varied lubrication conditions is expensive, time-consuming, and results in small, application-specific datasets. Self-supervised learning (SSL) methods pre-train representations on large amounts of unlabelled passive, non-invasive data and fine-tune on small labelled sets, offering a route to high-accuracy models with reduced labelled data requirements. The TF-C framework [77] and time-series SSL survey [78] demonstrate that SSL representations transfer across mechanical fault detection tasks, but direct application to LCM – where the label is a continuous lubrication condition variable rather than a discrete fault class – has not been demonstrated.

A related but distinct response to data scarcity is generative domain transfer rather than representation pre-training: Zhang et al. [53] use a CycleGAN to translate labelled laboratory lubrication-state signals into field-style signals, sidestepping the need for labelled field-fault data entirely (Section 7.6.2). This addresses the lab-to-field distribution shift component of the data scarcity problem but, unlike SSL, still depends on a labelled laboratory source domain and has not been shown to generalise across bearing types or sensing modalities; SSL pre-training on unlabelled data and generative domain transfer from labelled laboratory data are therefore complementary rather than competing directions for data-scarce LCM.

Foundation model approaches – large pre-trained time-series models that can be adapted to new tasks with minimal retraining – represent a longer-horizon research direction. A bearing foundation model pre-trained on large-scale unlabelled vibration data from multiple sources and machine types could in principle be fine-tuned for LCM with very few labelled examples, substantially reducing the data collection burden. No such model exists for bearing monitoring as of the time of writing.

Future direction: SSL pre-training on large unlabelled AE or vibration datasets from bearings in normal operation – which are abundant in industrial monitoring archives – should be investigated as a method for learning representations informative for LCM. The key open questions are: (1) what pretext tasks are most effective for learning lubrication-relevant representations (time-frequency consistency, masked AE, contrastive clustering?); (2) how much labelled LCM data is required for

effective fine-tuning; and (3) can SSL representations generalise across bearing types and operating conditions?

10 Conclusion

This review has provided a systematic examination of signal processing methods for lubrication condition monitoring of ball bearings, the first review in the LCM literature to organise its findings by signal processing method family rather than by sensing modality. A total of 48 primary sources were reviewed against inclusion criteria requiring online or in-line data acquisition, lubrication-specific monitoring objectives, and sufficient methodological detail to assess the signal processing approach.

On the sensing side, the review establishes a two-axis classification – active/passive and invasive/non-invasive – and shows that passive non-invasive methods (acoustic emission, vibration, passive ultrasound, microphone arrays, thermal monitoring) carry genuine lubrication-relevant information through the physical mechanisms summarised in Table 3. All of these signals increase in amplitude as the lubrication film thins and asperity contacts increase – a property that makes them inherently usable as lubrication condition indicators – but their amplitude is confounded by operating speed, load, and temperature independently of lubrication state. Active and invasive methods (ultrasonic reflectometry, electrical capacitance/impedance, optical, magnetic) provide more direct film thickness information via physics-based models, at the cost of installation complexity and, in some cases, bearing modification.

On the signal processing side, the master cross-reference matrix (Table 4) reveals a wide diversity of methods applied to LCM, spanning from computationally trivial time-domain statistics (RMS, pulse count rate) to sophisticated methods (graph neural networks, physics-informed κ regression). Time-domain statistical features dominate practical and industrial applications due to their low computational cost and robustness. Frequency-domain methods – particularly envelope analysis, spectral kurtosis, and fractional-octave filter banks – add mechanistic discrimination that time-domain methods cannot provide, enabling discrimination between starvation, contamination, and other lubrication fault types. Physics-based model-driven methods (spring-layer acoustic model, electrical circuit models, κ/Λ regression targets) bridge signal processing and lubrication physics, enabling quantitative film thickness estimation from sensor signals. Machine learning and data fusion methods show diagnostic promise but are at the research stage.

The comparative analysis in Section 8 reaches five principal conclusions: passive non-invasive methods are most sensitive to starvation, least sensitive to contamination, and confounded by operating condition variation; active methods provide quantitatively superior film thickness information; thermal monitoring responds more slowly than acoustic methods; no SP method has been validated under realistic variable-speed, variable-load industrial conditions; and the technology maturity gap between research and industry is large, with all sophisticated SP approaches remaining at the research or prototype stage.

Six signal-processing-centric research gaps are identified. The most consequential are the absence of standardised benchmark datasets that would enable rigorous cross-study comparison, the unsolved problem of speed- and load-invariant feature extraction for passive methods, and the underexploration of grease lubrication monitoring despite grease being the dominant lubricant in industrial rolling element bearings. Additional gaps include the disconnect between condition assessment outputs and actionable relubrication decisions, the lack of multi-sensor fusion validation in realistic industrial environments, and the untapped potential of self-supervised and foundation model approaches for learning informative representations from the large archives of unlabelled bearing monitoring data that exist in industrial settings.

The overarching conclusion is that the signal processing layer – not the sensing hardware – is the primary barrier limiting LCM from laboratory demonstration to industrial deployment. Advanced sensors capable of detecting lubrication-relevant signals exist and are demonstrated. What is lacking are SP methods that are simultaneously physically interpretable, robust to operating condition variation, validated under industrial conditions, and integrated with downstream maintenance decision systems.

References

- [1] Morten Opprud Jakobsen, Eskild Sune Herskind, Christian Fischer Pedersen, and Mikael Bergholz Knudsen. Detecting insufficient lubrication in rolling bearings, using a low cost MEMS microphone to measure vibrations. *Mechanical Systems and Signal Processing*, 200:110553, October 2023.
- [2] Wei Dai. In Situ Measurement of Grease Capacitive Film Thickness in Bearings: A Review. *Lubricants*, 12(10):329, September 2024.
- [3] Xiaoqiang Xu, Xiyin Liao, Tao Zhou, Zhiyi He, and Hongwei Hu. Vibration-based identification of lubrication starved bearing using spectral centroid indicator combined with minimum entropy deconvolution. *Measurement*, 226:114156, February 2024.
- [4] Mohamed G. A. Nassef, Mina Soliman, Belal Galal Nassef, Mohamed A. Daha, and Galal A. Nassef. Impact of Graphene Nano-Additives to Lithium Grease on the Dynamic and Tribological Behavior of Rolling Bearings. *Lubricants*, 10(2):29, February 2022.
- [5] S M Naufel Isalm, Md Farhan Mahmud Rashik, and Md Khairul Basher. Oil debris analysis and Vibration monitoring system for condition monitoring and fault diagnosis of a gearbox. *IARJSET*, 8(9), September 2021.
- [6] James M. Wakiru, Liliane Pintelon, Peter N. Muchiri, and Peter K. Chemweno. A review on lubricant condition monitoring information analysis for maintenance decision support. *Mechanical Systems and Signal Processing*, 118:108–132, March 2019.
- [7] Fei Shang, Bo Sun, and Dandan Cai. A comprehensive review of non-destructive methods for bearing lubricating oil film thickness measurement. *Industrial Lubrication and Tribology*, 76(3):441–451, April 2024.
- [8] Ling Wang and Honor Powrie. Advanced techniques for bearing condition monitoring. In *Electric Vehicle Tribology*, pages 153–181. Elsevier, 2024.
- [9] Elias Vagn Hansen and Per Johansen. A Comparison of Adaptive Ultrasound Reflectometry Calibration Methods for Use in Lubrication Films. *Energies*, 15(9):3240, April 2022.
- [10] Hui Cen, Dan Bai, Yanpu Chao, Yaohui Li, and Ruihua Li. EHL film thickness in rolling element bearings evaluated by electrical capacitance method: a review. *Tribology - Materials, Surfaces & Interfaces*, 15(1):55–77, January 2021.
- [11] Florian Michael Becker-Dombrowsky and Eckhard Kirchner. Electrical impedance based condition monitoring of machine elements—a systematic review. *Frontiers in Mechanical Engineering*, 10:1412137, July 2024.
- [12] Xiaoliang Zhu, Chong Zhong, and Jiang Zhe. Lubricating oil conditioning sensors for online machine health monitoring – A review. *Tribology International*, 109:473–484, May 2017.
- [13] Junda Zhu, David He, and Eric Bechhoefer. Survey of lubrication oil condition monitoring, diagnostics, prognostics and systems. *Journal of Chemical Science and Technology*, 2(3):100–115, July 2013.
- [14] Jiayi Sun, Liming Wang, Jianfeng Li, Fangyi Li, Jianyong Li, and Haiyang Lu. Online oil debris monitoring of rotating machinery: A detailed review of more than three decades. *Mechanical Systems and Signal Processing*, 149:107341, February 2021.
- [15] Pan Dou, Yaping Jia, Peng Zheng, Tonghai Wu, Min Yu, Tom Reddyhoff, and Zhongxiao Peng. Review of ultrasonic-based technology for oil film thickness measurement in lubrication. *Tribology International*, 165:107290, January 2022.
- [16] Yayu Li, Shiyuan Chang, Pan Dou, Wenzhuo Zhao, Tonghai Wu, and Min Yu. Lubrication film monitoring of the pitch bearing in a wind turbine. *Tribology International*, 214:111181, February 2026.
- [17] Gwidon W. Stachowiak and Andrew W. Batchelor. *Engineering Tribology*. Butterworth-Heinemann, 4th edition, 2014.

- [18] Richard Stribeck. Die wesentlichen eigenschaften der gleit- und rollenlager. *Zeitschrift des Vereines Deutscher Ingenieure*, 46:1341–1348, 1432–1438, 1902.
- [19] Geng Hou and Liangchi Zhang. In-situ detection of lubrication status of bearings with acoustic emission monitoring. *Wear*, 571:205839, June 2025.
- [20] Jonny Hansen, Marcus Björling, and Roland Larsson. A New Film Parameter for Rough Surface EHL Contacts with Anisotropic and Isotropic Structures. *Tribology Letters*, 69(2):37, June 2021.
- [21] Taisuke Maruyama, Masayuki Maeda, and Ken Nakano. Lubrication Condition Monitoring of Practical Ball Bearings by Electrical Impedance Method. *Tribology Online*, 14(5):327–338, December 2019.
- [22] *Elasto-Hydrodynamic Lubrication*. Elsevier, 1977.
- [23] Karolina Jablonka, Romeo Glovnea, and Jeroen Bongaerts. Quantitative measurements of film thickness in a radially loaded deep-groove ball bearing. *Tribology International*, 119:239–249, March 2018.
- [24] Daniel Cornel, Francisco Gutiérrez Guzmán, Georg Jacobs, and Stephan Neumann. Condition monitoring of roller bearings using acoustic emission. *Wind Energy Science*, 6(2):367–376, March 2021.
- [25] SKF. Lubrication condition – the viscosity ratio, κ .
- [26] Morten Opprud Jakobsen, Eskild Sune Herskind, Kim Bjerger, Peter Ahrendt, Christian Fischer Pedersen, and Mikael Bergholz Knudsen. Vibration signatures in ball bearings as a function of lubricant viscosity ratio κ , under alternating lubrication conditions. *Tribology International*, 156:106840, April 2021.
- [27] Piet M. Lugt. *Grease Lubrication in Rolling Bearings*. Wiley, 1 edition, December 2012.
- [28] Prashant Kumar Sahu. Grease Contamination Detection in the Rolling Element Bearing Using Deep Learning Technique. *International Journal of Mechanical Engineering and Robotics Research*, pages 275–280, 2022.
- [29] Xingnan Zhang and Romeo Glovnea. Grease film thickness measurement in rolling bearing contacts. *Proceedings of the Institution of Mechanical Engineers, Part J: Journal of Engineering Tribology*, 235(7):1430–1439, July 2021.
- [30] Hui Cen, Nicola De Laurentis, Norbert Bader, and Piet M. Lugt. Effect of thermal aging on the grease film thickness in ball bearings. *Tribology International*, 204:110511, April 2025.
- [31] Kanji Ono. A comprehensive report on ultrasonic attenuation of engineering materials, including metals, ceramics, polymers, fiber-reinforced composites, wood, and rocks. *Applied Sciences*, 10(7):2230, 2020.
- [32] Bart Scheeren, Mirosław Lech Kaminski, and Lotfollah Pahlavan. Evaluation of ultrasonic stress wave transmission in cylindrical roller bearings for acoustic emission condition monitoring. *Sensors*, 22(4):1500, February 2022.
- [33] J Miettinen, P Andersson, and V Wikströ. Analysis of grease lubrication of a ball bearing using acoustic emission measurement. *Proceedings of the Institution of Mechanical Engineers, Part J: Journal of Engineering Tribology*, 215(6):535–544, June 2001.
- [34] Xuanrui Zhang, Dong Zhen, Guojin Feng, Xiaoxia Liang, Hao Zhang, and Fengshou Gu. A coupled vibration-acoustic emission model for roller bearings incorporating lubricant traction and sliding friction. *Tribology International*, 221:112013, April 2026.
- [35] Delft University of Technology (TU Delft), Bart Scheeren, Allseas Engineering, Nitish Perveshsingh Thakoerdajal, Delft University of Technology (TU Delft), and Lotfollah Pahlavan. Influence of Grease Contamination on Acoustic Emission Monitoring of Low-speed Roller Bearings. *e-Journal of Nondestructive Testing*, 29(7), July 2024.
- [36] Christopher Murphy. Choosing the Most Suitable Predictive Maintenance Sensor, 2020.

- [37] Volodymyr Kudriashov, Vladislav Ivanov, Kiril Alexiev, and Petia Koprinkova-Hristova. Microphone Array for Non-contact Monitoring of Rolling Bearings. In Krassimir Georgiev, Michail Todorov, and Ivan Georgiev, editors, *Advanced Computing in Industrial Mathematics*, volume 681, pages 103–114. Springer International Publishing, Cham, 2017. Series Title: Studies in Computational Intelligence.
- [38] Wael Moussa. A Passive Thermography Approach to Bearing Condition Monitoring. *Juniper Online Journal Material Science*, 1(4), June 2017.
- [39] Bei Yan, Ke Yan, Te Luo, Yongsheng Zhu, Ben Q. Li, and Jun Hong. Thermal coefficients modification of high speed ball bearing by multi-object optimization method. *International Journal of Thermal Sciences*, 137:313–324, March 2019.
- [40] Taisuke Maruyama, Faidhi Radzi, Tsutomu Sato, Shunsuke Iwase, Masayuki Maeda, and Ken Nakano. Lubrication Condition Monitoring in EHD Line Contacts of Thrust Needle Roller Bearing Using the Electrical Impedance Method. *Lubricants*, 11(5):223, May 2023.
- [41] Bruce W. Drinkwater, Jie Zhang, Katherine J. Kirk, Jocelyn Elgoyhen, and Rob S. Dwyer-Joyce. Ultrasonic Measurement of Rolling Bearing Lubrication Using Piezoelectric Thin Films. *Journal of Tribology*, 131(1):011502, January 2009.
- [42] Shengchao Chen, Bo Wang, Guanghua Xu, and Jiachen Kuang. Evaluation of the Running Status of Ball Bearings Using Ultrasonic Signals. In *2023 9th International Conference on Mechatronics and Robotics Engineering (ICMRE)*, pages 245–250, Shenzhen, China, February 2023. IEEE.
- [43] R. S. Dwyer-Joyce, B. W. Drinkwater, and C. J. Donohoe. The measurement of lubricant–film thickness using ultrasound. *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences*, 459(2032):957–976, April 2003.
- [44] G. Lindner, Ch. Brückner, and M. Schmitt. A2.3 - Online Bearing Lubricant Sensing by Mode Conversion of Surface Acoustic Waves. In *Proceedings SENSOR 2011*, pages 45–52, Nürnberg, 2011. AMA Service GmbH, Von-Münchhausen-Str. 49, 31515 Wunstorf, Germany.
- [45] Bing Yu, Nan Cao, and Tianhong Zhang. A novel signature extracting approach for inductive oil debris sensors based on symplectic geometry mode decomposition. *Measurement*, 185:110056, November 2021.
- [46] Zhenzhen Liu, Yan Liu, Hongfu Zuo, Han Wang, and Cheng Wang. Oil debris and viscosity monitoring using optical measurement based on Response Surface Methodology. *Measurement*, 195:111152, May 2022.
- [47] Han Wang, Hongfu Zuo, Zhenzhen Liu, Di Zhou, Hongsheng Yan, Xin Zhao, and Michael Pecht. Online monitoring of oil wear debris image based on CNN. *Mechanics & Industry*, 23:9, 2022.
- [48] R. Carotenuto, F. Pezzimenti, F. G. Della Corte, D. Iero, and M. Merenda. Ranging with frequency dependent ultrasound air attenuation. *Sensors*, 21(15):4963, 2021.
- [49] Bart Scheeren, Mirosław Lech Kaminski, and Lotfollah Pahlavan. Acoustic emission monitoring of naturally developed damage in large-scale low-speed roller bearings. *Structural Health Monitoring*, 23(1):360–382, January 2024.
- [50] N. Tandon, K.M. Ramakrishna, and G.S. Yadava. Condition monitoring of electric motor ball bearings for the detection of grease contaminants. *Tribology International*, 40(1):29–36, January 2007.
- [51] Robert Bond Randall. *Vibration-based Condition Monitoring: Industrial, Automotive and Aerospace Applications, Second Edition*. Wiley, 1 edition, July 2021.
- [52] Akhand Rai and S.H. Upadhyay. A review on signal processing techniques utilized in the fault diagnosis of rolling element bearings. *Tribology International*, 96:289–306, April 2016.
- [53] Xinzhao Zhang, Zhijun Ren, Kai Huang, Tanta Lin, Yongsheng Zhu, Hong Fu, and Jun Hong. An interpretable rolling-bearing lubrication-state diagnosis method based on multiscale residual and semantic consistency CycleGAN. *IEEE Transactions on Instrumentation and Measurement*, 75:3512116, April 2026.

- [54] UE Systems. Ultraprobe® 9000. Product datasheet.
- [55] Jeremy Lineham. Ultrasonic probes for inspecting bearings. *World Pumps*, 2008(503):34–36, August 2008.
- [56] UE Systems. Ultra-Trak 750. Product manual, Version 1.
- [57] SKF. Ultrasound Lubrication Checker.
- [58] Ray Garvey. Monitoring Lubrication Using Multi-Frequency Sonic/Ultrasonic Sensor, 2019.
- [59] Morten Opprud Jakobsen. Low cost MEMS accelerometer and microphone based condition monitoring sensor, with LoRa and Bluetooth Low Energy radio. *HardwareX*, 18:e00525, June 2024.
- [60] Olivier Janssens, Raiko Schulz, Viktor Slavkovikj, Kurt Stockman, Mia Loccufier, Rik Van De Walle, and Sofie Van Hoecke. Thermal image based fault diagnosis for rotating machinery. *Infrared Physics & Technology*, 73:78–87, November 2015.
- [61] Anees Mohammed and Sinisa Djurovic. Electric Machine Bearing Health Monitoring and Ball Fault Detection by Simultaneous Thermo-Mechanical Fibre Optic Sensing. *IEEE Transactions on Energy Conversion*, 36(1):71–80, March 2021.
- [62] Kai Zhang, Qingfeng Meng, Wei Chen, Junning Li, and Phil Harper. Ultrasonic measurement of oil film thickness between the roller and the inner raceway in a roller bearing. *Industrial Lubrication and Tribology*, 67(6):531–537, September 2015.
- [63] Liqun Wu, Ion Palamarcu, Rizwan Bajwa, Yi Zhang, and Rob Dwyer-Joyce. Ultrasonic measurement for surface damage monitoring in coated bearing shells. *Friction*, 13(9):9441065, September 2025.
- [64] Shengchao Chen, Guanghua Xu, Tangfei Tao, Sicong Zhang, Kai Zhang, and Jiachen Kuang. A sub-Nyquist sampling and data compression approach for efficient ultrasonic measurement of bearing lubrication. *Measurement*, 256:118442, December 2025.
- [65] F. Tatzgern, M. Schirru, M. Schandl, C. Schneidhofer, and M. Varga. Tribo-acoustic tachometer: A novel ultrasonic device for the simultaneous operando measurement of grease film thickness and cage rotational speed in rolling element bearings. *Tribology International*, 212:110930, December 2025.
- [66] Jianyun Wang, Yanbo He, Jiaoyi Wu, Kun Shu, Chuanwei Zhang, Le Gu, Haide Yu, Tingjian Wang, Zhen Li, and Liqin Wang. Accuracy-improved ultrasonic phase algorithm for measuring lubricant film thickness. *International Journal of Mechanical Sciences*, 268:109058, April 2024.
- [67] Volker Schneider, Norbert Bader, Haichao Liu, and Gerhard Poll. Method for in situ film thickness measurement of ball bearings under combined loading using capacitance measurements. *Tribology International*, 171:107524, July 2022.
- [68] Denis Cojocaru, Gelu Ianuş, Vlad Cârlescu, Bogdan Chiriac, and Dumitru Olaru. Grease Film Behavior in Ball Bearings. *Lubricants*, 13(10):429, September 2025.
- [69] Haotian Shi, Hongpeng Zhang, Dian Huo, Shuang Yu, Jun Su, Yucai Xie, Wei Li, Laihao Ma, Haiquan Chen, and Yuqing Sun. An Ultrasensitive Microsensor Based on Impedance Analysis for Oil Condition Monitoring. *IEEE Transactions on Industrial Electronics*, 69(7):7441–7450, July 2022.
- [70] Takeo Yoshioka and Shigeo Shimizu. Monitoring of Ball Bearing Operation under Grease Lubrication Using a New Compound Diagnostic System Detecting Vibration and Acoustic Emission. *Tribology Transactions*, 52(6):725–730, October 2009.
- [71] Junjiao Zhang, Yongna Shen, Zhanwen Wu, Gongtian Shen, Yilin Yuan, and Bin Hu. Health Status Assessment of Passenger Ropeway Bearings Based on Multi-Parameter Acoustic Emission Analysis. *Sensors*, 25(14):4403, July 2025.
- [72] Philipp Renhart, Michael Maier, Christopher Strablegg, Florian Summer, Florian Grün, and Andreas Eder. Monitoring Tribological Events by Acoustic Emission Measurements for Bearing Contacts. *Lubricants*, 9(11):109, November 2021.

- [73] Hector M. Usgame Sandoval, Camilo A. Pedraza Ramírez, and Jabid Quiroga. Acoustic emission-based early fault detection in tapered roller bearings. *Ingeniería e Investigación*, 33(3):5–10, September 2013.
- [74] Xinzhuo Zhang, Xuhua Zhang, Linbo Zhu, Chuang Gao, Bo Ning, and Yongsheng Zhu. A Graph-Data-Based Monitoring Method of Bearing Lubrication Using Multi-Sensor. *Lubricants*, 12(6):229, June 2024.
- [75] Haiyang Pan, Yu Yang, Xin Li, Jinde Zheng, and Junsheng Cheng. Symplectic geometry mode decomposition and its application to rotating machinery compound fault diagnosis. *Mechanical Systems and Signal Processing*, 114:189–211, January 2019.
- [76] Christian Marius Lillelund, Fernando Pannullo, Morten Opprud Jakobsen, Manuel Morante, and Christian Fischer Pedersen. RULSurv: A probabilistic survival-based method for early censoring-aware prediction of remaining useful life in ball bearings, April 2025. arXiv:2405.01614 [cs].
- [77] Muhammad Farooq Siddique, Faisal Saleem, Muhammad Umar, Cheol Hong Kim, and Jong-Myon Kim. A Hybrid Deep Learning Approach for Bearing Fault Diagnosis Using Continuous Wavelet Transform and Attention-Enhanced Spatiotemporal Feature Extraction. *Sensors*, 25(9):2712, April 2025.
- [78] Abdul-Kazeem Shamba, Kerstin Bach, and Gavin Taylor. Contrast All the Time: Learning Time Series Representation from Temporal Consistency, 2024. Version Number: 2.