

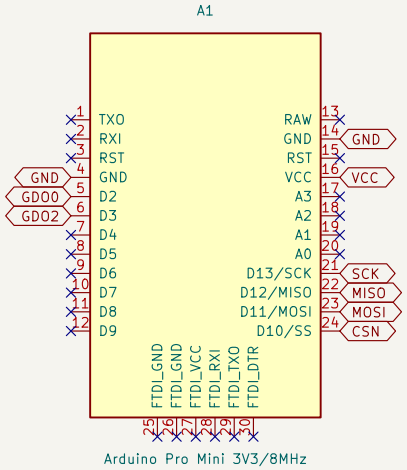






Carrier board: Arduino Pro Mini on top, CC1101 11-pin module on the bottom.

Use a 3.3 V / 8 MHz Pro Mini: the CC1101 is not 5 V tolerant.

C1 is optional bulk decoupling for TX bursts.

FTDI row and A4–A7 are not routed; pads for the FTDI row are plated but unconnected.

Sheet: /
File: promini_cc1101.kicad_sch

Title: Arduino Pro Mini + CC1101 868 MHz carrier

Size: A4	Date: 2026-09-14	**Rev: 1.0**
KiCad E.D.A. 10.0.6		Id: 1/1