


ZSE_50CC Pro_04037198_48D_1G_Ning Bo Guang Jun_PBT+FR+GF

Machine number: 0403198

Geometry: 1G

Date/Author: 2025.3.25

Comment: 根据现场组合, 用于阻燃增强及增强组合

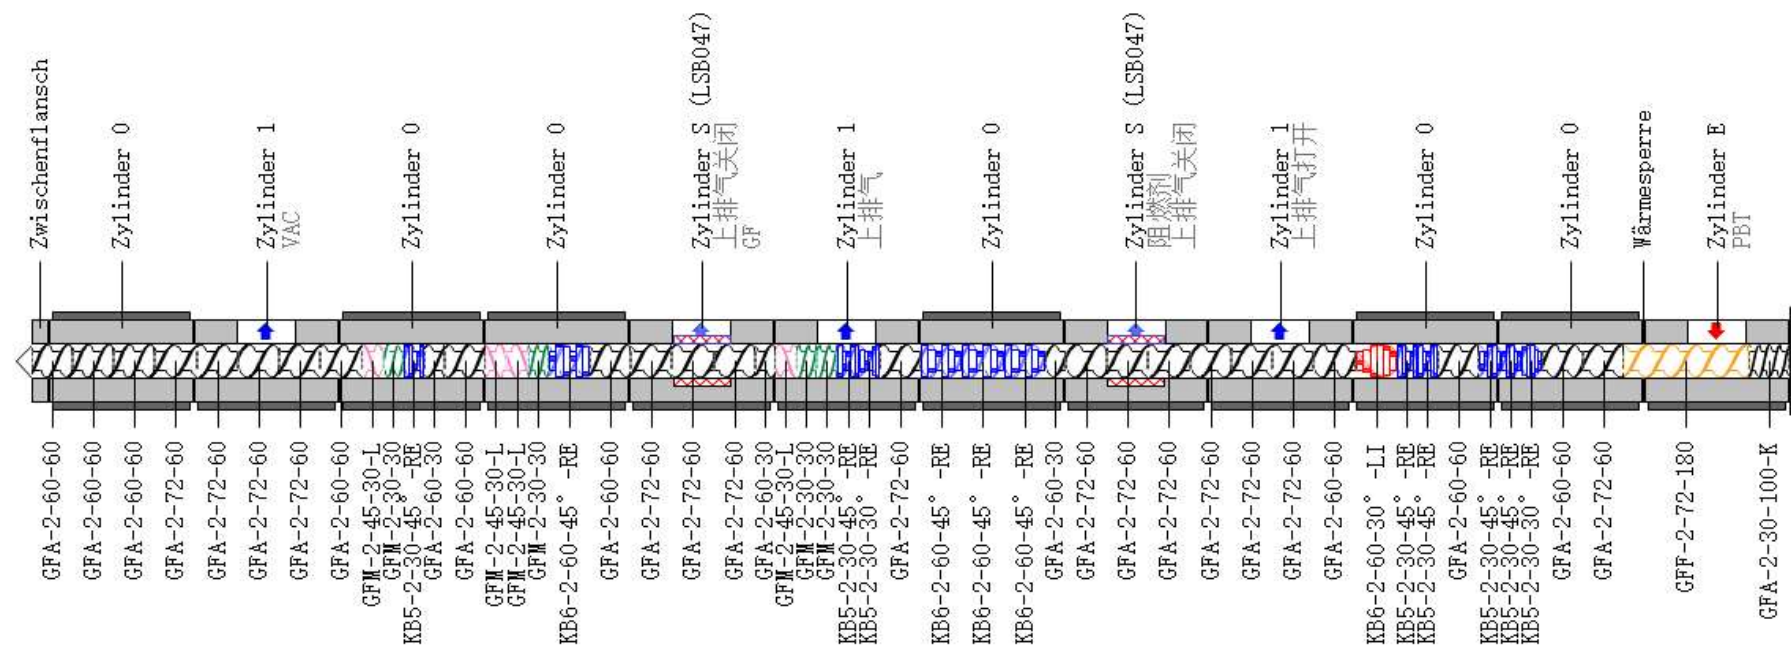

Maschinenbaukasten

Rotation direction: right
 Nominal diameter: 50 mm
 Centerline distance: 40 mm
 Standard value: 50 mm
 Max. drive power: 65 kW
 ...at screw speed: 500 1/min
 Length of the shaft [mm]:

Machine configuration

Barrel elements

Element type 'Spacer plate':
 Wärmesperre (1 / -)
 Zwischenflansch (1 / -)
Element type 'Standard barrel':
 Zylinder 0 (6 / -)
Element type 'Venting barrel':
 Zylinder 1 (3 / -)
Element type 'Feeding barrel':
 Zylinder B1 (- / -)
 Zylinder E (1 / -)
Element type 'Combined barrel':
 Zylinder S (LSB047) (2 / -)
 Zylinder S (LSB50XX) (- / -)

Threaded elements

Element type 'Threaded element':
 GFA-2-30-100-K (1 / -)
 GFA-2-30-30 (- / -)
 GFA-2-30-30-L (- / -)
 GFA-2-45-30 (- / -)
 GFA-2-45-60 (- / -)
 GFA-2-60-30 (3 / -)
 GFA-2-60-60 (9 / -)
 GFA-2-72-60 (15 / -)
 Spacer-X-XX-30 (- / -)
 Spacer-X-XX-60 (- / -)
Element type 'Pushing flight element':
 GFF-2-72-180 (1 / -)
Element type 'Screw mixing element':
 GFM-2-30-30 (4 / -)
 GFM-2-30-60 (- / -)
 GFM-2-45-30-L (4 / -)

Kneading blocks

Element type 'Kneading block':
 KB12-2-60-30° -RE (- / -)
 KB12-2-60-60° -RE (- / -)
 KB12-2-60-90° (- / -)
 KB5-2-30-30° -RE (2 / -)
 KB5-2-30-45° -Li (- / -)
 KB5-2-30-45° -RE (6 / -)
 KB5-2-30-60° -RE (- / -)
 KB5-2-30-90° -RE (- / -)
 KB6-2-60-30° -LI (1 / -)
 KB6-2-60-30° -RE (- / -)
 KB6-2-60-45° -RE (4 / -)
 KB6-2-60-60° -RE (- / -)
 KB6-2-60-90° (- / -)
 KS1-2-10-A/E (- / -)
 KS1-2-10-M (- / -)
 KS1-2-10-M(2) (- / -)
 KS1-2-10-M(3) (- / -)
 KS1-2-10-M(4) (- / -)
 KS1-2-10-M(5) (- / -)
 KS1-2-20-M (- / -)
 KS1-2-20-M(2) (- / -)
 KS1-2-20-M(3) (- / -)
 KS1-2-20-M(4) (- / -)
 KS1-2-20-M(5) (- / -)

Screw configuration

No.	mm	Name	Annotation
	1	58	GFA-2-30-100-K
	2	238	GFF-2-72-180
	3	298	GFA-2-72-60
	4	358	GFA-2-60-60
	5	388	KB5-2-30-30° -RE
	6	418	KB5-2-30-45° -RE
	7	448	KB5-2-30-45° -RE
	8	508	GFA-2-60-60
	9	538	KB5-2-30-45° -RE
	10	568	KB5-2-30-45° -RE
	11	628	KB6-2-60-30° -L.I
	12	688	GFA-2-60-60
	13	748	GFA-2-72-60
	14	808	GFA-2-72-60
	15	868	GFA-2-72-60
	16	928	GFA-2-72-60
	17	988	GFA-2-72-60
	18	1048	GFA-2-72-60
	19	1078	GFA-2-60-30
	20	1138	KB6-2-60-45° -RE
	21	1198	KB6-2-60-45° -RE
	22	1258	KB6-2-60-45° -RE
	23	1318	GFA-2-72-60
	24	1348	KB5-2-30-30° -RE
	25	1378	KB5-2-30-45° -RE
	26	1408	GFM-2-30-30

No.	mm	Name	Annotation
	27	1438	GFM-2-30-30
	28	1468	GFM-2-45-30-L
	29	1498	GFA-2-60-30
	30	1558	GFA-2-72-60
	31	1618	GFA-2-72-60
	32	1678	GFA-2-72-60
	33	1738	GFA-2-60-60
	34	1798	KB6-2-60-45° -RE
	35	1828	GFM-2-30-30
	36	1858	GFM-2-45-30-L
	37	1888	GFM-2-45-30-L
	38	1948	GFA-2-60-60
	39	1978	GFA-2-60-30
	40	2008	KB5-2-30-45° -RE
	41	2038	GFM-2-30-30
	42	2068	GFM-2-45-30-L
	43	2128	GFA-2-60-60
	44	2188	GFA-2-72-60
	45	2248	GFA-2-72-60
	46	2308	GFA-2-72-60
	47	2368	GFA-2-72-60
	48	2428	GFA-2-60-60
	49	2488	GFA-2-60-60
	50	2548	GFA-2-60-60

Barrel configuration

No.	mm	Name	Annotation
	A	210	Zylinder E
	B	211	Wärmesperre
	C	421	Zylinder 0
	D	631	Zylinder 0
	E	841	Zylinder 1
	F	1051	Zylinder S (LSB047)
	G	1261	Zylinder 0
	H	1471	Zylinder 1

No.	mm	Name	Annotation
	I	1681	Zylinder S (LSB047)
	J	1891	Zylinder 0
	K	2101	Zylinder 0
	L	2311	Zylinder 1
	M	2521	Zylinder 0
	N	2548	Zwischenflansch

