




# SYTGT098 Ammunition storage



SYTGT098A-G – Single hall, walls made of slabs, poured roof supported by metal frame and reinforced concrete pillars. Requires delayed fuzing.

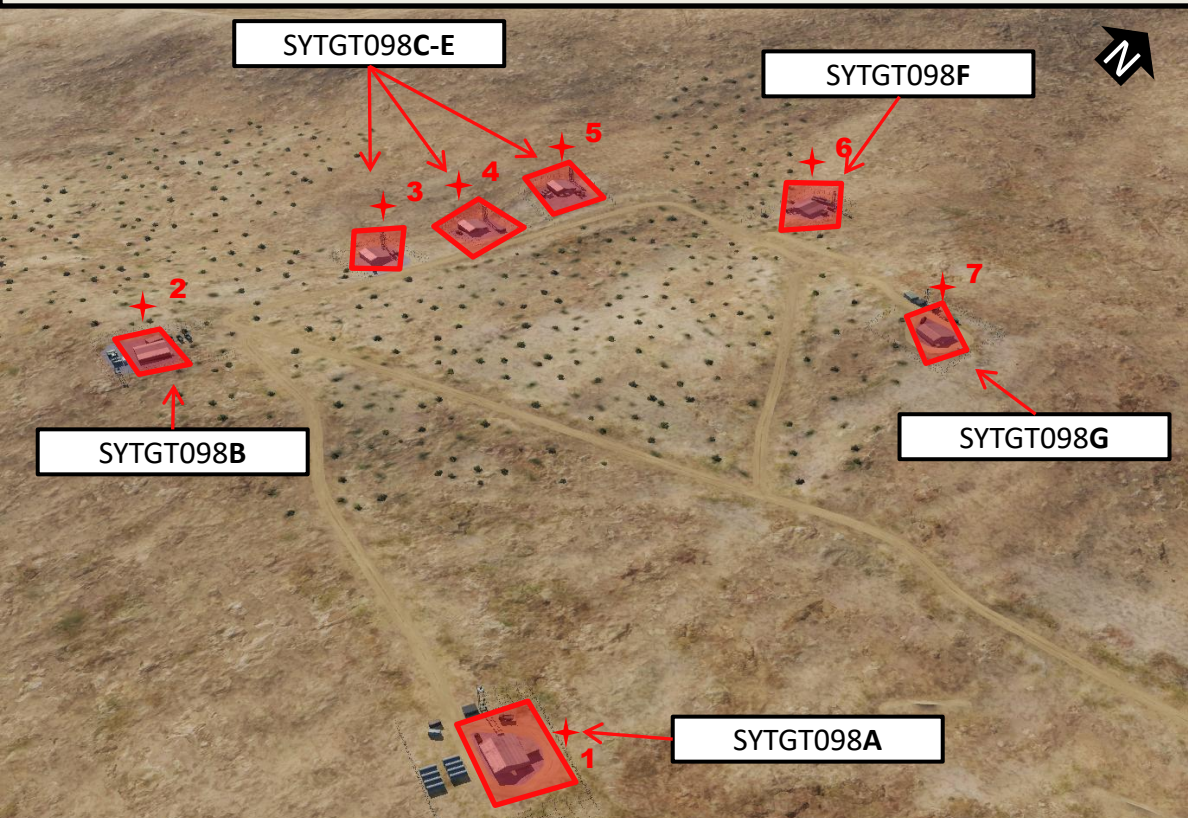

## DESCRIPTION OF THE DESIRED POINTS OF IMPACT WITH WPN TYPE:

SYTGT098A – Storage 1  
DPI 1 N 33 41.383 E 036 43.524/2595ft/(500 lbs bomb)

SYTGT098B – Storage 2  
DPI 2 N33 41.392 E 036 43.218/2631ft/(500 lbs bomb)

SYTGT098C – Storage 3  
DPI 3 N 33 41.511 E 036 43.167/2549ft/(500 lbs bomb)

SYTGT098D – Storage 4  
DPI 3 N 33 41.562 E 036 43.169/2546ft/(500 lbs bomb)

SYTGT098E – Storage 5  
DPI 3 N 33 41.609 E 036 43.176/2598ft/(500 lbs bomb)

SYTGT098F – Storage 6  
DPI 3 N 33 41.684 E 036 43.290/2602ft/(500 lbs bomb)

SYTGT098G – Storage 7  
DPI 3 N 33 41.634 E 036 43.436/2628ft/(500 lbs bomb)