




SYTGT035 International communication center

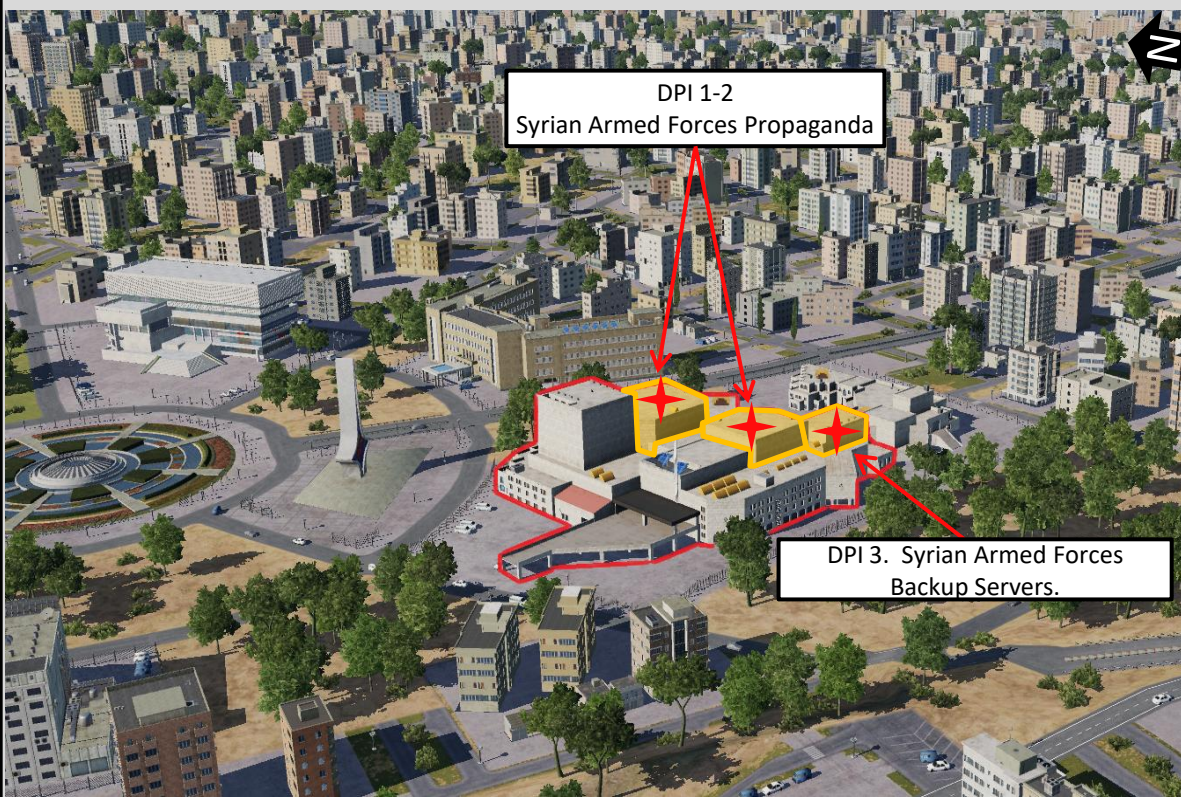

DESCRIPTION OF THE DESIRED POINTS OF IMPACT
WITH WPN TYPE:

SYTGT035A – Propaganda

DPI 1 N33 30.755 E036 16.690/2260ft/(500 lbs bombs)
DPI 2 N33 30.747 E036 16.703/2260ft/(500 lbs bombs)

SYTGT035B – Servers

DPI 3 N33 30.735 E036 16.723/2260ft/(2000 lbs bomb)

Suggested fuzing solution on DPI 3 –Delayed fusing required in
order to effect the servers located in the basement.

- Collateral damage concerns surround the centre.