




OPARTGT098 Ammunition storage



OPARTGT098A-G – Single hall, walls made of slabs, poured roof supported by metal frame and reinforced concrete pillars. Requires delayed fuzing.

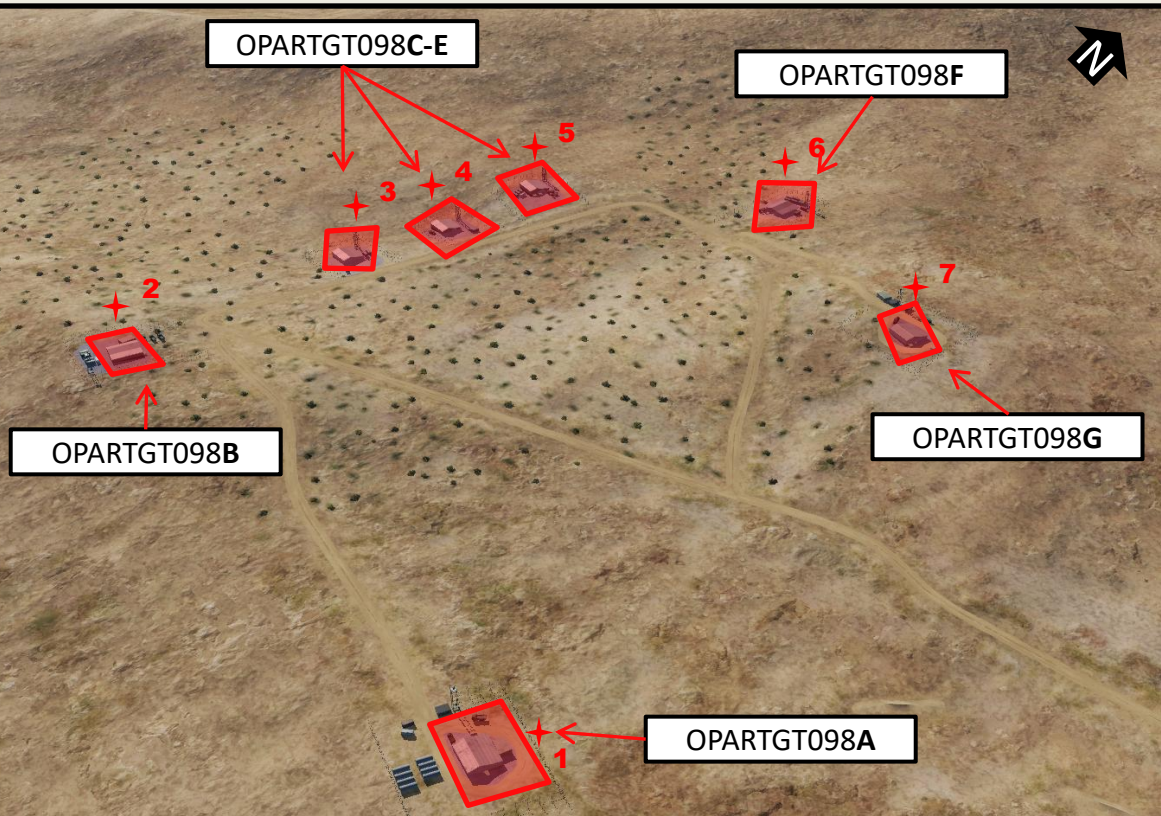

DESCRIPTION OF THE DESIRED POINTS OF IMPACT WITH WPN TYPE:

OPARTGT098A – Storage 1
DPI 1 N 33 41.383 E 036 43.524/2595ft/(500 lbs bomb)

OPARTGT098B – Storage 2
DPI 2 N33 41.392 E 036 43.218/2631ft/(500 lbs bomb)

OPARTGT098C – Storage 3
DPI 3 N 33 41.511 E 036 43.167/2549ft/(500 lbs bomb)

OPARTGT098D – Storage 4
DPI 3 N 33 41.562 E 036 43.169/2546ft/(500 lbs bomb)

OPARTGT098E – Storage 5
DPI 3 N 33 41.609 E 036 43.176/2598ft/(500 lbs bomb)

OPARTGT098F – Storage 6
DPI 3 N 33 41.684 E 036 43.290/2602ft/(500 lbs bomb)

OPARTGT098G – Storage 7
DPI 3 N 33 41.634 E 036 43.436/2628ft/(500 lbs bomb)