
Oct-15

Day-12

Life of a Packet

- Each Network Topology.

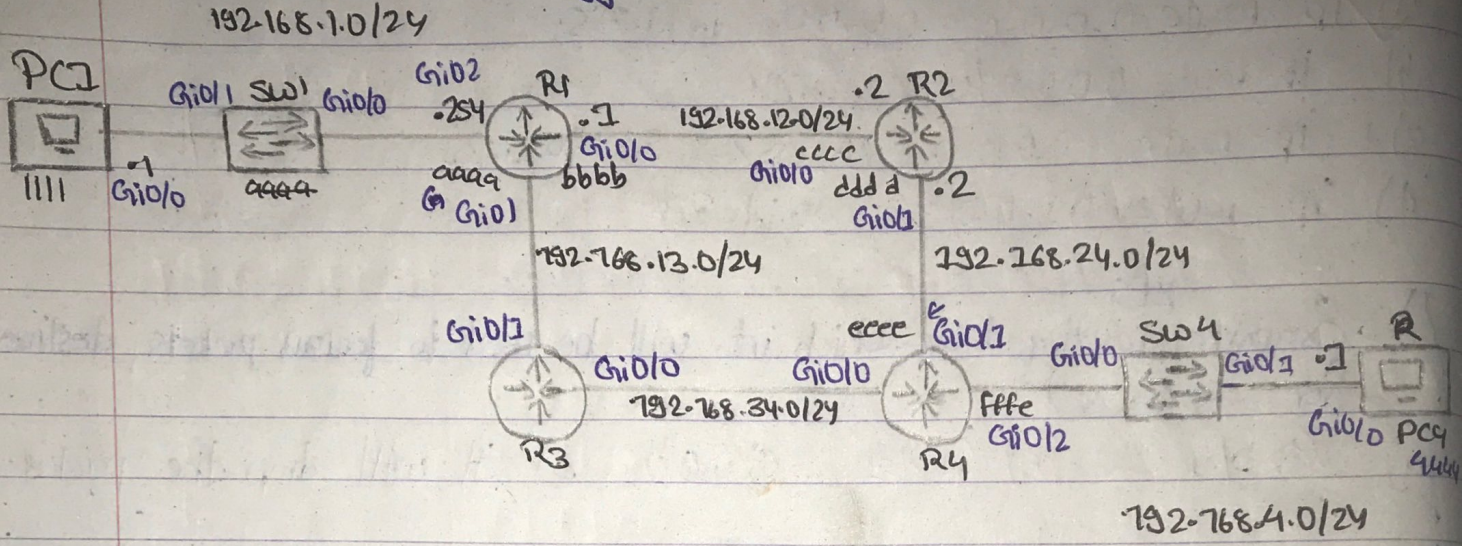

- Let's assume we have pre-configured static routes on these devices, so that the packet will follow the same path as in static routing.
- Each interface on a device has unique MAC address.
- So, PC1 wants to send some data to PC4, and its encapsulate in this header.

Src:	192.168.1.1
Dst:	192.168.4.1

- In the IPv4 header the source IP address comes first, but in the ethernet header the destination MAC address comes first

- Switches, didn't modify the frames at any point. They forward the frames & & learned the MAC address, but they don't actually de-encapsulate & re-encapsulate the packet with new header.

for QUIZ use the above fig

Q.1) PC4 sends a packet to PC1. What is the destination MAC address when it sent from PC4's network interface.
Ans - ffffe

Q.2) PC4 sends a packet to PC1. What is src. MAC when it is received on R1's Gi0/0 interface.?
Ans - cccc

Q.3) PC4 sends a packet to PC1. What is the source MAC address when it is sent from SW1's Gi0/1 interface
Ans - aaaa

Q.4) PC4 sends a packet to PC1. What is dst. IP adddress when it is sent from R4's Gi0/1 interface
Ans - 192.168.1.1

Q.5) PC4 sends a packet to PC1. What is source IP address when it is received on R1's Gi0/0 interface
Ans. 192.168.4.1

Src & Dst IP won't change. They remain same throughout process but every router will src & dst mac change hudai aauxy.