FEYMAN

IM26

Hardware Integration Guide

Inertial Measurement Unit

Document Version: V1.0

Applicable Model: IM26

www.feymani.com
youtube.com/@FeymanIncFMI
github.com/Feyman-Technology

Revision History

Version	Description	Date
V1.0	Initial release — hardware integration guide (sign-off: LQ)	01-2026

> **NOTE** This guide targets hardware engineers integrating the IM26 GNSS/INS module into a host platform. All port voltages are 3.3 V. Confirm pin assignments, reference-design values and mechanical dimensions against the released schematic and mechanical drawing before production.

Contents

1 **Introduction** 4

2 **Specifications** 4

2.1 Gyroscope 4

2.2 Accelerometer 4

2.3 Attitude 4

3 **Hardware Instructions** 5

3.1 Electrical Characteristics 5

3.2 Pin Assignment 5

3.3 Reference Design 6


3.4 Mechanical 7

4 **SMT Precautions** 7


1 Introduction

The IM26 IMU module fuses data from a MEMS accelerometer and gyroscope with GNSS RTK data to deliver high-performance attitude measurement, with roll and pitch accurate to within 0.02 degrees. This level of accuracy has found the IM26 widespread use in industrial applications such as machine control, robotics, tilt surveys, AHRS, and dead reckoning.

The IM26 is protected under various international patents (US US11409001B2, Chinese CN110017849B, etc.).



Survey



Agriculture



Construction



Robotics

2 Specifications

2.1 Gyroscope

GYROSCOPE	
Bias (full temperature)	0.1 °/s
Bias instability	1 °/h
Scale factor (full temperature)	0.10 %
Random walk	0.12 deg/√h
Non-orthogonality error	500 ppm
Nonlinearity	200 ppm
Range	1000 deg/s

2.2 Accelerometer

ACCELEROMETER	
Bias (full temperature)	XY: 2 mg, Z: 5 mg
Bias instability	20 µg
Scale factor (full temperature)	0.10 %
Random walk	0.02 m/s/√h
Non-orthogonality error	500 ppm
Nonlinearity	200 ppm
Range	16 g

2.3 Attitude

ACCURACY	
Heading (RTK aided)	0.1°
Roll / Pitch (RTK aided)	0.02°

3 Hardware Instructions

3.1 Electrical Characteristics


Parameter	Min	Typ	Max	Units
Supply voltage	3.0	3.3	3.6	Volt
Current consumption	120	130	140	mA

3.2 Pin Assignment

Pin	Name	Description (all port voltages are 3.3 V)
1	**BOOT**	Start modes — High: BOOT mode; NC or Low: normal working mode
2	**RESET**	Hardware reset pin (pull low 10 ms to reset module)
3	**GND**	Ground
4	**GND**	Ground
5	**GPIO**	Output IO; an active buzzer can be connected
6	**3V3**	Voltage supply
7	**UART2_TX**	UART2 output — connect to GNSS board RX
8	**UART2_RX**	UART2 input — connect to GNSS board TX
9	**GND**	Ground
10	**3V3**	Sensor power supply
11	**CAN RX**	CAN interface, data reception — connects to CAN transceiver
12	**CAN TX**	CAN interface, data transmission — connects to CAN transceiver
13	**UART3_RX**	UART3 input — configuration, message output and firmware upgrade
14	**UART3_TX**	UART3 output — configuration, message output and firmware upgrade
15	**1PPS**	1PPS pin — connect to GNSS board 1PPS
16	**UART1_TX**	UART1 output — configuration, message output and firmware upgrade
17	**UART1_RX**	UART1 input — configuration, message output and firmware upgrade
18	**GND**	Ground
19	**SWDIO**	Debug IO (reserved)
20	**SWCLK**	Debug IO (reserved)
21	**GND**	Ground

3.3 Reference Design


UART ports 1 and 3 have the same functions; one can be connected to the main processor and the other used as a debugging interface. In addition, the BOOT pin is recommended to be routed for backup. The buzzer can be used for status indication, such as power-on and completion of installation-angle estimation.

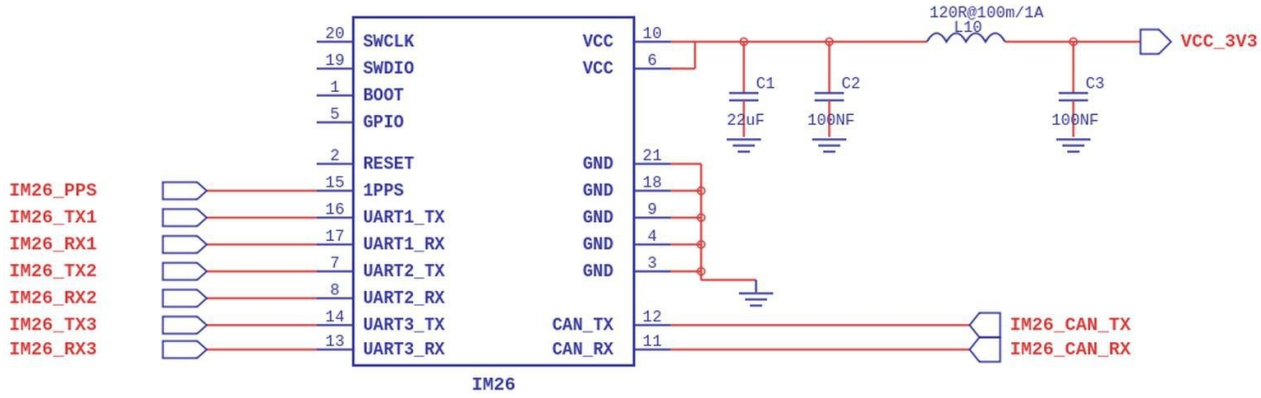

IM26 reference design

3.4 Mechanical

The module height is 3.4 ± 0.1 mm; the edge pad size is 1.6 mm × 0.8 mm and the middle pad size is 3 mm × 3 mm. It is recommended to place the IM26 module in a thermally stable region to avoid convection with outside air, and external stress on the module is strictly forbidden. The coordinate system is defined by the right-hand rule, as shown below.

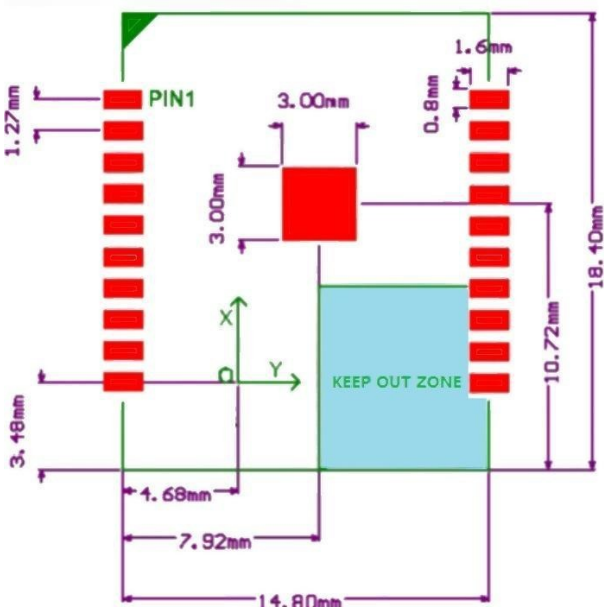

IM26 land pattern and coordinate system (mm)

4 SMT Precautions

The IM26 modules must be baked at low temperature to remove water vapor before SMT. Bake for at least 24 hours at 60 ℃ prior to SMT. For the detailed SMT temperature profile, refer to the reference document: FMI FEYMAN IMU SMT Requirements.pdf.