
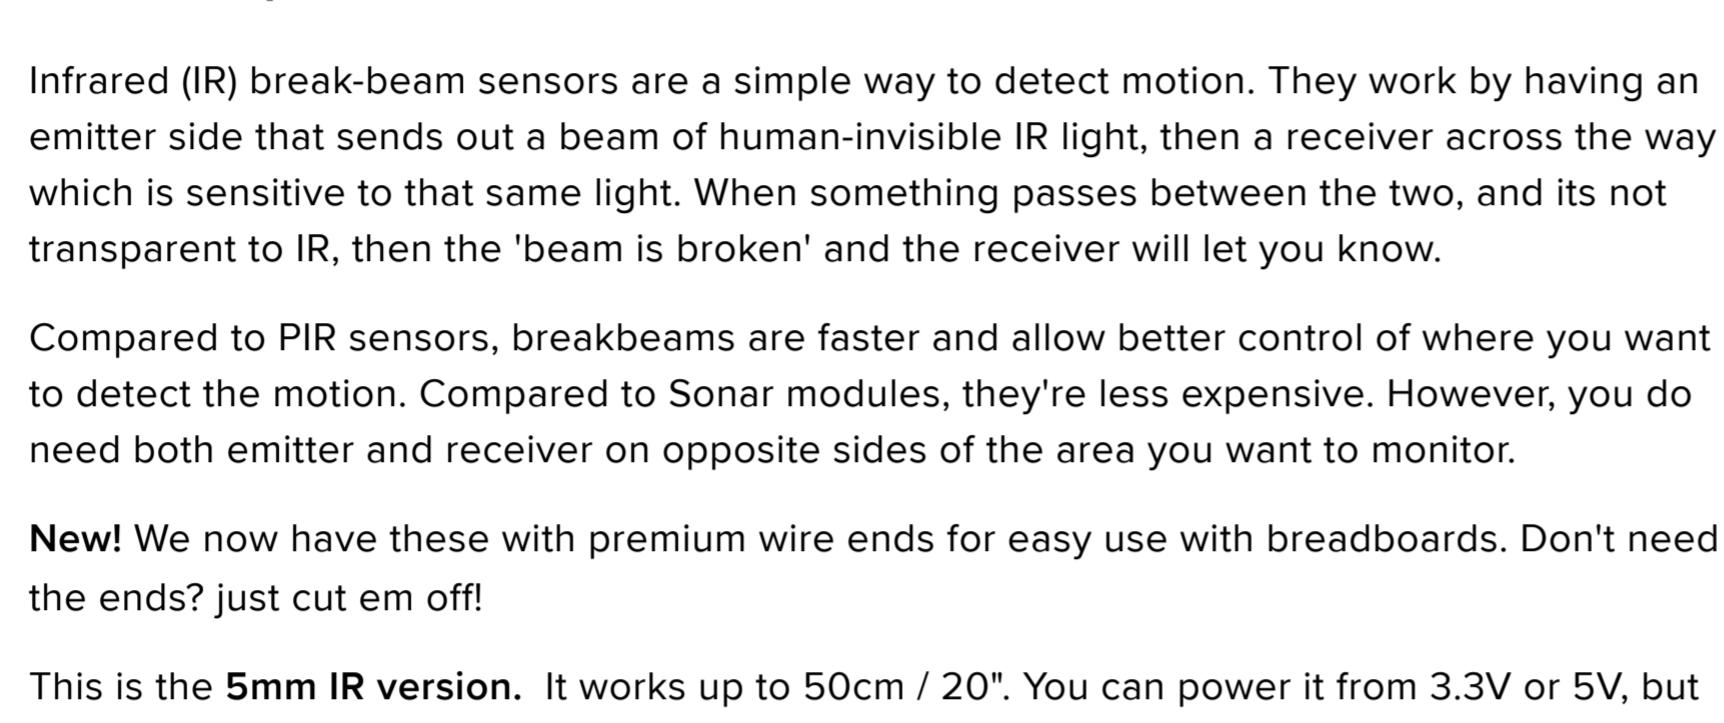


Sensors / Motion / IR Break Beam Sensor with Premium Wire Header Ends - 5mm LEDs

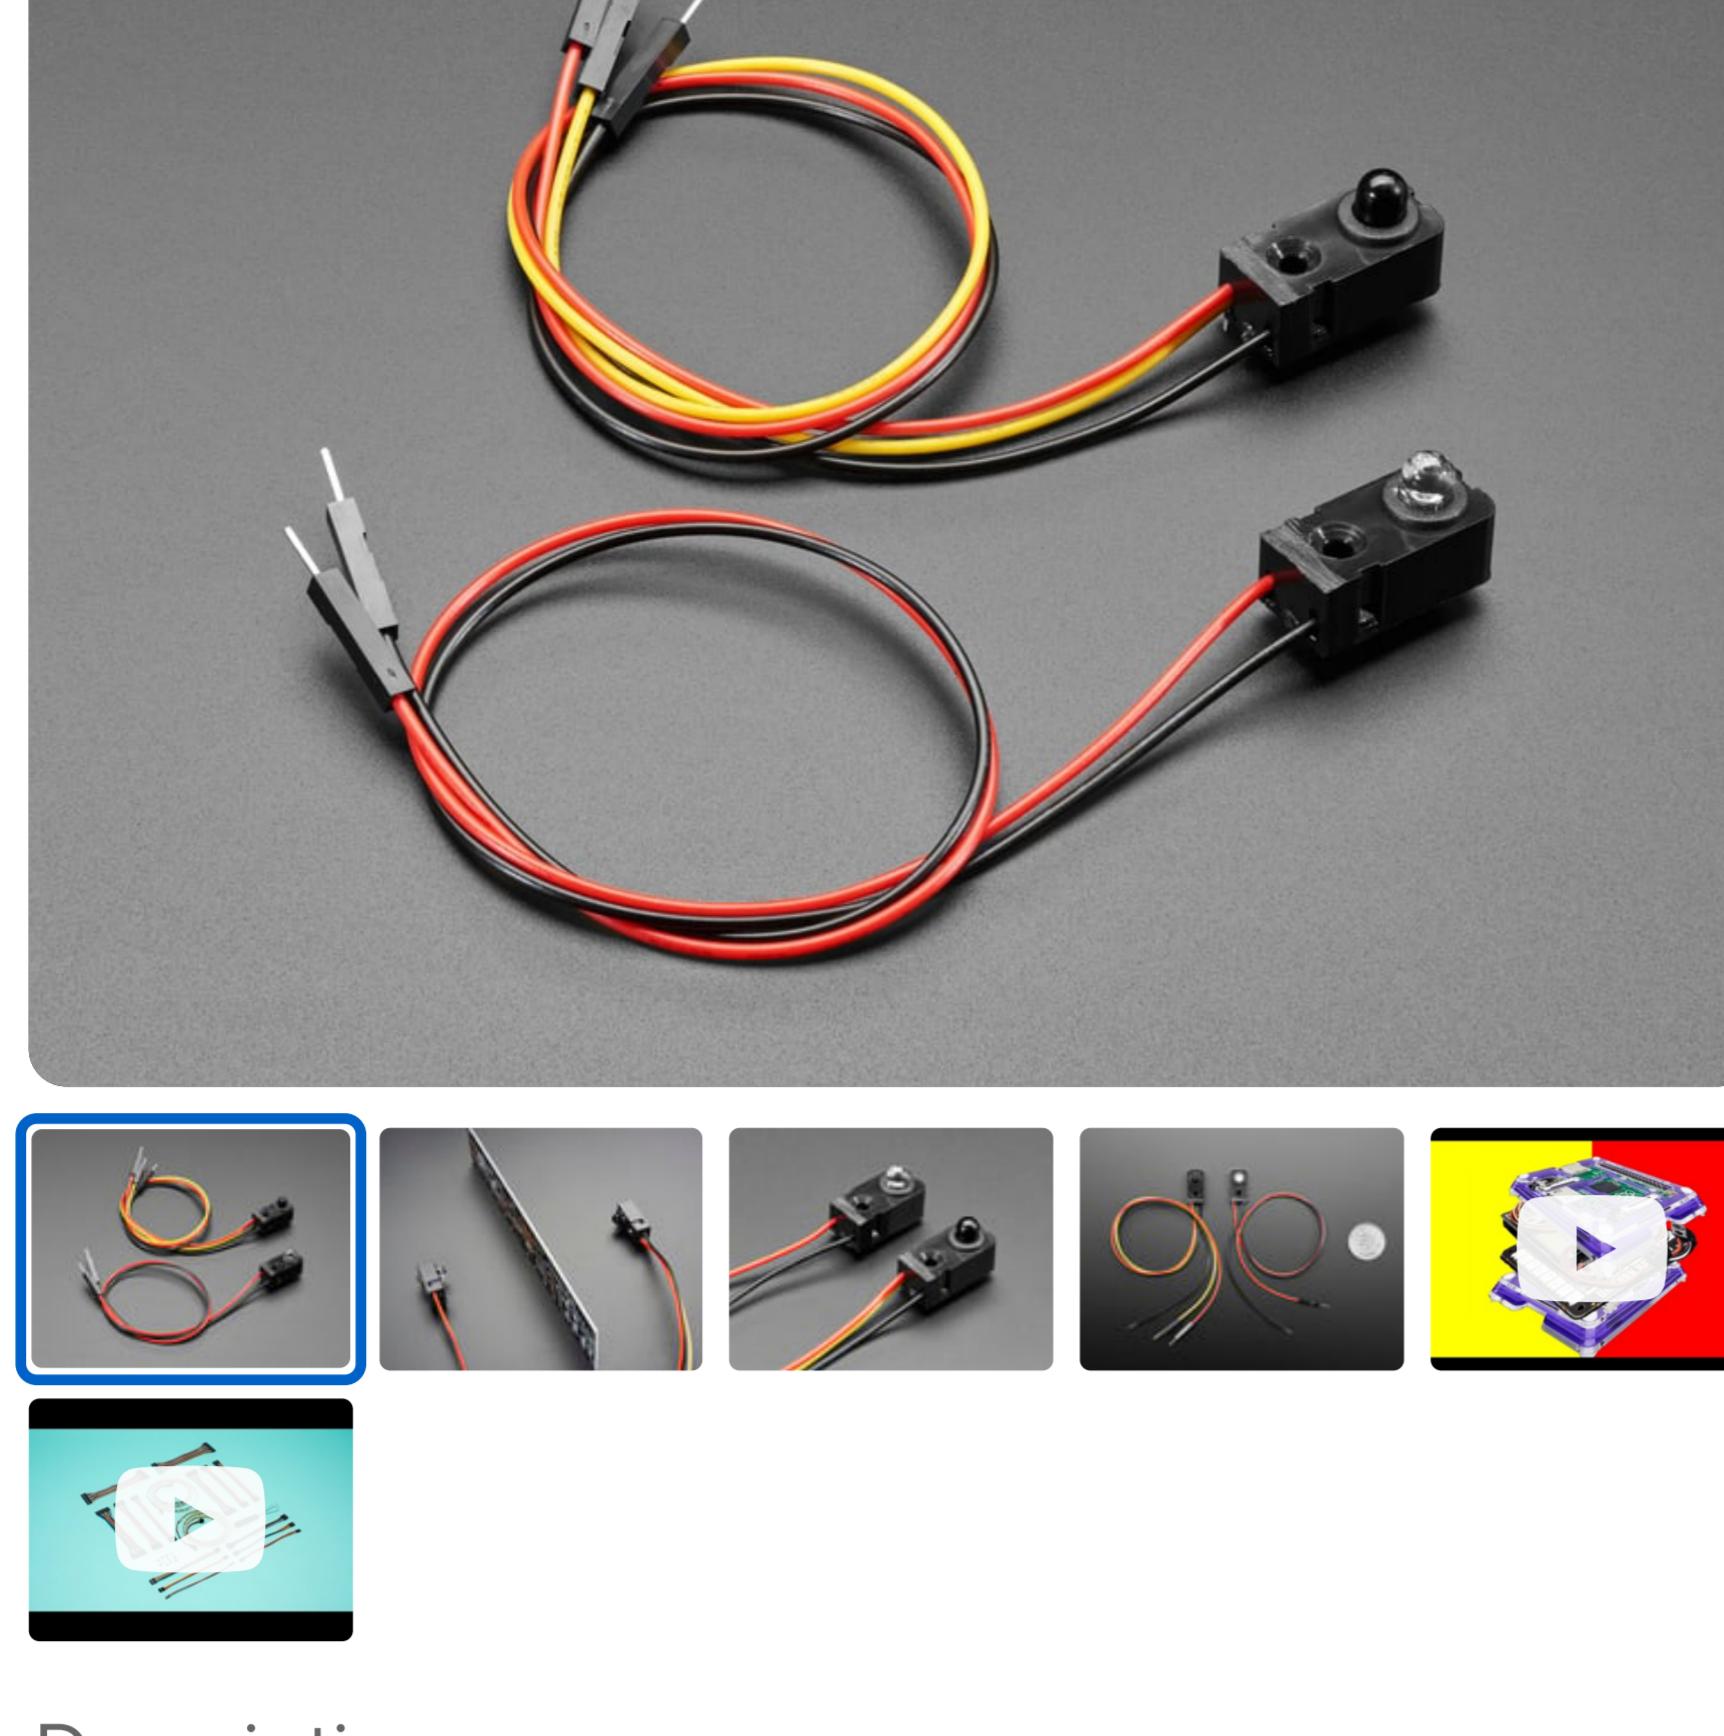

IR Break Beam Sensor with Premium Wire Header Ends - 5mm LEDs

Product ID: 2168

\$5.95

Out of stock

Please enter your details below and we will send you an email when this item is back in stock. You will only be emailed about this product!

Your Email

Notify Me**Buy on Digi-Key**[Why buy on Digi-Key?](#)**Add to Wishlist****Description**[Technical Details](#)

Description

Infrared (IR) break-beam sensors are a simple way to detect motion. They work by having an emitter side that sends out a beam of human-invisible IR light, then a receiver across the way which is sensitive to that same light. When something passes between the two, and it's not transparent to IR, then the 'beam is broken' and the receiver will let you know.



Compared to PIR sensors, breakbeams are faster and allow better control of where you want to detect the motion. Compared to Sonar modules, they're less expensive. However, you do need both emitter and receiver on opposite sides of the area you want to monitor.

New! We now have these with premium wire ends for easy use with breadboards. Don't need the ends? just cut em off!

This is the **5mm IR version**. It works up to 50cm / 20". You can power it from 3.3V or 5V, but 5V will get you better range and is what we suggest. The receiver is *open collector transistor output* which means that you do need a pull up resistor if you want to read a digital signal off the signal wire. Most microcontrollers have the ability to turn on a built in pull up resistor. If you do not, connect a 10K resistor between the white wire of the receiver and the red wire. If you want to control a relay or LED or whatever, it can sink up to 100mA to ground

[Check out our IR breakbeam tutorial for how to get started quickly.](#)

[We also carry a 3mm version that works for slightly shorter distances.](#)

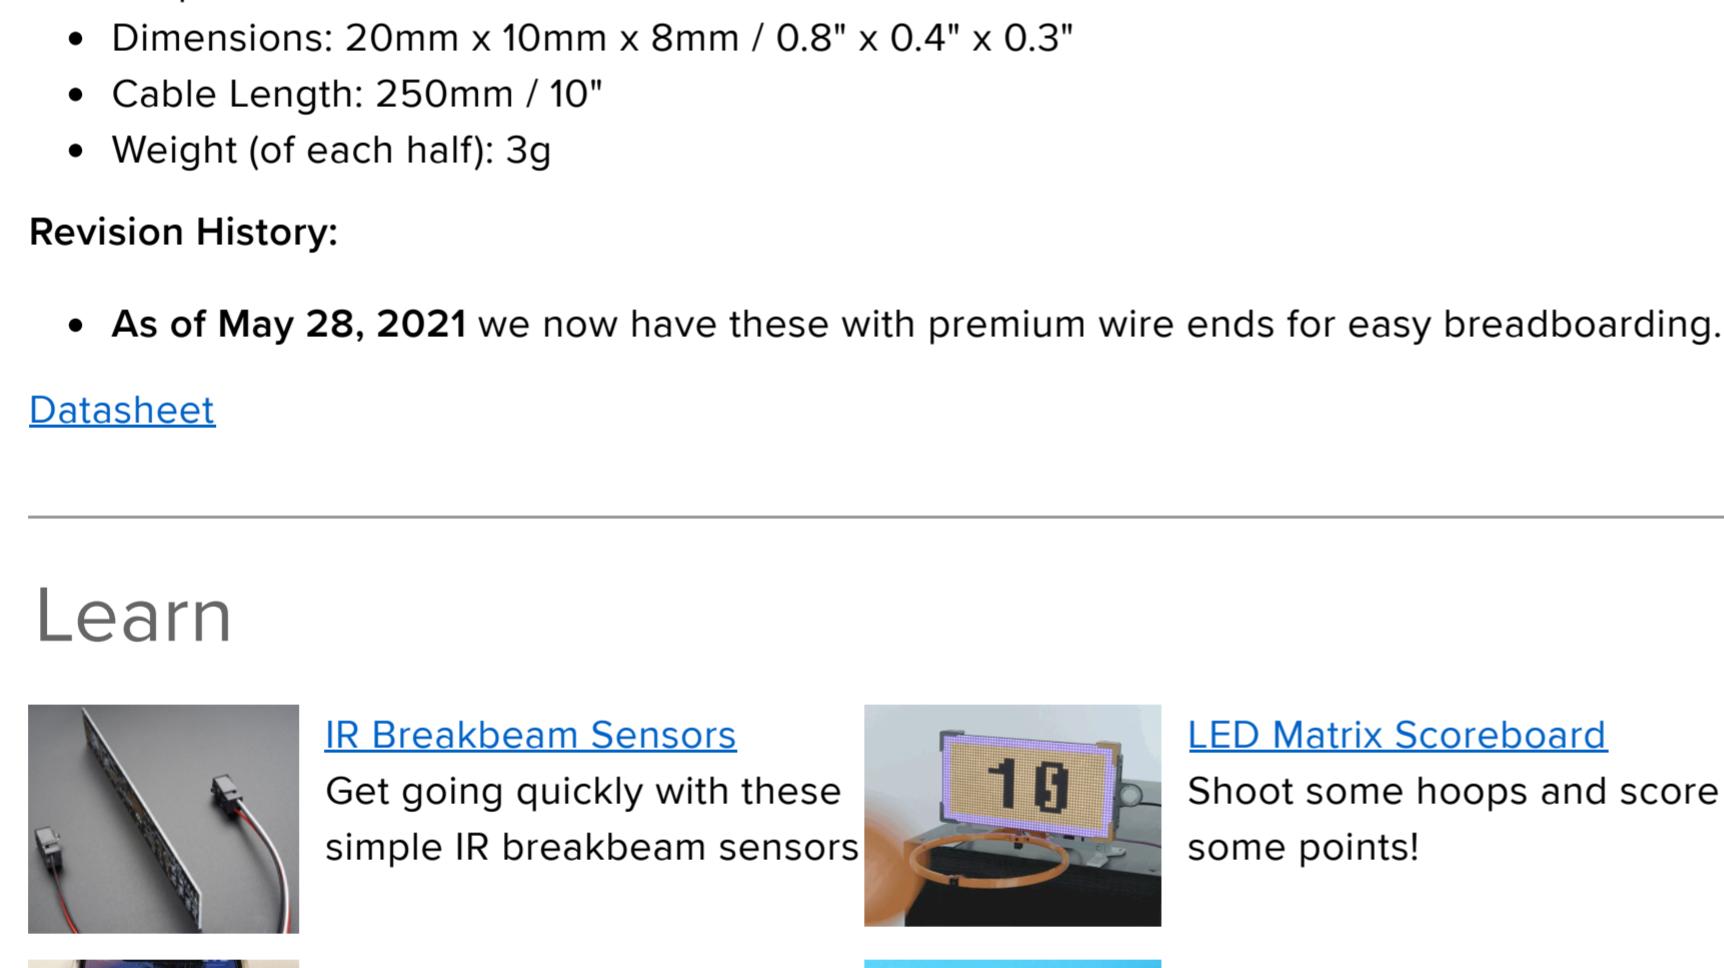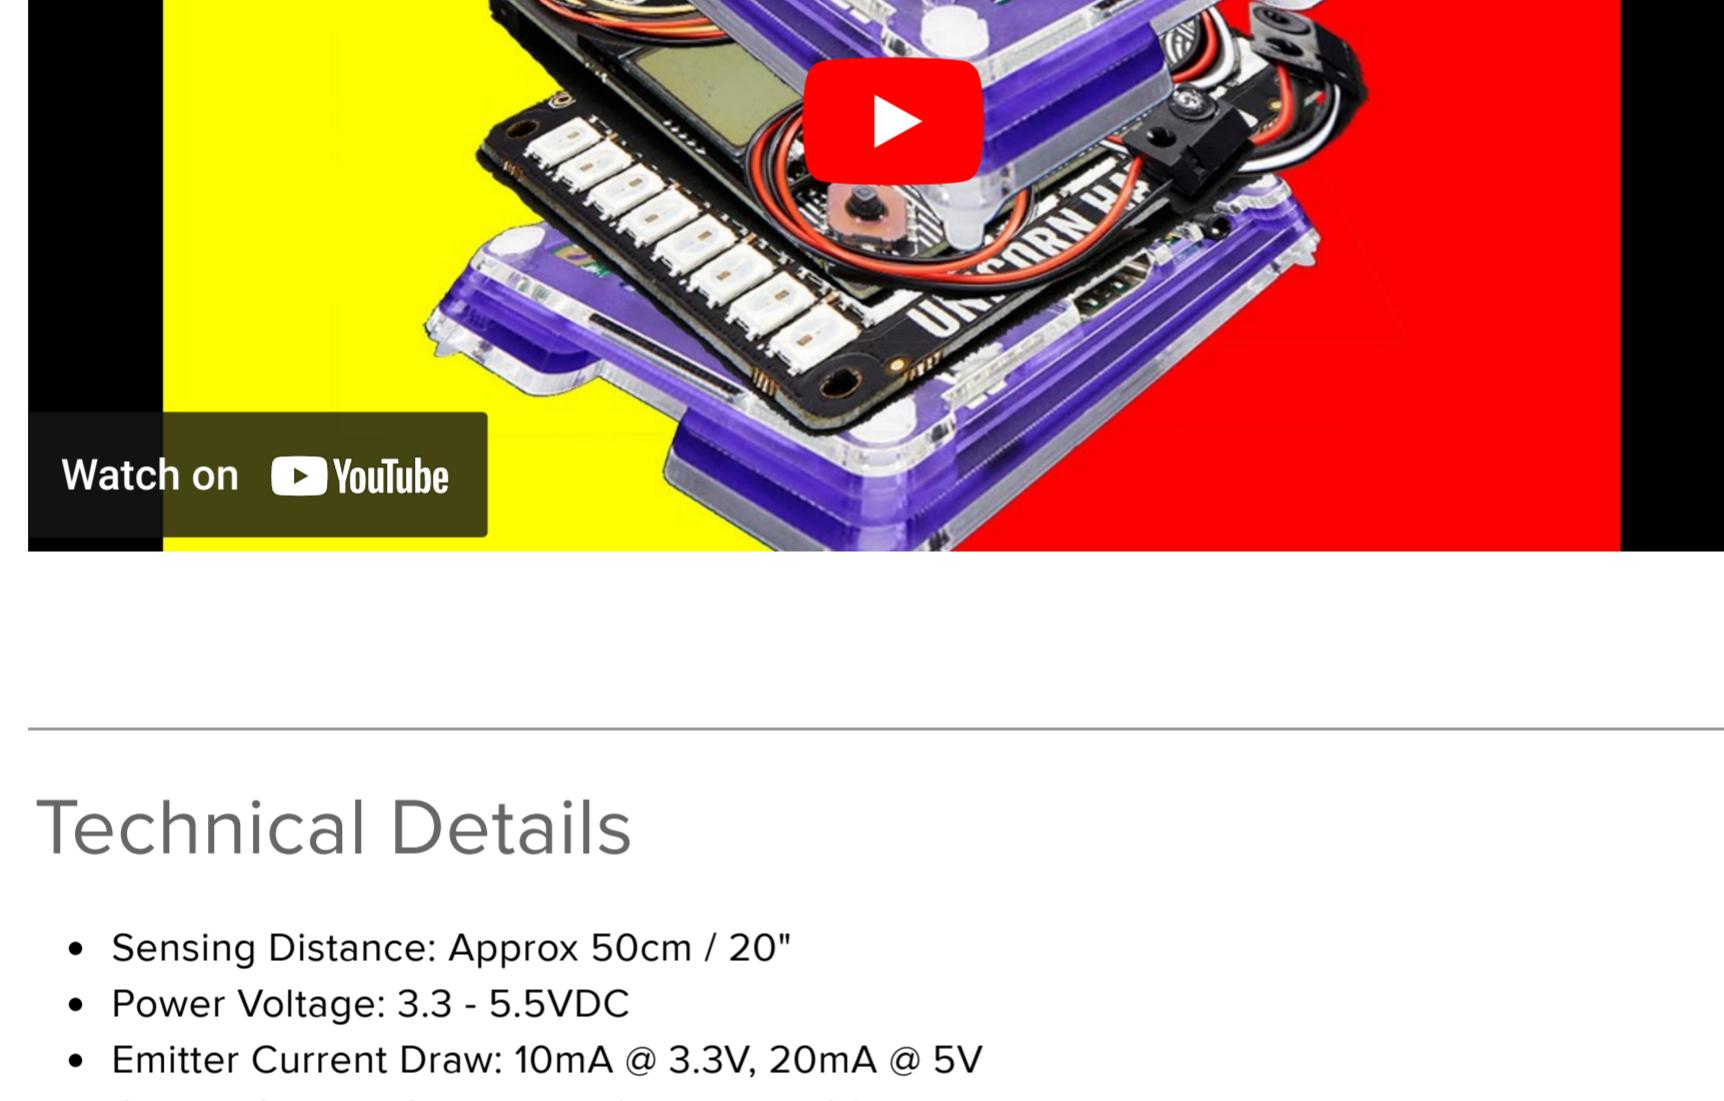

Technical Details

- Sensing Distance: Approx 50cm / 20"
- Power Voltage: 3.3 - 5.5VDC
- Emitter Current Draw: 10mA @ 3.3V, 20mA @ 5V
- Output Current Capability of receiver: 100mA sink
- Transmitter/Receiver LED Angle: 10°
- Response Time: <2 ms
- Dimensions: 20mm x 10mm x 8mm / 0.8" x 0.4" x 0.3"
- Cable Length: 250mm / 10"
- Weight (of each half): 3g

Revision History:

- As of May 28, 2021 we now have these with premium wire ends for easy breadboarding.

[Datasheet](#)

Learn

