

LA66 AT Command Sets

Version	Describe	Author	Time
V1.0	Release	Dragino	2022-12-12

LA66 AT Command Sets	1
1. Introduction	4
1.1 How to connect device and send AT command?	4
2. General Command	6
2.1 AT?: Short Help	6
2.2 ATZ: MCU Reset	6
2.3 AT+FDR: Factory Data Reset	6
2.4 AT+VER: Image Version and Frequency Band	7
2.5 AT+CFG: Print all configurations	7
3. Keys, IDs and EUIs management	8
3.1 AT+APPEUI: Application EUI	8
3.2 AT+APPKEY: Application Key	8
3.3 AT+APPSKEY: Application Session Key	9
3.4 AT+DADDR: Device Address	9
3.5 AT+DEUI: Device EUI	10
3.6 AT+NWKID: Network ID(You can enter this command change only after successful network connection)	10
3.7 AT+NWKSKEY: Network Session Key	10
3.8 AT+APPSKEY: Get or Set the Application Session Key	11
4. Joining and sending data on LoRa® network	12
4.1 AT+CFM: Confirm Mode	12
4.2 AT+JOIN: Join LoRa® Network	12
4.3 AT+NJM: LoRa® Network Join Mode	13
4.4 AT+NJS: LoRa® Network Join Status	13
4.5 AT+RECV: Print Last Received Data in Raw Format	14
4.6 AT+RECVB: Print Last Received Data in Binary Format	14
4.7 AT+SEND: Send Text Data	14
5. LoRa® network management	15
5.1 AT+ADR: Adaptive Rate	15
5.2 AT+CLASS: LoRa® Class(Currently only support class A, class C)	15
5.3 AT+DCS: Duty Cycle Setting	16
5.4 AT+DR: Data Rate (Can Only be Modified after ADR=0)	16
5.5 AT+FCD: Frame Counter Downlink	17
5.6 AT+FCU: Frame Counter Uplink	17
5.7 AT+JN1DL: Join Accept Delay1	18
5.8 AT+JN2DL: Join Accept Delay2	18
5.9 AT+PNM: Public Network Mode	18
5.10 AT+RX1DL: Receive Delay1	19
5.11 AT+RX2DL: Receive Delay2	19
5.12 AT+RX2DR: Rx2 Window Data Rate	20
5.13 AT+RX2FQ: Rx2 Window Frequency	20
5.14 AT+TXP: Transmit Power	21

5.15	AT+RSSI: RSSI of the Last Received Packet	21
5.16	AT+SNR: SNR of the Last Received Packet	21
5.17	AT+PORT: Application Port	22
5.18	AT+ CHS: Single Channel Mode	22
5.19	AT+ CHE: Eight Channel Mode	22
5.20	AT+SLEEP: Set sleep mode	24
5.21	AT+DEVICETIMEREQ: Device time req	24
5.22	AT+BAT: Get the current battery voltage in Mv	24
5.23	AT+RJTDC: Get or set the ReJoin data transmission interval in min	25
5.24	AT+RPL: Get or set response level	25
5.25	AT+TIMESTAMP: Get or Set UNIX timestamp in second	26
5.26	AT+LEAPSEC: Get or Set Leap Second	26
5.27	AT+SYNCMOD: Get or Set time synchronization method	26
5.28	AT+SYNCTDC: Get or Set time synchronization method	27
5.29	AT+DDETECT: Get or set the downlink detection	27
5.30	AT+SETMAXNBTRANS: Get or set the max nbtrans in LinkADR	27
5.31	AT+SENDB: Send hexadecimal data along with the application port and confirm status	28

1. Introduction

This article describes the AT Commands Set for LA66 module.


1.1 How to connect device and send AT command?

Software Setting:

An USB-TTL can be used with standard windows software such as Serial Port Utility. The chosen software should be configured with the following parameters:

- Baud rate: 9600
- Data: 8 bit
- Parity: none
- Stop: 1 bit
- Flow type: none

Figure 1 show the standard configuration for Serial Port Utility to use USB-TTL.

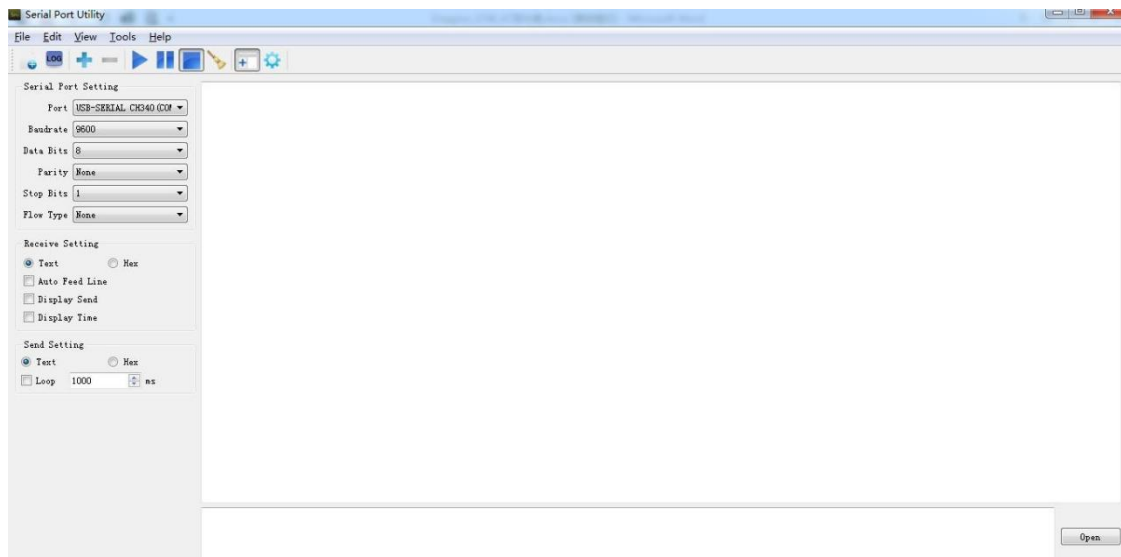

All the AT commands have a standard format as “AT+XXX”, with XXX denoting the command.

There are four available command behaviors:

- **AT+XXX?** provides a short help of the given command, for example **AT?**
- **AT+XXX** is used to run a command, such as **AT+JOIN**
- **AT+XXX=?** is used to get the value of a given command, for example, **AT+VER=?**
- **AT+XXX=<value>** is used to provide a value to a command, for example, **AT+NJM=1**
- The output of the commands is provided on the UART. The output format is as below:

<value><CR><LF>

<CR><LF><Status>

Note: <CR> stands for “carriage return” and <LF> stands for “line feed”

The <value><CR><LF> output is returned whenever the “help AT+XXX?” or the “get

AT+XXX=?” commands are run.

When no value is returned, the <value><CR><LF> output is not returned at all.

Every command (except for ATZ used for MCU reset) returns a status string, which is preceded and followed by <CR><LF> in a “<CR><LF><Status>” format. The possible status are:

- OK: command run correctly without error.
- AT_ERROR: generic error
- AT_PARAM_ERROR: a parameter of the command is wrong
- AT_BUSY_ERROR: the LoRa® network is busy, so the command could not completed
- AT_TEST_PARAM_OVERFLOW: the parameter is too long
- AT_NO_NETWORK_JOINED: the LoRa® network has not been joined yet
- AT_RX_ERROR: error detection during the reception of the command

More details on each command description and examples are described in the next part of this section. Note that each command preceded by # is the one provided by the host to the module. Then the return of the module is printed.

2. General Command

2.1 AT?: Short Help

AT?: Short Help	
Test Command: AT?	Response: AT+<CMD>?:help on <CMD> AT+<CMD>:run <CMD> AT+<CMD>=<value>:set the value AT+<CMD>=? :get the value <followed by the help of all commands> OK

2.2 ATZ: MCU Reset

ATZ: MCU Reset	
Test Command: ATZ?	Response: ATZ: Trig a reset of the MCU OK
Test Command: ATZ	Response: LA66 Device Image Version: v1.1 LoRaWan Stack: DR-LWS-007 Frequency Band: US915 DevEui= 70 B3 D5 7E D0 05 30 EE JoinRequest NbTrials= 72 ***** UpLinkCounter= 0 ***** TX on freq 905.300 MHz at DR 0 txDone

2.3 AT+FDR: Factory Data Reset

AT+FDR: Factory Data Reset	
Test Command:	Response:
AT+FDR	LA66 Device Image Version: v1.1 LoRaWan Stack: DR-LWS-007

	Frequency Band: US915 DevEui= XX XX XX XX XX XX XX XX Please set the parameters or reset Device to apply change
Test Command: AT+FDR?	Response: Reset Parameters to Factory Default, Keys Reserve OK

2.4 AT+VER: Image Version and Frequency Band

AT+VER: Image Version and Frequency Band	
Test Command: AT+VER=?	Response: 1.3 EU868 OK
Test Command: AT+VER?	Response: AT+VER: Get current image version and Frequency Band OK

2.5 AT+CFG: Print all configurations

AT+CFG: Print all configurations	
Test Command: AT+CFG	Response: AT+DEUI = XX XX XX XX XX XX XX XX AT+APPEUI=XXXXXXXX AT+SETMAXNBTRANS=X,X OK

3. Keys, IDs and EUIs management

3.1 AT+APPEUI: Application EUI

AT+APPEUI: Application EUI <8 hex separated by >	
Test Command: AT+APPEUI?	Response: AT+APPEUI: Get or Set the Application EUI OK
Test Command: AT+APPEUI=?	Response: XX XX XX XX XX XX XX XX OK
Test Command: AT+APPEUI=01 30 48 23 54 76 53 CD	Response: OK

3.2 AT+APPKEY: Application Key

AT+APPKEY: Application Key <16 hex separated by >	
Test Command: AT+APPKEY?	Response: AT+APPKEY: Get or Set the Application Key OK
Test Command: AT+APPKEY=?	Response: XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX OK
Test Command: AT+APPKEY= XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX	Response: OK

3.3 AT+APPSKEY: Application Session Key

AT+APPSKEY: Application Session Key <16 hex separated by >	
Test Command: AT+APPSKEY?	Response: AT+APPSKEY: Get or Set the Application Session Key OK
Test Command: AT+APPSKEY=?	Response: XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX OK
Test Command: AT+APPSKEY= XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX	Response:(While Error in format, return AT_PARAM_ERROR) OK

3.4 AT+DADDR: Device Address

AT+DADDR: Device Address <4 hex digit separate by >	
Test Command: AT+DADDR?	Response: AT+DADDR: Get or Set the Device Address OK
Test Command: AT+DADDR=?	Response: (While Error in format, return AT_PARAM_ERROR) XX XX XX XX OK
Test Command: AT+DADDR=XX XX XX XX	Response: OK

3.5 AT+DEUI: Device EUI

AT+DEUI: Device EUI<8 hex separated by:>	
Test Command: AT+DEUI?	Response: AT+DEUI: Get or Set the Device EUI OK
Test Command: AT+DEUI=?	Response: XX XX XX XX XX XX XX XX OK
Test Command: AT+DEUI= XX XX XX XX XX XX XX XX	Response:(System will write new value to Device EUI,While Error in format, return AT_PARAM_ERROR) OK

3.6 AT+NWKID: Network ID(You can enter this command change only after successful network connection)

AT+NWKID: Network ID<4 hex separated by:>	
Test Command: AT+NWKID?	Response: AT+NWKID: Get or Set the Network ID OK
Test Command: AT+NWKID=?	Response: XX XX XX XX OK
Test Command: AT+NWKID=A8 40 41 FF	Response: OK

3.7 AT+NWKSKEY: Network Session Key

AT+NWKSKEY: Network Session Key<16 hex separated by:>	
Test Command: AT+NWKSKEY?	Response: AT+NWKSKEY: Get or Set the Network Session Key OK
Test Command: AT+NWKSKEY=?	Response: XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX

	OK
Test Command: AT+NWKEY= XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX XX	Response: OK

3.8 AT+APPSKEY: Get or Set the Application Session Key

AT+APPSKEY: Application Session Key <16 hex separated by:>	
Test Command: AT+APPSKEY?	Response: AT+APPSKEY: Get or Set the Application Session Key OK
Test Command: AT+APPSKEY=?	Response: FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF OK
Test Command: AT+APPSKEY= FF FF FF FF FF FF FF FF FF FF FF FF FF FF FF	Response: OK

4. Joining and sending data on LoRa® network

4.1 AT+CFM: Confirm Mode

AT+CFM: Confirm Mode	
Test Command: AT+CFM?	Response: AT+CFM: Get or Set the confirmation mode (0-1) OK
Test Command: AT+CFM=?	Response(confirm status, max retries, uplink fcmt increase status) 0,7,0 OK
Test Command: AT+CFM=1,7,1	Response: OK
Test Command: AT+CFM=2	While Error in format, return AT_PARAM_ERROR

4.2 AT+JOIN: Join LoRa® Network

AT+ JOIN: Join LoRa® Network	
Test Command: AT+JOIN	Response: OK
Test Command: AT+ JOIN?	Response: AT+JOIN: Join network OK
	While Error in format, return AT_BUSY_ERROR

4.3 AT+NJM: LoRa® Network Join Mode

AT+ NJM: LoRa® Network Join Mode	
Test Command: AT+NJM=?	Response: 1 OK
Test Command: AT+NJM?	Response: AT+NJM: Get or Set the Network Join Mode. (0: ABP, 1: OTAA) OK
Test Command: AT+NJM=0	Response: OK
Test Command: AT+NJM=2	While Error in format, return AT_PARAM_ERROR

4.4 AT+NJS: LoRa® Network Join Status

AT+ NJS: LoRa® Network Join Status	
Test Command: AT+NJS=?	Response: 0 OK
Test Command: AT+NJS?	Response: AT+NJS: Get the join status OK

4.5 AT+RECV: Print Last Received Data in Raw Format

AT+ RECV: Print Last Received Data in Raw Format<port:data>	
Test Command: AT+RECV=?	Response: 0: OK
Test Command: AT+RECV?	Response: AT+RECV: print last received data in raw format OK

4.6 AT+RECVB: Print Last Received Data in Binary Format

AT+ RECVB: Print Last Received Data in Binary Format<port:data>	
Test Command: AT+RECVB=?	Response: 2: 0010 OK
Test Command: AT+RECVB?	Response: AT+RECVB: print last received data in binary format (with hexadecimal values) OK

4.7 AT+SEND: Send Text Data

AT+ SEND: Send Text Data<port:data>	
Test Command: AT+SEND?	Response: AT+SEND: Send text data along with the application port OK
Test Command: AT+SEND=0,2,5,happy	Response: OK
	While Error in format, return AT_BUSY_ERROR/AT_PARAM_ERROR/AT_NO_NETWORK_J OI NED

5. LoRa® network management

5.1 AT+ADR: Adaptive Rate

AT+ ADR: Adaptive Rate	
Test Command: AT+ADR=?	Response: 1 OK
Test Command: AT+ADR?	Response: AT+ADR: Get or Set the Adaptive Data Rate setting. (0: off, 1: on) OK
Test Command: AT+ADR=0	Response: OK
	While Error in format, return AT_PARAM_ERROR

5.2 AT+CLASS: LoRa® Class(Currently only support class A, class C)

AT+ CLASS: LoRa® Class	
Test Command: AT+CLASS=?	Response: A OK

Test Command: AT+CLASS?	Response: AT+CLASS: Get or Set the Device Class OK
Test Command: AT+CLASS=A	Response: OK
	While Error in format, return AT_PARAM_ERROR

5.3 AT+DCS: Duty Cycle Setting

AT+ DCS: Duty Cycle Setting	
Test Command: AT+DCS?	Response: AT+DCS: Get or Set the ETSI Duty Cycle setting - 0=disable, 1=enable - Only for testing OK
Test Command: AT+DCS=?	Response: 1 OK
Test Command: AT+DCS=1	Response: OK
	While Error in format, return AT_PARAM_ERROR

5.4 AT+DR: Data Rate (Can Only be Modified after ADR=0)

AT+DR: Data Rate	
Test Command: AT+DR=?	Response: 5 OK
Test Command: AT+DR?	Response: Get or Set the Data Rate. (0-7 corresponding to DR_X) OK
Test Command: AT+DR=2	Response: Attention:Take effect after AT+ADR=0

	OK
	While Error in format, return AT_PARAM_ERROR

5.5 AT+FCD: Frame Counter Downlink

AT+ FCD: Frame Counter Downlink	
Test Command: AT+FCD=?	Response: 0 OK
Test Command: AT+FCD?	Response: AT+FCD: Get or Set the Frame Counter Downlink OK
Test Command: AT+FCD=10	Response:(System will write new value to FCD) OK
	While Error in format, return AT_PARAM_ERROR

5.6 AT+FCU: Frame Counter Uplink

AT+ FCU: Frame Counter Uplink	
Test Command: AT+FCU=?	Response: 0 OK
Test Command: AT+FCU?	Response: AT+FCU: Get or Set the Frame Counter Uplink OK
Test Command: AT+FCU=10	Response: OK
	While Error in format, return AT_PARAM_ERROR

5.7 AT+JN1DL: Join Accept Delay1

AT+ JN1DL: Join Accept Delay1	
Test Command: AT+JN1DL=?	Response: 5000 OK
Test Command: AT+JN1DL?	Response: AT+JN1DL: Get or Set the Join Accept Delay between the end of the Tx and the Join Rx Window 1 in ms OK
Test Command: AT+JN1DL=10000	Response: OK
	While Error in format, return AT_PARAM_ERROR/AT_BUSY_ERROR

5.8 AT+JN2DL: Join Accept Delay2

AT+ JN2DL: Join Accept Delay2	
Test Command: AT+JN2DL=?	Response: 6000 OK
Test Command: AT+JN2DL?	Response: AT+JN2DL: Get or Set the Join Accept Delay between the end of the Tx and the Join Rx Window 2 in ms OK
Test Command: AT+JN2DL=20000	Response: OK
	While Error in format, return AT_PARAM_ERROR/AT_BUSY_ERROR

5.9 AT+PNM: Public Network Mode

AT+ PNM: Public Network Mode	
Test Command: AT+PNM=?	Response: 1

	OK
Test Command: AT+PNM?	Response: AT+PNM: Get or Set the public network mode. (0: off, 1: on) OK
Test Command: AT+PNM=1	Response:(System will write new value to PNM) OK
	While Error in format, return AT_PARAM_ERROR/AT_BUSY_ERROR

5.10 AT+RX1DL: Receive Delay1

AT+ RX1DL: Receive Delay1	
Test Command: AT+RX1DL=?	Response: 1000 OK
Test Command: AT+RX1DL?	Response: AT+RX1DL: Get or Set the delay between the end of the Tx and the Rx Window 1 in ms OK
Test Command: AT+RX1DL=1500	Response: OK
	While Error in format, return AT_BUSY_ERROR/AT_PARAM_ERROR

5.11 AT+RX2DL: Receive Delay2

AT+ RX2DL: Receive Delay2	
Test Command: AT+RX2DL=?	Response: 2000 OK
Test Command: AT+RX2DL?	Response: AT+RX2DL: Get or Set the delay between the end of the Tx and the Rx Window 2 in ms

	OK
Test Command: AT+RX2DL=2500	Response: OK
	While Error in format, return AT_BUSY_ERROR/AT_PARAM_ERROR

5.12 AT+RX2DR: Rx2 Window Data Rate

AT+ RX2DR: Rx2 Window Data Rate	
Test Command: AT+RX2DR=?	Response: OK
Test Command: AT+RX2DR?	Response: AT+RX2DR: Get or Set the Rx2 window data rate (0-7 corresponding to DR_X) OK
Test Command: AT+RX2DR=6	Response: OK
	Response: While Error in format, return AT_PARAM_ERROR

5.13 AT+RX2FQ: Rx2 Window Frequency

AT+ RX2FQ: Rx2 Window Frequency	
Test Command: AT+RX2FQ=?	Response: 434665000 OK
Test Command: AT+RX2FQ?	Response: AT+RX2FQ: Get or Set the Rx2 window frequency OK
Test Command: AT+RX2FQ=434665000	Response: OK
	While Error in format, return AT_BUSY_ERROR / AT_BUSY_ERROR

5.14 AT+TXP: Transmit Power

AT+ TXP: Transmit Power	
Test Command: AT+TXP=?	Response: 0 OK
Test Command: AT+TXP?	Response: AT+TXP: Get or Set the Transmit Power (0-5, MAX:0, MIN:5, according to LoRaWAN Spec) OK
Test Command: AT+ TXP=1	Response: OK
	While Error in format, return AT_PARAM_ERROR

5.15 AT+RSSI: RSSI of the Last Received Packet

AT+ RSSI: RSSI of the Last Received Packet	
Test Command: AT+RSSI=?	Response: 0 OK
Test Command: AT+RSSI?	Response: AT+RSSI: Get the RSSI of the last received packet OK

5.16 AT+SNR: SNR of the Last Received Packet

AT+ SNR: SNR of the Last Received Packet	
Test Command: AT+SNR=?	Response: 0 OK
Test Command: AT+SNR?	Response: AT+SNR: Get the SNR of the last received packet OK

5.17 AT+PORT: Application Port

AT+PORT: Application Port	
Test Command: AT+PORT=21	Response: OK
Test Command: AT+PORT?	Response: AT+PORT: Get or set the application port OK
Test Command: AT+PORT=?	Response: 21 OK

5.18 AT+ CHS: Single Channel Mode

AT+ CHS: Single Channel Mode	
Test Command: AT+ CHS=?	Response: 0 OK
Test Command: AT+ CHS?	Response: AT+CHS: Get or Set Frequency (Unit: Hz) for Single Channel Mode OK
Test Command: AT+ CHS=868100000	Response: OK

5.19 AT+ CHE: Eight Channel Mode

AT+ CHE: Eight Channel Mode	
Test Command: AT+ CHE=?	Response: 1 902.3 902.5 902.7 902.9 903.1 903.3 903.5 903.7 OK
Test Command: AT+ CHE?	Response: AT+CHE: Get or Set eight channels mode,Only for US915,AU915,CN470

	OK
Test Command: AT+ CHE=1	Response: OK

CHE	CN470 Uplink Channels(125KHz,4/5,Unit:MHz,CHS=0)								
0	ENABLE Channel 80-95								
11	486.3	486.5	486.7	486.9	487.1	487.3	487.5	487.7	Channel 80-87
12	487.9	488.1	488.3	488.5	488.7	488.9	489.1	489.3	Channel 88-95

CHE	US915 Uplink Channels(125KHz,4/5,Unit:MHz,CHS=0)								
0	ENABLE Channel 0-63								
1	902.3	902.5	902.7	902.9	903.1	903.3	903.5	903.7	Channel 0-7
2	903.9	904.1	904.3	904.5	904.7	904.9	905.1	905.3	Channel 8-15
3	905.5	905.7	905.9	906.1	906.3	906.5	906.7	906.9	Channel 16-23
4	907.1	907.3	907.5	907.7	907.9	908.1	908.3	908.5	Channel 24-31
5	908.7	908.9	909.1	909.3	909.5	909.7	909.9	910.1	Channel 32-39
6	910.3	910.5	910.7	910.9	911.1	911.3	911.5	911.7	Channel 40-47
7	911.9	912.1	912.3	912.5	912.7	912.9	913.1	913.3	Channel 48-55
8	913.5	913.7	913.9	914.1	914.3	914.5	914.7	914.9	Channel 56-63

CHE	AU915 Uplink Channels(125KHz,4/5,Unit:MHz, CHS=0)								
0	ENABLE Channel 0-63								
1	915.2	915.4	915.6	915.8	916	916.2	916.4	916.6	Channel 0-7
2	916.8	917	917.2	917.4	917.6	917.8	918	918.2	Channel 8-15
3	918.4	918.6	918.8	919	919.2	919.4	919.6	919.8	Channel 16-23
4	920	920.2	920.4	920.6	920.8	921	921.2	921.4	Channel 24-31
5	921.6	921.8	922	922.2	922.4	922.6	922.8	923	Channel 32-39
6	923.2	923.4	923.6	923.8	924	924.2	924.4	924.6	Channel 40-47
7	924.8	925	925.2	925.4	925.6	925.8	926	926.2	Channel 48-55
8	926.4	926.6	926.8	927	927.2	927.4	927.6	927.8	Channel 56-63

5.20 AT+SLEEP: Set sleep mode

AT+SLEEP: Set sleep mode(1:Enable,0:Disable)	
Test Command: AT+ SLEEP=?	Response: 1 OK
Test Command: AT+ SLEEP?	Response: Set sleep mode OK
Test Command: AT+ SLEEP	Response: OK

5.21 AT+DEVICETIMEREQ: Device time req

AT+DEVICETIMEREQ: Device time req	
Test Command: AT+DEVICETIMEREQ=?	Response: AT_PARAM_ERROR OK
Test Command: AT+DEVICETIMEREQ?	Response: Device time req OK
Test Command: AT+DEVICETIMEREQ=1	Response: Sync time ok OK

5.22 AT+BAT: Get the current battery voltage in Mv

AT+BAT: Get the current battery voltage in mV	
Test Command: AT+BAT=?	Response: 3329 OK
Test Command: AT+BAT?	Response: AT+BAT: Get the current battery voltage in Mv OK

Test Command: AT+BAT=1	Response: AT_PARAM_ERROR OK
----------------------------------	---

5.23 AT+RJTDC: Get or set the ReJoin data transmission interval in min

AT+RJTDC: Get or set the ReJoin data transmission interval in min	
Test Command: AT+RJTDC=?	Response: 20 OK
Test Command: AT+RJTDC?	Response: Get or set the ReJoin data transmission interval in min OK
Test Command: AT+RJTDC=20	Response: OK

5.24 AT+RPL: Get or set response level

AT+RPL: Get or set response level	
Test Command: AT+RPL=?	Response: 0 OK
Test Command: AT+RPL?	Response: Get or set response level OK
Test Command: AT+RPL=0	Response: OK

5.25 AT+TIMESTAMP: Get or Set UNIX timestamp in second

AT+TIMESTAMP: Get or Set UNIX timestamp in second	
Test Command: AT+TIMESTAMP=?	Response: systime= 1970/1/1 00:17:36 (1056) OK
Test Command: AT+TIMESTAMP?	Response: Get or Set UNIX timestamp in second OK
Test Command: AT+TIMESTAMP=1670806785	Response: OK

5.26 AT+LEAPSEC: Get or Set Leap Second

AT+LEAPSEC: Get or Set Leap Second	
Test Command: AT+LEAPSEC=?	Response: 18 OK
Test Command: AT+LEAPSEC?	Response: Get or Set Leap Second OK
Test Command: AT+LEAPSEC=3	Response: OK

5.27 AT+SYNCMOD: Get or Set time synchronization method

AT+LEAPSEC: Get or Set Leap Second	
Test Command: AT+SYNCMOD=?	Response: 0 OK
Test Command: AT+SYNCMOD?	Response: Get or Set time synchronization method OK
Test Command: AT+SYNCMOD=1	Response: OK

5.28 AT+SYNCTDC: Get or Set time synchronization interval in day

AT+SYNCTDC: Get or Set time synchronization method	
Test Command: AT+SYNCTDC=?	Response: 20 OK
Test Command: AT+SYNCTDC?	Response: Get or Set time synchronization interval in day OK
Test Command: AT+SYNCTDC=20	Response: OK

5.29 AT+DDETECT: Get or set the downlink detection

AT+DDETECT: Get or set the downlink detection	
Test Command: AT+DDETECT=?	Response: 0,1440,2880 OK
Test Command: AT+DDETECT?	Response: Get or set the downlink detection OK
Test Command: AT+SYNCTDC=1,1440,2880	Response: OK

5.30 AT+SETMAXNBTRANS: Get or set the max nbtrans in LinkADR

AT+SETMAXNBTRANS: Get or set the max nbtrans in LinkADR	
Test Command: AT+SETMAXNBTRANS=?	Response: 1,0 OK
Test Command: AT+SETMAXNBTRANS?	Response: Get or set the max nbtrans in LinkADR OK

Test Command: AT+SETMAXNBTRANS=1,1	Response: OK
--	----------------------------

5.31 AT+SENDB: Send hexadecimal data along with the application port and confirm status

AT+SENDB= Send hexadecimal data along with the application port and confirm status	
Test Command: AT+SENDB=?	Response: AT_PARAM_ERROR
Test Command: AT+SENDB?	Response: Send hexadecimal data along with the application port and confirm status OK
Test Command: AT+SENDB=0,2,4,11223344	Response: ***** UpLinkCounter= 1 ***** TX on freq 904.100 MHz at DR 3 OK