


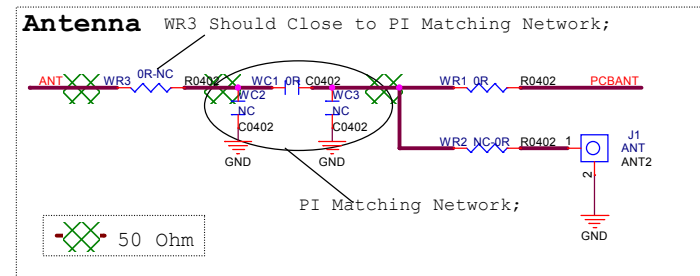





VCC-BAT: 2.7V~5.5V 600mA
VDD-3V3: Supply PA, IO and Flash.
2.7V~3.5V 400mA
VDD25-EF: Supply Key,
2.4V~2.6V 40mA

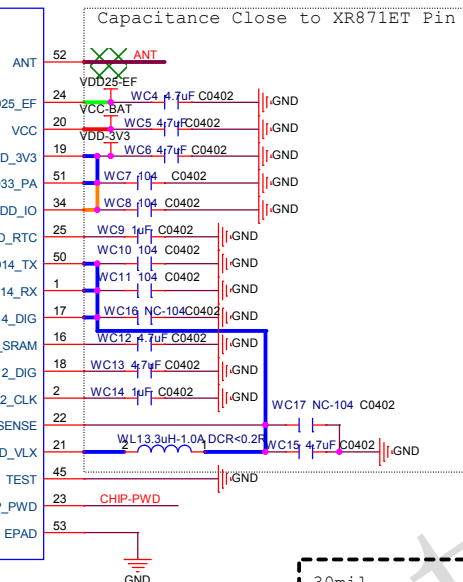

FLASH

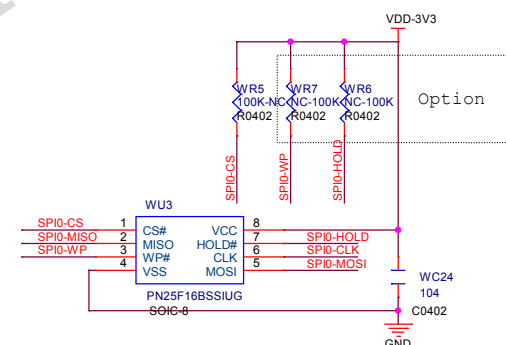

CLK



Key power supply

VDD25-EF

CHIP RESET

