REOLINK TECHNOLOGY PTE.LTD.
3 TAI SENG AVENUE,#07-31,TAI SENG EXCHANGE,SINGAPORE 536465

RECICLA
Al Azul

PAP 22
Raccolta Carta

FR
Cet appareil, ses accessoires et cordons se recyclent

À DÉPOSER EN MAGASIN

OU

À DÉPOSER EN DÉCHÈTERIE

Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !


58.03.009.0076

Reolink

EN/DE/FR/IT/ES
Item No. : P952

OMVI X16 PoE

Operational Instructions

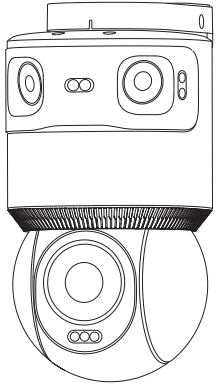

@ReolinkTech https://reolink.com

EN

Contents

01 What's in the Box ····· 02
02 Device Overview ····· 03
03 Initial Setup ····· 05
04 Maintenance Guidelines ····· 11
05 Install the Camera ····· 12
06 Specifications ····· 23
07 Important Safety Instructions ····· 23
08 Troubleshooting ····· 24
09 Legal Disclaimer ····· 25
10 Notification of Compliance ····· 26

01 What's in the Box


Camera


Mounting Bracket
(Pre-installed)


Mounting Template


1m Ethernet Cable


PoE Injector


Power Cord
(for PoE Injector)


Pack of Screws


Waterproof Lid




Surveillance Sticker




Operational Instructions

NOTE:
Mounting bracket compatible with C-type holes on Reolink D20 and RLA-JBL1 junction boxes (junction box sold separately; wall-mount only).

What You Also Need *Not Included*



#1 & #2 PH Screwdrivers




Power Drill



Ladder
(If Necessary)

02 Device Overview

❶❹ Lens
❷❸❼ Dual-Light LEDs (Spotlight & IR)
❺❻ Infrared LEDs
❽ Microphone
❾ LAN Port
❿ Power Port
⓫ Bracket Screws
⓬ Mounting Bracket
⓭ Mounting Base
⓮ Reset Button
⓯ microSD Card Slot
⓰ Speaker

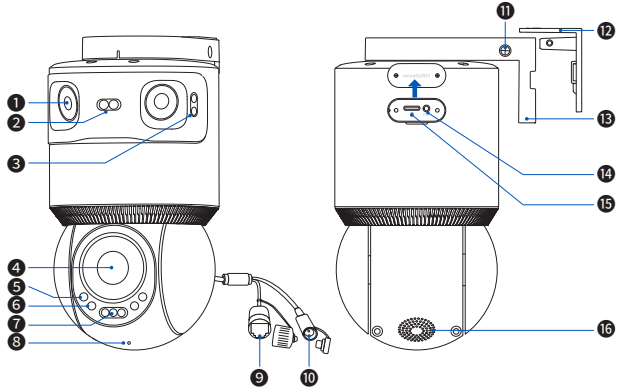

03 Initial Setup

Step 1. Download the Reolink App or Client

• **On Smartphone**

Download on the App Store

GET IT ON Google Play


• **On PC**

Download the Reolink Client: Go to https://reolink.com > Support > Download Center > App & Client.

NOTE:
To connect the camera to a Reolink PoE NVR, use the NVR interface for setup.

Step 2. Insert the microSD Card (Optional)

Rotate the bracket to expose the microSD slot. Use a #1 Phillips screwdriver to open the cover, insert the card (sold separately), and secure the cover back in place.

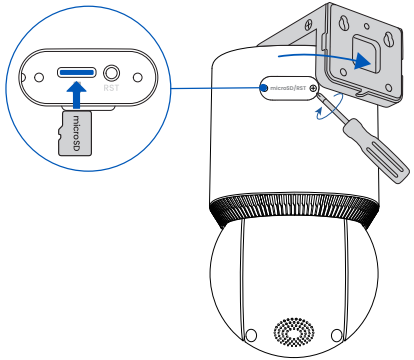


NOTE:
It is recommended to use a Class 10, 512GB microSD card for video storage.

Step 3. Power on the Camera

1. Connect the camera to a PoE injector with an Ethernet cable.
2. Power on the PoE injector and connect it to your router.

NOTE:
When powered on, the PT lens will rotate. If the camera does not respond, reset it and cover the lens to trigger night mode. If the lights still remain off, contact Reolink Support.

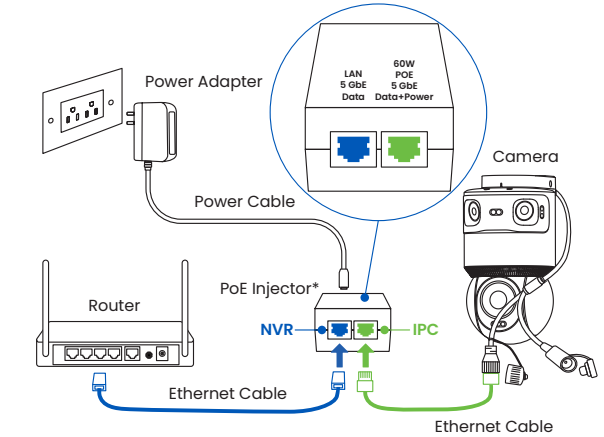


To Router/NVR: Data Only

To IP Camera: PoE (Data + Power)

NOTE:
The camera can also be powered via a PoE switch, a 12V/3A DC adapter, or a Reolink PoE NVR.
(Sold separately)


Step 4. Initialize the Camera

Tap the "+" button in the top corner, scan the camera's QR code, and follow the on-screen instructions to complete the setup.

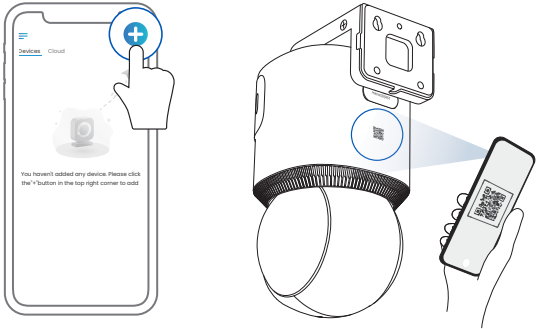

Step 5. Disconnect the Ethernet Cable Before Installation

For easier installation, it is recommended to disconnect the camera's Ethernet cable before starting. Reconnect them according to the instructions during installation.

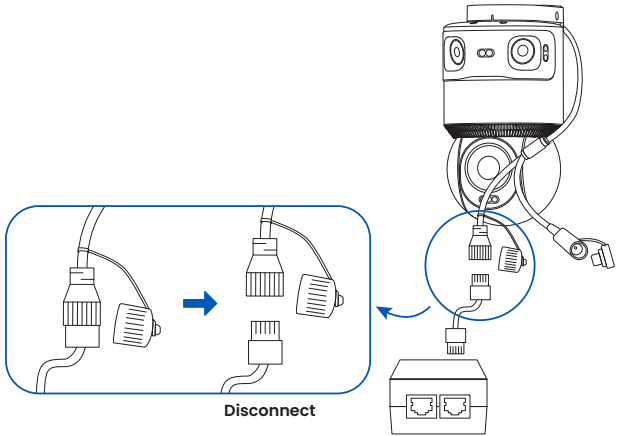

04 Maintenance Guidelines

Tip 1. Mounting for Optimal Image Quality

Ensure both the camera location and the monitored area are evenly lit.

Avoid pointing at light sources or directly at windows to prevent flare and overexposure.

Avoid installing in deep shade; position the camera to face a well-lit zone.

Tip 2. Protecting Your Camera

Keep the LAN Port and power port dry and free from dirt/debris to maintain its resistance.


Tip 3. Regular Maintenance

Periodically clean the lens gently with a soft cloth.

05 Install the Camera

Step 1. Choose a Mounting Location

Recommended installation height:
3 m (9.8 ft) or higher.

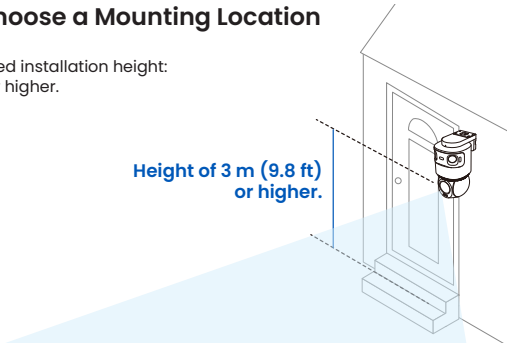


Step 2. Choose a Mounting Option

A Ceiling Mounting

B Wall Mounting


C Corner Mounting (Optional)

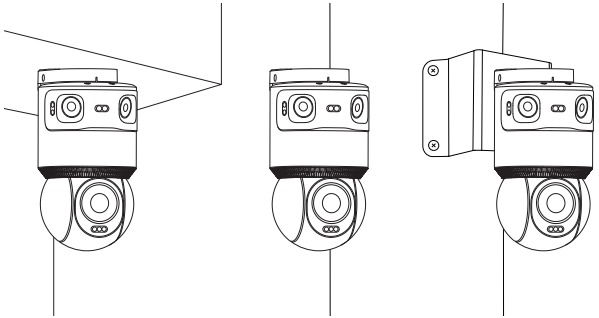

NOTE:
Corner mounting requires the RLA-BKC1 V2.0 corner bracket, sold separately.

Step 3. Secure the Mounting Bracket


1. Loosen the camera's captive screws by turning them counterclockwise. Slide out the bracket as shown.

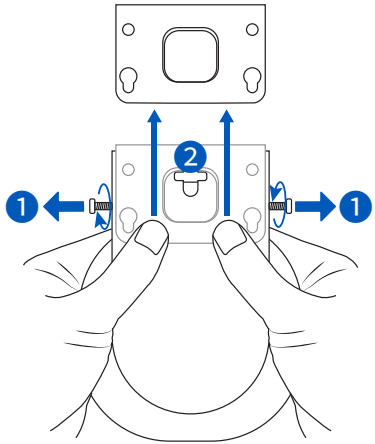


2. Drill holes as indicated in the mounting template. Use included long screws to secure the mounting base.

NOTE:
Use the included drywall anchors if needed.

A Ceiling Mounting

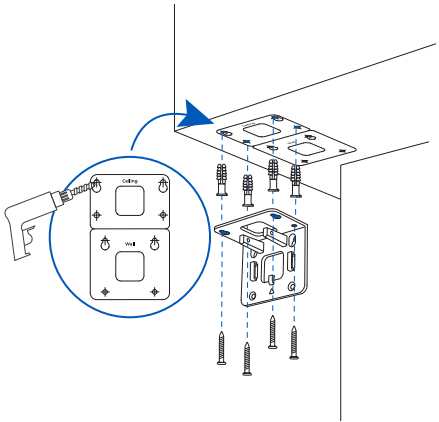


B Wall Mounting

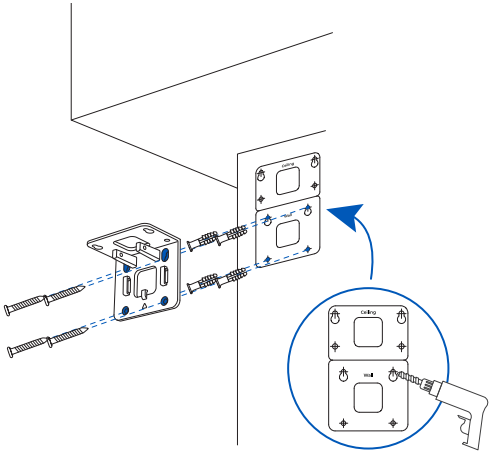


Step 4. Secure the Camera

1. Select a cable routing method based on your installation.


A Top Routing

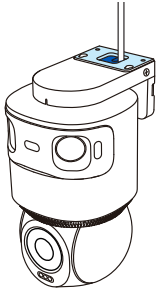


B Side Routing



C Bottom Routing

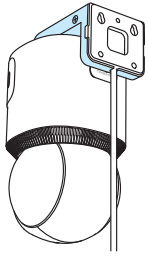


2. Attach the safety tether and pass the cable through the opening. Seat the camera into the bracket, then tighten the screws clockwise.

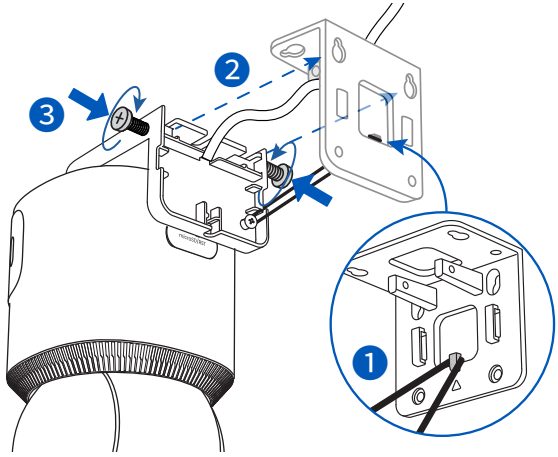

Step 5. Connect the Waterproof Lid and Ethernet Cable

Hang the camera on the mount and connect the Waterproof Lid (refer to next page) and Ethernet cable.

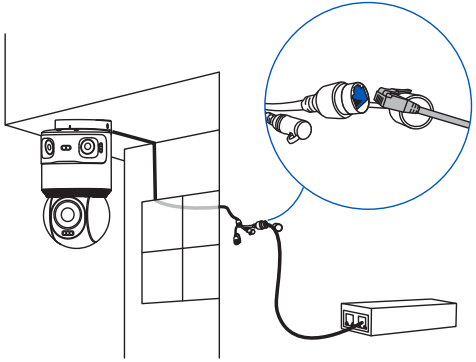

Waterproof Lid Connection

❶ Slide End Cap **A**, O-Ring **C**, and Barrel **D** onto the cable.


❷ Connect the cable to the camera, then tighten **D** securely onto the port.

❸ Open Grommet (**B**), attach it around the cable, then press it firmly into **D**.

** Push it in as far as it will go.*

❹ Slide **C** to the joint, then tighten **A** to seal the connection.


** Do not over-tighten to avoid squeezing out the seal.*

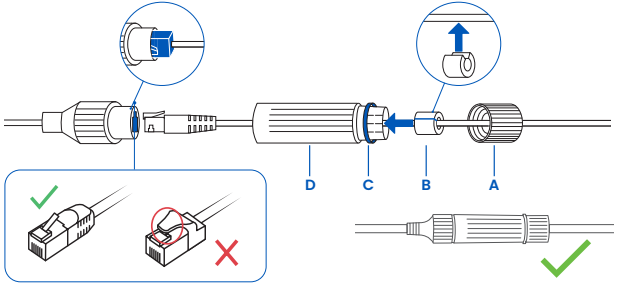

NOTE:
For optimal weatherproofing, use the recommended Ethernet cable shown below.


Step 6: Adjust the Camera Angles

The upper panoramic cam

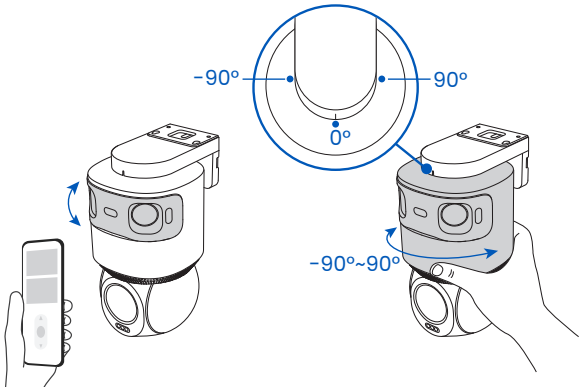

NOTE:
The upper dual-lens module can be panned manually and tilted remotely using the Reolink APP, Client, or NVR.

The lower PT cam

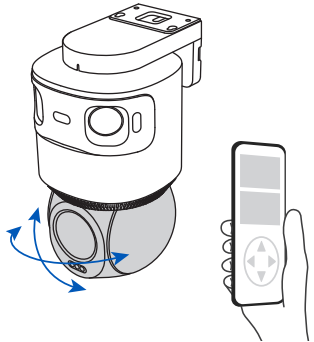

NOTE:
The PTZ lens can be remotely controlled through the Reolink App, Client, or NVR.


06 Specifications

Operating Temperature: -10°C ~+55°C (14°F~131°F)
Operating Humidity: 10%~90%
Weight: 2.85KG
For additional specifications, please visit https://reolink.com/.


07 Important Safety Instructions

Please read the instructions carefully before using the device.

1. Replace only with the same or equivalent type of accessories recommended by Reolink.
2. Do not use the device in an environment that exceeds the recommended temperature range.
3. Do not use the device in an environment that exceeds the recommended humidity range.
4. Do not attempt to disassemble, repair, or alter the device by yourself.
5. Always follow the local safety laws and regulations when using the device.
6. The device contains (or comes with) small components, small plastic elements, and other small parts that may cause choking hazards. Keep the device and its accessories out of reach of children. Consult a physician immediately if small parts are swallowed.
7. The device contains (or comes with) cables or cords that may cause strangulation hazards. Keep the device and its accessories out of reach of child.
8. The product doesn't include assistive features. Customers with disabilities can use devices with assistive features, like computers or smartphones with text-to-speech tools, for accessibility. For individuals with visual or physical impairments, professional help may be needed for installation. Once installed, the product can be controlled entirely via the app.
9. This product contains a light source of energy efficiency class F.



Non-replaceable light source



Non-replaceable control gear

08 Troubleshooting

Camera Doesn't Work Properly When Added to the Reolink NVR or Home Hub

If your Reolink camera isn't working properly after being added to an NVR or Home Hub, please make sure the firmware on your camera, NVR, and Hub is updated to the latest version. If the issue continues after updating, contact Reolink Support at https://support.reolink.com/.

09 Legal Disclaimer

To the maximum extent permitted by applicable law, this document and the product described, with its hardware, software, firmware, and services, are delivered on an "as-is" and "as-available" basis, with all faults and without warranty of any kind. Reolink disclaims all warranties, express or implied, including but not limited to, warranties of merchantability, satisfactory quality, fitness for a particular purpose, accuracy, and non-infringement of third-party rights. In no event will Reolink, its directors, officers, employees, or agents be liable to you for any special, consequential, incidental or indirect damages, including but not limited to damages for loss of business profits, business interruption, or loss of data or documentation, in connection with the use of this product, even if Reolink has been advised of the possibility of such damages.

To the extent permitted by applicable law, your use of the Reolink products and services is at your sole risk and you assume all risks associated with internet access. Reolink does not take any responsibilities for abnormal operation, privacy leakage or other damages resulting from cyber attacks, hacker attacks, virus inspections, or other internet security risks. However, Reolink will provide timely technical support if required.

The laws and regulations related to this product vary by jurisdiction. Please check all relevant laws and regulations in your jurisdiction before using this product to ensure that your use conforms to the applicable law and regulation. During the use of the product, you must comply with relevant local laws and regulations. Reolink is not responsible for any illegal or improper use and its consequences. Reolink is not liable in the event that this product is used with illegitimate purposes, such as third-party rights infringement, medical treatment, safety equipment, or other situations where the product failure could lead to death or personal injury, or for weapons of mass destruction, chemical and biological weapons, nuclear explosion, and any unsafe nuclear energy uses or anti-humanity purposes. In the event of any conflicts between this manual and the applicable law, the latter prevails.

10 Notification of Compliance

SIMPLIFIED EU AND UK DECLARATION OF CONFORMITY

Hereby, REOLINK TECHNOLOGY PTE.LTD. declares that the equipment [refer to the cover of the Operational Instructions] is in compliance with Directive 2014/30/EU.The full text of the EU and UK declaration of conformity is available at the following internet address https://reolink.com/certification-compliance/

Hereby, REOLINK TECHNOLOGY PTE.LTD. declares that this device is in compliance with The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023. For the Statement of Compliance, visit the Web site https://reolink.com/certification-compliance/

Correct Disposal of This Product

This symbol indicates that this electrical or electronic device must not be treated as household waste at the end of its life; instead, it requires separate collection. Free collection points for recycling and reuse are available in your local area. Please contact your municipal authority for these locations. Upon request, authorized retailers may accept up to three old devices free of charge at or near the point of sale. You are required to separate old equipment from general municipal waste. Before returning the device, please remove any batteries, accumulators, or lamps that are not permanently built-in and can be removed without damage. If the device contains personal data, you are responsible for deleting it prior to disposal.

(a)the equipment does not have a standby mode or other equivalent state in terms of energy efficiency requirements, power management function or the ability to deactivate wireless network connections mode;
(b)the power consumption of the equipment is likely to be higher than other equipment models meeting these functional requirements.

Limited Warranty

This product comes with a 2-year limited warranty that is valid only if purchased from Reolink Official Store or a Reolink authorized reseller. Learn more: https://reolink.com/warranty-and-return/.

NOTE: We hope that you enjoy the new purchase. But if you are not satisfied with the product and plan to return, we strongly suggest that you reset the camera to factory default settings and take out the inserted SD card before returning.

Terms and Privacy

Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com

Technical Support

If you need any technical help, please visit our official support site and contact our support team before returning the products, https://support.reolink.com.

Terms of Service

By using the Product Software that is embedded on the Reolink product, you agree to the terms&conditions between you and Reolink. Learn more: https://reolink.com/terms-conditions/

Trademarks Acknowledgement

"Reolink" and other Reolink's trademarks and logos are the properties of Reolink. Other trademarks and logos mentioned are the properties of their respective owners.

***Product Overview**

Designed for off-grid area surveillance, this 4G camera
allows you to remotely view and manage live footage via its companion applications.