
LEDs — top face (into the moon)



Driver, sensor, cable — bottom face

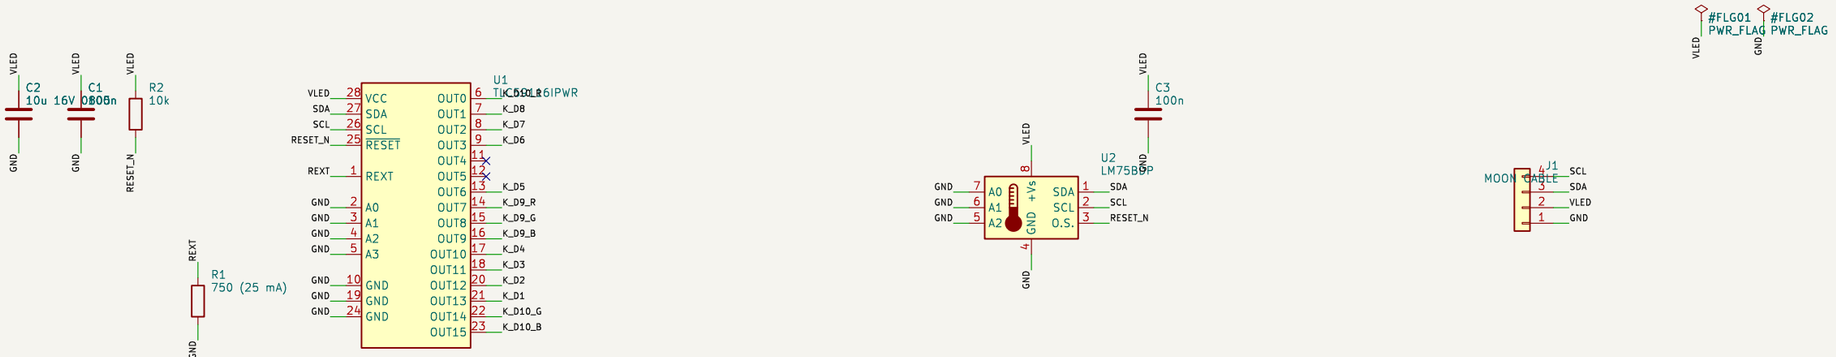

Top face white mask (reflector). Edge band r 12–13 mm is clamped by the moon skirt: no copper the
I2C: TLC59116 0x60 (A3..A0 = GND), LM75B 0x48. Pull-ups are on the main board.
TLC59116 REXT 750R -> 25.0 mA per output (Wurth RGB abs max 30 mA). All LED anodes on VLED.

14MM47 / reading_light

Sheet: /		
File: led-board.kicad_sch		
Title: Moon reading light — LED board (moon base)		
Size: A3	Date: 2026-11-02	**Rev: 0.1**
KiCad E.D.A. 9.0.9		Id: 1/1