


A USB-C input, ESD and charger

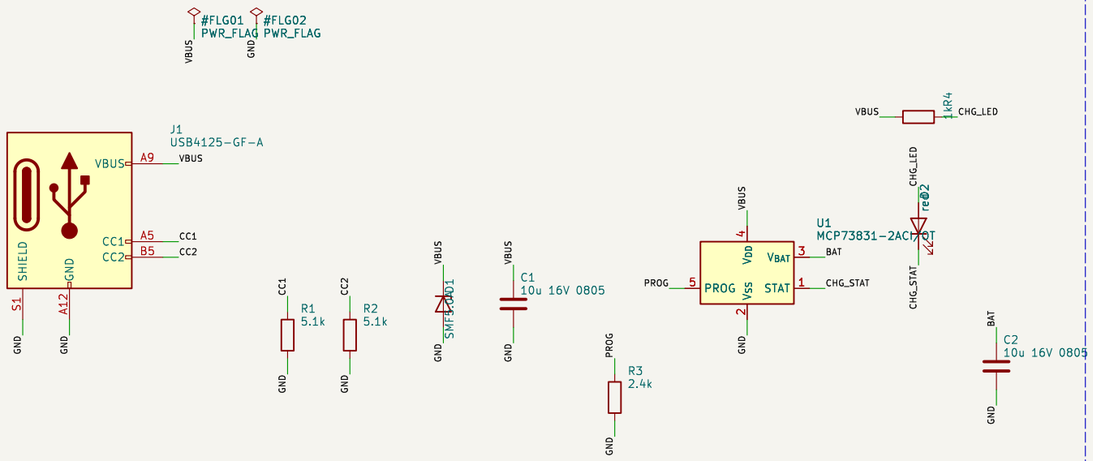


B Battery, reverse-battery FET, load sharing, slide power switch

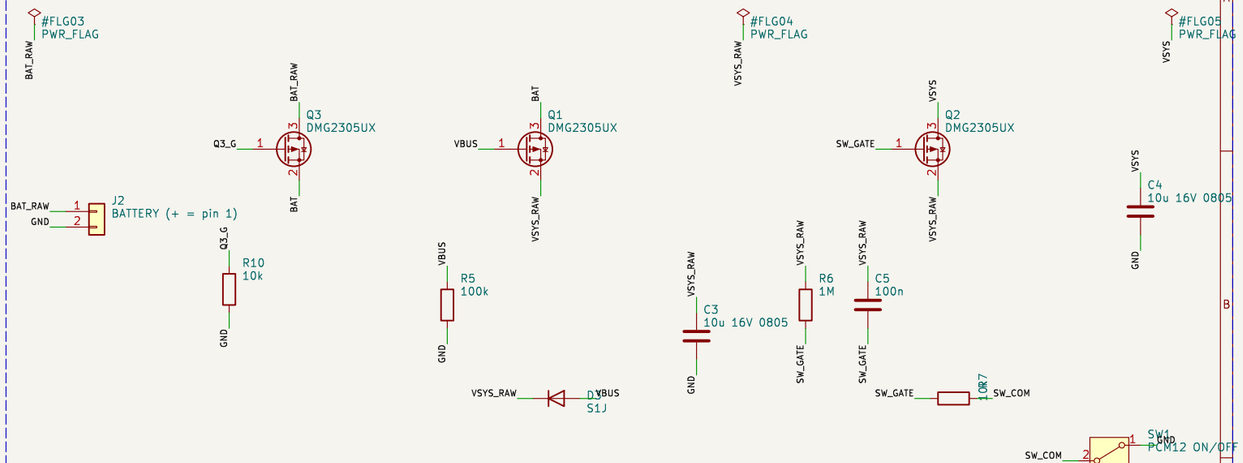

C MCU, programming header, test pads

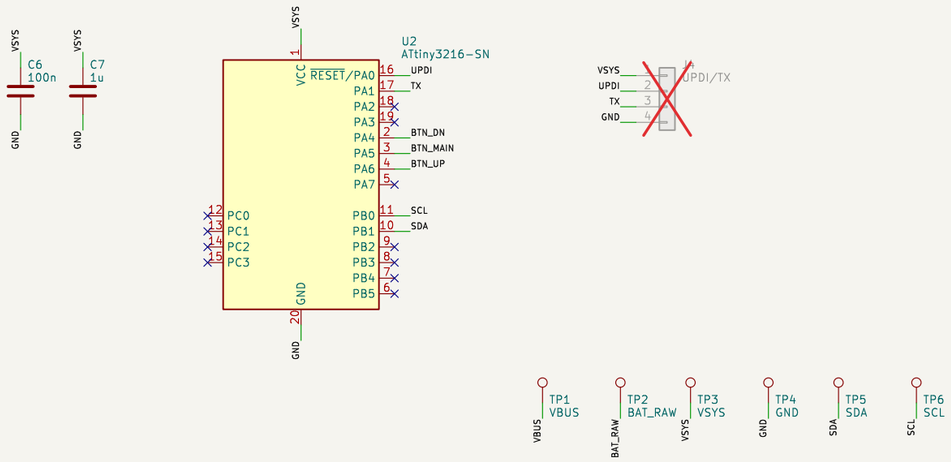

D Buttons, I2C pull-ups, moon cable

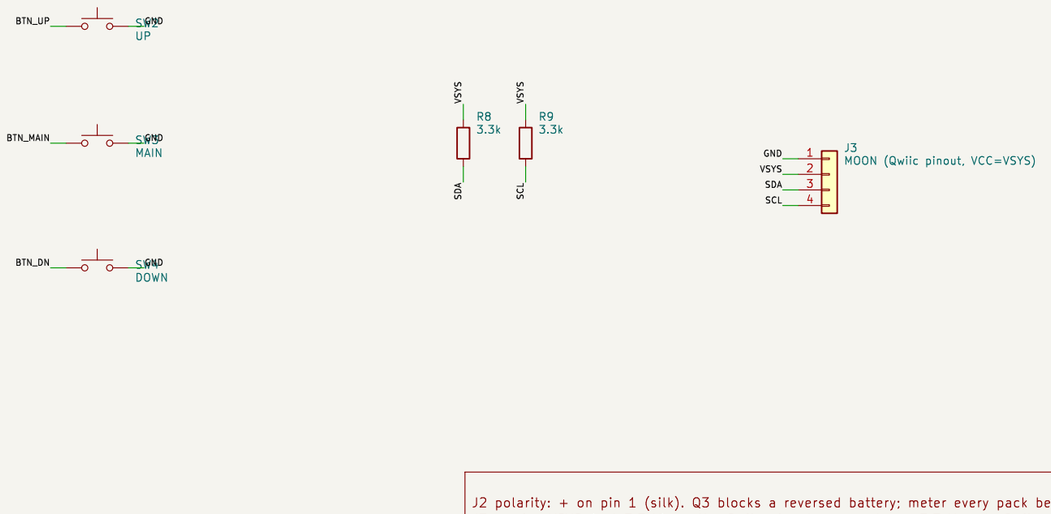

J2 polarity: + on pin 1 (silk). Q3 blocks a reversed battery; meter every pack before plugging in.
J3 carries VSYS (not 3.3 V) on the Qwiic pinout: never plug a 3.3 V-only Qwiic device into it.
Charge 417 mA (R3 2.4k). Slide switch is the only on/off (Matt). VSYS 3.3–4.2 V on battery, ~4.15 V

14MM47 / reading_light

Sheet: /
File: main-board.kicad_sch

Title: Moon reading light — main board (pack)

Size: A3	Date: 2026-11-02	**Rev: 0.1**
KiCad E.D.A. 9.0.9		Id: 1/1