


A USB-C input, ESD and charger

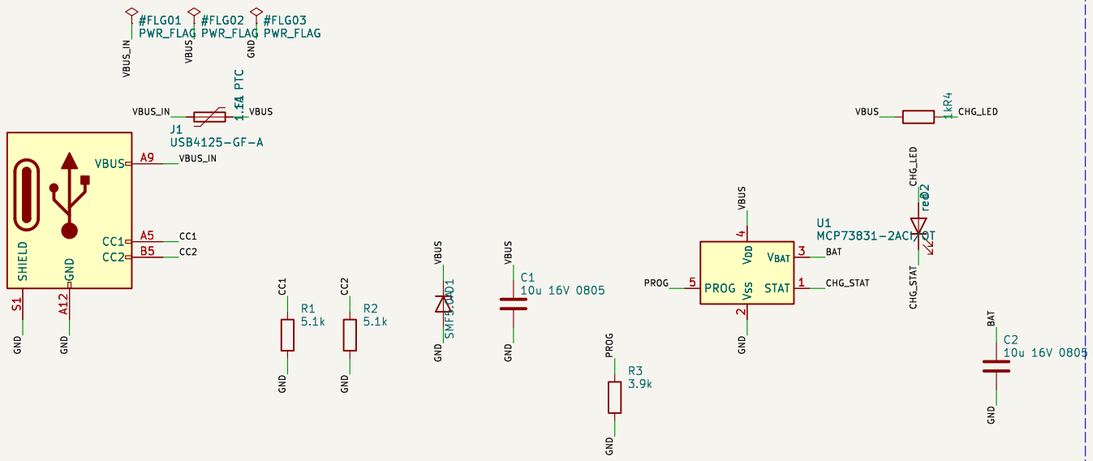


B Battery, reverse-battery FET, load sharing, slide power switch

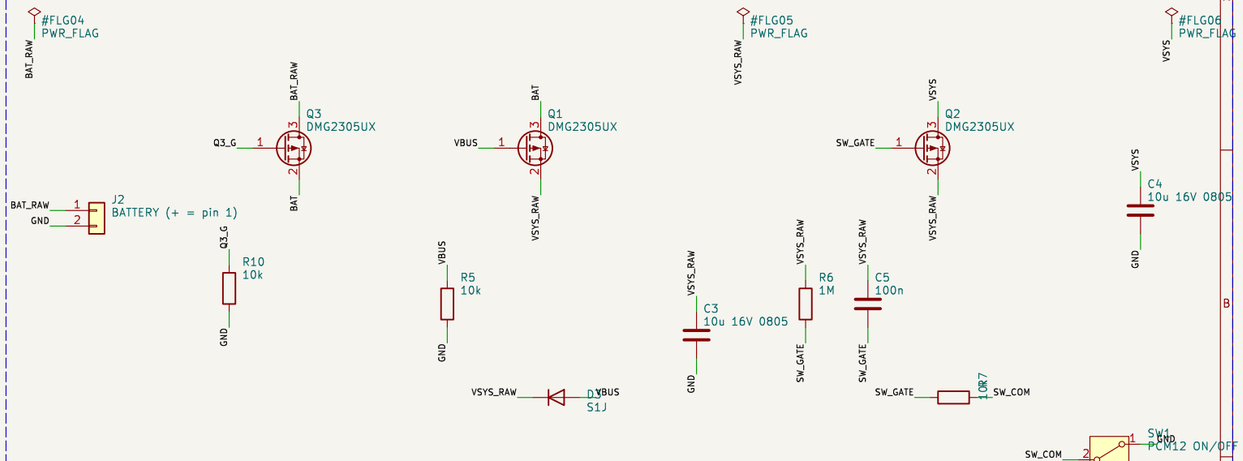

C MCU, programming header, test pads

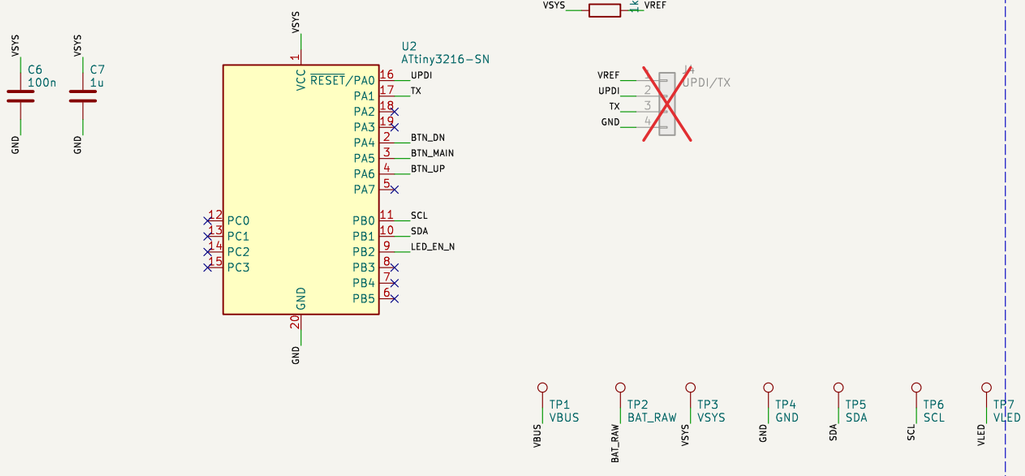

D Buttons, I2C pull-ups, moon cable

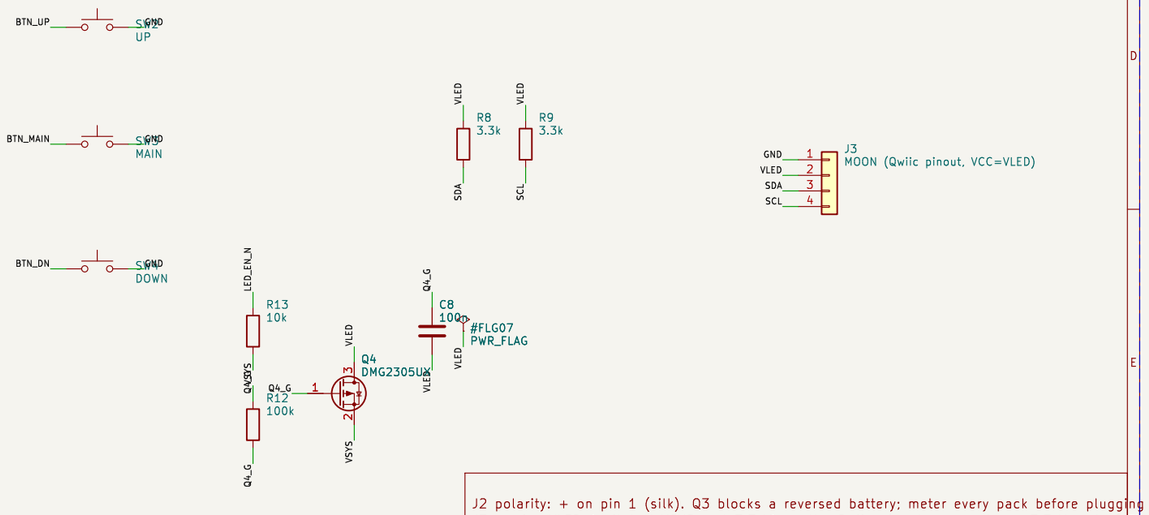

J2 polarity: + on pin 1 (silk). Q3 blocks a reversed battery; meter every pack before plugging in.
J3 carries VLED (switched VSYS, not 3.3 V) on the Qwiic pinout: never plug a 3.3 V–only Qwiic device
Charge 256 mA (R3 3.9k; total USB draw <= ~0.55 A: use a >= 1 A USB-C charger). Slide switch is

14MM47 / reading_light

Sheet: /		
File: main-board.kicad_sch		
Title: Moon reading light — main board (pack)		
Size: A3	Date: 2026-11-02	**Rev: 0.1**
KiCad E.D.A. 9.0.9		Id: 1/1