


CG6-CHAS-E-019 Test Fixture Instructions

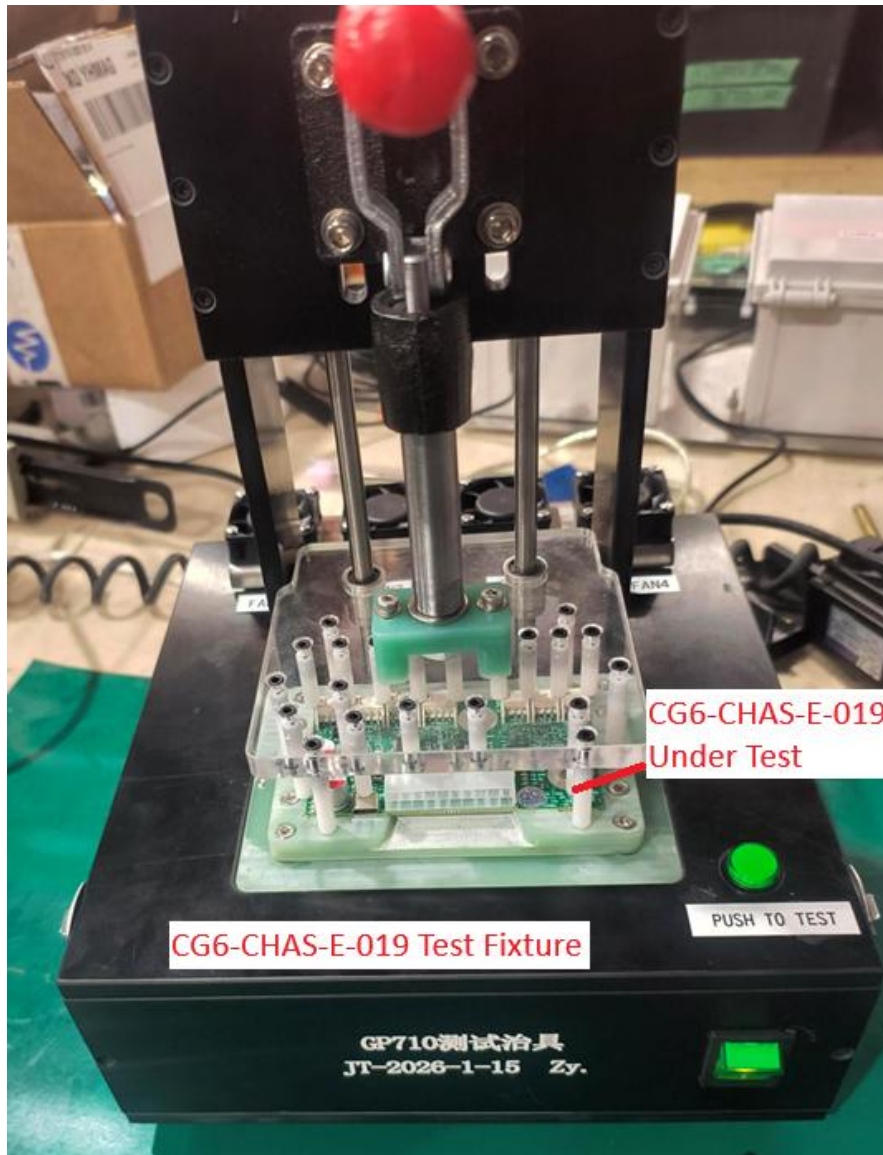

Contents

Operating Instructions.....	2
Remote Updates and Troubleshooting.....	5


Operating Instructions

Requires:

CG6-CHAS-E-019 Test Fixture, CG6-CHAS-E-019 v1.5+ PCBAs and HDMI monitor


Step 1

Connect power cable to rear of test fixture

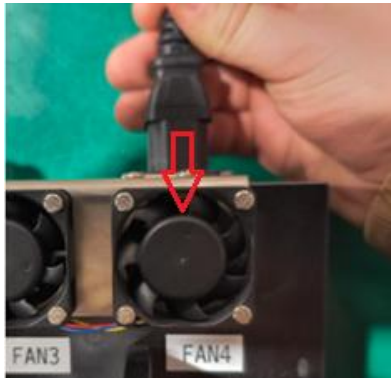


Step 2

Connect HDMI cable from monitor to test fixture

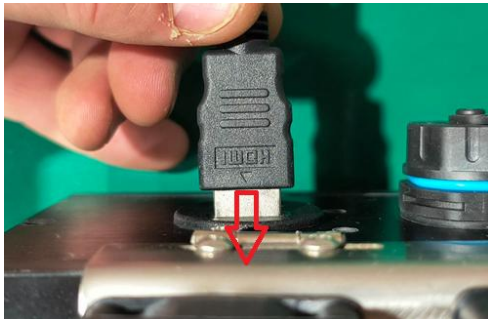


Step 3

Place the power switch in the ON (I) position

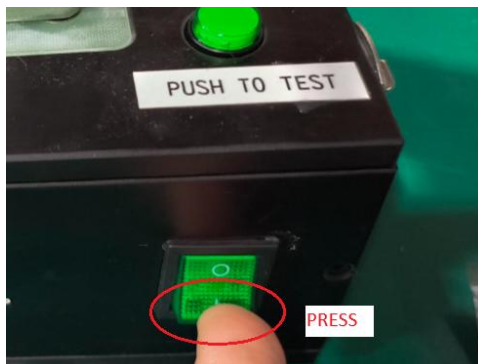


Step 4

Wait for approximately one minute while the computer inside the test fixture boots and launches the testing program. Note the output on the monitor. Note the software version at the top of the screen and the *INFO* instructions

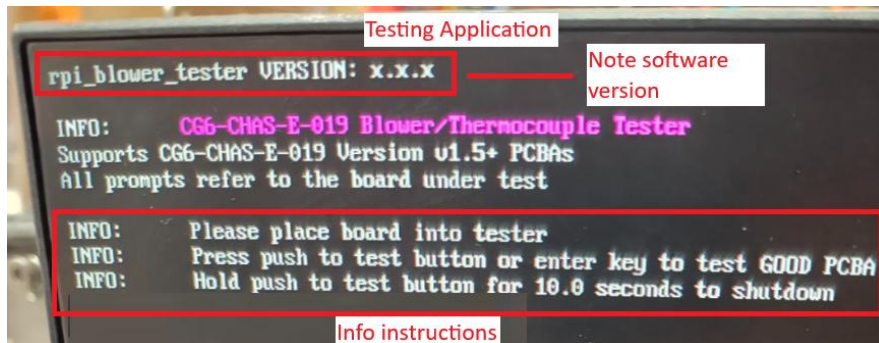

Step 5

Place a *GOOD* reference board into the test fixture and pull the plunger down. A *GOOD* reference board is a PCBA that previously passed in the test fixture

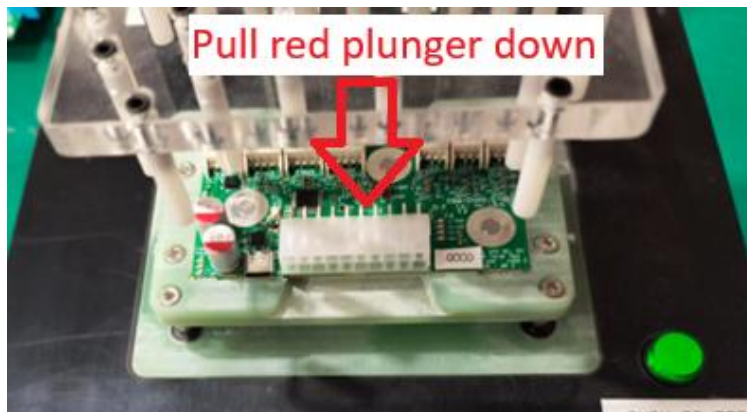


Step 6

Press the *PUSH TO TEST* button to start the test




Step 7

Note the test output on the monitor. If the overall test result for the *GOOD* reference board is *FAIL*, contact Gastronomous. Testing takes approximately one minute

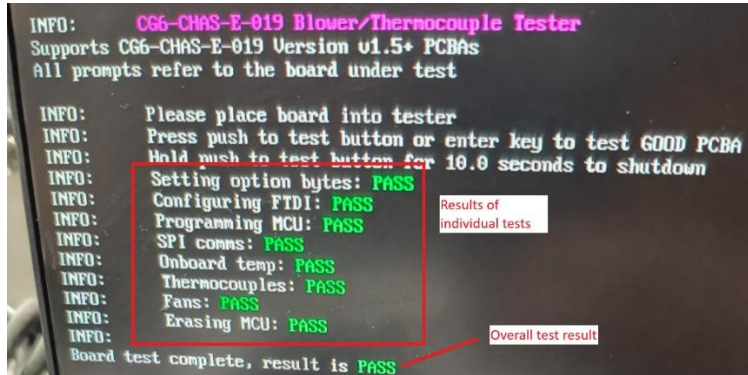


Step 8

When the test is complete, release the plunger and unload the *GOOD* reference board. Continue to test the remainder of the CG6-CHAS-E-019 boards from current production. If the PCBA fails, troubleshooting information and designators will be displayed to the monitor



Step 9

When testing is complete, hold the *PUSH TO TEST* for 10 seconds to safely shut down the computer inside the test fixture. The monitor will instruct when to release the button to start the safe shutdown

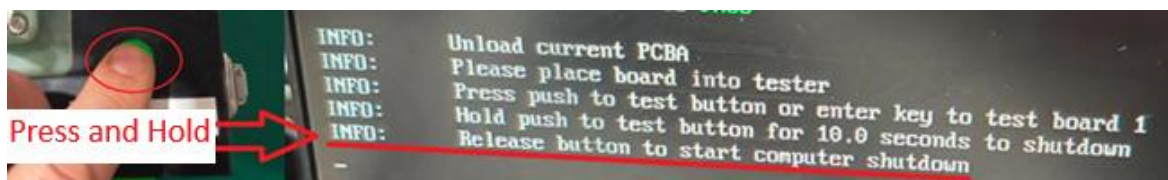

Step 10

After monitor is blank, set the power switch to the *OFF* (O) position




Remote Updates and Troubleshooting

Requires:

CG6-CHAS-E-019 test fixture, GOOD CG6-CHAS-E-019 v1.5+ PCBA, ethernet cable and internet connection


Step 1

Place the *GOOD* CG6-CHAS-E-019 into the test fixture and pull the plunger down

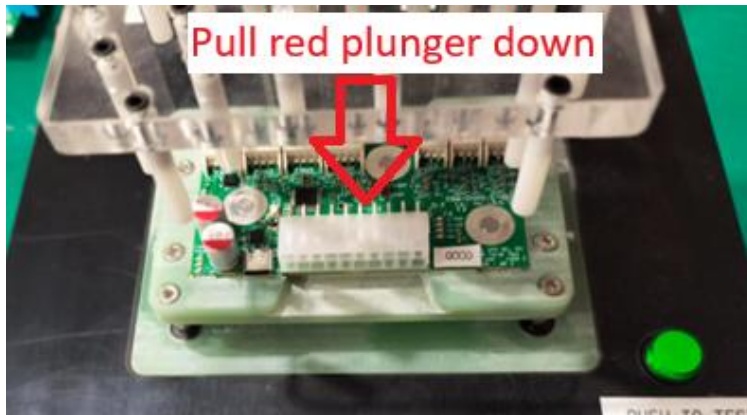

Step 2

Unscrew the cover on the ethernet bulkhead on the back of the test fixture and connect to the internet with an ethernet cable

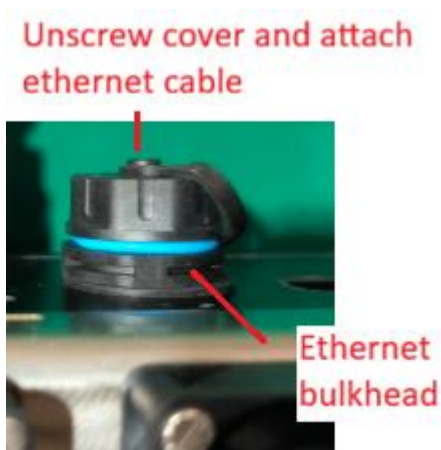

Step 3

Keep the test fixture powered on and notify the Gastronomous Team over WeChat